



(22) Date de dépôt/Filing Date: 1994/10/19

(41) Mise à la disp. pub./Open to Public Insp.: 1995/04/23

(45) Date de délivrance/Issue Date: 2004/04/27

(30) Priorité/Priority: 1993/10/22 (P 4336097.1) DE

(51) Cl.Int.⁵/Int.Cl.⁵ D01D 5/088


(72) Inventeurs/Inventors:
BUDENBENDER, JURGEN, DE;
GARTNER, ECKHARD, DE;
JANSEN, JAKOB, DE

(73) Propriétaire/Owner:
BAYER AKTIENGESELLSCHAFT, DE

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : PROCEDE CONTINU SERVANT AU FILAGE PAR FUSION DE MONOFILAMENTS

(54) Title: CONTINUOUS PROCESS FOR MELT-SPINNING MONOFILAMENTS

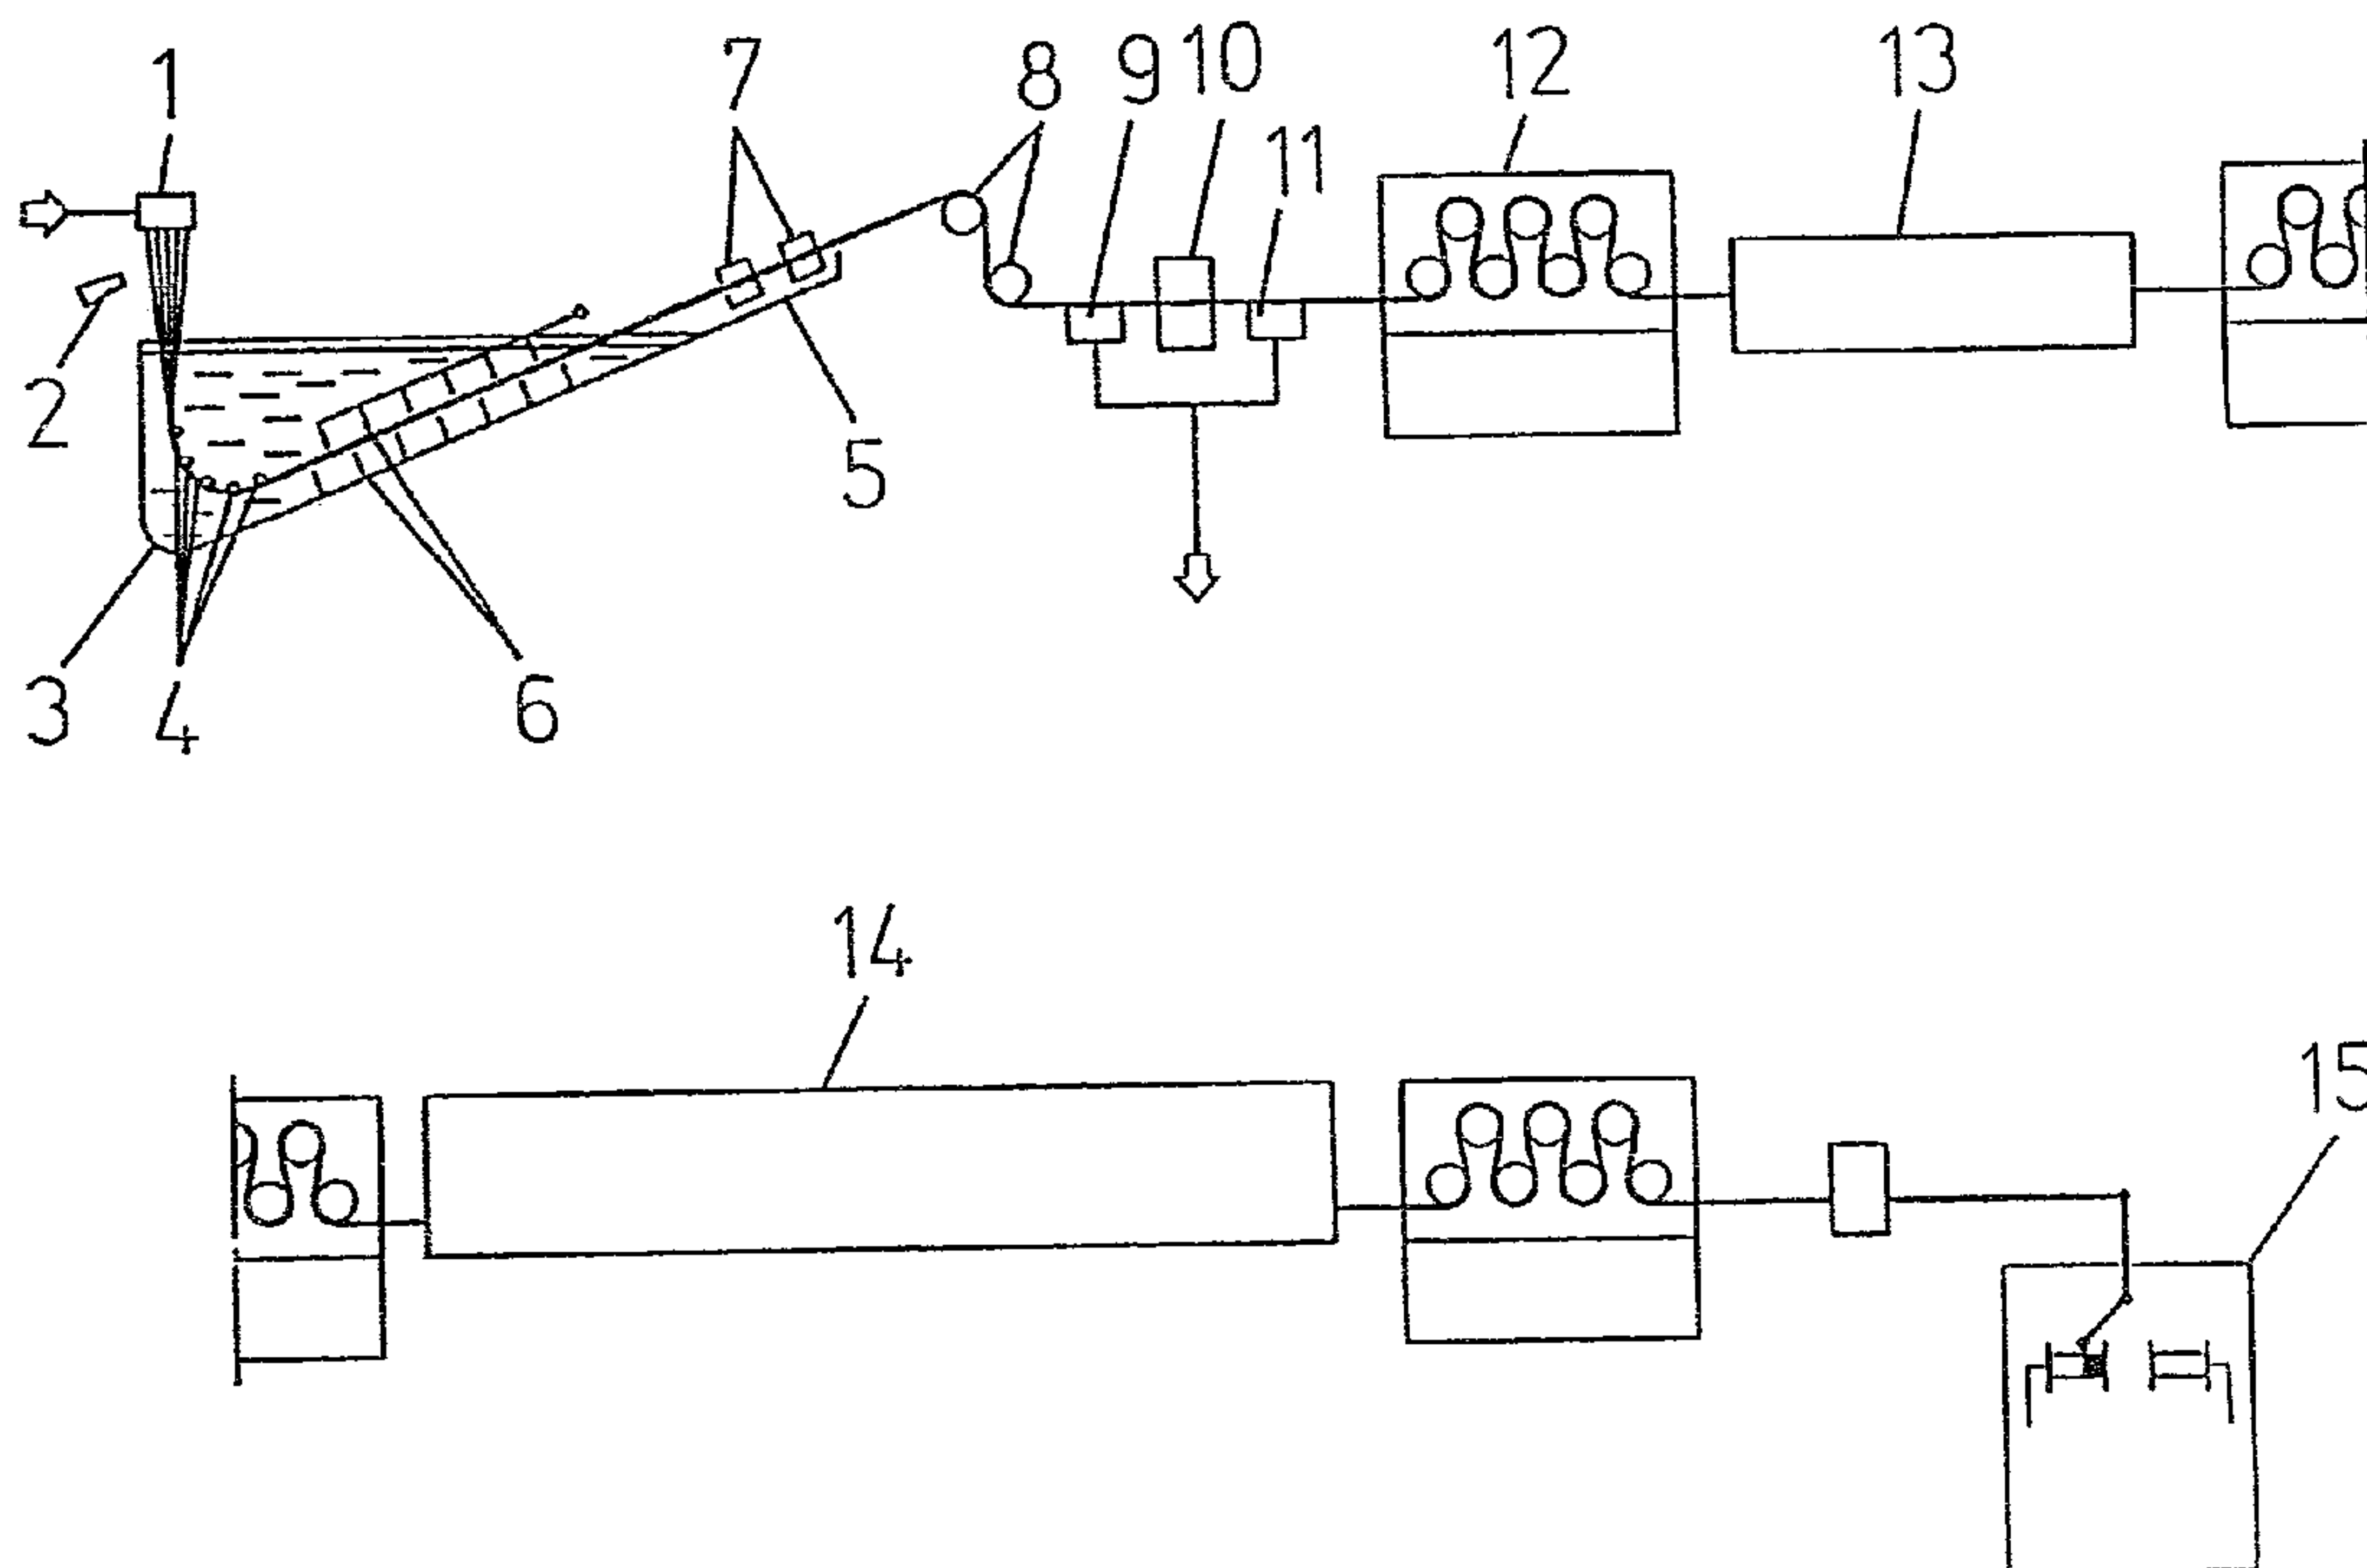

(57) Abrégé/Abstract:

The invention relates to a continuous process for the formation of monofilaments having a diameter of from 60 μm to 500 μm from filament-forming polymers by melt-spinning the polymer, optionally quenching the formed polymer filaments below the melt-spinning head with a cooling medium, cooling the filaments in a liquid bath having a temperature of from -10°C to 150°C , removing the entrained water and post-treating the filaments by spin finishing, drawing and fixing at a filament delivery speed which is greater than 600 to 4000 m/min after the fixing step.

2118478

Continuous process for melt-spinning monofilaments

A b s t r a c t

The invention relates to a continuous process for the formation of monofilaments having a diameter of from 60 μm to 500 μm from filament-forming polymers by melt-spinning the polymer, optionally quenching the formed polymer filaments below the melt-spinning head with a cooling medium, cooling the filaments in a liquid bath having a temperature of from -10°C to 150°C , removing the entrained water and post-treating the filaments by spin finishing, drawing and fixing at a filament delivery speed which is greater than 600 to 4000 m/min after the fixing step.

Continuous process for melt-spinning monofilaments

The invention relates to a high-speed production process for the formation in continuous manner of monofilaments having
5 a diameter of from 60 μm to 500 μm from filament-forming polymers, by melt-spinning the polymer, optionally quenching the formed polymer filaments below the melt-spinning head with a cooling medium, cooling the filaments in a liquid bath having a temperature of from -10°C to 150°C , removing
10 the entrained water and post-treating the filaments by finishing, drawing and fixing, with the delivery speed of the filaments after the fixing step being greater than 600 to 4000 m/min.

15 Processes for the formation and further treatment of monofilaments are fundamentally known. The known process steps are described in detail in the Handbuch der Kunststoff-Extrusionstechnik [Manual of Plastics Extrusion Technology] II, Carl Hanser Verlag Munich, Vienna, 1986, pp.
20 295 to 319. According to this source, thermoplastic monofilaments (having a diameter greater than 60 μm) may be produced by spinning, for example in water, at a maximum delivery speed of 600 m/min.

25 Monofilaments of substantially smaller cross section and multifilaments are spun directly in air at a markedly greater delivery speed using different processes. Thus, German Offenlegungsschrift DE 41 29 521 A1 describes an apparatus for high-speed spinning of multifilaments at
30 winding speeds of at least 2000 m/min., in particular at least 5000 m/min.

By contrast with the process according to the invention, multifilaments are in this case spun in air and wound
35 directly. A particular feature of this patent is the cooling device. It comprises a porous tube which is open in the direction of spinning and is disposed concentrically to

23189-7692

the spinning line. The high winding speeds obviate the need for active supply of a cooling medium. The process described therein relates to filament yarns having single filament titres of from 0.1 to 6 dtex, and is not applicable to monofilaments of a diameter greater than 50 μm (approx. 20 dtex).

International Application WO 91/11547 discloses a process and an apparatus for high-speed spinning of monofilaments having a single titre of from 1 to 30 dtex (corresponding to approx. 10 to 55 μm). The melt-spun monofilaments are in this case cooled with blown air, drawn over a friction element, provided with a spin finish and wound onto bobbins at a speed of up to 6000 m/min. This process differs from the process according to DE 41 29 521 A1 only in terms of the active cooling of the monofilaments by blown air and in the friction element by way of which the filament tension is influenced.

Both direct spinning-stretching processes (DE 41 29 521 A1 and WO 91/11547) are as a matter of principle restricted to small monofilament diameters ($\varnothing < 55 \mu\text{m}$) by the unfavourable nature of heat removal resulting from air cooling and poor internal thermal conduction in the wire.

The present invention provides a continuous process for melt-spinning monofilaments having a diameter of from 60 to 500 μm from filament-forming polymers, in particular polyamide, in which spinning takes place in a cooling bath and which, despite the high delivery speed of from 600 to 4000 m/min, is still controllable, in particular while passing through the cooling bath, and which affords a filament quality at least comparable to that of the production processes known hitherto (at a delivery speed of from 200 to 400 m/min; see Handbuch der Kunststoffextrusionstechnik II, Hanser-Verlag (1989) Patents, Knapp, Hensen Chapter 10).

23189-7692

According to the invention the filament-forming polymer is melt-spun in air; the spun filaments are cooled and deflected in a liquid bath having a temperature of from -10 to 150°C , with optional steadying
5 of the fluid flow caused by the drag flow of the filaments; entrained water is removed from the filaments by wiping and/or throwing off, and the filaments are post-treated by optionally finishing, drawing and fixing. The filaments are then wound, with the filament delivery speed being at least
10 600 to 4000 m/min.

The subject of the invention is a continuous process for the formation of monofilaments having a diameter of from $60\text{ }\mu\text{m}$ to $500\text{ }\mu\text{m}$, preferably from 100 to $300\text{ }\mu\text{m}$, by melt-
15 spinning the polymer, optionally quenching the formed polymer filaments below the melt-spinning head with a cooling medium, cooling the filaments in a liquid bath having a cooling liquid temperature of from -10°C to 150°C , deflecting the filaments in the liquid bath at a filament
20 guide, optionally steadying the fluid flow in the liquid bath caused by the drag flow of the filaments, wiping and throwing off the entrained fluid at the liquid bath outlet, removing by suction the residual entrained fluid, optionally applying a finish, drawing in one or more stages in hot air,
25 hot water or vapour or in a combination of the latter media, fixing the drawn filaments in hot air and/or vapour and subsequently winding the filaments, with the delivery speed of the filaments after the fixing step being from 600 to 4000 m/min, preferably from 1000 to 3500 m/min.

30

The polymer melt is spun in air from a spinning head which is known in principle. Any filament-forming polymers which may be melt-processed are fundamentally suitable for the purpose, in particular polyamide, polyester, polyethylene,
35 polyphenylene sulphide, polypropylene and polyacrylonitrile. Of these, polyamides such as polyamide-6, polyamide-66, polyamide-12, polyamide-6/T, and copolyamides such as

polyamide-66/6, polyamide-12/6, polyamide 11/6 and polyamide-6/10, and mixtures thereof are in particular suitable. Polyamide-6 having a solution viscosity η_{rel} of from 2.8 to 4.4 as a 1% solution, measured in meta cresol at 5 25°C, is particularly preferred.

The polymer filaments formed are preferably quenched with temperature-controlled air at from 0 to 50°C, preferably from 10 to 25°C, delivered by blowing nozzles below the spinning 10 head in lateral manner along a zone from 1 to 10 cm in length, in order to stabilise the smooth running of the filaments. The polymer filaments are then cooled in a liquid bath having a liquid temperature of from -10 to 150°C, preferably from 10 to 40°C. While still in the liquid bath 15 the filaments are deflected at a filament guidance from the vertical to the direction of the basin rim of the liquid bath. Formation of fluid flows in the liquid bath is preferably avoided by the installation of baffles.

20 Suitable cooling liquids for the liquid bath are any liquids which are inert to the filament polymers, such as for example water, oils (for example silicone oil), hydrocarbons, chlorocarbons, etc. The preferred cooling liquid for the liquid bath is water.

25

The entrained fluid carried from the cooling bath at the high processing speed is preferably wiped from the filaments with wipers and is thrown off at the liquid bath outlet on pull rollers. Residual entrained fluid is withdrawn from 30 the filaments at a suction unit, and the filaments are then supplied to the further post-treatment steps. The first possible finishing which follows takes place in a manner which is known per se by applying to the filaments at the finish station an optionally aqueous finishing agent. 35 Suitable finishes for this purpose are any lubricant dispersions based on, for example, natural and synthetic fats and ester oils, mineral oils, silicone oils, paraffin

23189-7692

waxes, polyethylene or polypropylene waxes, condensates of fatty acids with polyalkylene polyamines and derivatives thereof, addition products of alkylene oxides and fatty alcohols, fatty amines or fatty acids and the like,
5 organophosphoric acid esters, nonionic and anionic surfactants, etc.

The finishing step may also optionally take place after drawing or fixing.

The optionally finished filaments are then drawn
10 by from 200 to 700% in one or more stages, preferably in from one to four stages, in hot air having a temperature of from 150 to 350°C, hot water having a temperature of from 85 to 98°C or vapour having a temperature of from 100 to 150°C or in any combination of the latter media, with the maximum
15 degree of draw being determined by the drawability which is typical for the respective polymer.

The drawn filaments are then fixed in hot air having a temperature of from 150 to 350°C and/or vapour having a temperature of from 100 to 150°C and are then wound
20 at a speed of from 600 to 4000 m/min, preferably from 1000 to 3500 m/min. A particular post finish (avivage) is preferably additionally applied at each bobbin station. Any lubricant dispersions based on, for example, natural and synthetic fats and ester oils, mineral oils, silicone oils,
25 paraffin waxes, polyethylene or polypropylene waxes, condensates of fatty acids with polyalkylene polyamines and derivatives thereof, addition products of alkylene oxides and fatty alcohols, fatty amines or fatty acids and the like, organophosphoric acid esters, nonionic and anionic
30 surfactants, etc. are suitable as the avivage.

23189-7692

In an apparatus aspect, the invention provides an apparatus for effecting a process according to the invention, comprising a melt-spinning head with spinneret, a blowing nozzle, a liquid bath having a comb-shaped filament
5 guide and a baffle, a wiper, at least one deflecting roller or notched grooved roll for throwing off entrained cooling liquid, an adherent liquid suction means upstream of or downstream of a subsequent application of a spin finish, one or more drawing apparatuses for hot drawing, a fixing zone
10 and a winding station, wherein the post finish is applied in a direct manner as a one-way finish at at least one bobbin station and the winding speed is from 600 m/min to 4000 m/min, and the winding on to the bobbin may be either of a single monofilament or a plurality of monofilaments
15 together.

The invention is explained again by way of example with the aid of the Figures which follow and further sample embodiments, in which:

Fig. 1 shows a schematic diagram of the complete process,

Fig. 2 shows the liquid bath according to the invention with filament guidance and baffles,

5

Fig. 3a, 3b shows the filament guidance according to the invention,

Fig. 4 shows preferred baffles according to the invention.

10

The polymer melt conveyed by conventional pumps (gear pumps) emerges at the annular spinneret 1 and is quenched with air at a temperature of from 0 to 50°C from blowing nozzles 2, which flows through between the spinneret 1 and the cooling liquid (for example water). The filaments 17 become immersed in the liquid bath 3 and are deflected at the filament guidance 4 into the direction of the basin rim 5. The filament guidance 4 comprises rod-shaped guidance elements 4' of stainless steel or ceramic which are disposed in a semi-circle. The filaments are guided through so-called combs 16 in order to prevent collision and adhesion. It is important that friction between the filaments 17 and the filament guidance 4, and also the number of points of contact, be kept to a minimum.

25

The specific filament guidance (Fig. 3) is a further subject of the invention. The guidance elements 4' of the filament guidance 4 are constructed such that at the high haul-off speed the filaments 17 slide over the guidance elements 4' through the entrained water - in a manner similar to the effect of a sliding bearing - and are consequently guided in a manner which is simultaneously contactless.

30

A liquid bath 3 having baffles 6, 6' is preferably utilised. The fluid flow caused by the drag flow of the filaments 17 is steadied by the baffles 6, 6' (see, for example, Fig. 4). The baffles 6 are disposed transversely to the direction of

35

filament travel below and partially above the filament sheaf (see Fig. 4). The upper baffles 6' may be folded upward in order to lay on the filaments.

- 5 After emerging from the liquid bath 3 the entrained fluid (for example water) is removed from the filaments 17 by means of a wiper 7. Further entrained fluid is thrown off by deflecting the filaments at deflecting rollers 8. Notched rollers are preferably utilised for enhanced removal
- 10 (throwing off) of the entrained water. Further entrained water remaining on the filaments is removed by the adherent water suction means 9. The spin finish is then applied to the filaments at the finish station 10 by a finishing roll or in a spray chamber having nozzles, and is evened out with
- 15 a wiper.

It may be necessary to remove superfluous finish with a further adherent water suction means 11.

- 20 The filaments are then supplied, for example by way of a roll septet 12, to the drawing zone 13. The filaments are drawn, for example, in two stages in hot air at a temperature of from 240 to 260°C and by a total of 420%.
- 25 Fixing takes place in the fixing zone 14 in hot air at, for example, from 250 to 260°C. The filaments are then wound on to the winding stations 15 at a winding speed of up to 4000 m/min.

Examples

Monofilaments are formed from pure polyamide-6 and copolyamide (85% PA 6 with 15% PA 6.6) in accordance with the embodiment illustrated hereinabove. Prior to cooling in the liquid bath the monofilaments emerging from the spinning head are quenched with air (25°C) in perpendicular manner directly below the spinneret.

- 10 The process parameters are shown in detail in Table 1 which follows.

The comparative Example is representative of the formation of polyamide-6 monofilaments in the current conventional manner.

Table 1
Example No. Comparative Example

1	2	3	4	5	PA 6
PA 6	PA 6	PA 6	PA 6	CPA 6.6/15	PA 6
Relative viscosity	3.1	3.1	4.0	4.0	3.1
η_{rel}	200	100	200	200	200
Monofilament diameter, μm	1.1	1	1.8	1.4	0.5
Spinneret diameter mm	230	910	476	258	75
Haul-off speed m/min	water	water	water	water	water
Cooling medium in liquid bath	20	20	30	30	20
Temperature of cooling medium, $^{\circ}C$	3.4	3.2	3.5	4.46	3.4
1st draw ratio	1.176	1.2	1.2	1.3	1.26
2nd draw ratio	240	250	250	250	170
1st hot air draw temperature	250	260	260	260	180
2nd hot air draw temperature	250	260	260	260	185
Hot air fixing temperature	1000	3500	2000	1500	322
Winding speed m/min	Properties of fibres obtained				
Linear strength (cn/tex)	52	47	55	71	54
Max. tensile elongation (%)	25	22	26	21	26
Textile quality	13	10.3	14.3	14.9	14
Thermoshrinkage [%] at 150 $^{\circ}C$	9.5	9.5	9.5	14	9.5

23189-7692

CLAIMS:

1. A continuous process for preparing a monofilament having a diameter of from 60 μm to 500 μm from a filament-forming polymer by melt-spinning the polymer in a melt-spinning head, cooling the filament in a liquid bath having a cooling liquid temperature of from -10°C to 150°C , deflecting the filament in the liquid bath at a comb-shaped filament guide, wiping and throwing off the entrained liquid at the liquid bath outlet, removing by suction the residual entrained liquid, drawing in one or more stages in a medium of hot air, hot water or vapour or in a combination of the latter media, fixing the drawn filament in hot air and/or vapour and subsequently winding the filament, with the delivery speed of the filament after the fixing step being from 600 to 4000 m/min.
2. A process according to claim 1, wherein the formed polymer filament is quenched with a cooling medium below the melt-spinning head.
3. A process according to claim 1 or 2, wherein after said deflecting the filament, the fluid flow caused by the drag flow of the filament is steadied.
4. A process according to claim 1, 2 or 3, wherein after the removal of residual entrained liquid, a finish is applied to the filament.
5. A process according to any one of claims 1 to 4, wherein the delivery speed of the filament is from 1000 to 3500 m/min.

23189-7692

6. A process according to any one of claims 1 to 5, wherein the filament has a final diameter of from 100 to 300 μm .

7. A process according to any one of claims 1 to 6,
5 wherein the filament-forming polymer is a polyamide.

8. A process according to any one of claims 1 to 7, wherein the formed filament is quenched with air at a temperature of from 0 to 50°C below the spinning head in the lateral manner along a zone from 1 to 10 cm in length.

10 9. A process according to any one of claims 1 to 8, wherein the temperature of the cooling bath is from 10 to 40°C.

10. A process according to any one of claims 1 to 9, wherein to steady the fluid flow in the cooling bath a
15 baffle is positioned below and above the filament sheaf.

11. A process according to claim 10, wherein the baffle above the filament sheaf is capable of being folded away in an upward manner during operation of the process.

12. A process according to any one of claims 1 to 11,
20 wherein the filament is drawn by from 200 to 700% in a medium of hot air having a temperature of from 150 to 350°C, hot water having a temperature of from 85 to 98°C or vapour having a temperature of from 100 to 150°C or in any sequential combination of the latter media, and is then
25 fixed in hot air at a temperature of from 150 to 350°C and/or vapour having a temperature of from 100 to 150°C.

13. An apparatus for effecting a process according to any one of claims 1 to 12, comprising a melt-spinning head

23189-7692

with spinneret, a blowing nozzle, a liquid bath having a comb-shaped filament guide and a baffle, a wiper, at least one deflecting roller or notched grooved roll for throwing off entrained cooling liquid, an adherent liquid suction
5 means upstream of or downstream of a subsequent application of a spin finish, one or more drawing apparatuses for hot drawing, a fixing zone and a winding station, wherein the post finish is applied in a direct manner as a one-way finish at at least one bobbin station and the winding speed
10 is from 600 m/min to 4000 m/min, and the winding on to the bobbin may be either of a single monofilament or a plurality of monofilaments together.

14. An apparatus according to claim 13, wherein the filament guide comprises rod-shaped guide elements disposed
15 in a semi-circle and having combs to guide a filament in a single manner on the guide elements.

FETHERSTONHAUGH & CO.

PATENT AGENTS

OTTAWA, CANADA

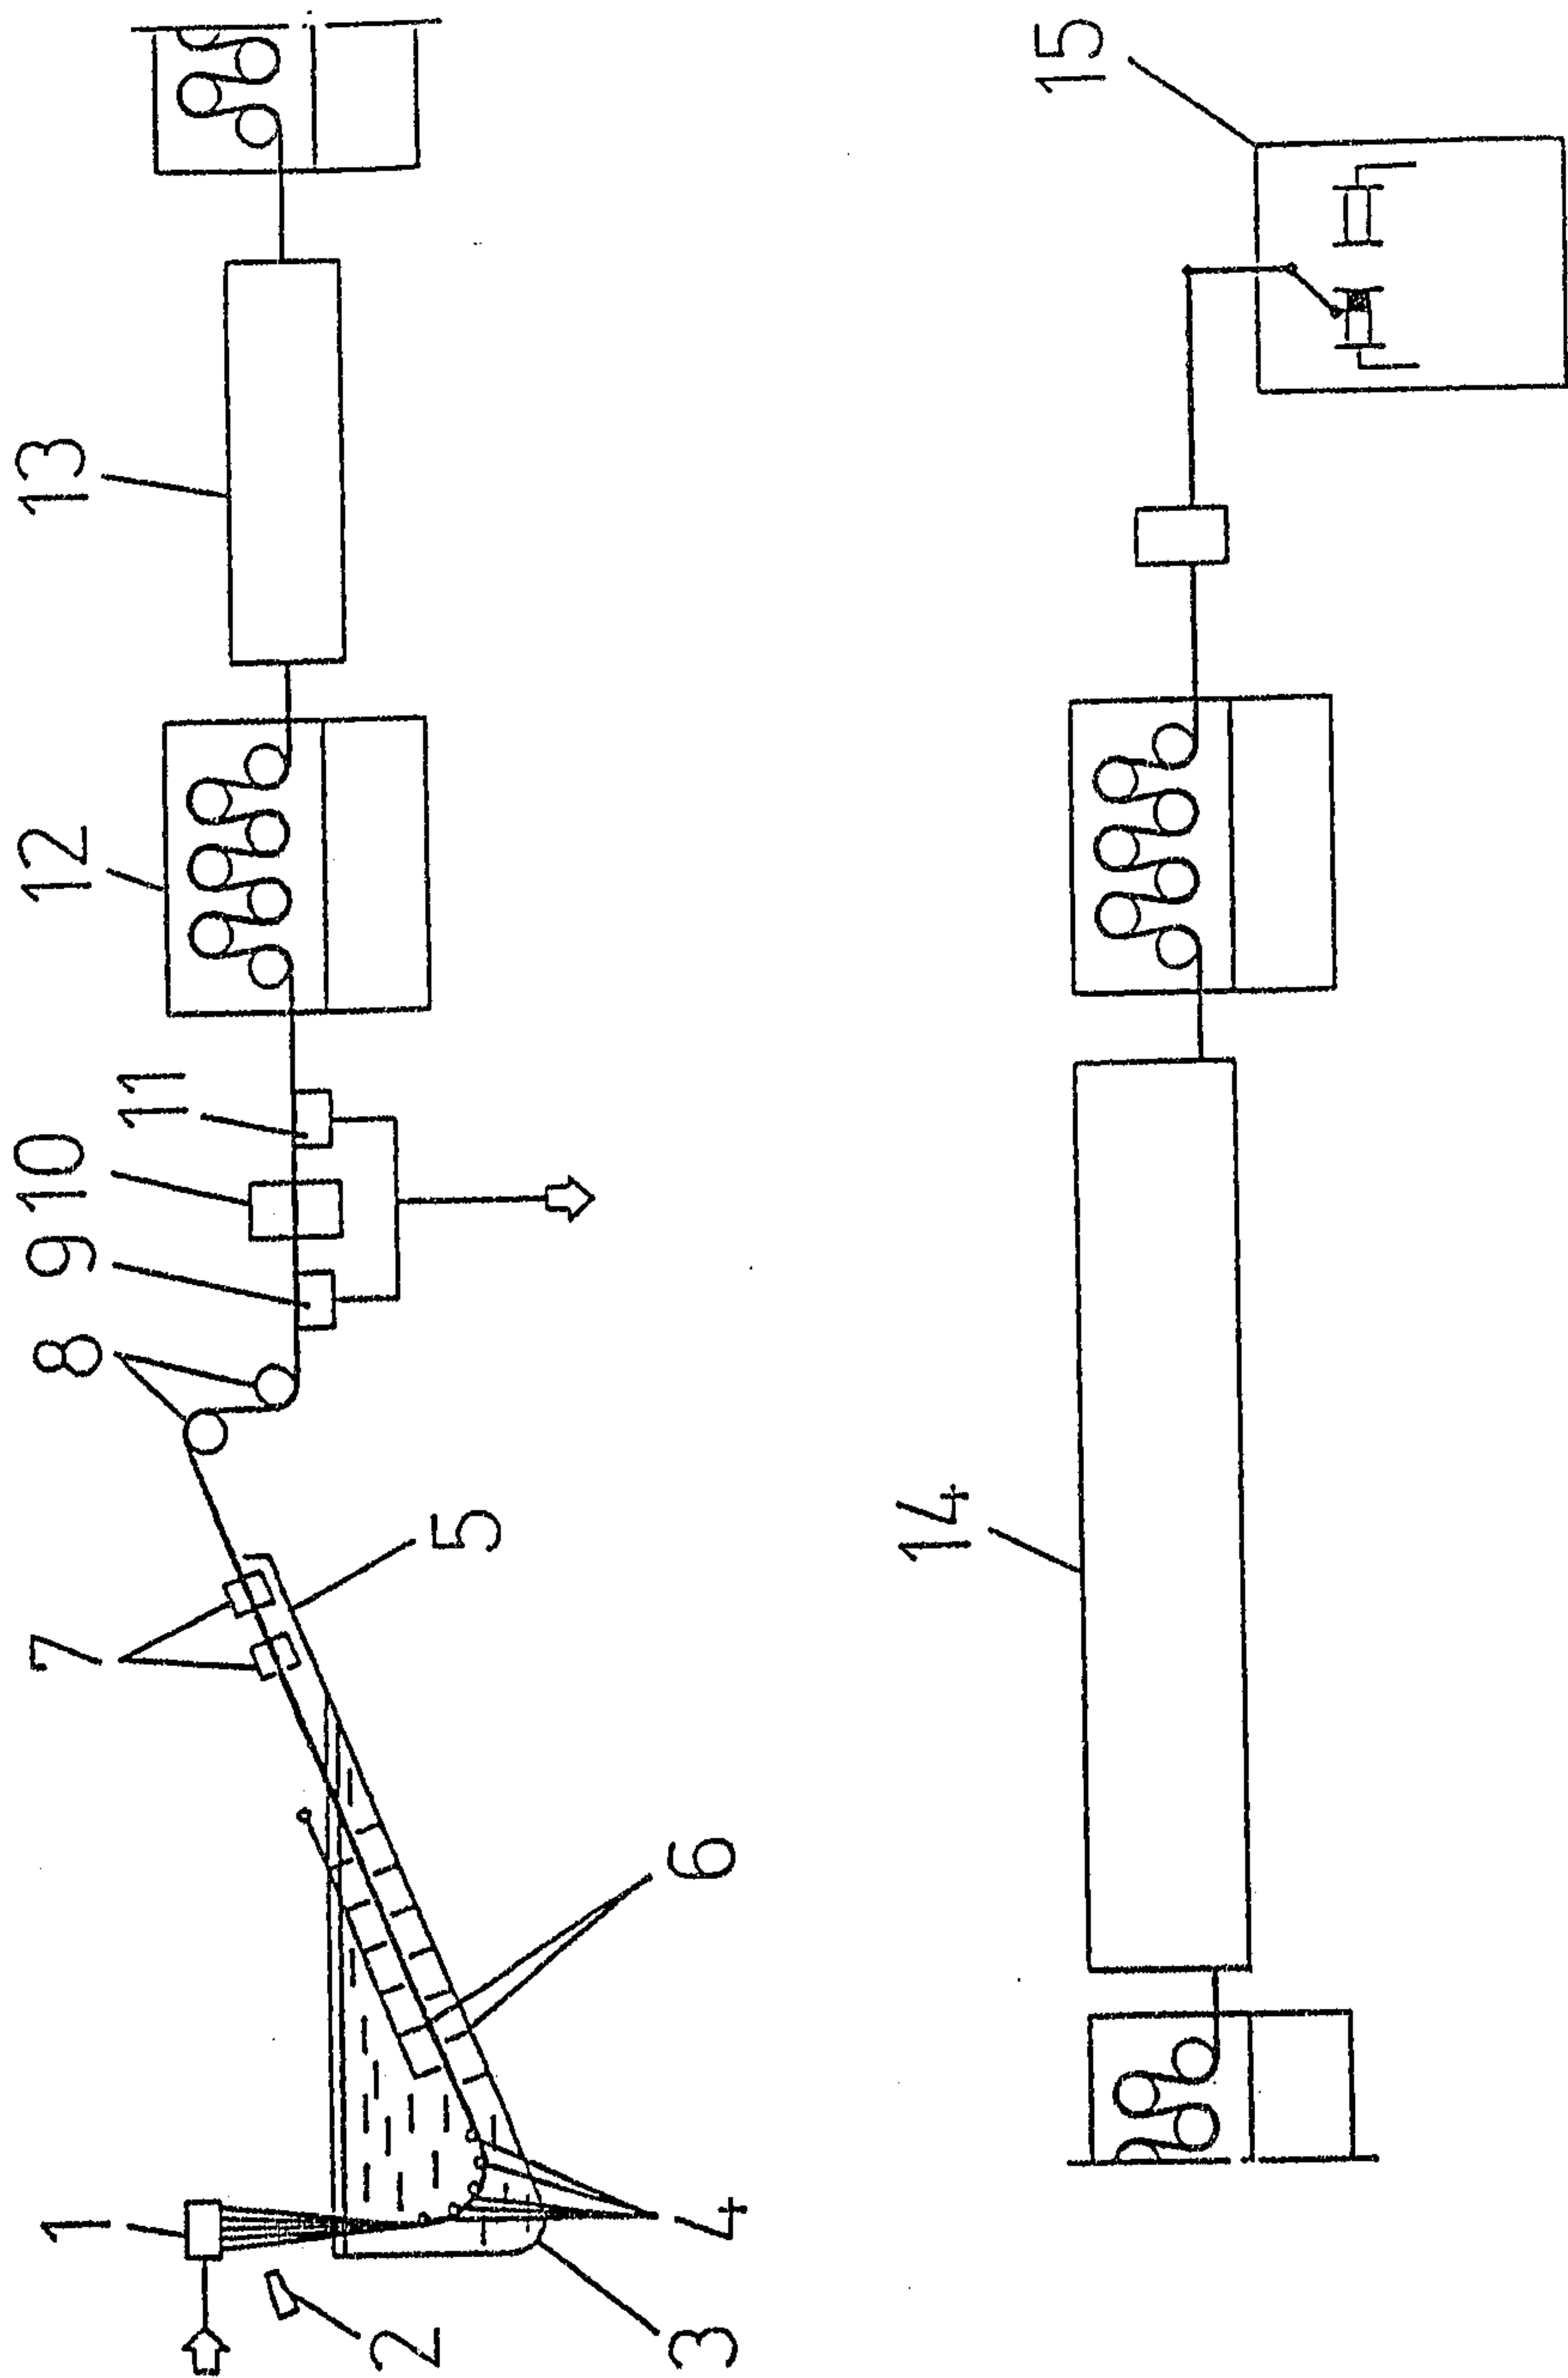


Fig.1

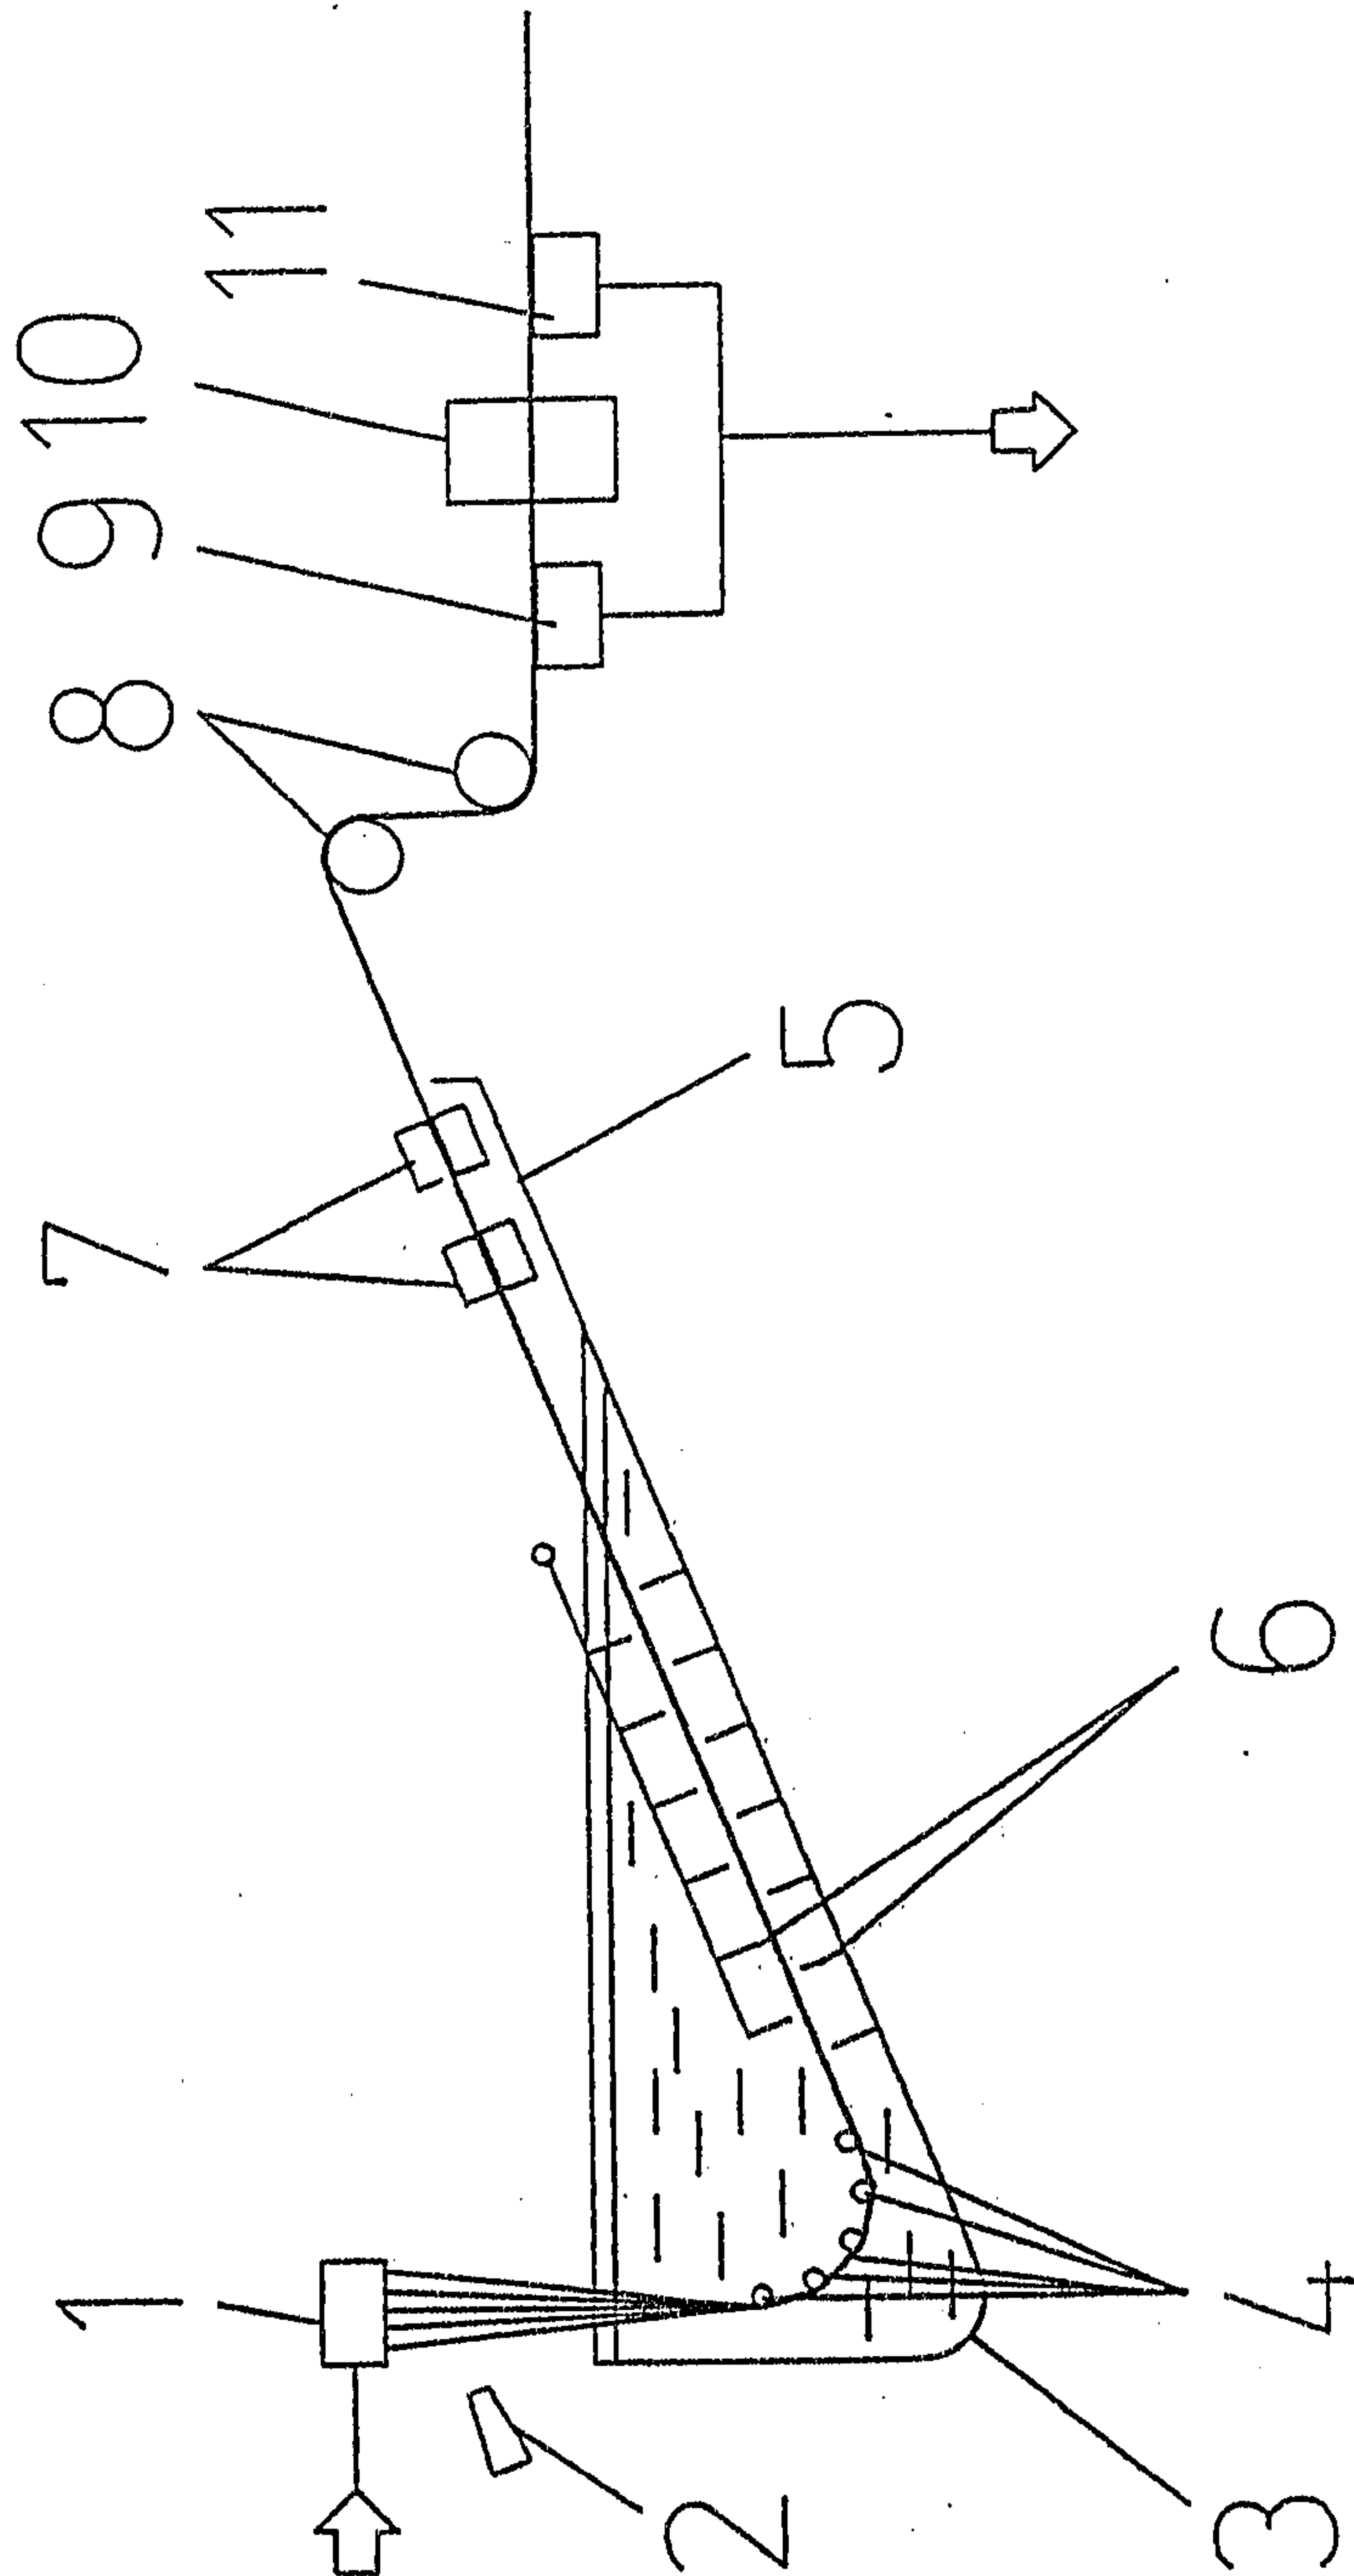


Fig. 2

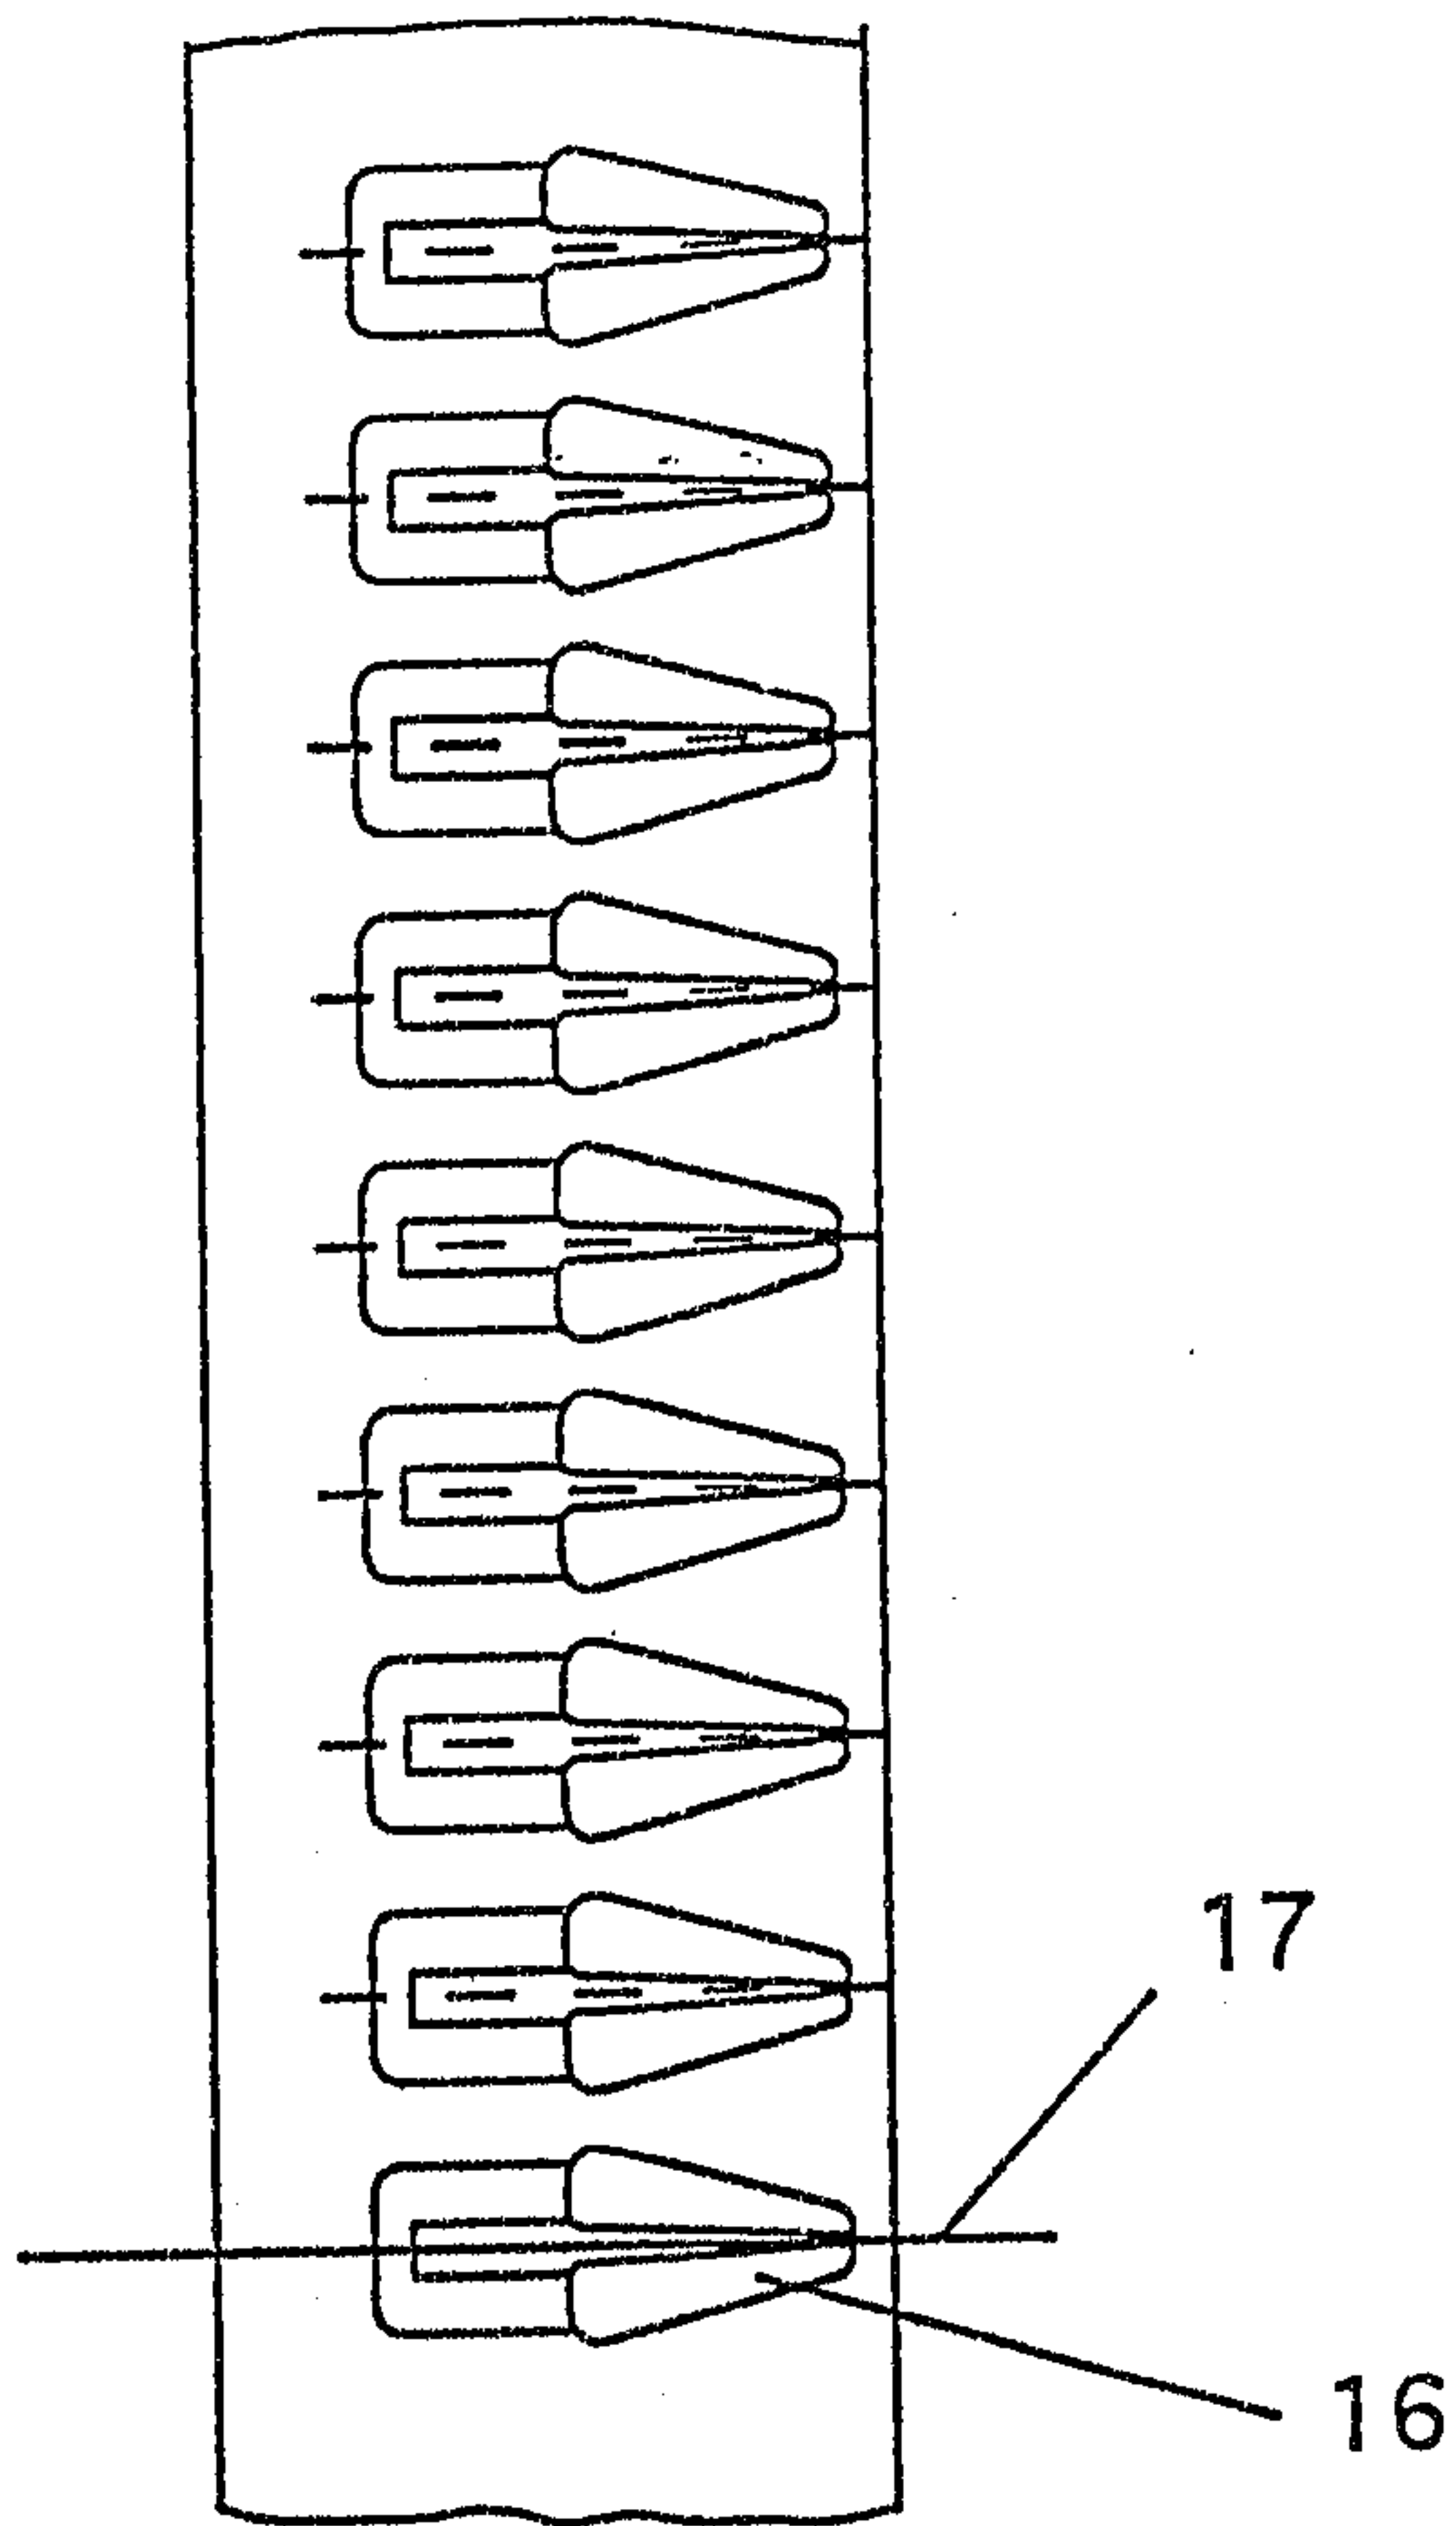


Fig. 3a

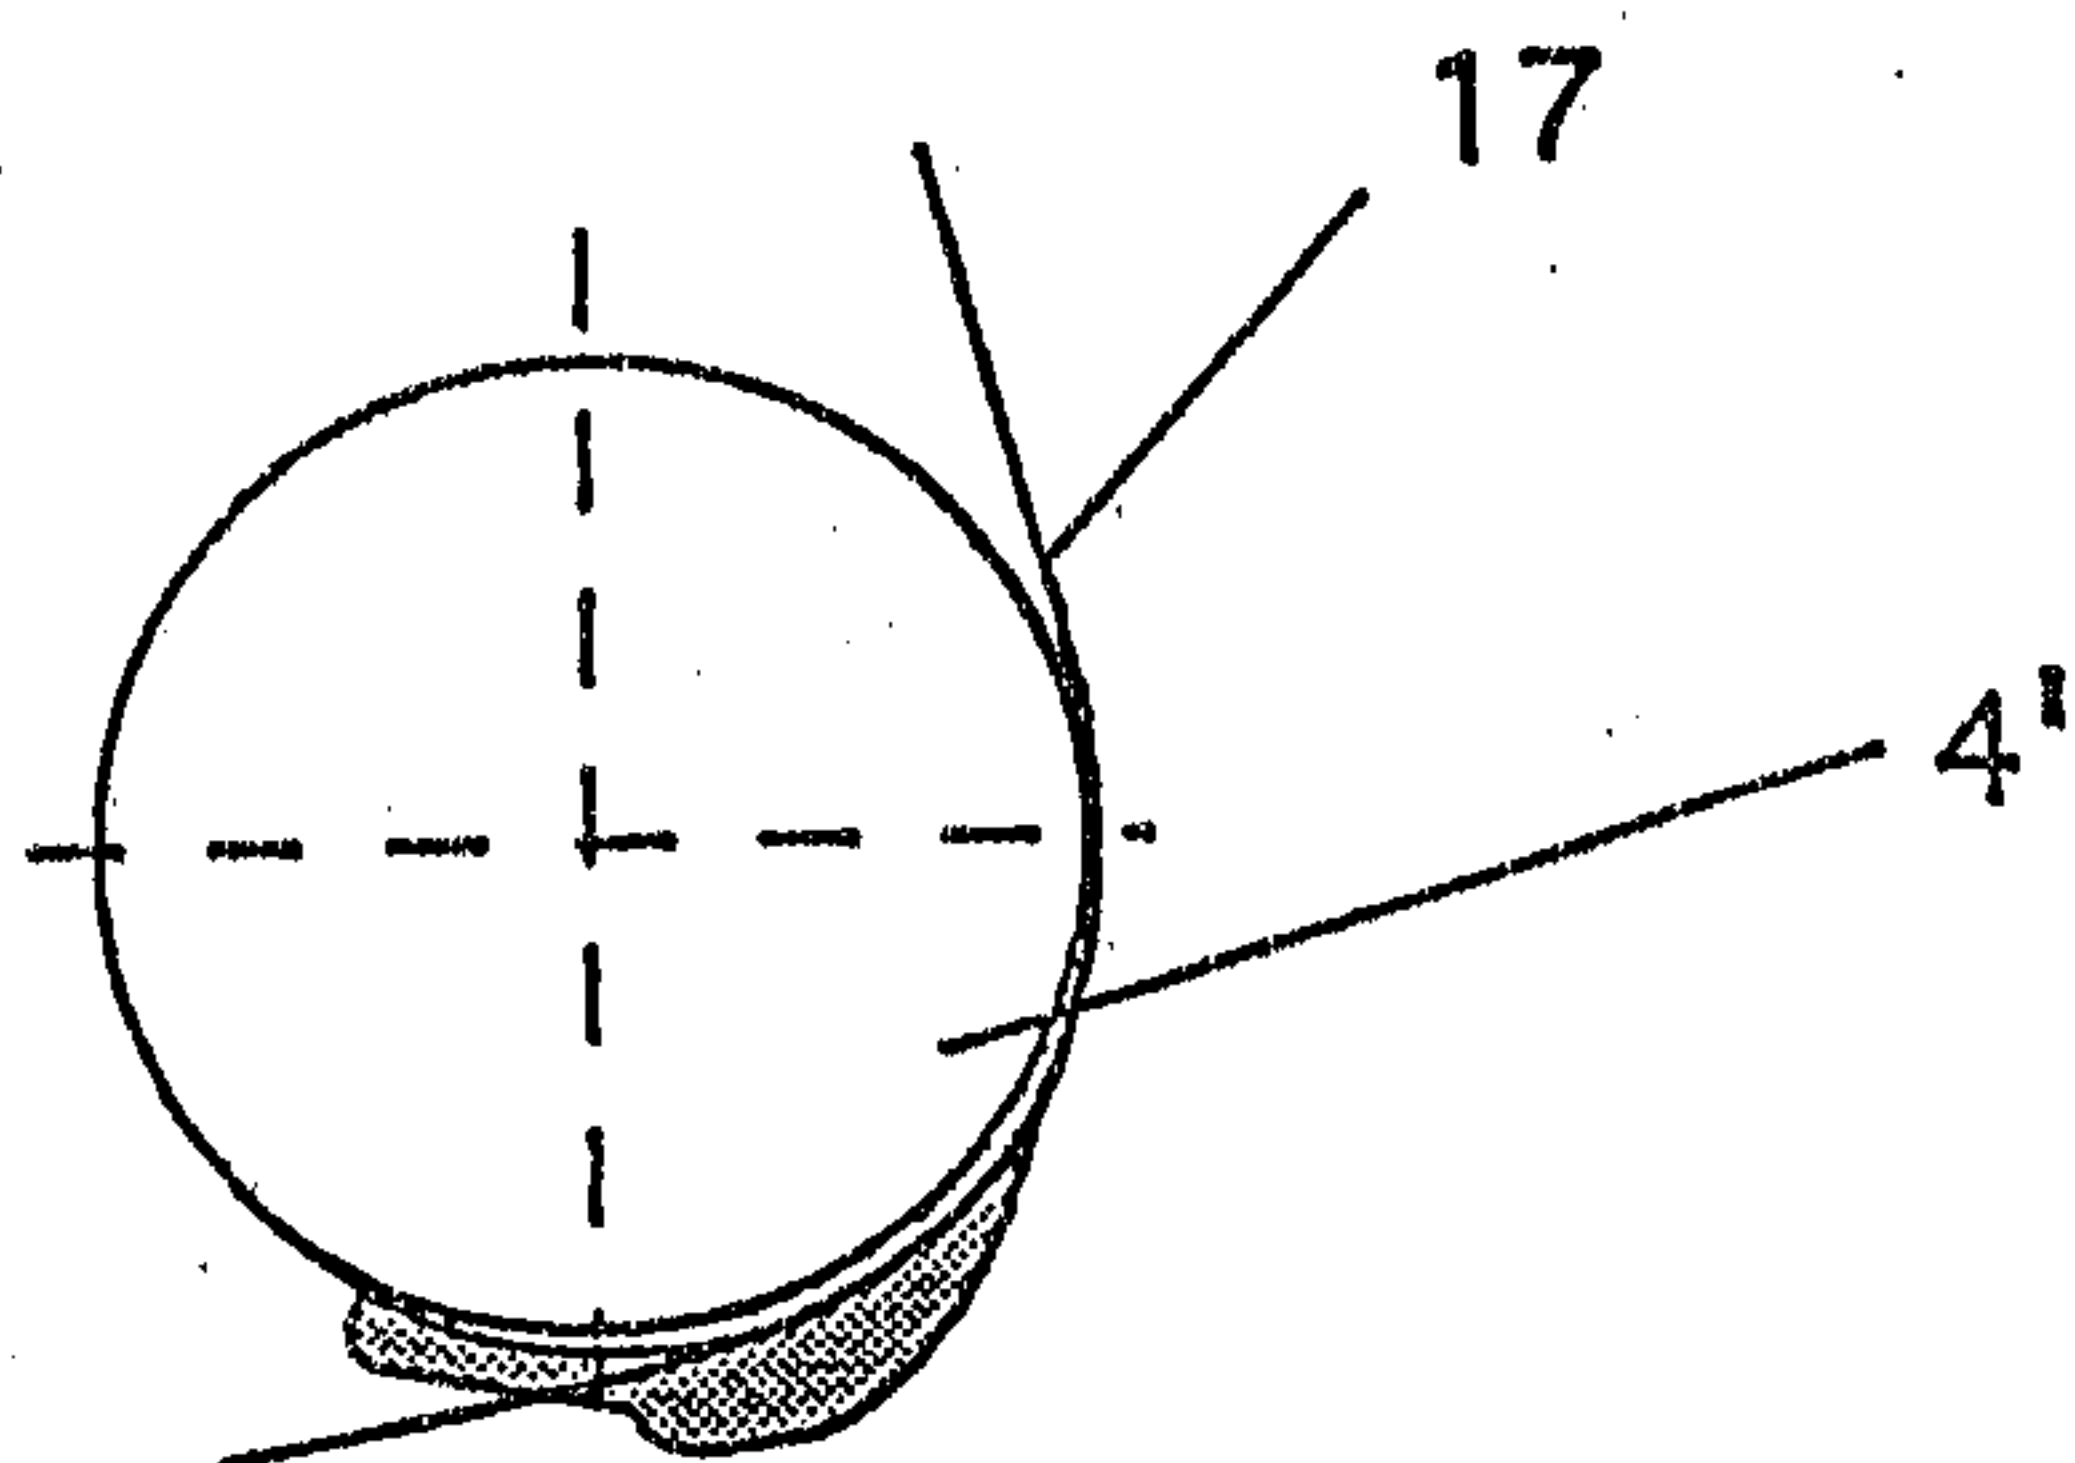


Fig. 3b

2118478

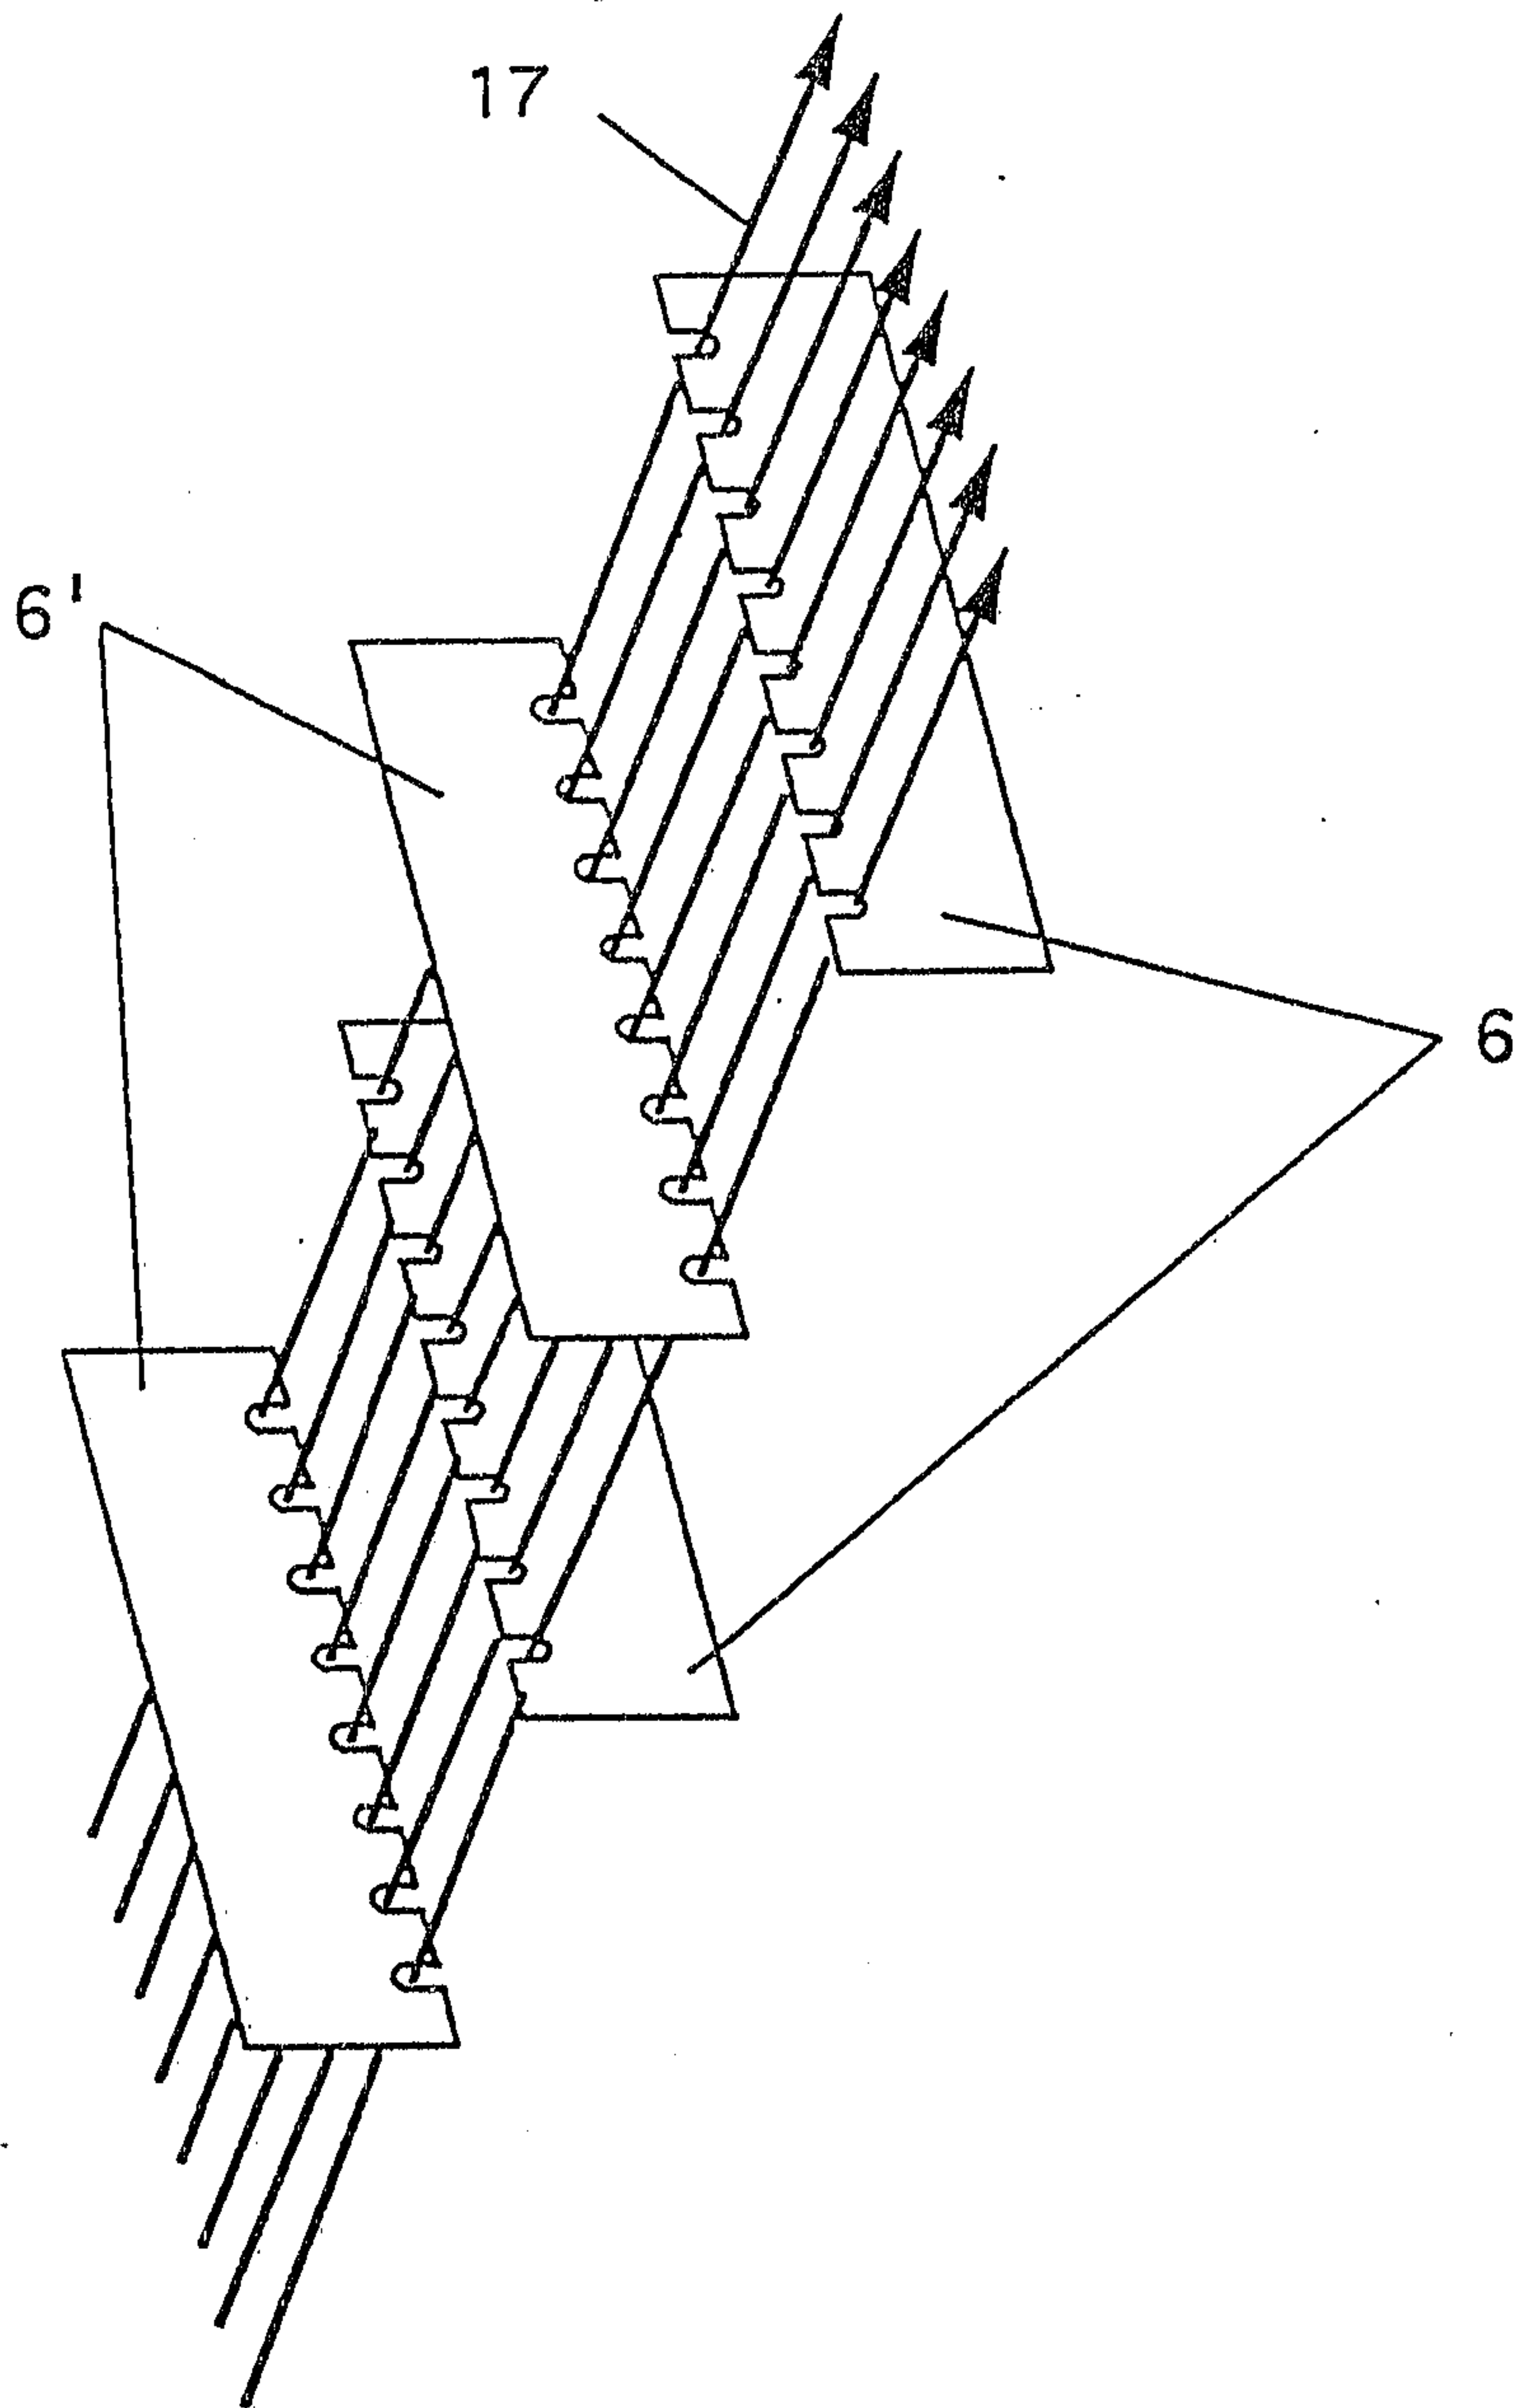


Fig. 4.

Patent Agents
Fetherstonhaugh & Co.

