



US 20070166492A1

(19) **United States**

(12) **Patent Application Publication**
Holbert et al.

(10) **Pub. No.: US 2007/0166492 A1**

(43) **Pub. Date: Jul. 19, 2007**

(54) **PAPERBOARD SUBSTRATE FOR BLISTER PACKAGING**

Publication Classification

(76) Inventors: **Victor P. Holbert**, Loveland, OH (US);
David V. Reed, Blanchester, OH (US)

(51) **Int. Cl.**
B32B 27/08 (2006.01)
B32B 7/12 (2006.01)
B32B 27/40 (2006.01)
B32B 27/34 (2006.01)
B32B 27/36 (2006.01)
B65D 83/04 (2006.01)

(52) **U.S. Cl.** **428/35.7**; 428/537.5; 428/480;
 428/423.1; 428/474.4; 428/349;
 428/198; 206/531

Correspondence Address:
INTERNATIONAL PAPER COMPANY
6285 TRI-RIDGE BOULEVARD
LOVELAND, OH 45140 (US)

(21) Appl. No.: **11/593,462**

(22) Filed: **Nov. 6, 2006**


Related U.S. Application Data

(63) Continuation of application No. 10/355,038, filed on Jan. 31, 2003, now Pat. No. 7,192,640.

(60) Provisional application No. 60/352,853, filed on Feb. 1, 2002.

(57) **ABSTRACT**

A packaging laminate comprising a paperboard substrate for providing a base layer, a tear-resistant polymer layer applied to said substrate, and a heat seal polymer layer applied to said tear-resistant polymer. This laminate structure is particularly useful for blister pack packaging.

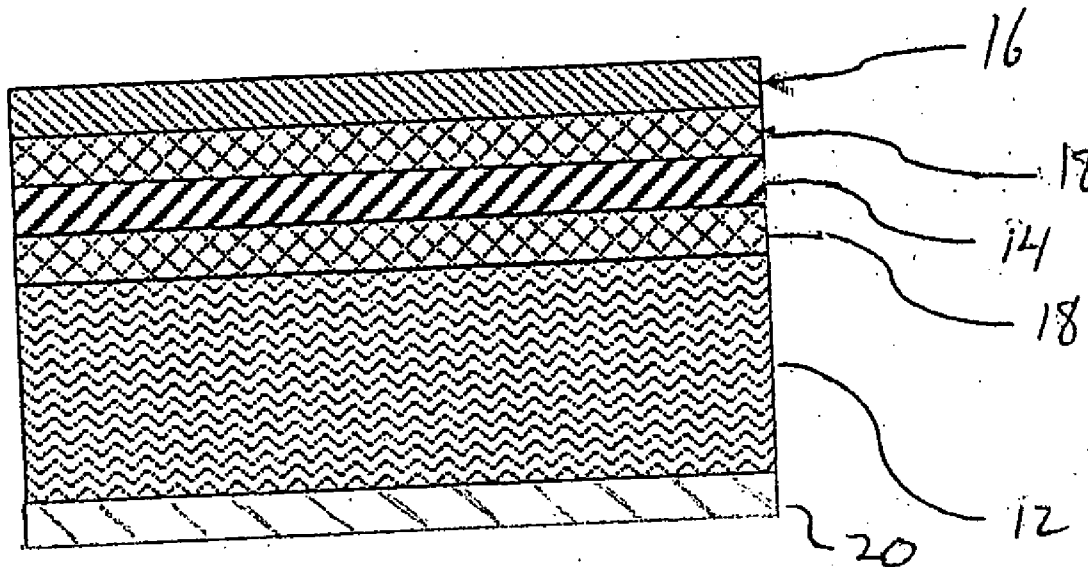

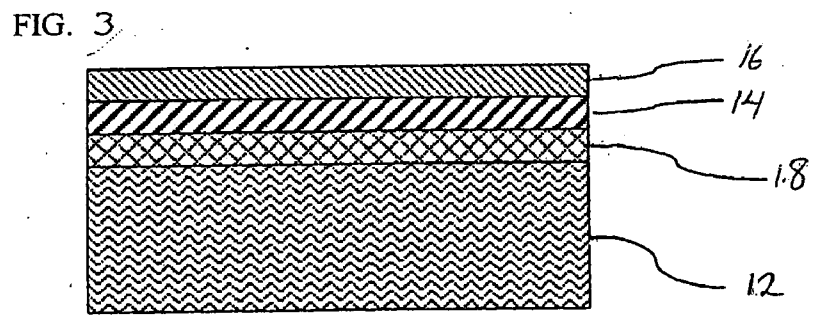
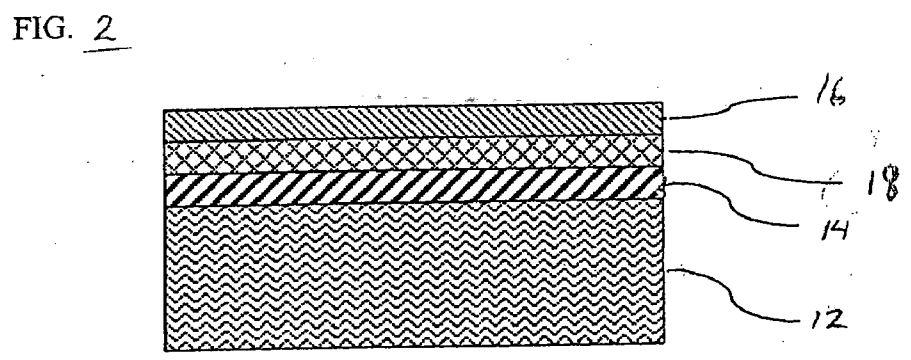
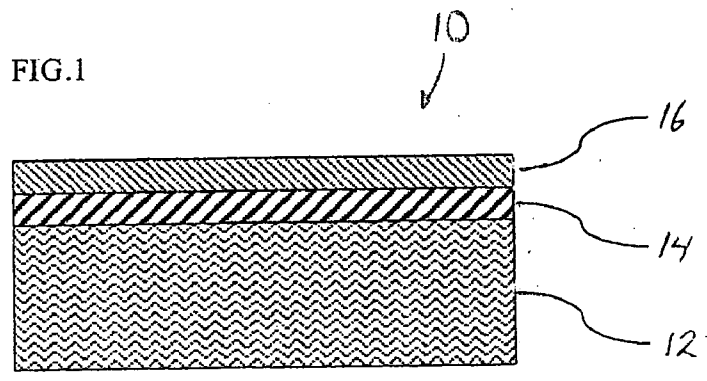


FIG. 4

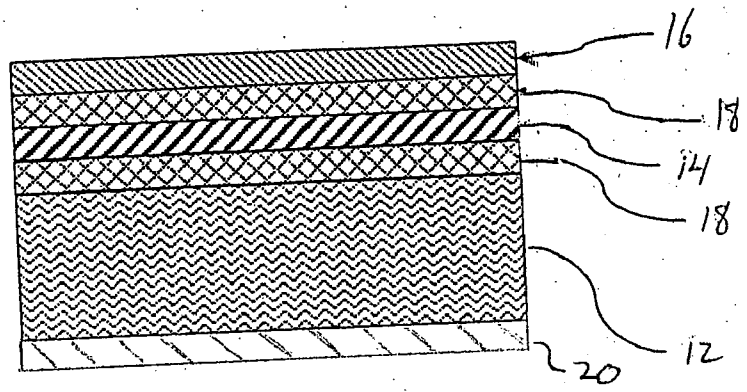


FIG. 5

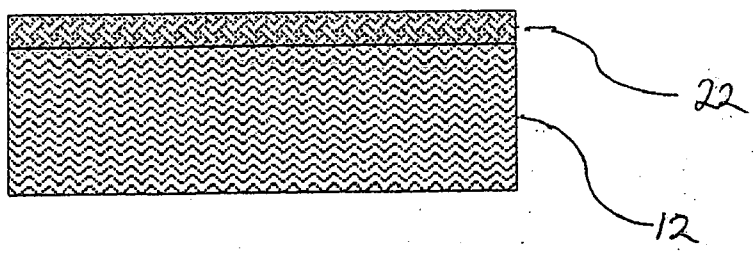


FIG. 6

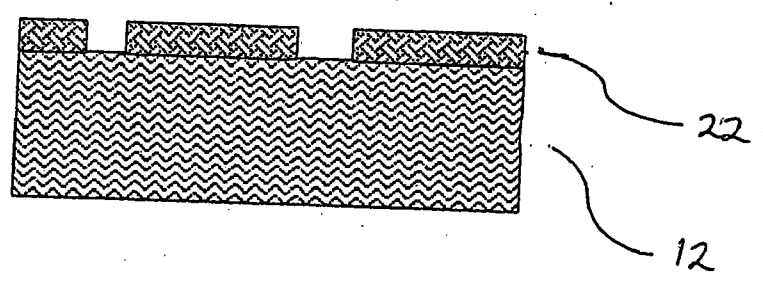


FIG. 7

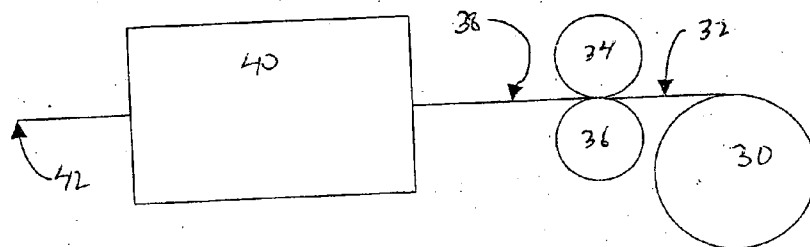


FIG. 8


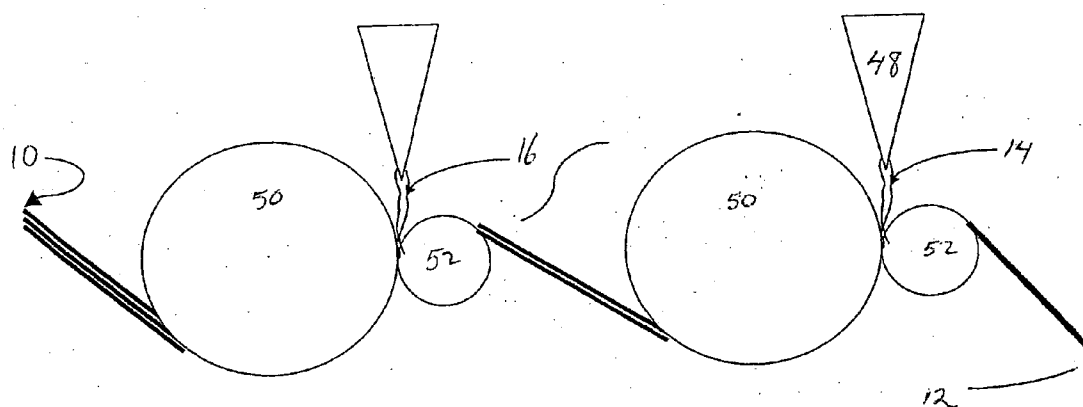


FIG. 9

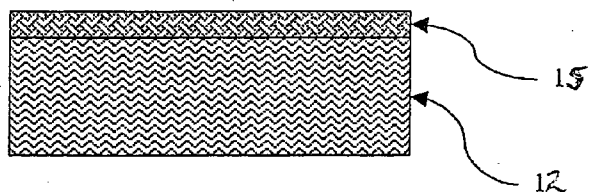

PAPERBOARD SUBSTRATE FOR BLISTER PACKAGING

[0001] This application claims the benefit of provisional application 60/352,853, filed Feb. 1, 2002.

BACKGROUND OF THE INVENTION

[0002] Blister packs are formed by a substrate, such as paperboard, with a plastic layer sealed to the substrate. The plastic layer has bubbles or compartments conforming to the size and shape of the product being packaged in blister packs with each tablet individually held within a bubble.

[0003] As is a common problem with pharmaceuticals in any type of packaging, the packaging must be accessible by the person using the medication, but also be child-resistant. This poses problems, particularly when the recipient of the medication is lacking manual dexterity or strength.

[0004] It is an object of the invention to provide a laminated paperboard substrate for packaging that is child-resistant, yet easily opened by the intended consumer.

[0005] It is another object of the invention to provide a laminated paperboard substrate for packaging that is child-resistant, yet easily opened by the intended consumer.

[0006] It is another object of the invention to provide a laminated paperboard substrate packaging wherein the strength needed to open the package can be controlled.

[0007] It is yet another object of the invention to provide a laminated paperboard substrate for a blister material that does not adhere to chill rolls during manufacture.

[0008] It is another object of the invention to provide a substrate that easily bonds to blister material including PVC, Aclar, and PET.

[0009] It is another object of the invention to provide a package which is inexpensive to manufacture.

[0010] These and other objects of the invention will become apparent after review the disclosure of the invention.

SUMMARY OF THE INVENTION

[0011] A packaging laminate is formed by a paperboard substrate with a plastic blister layer sealed to the structure. The packaging laminate comprises a paperboard substrate for providing a base layer, a tear-resistant polymer layer applied to said substrate, and a heat seal polymer layer applied to said tear-resistant polymer. This laminate structure is particularly useful for blister pack packaging. A series of instructions must be followed in order to access the contents of the blister package due to the presence of the tear-resistant layer. The tear strength can be controlled by modulating the levels of adhesion of the tear-resistant polymer to the paperboard by one of several methods. A patterned coating of adhesion primer can be applied to the paperboard. Also, a patterned coating of an adhesion inhibitor may be applied to the paperboard. Alternatively, the molten polymer stream forming the tear-resistant layer may be applied to the paperboard from the extrusion die with a patterned nip roll. The use of such modulated adhesion allows for higher tear strength in the body of the package and a lower level in specific areas defined by the package design and geometry. This allows the intended consumer to

easily access the contents of the blister pack while still forming a child-resistant layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a view of the laminate comprising the blister pack substrate;

[0013] FIG. 2 depicts the laminate with a tie layer between the tear-resistant polymer layer and heat seal polymer layer;

[0014] FIG. 3 is a view of the laminate having a tie layer between the paperboard and tear-resistant polymer;

[0015] FIG. 4 depicts the laminate having a tear layer between both the paperboard and tear-resistant layer and the tear-resistant layer and heat sealable polymer.

[0016] FIG. 5 depicts the substrate having an adhesion primer or adhesion inhibitor;

[0017] FIG. 6 depicts the substrate having a discontinuous layer of adhesive primer or adhesion inhibitor;

[0018] FIG. 7 shows the process for applying the adhesive primer or adhesion inhibitor to the substrate;

[0019] FIG. 8 shows the process for forming the laminate of the invention; and

[0020] FIG. 9 shows a laminate having a combined tear resistant and heat seal polymer layer.

DETAILED DESCRIPTION OF THE INVENTION

[0021] A laminate used to make the substrate of a blister pack is shown in FIG. 1. The packaging laminate comprises a paperboard substrate for providing a base layer, a tear-resistant polymer layer applied to said substrate and a heat seal polymer layer applied to said tear resistant polymer. Paperboard layer 12 provides the base layer of the substrate and a tear-resistant polymer layer 14 is applied to the paperboard to provide a child-proof resistance to opening. Paperboard layer 12 is most suitably high grade paperboard stock, for example, 100-300 lbs. or higher sized carton board. A heat seal polymer layer 16 is applied as the outer layer of the laminate and provides a good bonding surface for the plastic blister layer.

[0022] The tear-resistant polymer layer 14 may be polyamides, such as nylon 6, nylon(6,6), nylon(6,12) or other polyamides, polyester, polyurethane, block copolymer, unsaturated block copolymers such as styrene-butadiene-styrene, styrene-isoprene-styrene and the like; saturated block copolymers such as styrene-ethylene/butylene-styrene, styrene-ethylene/propylene-styrene, and the like) or other material possessing high tear-resistant properties. The polymer used to make the tear-resistant layer may be blended with another polymer selected from the group including ethylene copolymers such as ionomers, vinyl acetate, methylacrylic or acrylic acid copolymers.

[0023] Film weights for the tear-resistant polymer layer may be from 2 to 50 pounds per 3000 ft² with a preferred weight of 5 to 30 pounds per 3000 ft².

[0024] Blends of tear resistant polymers including from 60 to 100 weight percent of polyamide, such as nylon 6, nylon(6,6), nylon(6,12) or other polyamides, polyester, polyurethane, block copolymer, unsaturated block copoly-

mers such as styrene-butadiene-styrene, styrene-isoprene-styrene and the like; saturated block copolymers such as styrene-ethylene/butylene-styrene, styrene-ethylene/propylene-styrene, and other material possessing high tear-resistant properties, and blended with 0 to 40 weight percent of other polymers comprising ethylene copolymers such as ionomers, vinyl acetate, methylacrylic or acrylic acid copolymers.

[0025] The heat seal polymer layer **16** is formed by a material exhibiting excellent heat seal properties to PVC, Aclar, PET and other materials used to make the blister layer. The heat seal polymer layer is chosen from a group consisting of EVA, EMA, ionomers, acrylic copolymers, acrylate copolymers and modified versions of the like.

[0026] Film weights for the heat seal polymer layer may be from 3 to 15 pounds per 3000 ft² with a preferred weight of 8 pounds per 3000 ft².

[0027] The heat seal polymer can incorporate anti-blocking agents to reduce the tackiness of the sealant layer. The anti-blocking agents can be calcium carbonate, talc, silica or other suitable materials.

[0028] FIG. 2 depicts the laminate with the use of a tie layer **18** between the tear-resistant polymer layer **14** and heat sealable polymer layer **16** such as tie material coatings marketed under the trademark TYMOR, or more specifically, TYMOR 1205 having a coating weight on the order of 4 pounds per 3000 square foot ream. The tie material coating marketed is a polyethylene backbone polymer with functional groups grafted thereon, such as maleic anhydride copolymer. Suitable tie layer are selected from the group of materials including polymers grafted with species such as maleic anhydride. Film weights are from 1 to 12 pounds per 3000 ft², preferably from 1 to 3 pounds per 3000 ft².

[0029] FIG. 3 depicts a laminate using a tie layer **18** between the paperboard layer **12** and tear-resistant polymer layer **14**. Likewise, FIG. 4 depicts a laminate having a tie layer **18** between both the paperboard layer **12** and tear-resistant polymer layer, and between the tear-resistant polymer layer **14** and heat sealable polymer layer **16**. A clay coating can be formed on the side of the paperboard substrate opposite the tear-resistant and heat seal polymers to improve print quality.

[0030] The laminate tear strength can be controlled by varying the film weight of the tear-resistant polymer layer as an increase in tear resistance results from an increase in film weight. Also, during manufacturing, die cuts or perforations may be provided in the tear-resistant polymer layer. This creates areas of controlled weakness to direct the tearing of the package limiting the direction the package can be opened.

[0031] Also, modulating levels of adhesion between the tear-resistant polymer and the paperboard controls the amount of tear resistance. This may be done by the addition

of adhesion promoting primer **22** between the paperboard **12** and tear-resistant polymer **14**. Suitable materials for the adhesion promoting primer include polyethylene amine applied at between 1 and 6 pounds per 3000 ft², preferably 1 pound per 3000 ft². The adhesion primer is applied to the paperboard **12** prior to the extrusion of the tear-resistant polymer onto the substrate as is shown in FIG. 5.

[0032] The adhesion promotion primer **22** may be applied in a non-continuous pattern to create differential adhesion between the tear-resistant polymer to the paperboard. Such a discontinuous pattern is shown in FIG. 6. The weaker adhesion areas created by the non-continuous pattern would dictate the steps necessary to open the package to access the contents.

[0033] Alternatively, an adhesion inhibitor may, be applied between the paperboard and tear-resistant polymer. Suitable adhesion inhibitors include silicone, lacquers, or varnishes applied at between 1 and 6 pounds per 3000 ft², preferably 1 to 2 pounds per 3000 ft². The adhesion inhibitor may also be applied in a non-continuous pattern to create the differential adhesion of the tear-resistant polymer to the paperboard. The differential adhesion again creates patterns that may be followed to access the contents.

[0034] FIG. 7 depicts a method for coating the paperboard substrate with either the adhesion primer or adhesion inhibitor. A paperboard roll **30** feeds unprimed web **32** between a gravure roll **35** and backing roll **36** where either the adhesion primer or an adhesion inhibitor is applied. After application, the wet coated paperboard **38** passes through a dryer **40** and the dried primed web **42** exits from the dryer **40**. Differential adhesion may also be attained by the use of a patterned nip roll on the extrusion line when the tear-resistant polymer is applied to the paperboard. This process is depicted in FIG. 8. The nip roll cooperates with the chill roll and a non-uniform pattern is created to result in areas of variable adhesion. A paperboard web **12** is fed between a chill roll **50** and a nip roll **52**. An extruder drive **48** provides molten tear-resistant polymer. The resulting two layer structure is then fed between a second chill roll **50** and nip roll **52** where an extruder die applies molten heat seal polymer **16**. Exiting from this second chill roll is a completed laminate **10**. The resultant laminate will bond easily as board-to-board as well as board to blister under conditions having a range in temperature of 250-400 degrees Fahrenheit and pressure of 40-80 psi with a dwell times of 1 to 2 seconds. A low heat exposure results from the decreased heat seal initiation temperature and shorter dwell time. This is critical to products such as pharmaceutical, nutraceuticals and cosmetics that can be damaged by heat exposure. The bond strength of the laminate of the invention to itself and common blister materials under various seal conditions is summarized in the following table.

TABLE 1

Heat seal data for standard and tear-resistant blister constructions at various heat seal conditions.							
Temp: F.	Dwell: S	Pressure: PSI		Standard Blister to PVC	Tear- Resistant Blister to PVC	Tear- Resistant Blister to PET	Tear- Resistant Blister to Aclar
275	1	80	Avg in gf	1151	1612	1301	1448
300	1	80	Avg in gf	1380	1538	1188	1264
325	1	80	Avg in gf	1060	1244	1092	1515
350	1	80	Avg in gf	996	1545	1080	1424
Avg of All			Avg in gf	1147	1485	1165	1413
275	2	80	Avg in gf	1200	1811	1214	1532
300	2	80	Avg in gf	1365	1392	1164	1407
325	2	80	Avg in gf	1331	1596	1196	1326
350	2	80	Avg in gf	1522	1652	1213	1514
Avg of All			Avg in gf	1355	1613	1197	1445

[0035] In an alternative embodiment of the invention, the tear-resistant polymer may be blended with a polymer possessing heat sealable qualities. In this instance, shown in FIG. 9, a single layer 15 having both tear-resistance and the ability to heat seal to the blister layer is achieved in a single layer.

[0036] In another embodiment of the invention, the tear resistant polymer may be a tear resistant polymer film laminated to the paperboard substrate. For extrusion lamination the film could be attached by a tie layer 18. The heat seal polymer is then applied to the external side of the tear resistant polymer film. In this embodiment, the film could be an oriented film such as oriented or biaxially oriented polyamide, oriented polyester and the like. A preferred embodiment is a cross oriented HDPE film marketed under the trade name Valeron with film thickness from 1 to 3 mils, preferably from 1 to 1.5 mils. The film can be laminated by adhesive or extrusion lamination. If adhesive lamination is used, any suitable liquid adhesive could be used, such as ethylene vinyl acetate, polyurethane, acrylic or acrylate polymers and the like, in place of the tie layer. The tear resistant film comprising films of polyamide, such as nylon 6, nylon(6,6), nylon(6,12) or films of other polyamides, polyester, polyurethane, block copolymer including, unsaturated block copolymers such as styrene-butadiene-styrene, styrene-isoprene-styrene and the like; saturated block copolymers such as styrene-ethylene/butylene-styrene, styrene-ethylene/propylene-styrene, and the like or other materials possessing high tear-resistant properties. The polymer film used to make the tear-resistant layer may be blended with another polymer selected from the group consisting of ethylene copolymers such as ionomers, vinyl acetate, methacrylic or acrylic acid copolymers. The film thickness could be between 0.0005 and 0.002 inches, preferably 0.0005 inches.

[0037] Tear strengths of various preferred structures are detailed in the following table.

TABLE 2

Tear data for various tear resistant materials utilized in tear-resistant blister board construction.		
Material Composition	MD Elmendorf Tear (grams)	TD Elmendorf Tear (grams)
100% Polyamide	183.36	203.6
75% Polyamide/25% Ionomer	389.96	342.68
80% Polyamide/20% Ionomer	423.42	371.06
Tear Resistant Film	1050.7	684.4

[0038] While the invention has been described with reference to a preferred embodiment, variations and modifications would be apparent to one of ordinary skill in the art after reviewing the disclosure of the invention. The invention encompasses such variations and modifications.

1-27. (canceled)

28. A blister pack laminate comprising:

a substrate having inner and outer surfaces;

a tear-resistant polymer layer positioned interior to the inner surface of the substrate;

an adhesion inhibitor positioned between the substrate and the tear-resistant polymer layer wherein the adhesion inhibitor promotes disengagement of the substrate from the tear-resistant layer to reduce stress concentration, crack propagation or a combination thereof in the tear resistance layer; and

a heat seal polymer layer positioned interior to the tear-resistant layer.

29. The laminate of claim 28, wherein the substrate is paperboard.

30. The laminate of claim 28, wherein the tear resistant polymer layer comprises cross laminated HDPE.

31. The laminate of claim 28, wherein the tear resistant polymer layer comprises oriented or biaxially oriented polyamide and oriented polyester.

32. The laminate of claim 28, wherein the heat seal polymer layer is selected from the group consisting of EVA, EMA, ionomers, acrylic copolymers, acrylate copolymers and combination of two or more thereof.

33. The laminate of claim 28, wherein the heat seal polymer layer has anti-blocking agents to reduce the tackiness of the heat seal polymer layer.

34. The laminate of claim 28, wherein the anti-blocking agents comprise calcium carbonate, talc or silica.

35. The laminate of claim 28, further comprising a coating layer positioned exterior to the outer surface of the substrate.

36. The laminate of claim 28, further comprising a tie layer between the substrate and the tear resistant polymer layer.

37. The laminate of claim 28, further comprising a tie layer positioned between the tear-resistant polymer layer and the heat seal polymer layer.

38. The laminate of claim 28, further comprising a layer of adhesive primer positioned between the substrate and the tear-resistant polymer layer.

39. The laminate of claim 28 wherein the adhesion inhibitor is a layer.

40. A blister pack laminate, comprising:

a substrate having inner and outer surfaces;

a coating layer positioned exterior to the outer surface of the substrate;

a tear-resistant polymer layer positioned interior to the inner surface of the substrate;

an adhesion inhibitor disposed between the substrate and the tear-resistant polymer layer wherein the adhesion inhibitor promotes disengagement of the substrate from the tear-resistant layer to reduce stress concentration, crack propagation or a combination thereof in the tear resistance layer; and

a heat seal polymer layer positioned interior to the tear-resistant layer.

41. The laminate of claim 40, wherein the tear resistant polymer layer is a cross laminated HDPE tear resistant layer.

42. The laminate of claim 40, wherein the heat seal polymer layer is selected from the group consisting of EVA, EMA, ionomers, acrylic copolymers, acrylate copolymers and combination of two or more thereof.

43. A blister pack laminate comprising:

a substrate having inner and outer surfaces;

a tear-resistant polymer layer positioned interior to the inner surface of the substrate;

an adhesion inhibitor positioned between the substrate and the tear-resistant polymer layer; and

a heat seal polymer layer positioned interior to the tear-resistant polymer layer.

44. The blister pack laminate of claim 43 further comprising a coating layer positioned exterior to the outer surface of the substrate.

45. The blister pack laminate of claim 43 further comprising a tie layer between the substrate and the tear-resistant polymer layer.

46. The blister pack laminate of claim 43 further comprising a tie layer between the tear-resistant layer and the heat seal polymer layer.

47. The blister pack laminate of claim 43 wherein the adhesion inhibitor promotes disengagement of the substrate from the tear-resistant layer so as to reduce stress concentration and crack propagation in the tear resistance layer.

48. The blister pack laminate of claim 43 wherein the adhesion inhibitor is a layer.

49. The blister pack laminate of claim 48 wherein the adhesion inhibitor is a discontinuous layer.

50. The blister pack laminate of claim 49 wherein the adhesion inhibitor is a continuous layer.

51. The blister pack laminate of claim 43 wherein the adhesion inhibitor is layer which is applied with a nip roll.

52. The blister pack laminate of claim 43 wherein the tear resistant polymer layer comprises cross laminated HDPE.

53. The blister pack laminate of claim 43 wherein the tear resistant polymer layer comprises oriented or biaxially oriented polyamide and oriented polyester.

* * * * *