PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B01D 53/02, B01J 20/04, 20/30, C01G 1/02 — A1

(11) International Publication Number: **WO 99/04881**

(43) International Publication Date: 4 February 1999 (04.02.99)

(21) International Application Number: PCT/EP98/04432

(22) International Filing Date: 16 July 1998 (16.07.98)

(30) Priority Data:
BO97A000453 23 July 1997 (23.07.97) IT

(71) Applicants *(for all designated States except US)*: CONSIGLIO NAZIONALE DELLE RICERCHE [IT/IT]; Piazzale Aldo Moro, 7, I–00185 Roma (IT). UNIVERSITA' DEGLI STUDI DI BOLOGNA [IT/IT]; Via Zamboni, 33, I–40126 Bologna (IT).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: MATACOTTA, Francesco, Cino [IT/IT]; Via Molini, 22, I–34135 Trieste (IT). CALESTANI, Gianluca [IT/IT]; Via Paullo, 46, I–43100 Parma (IT).

(74) Agent: MODIANO, Guido; Modiano & Associati, Via Meravigli, 16, I–20123 Milano (IT).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND COMPOUND FOR THE SELECTIVE ADSORPTION OF NITROGEN OXIDES

(57) Abstract

A method for selectively absorbing nitrogen oxides NO_x from gaseaous mixtures containing carbon dioxide or carbon dioxide and water and optionally contaminants chosen among CO, SO_2, hydrocarbons and mixtures thereof, comprising placing the gaseous mixtures in contact with absorber compounds having formula $Ba_2Cu_3O_{5+d}$, where d is a number from 0.6 to 1. New compounds having the above formula are characterized by high resistance to carbonatation and by specific Raman spectra.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

METHOD AND COMPOUND FOR THE SELECTIVE ADSORPTION OF NITROGEN OXIDES

Technical field

The present invention relates to a method for the selective absorption of NO_x nitrogen oxides from gaseous mixtures that contain them and to the compounds that can be used for said absorption.

In particular, it relates to the absorption of nitrogen oxides from the exhaust gas of internal-combustion engines.

Background art

The literature (M. Machida et al. - J. Chem. Soc., Chem. Commun. (1990), p. 1165, and New Frontiers in Catalysis, Proc. of the 10th Intern. Congress on Catalysis, Budapest, Hungary, Elsevier (1993) p. 2644) describes mixed barium-copper oxides which are given the formula $BaCuO_x$, where x has the values of 2.1 and 2.5, and are capable of reversibly absorbing nitrogen oxides by working within a certain temperature range, fixing them as barium nitrites and nitrates, and of releasing them by heating to temperatures higher than the absorption values, restoring the structure of the initial oxides.

The above mentioned mixed oxides are highly reactive also to carbon dioxide, which they fix as highly stable barium carbonate which, by depositing on the surface of the material, inhibits its further absorbing capability.

High reactivity to carbon dioxide therefore prevents use of compounds $BaCuO_x$ to absorb nitrogen oxides from mixtures rich in carbon dioxide, such as the exhaust gas of motor vehicles.

An attempt has been made to obviate this drawback by

using mixtures of $BaCuO_{2.1}/MnO_2$ which are scarcely sensitive to carbonatation.

Finally, it has been found that $BaCuO_x$ compounds tend to lose, over time, their capability of absorbing nitrogen oxides.

Application EP-A-666 102 describes the use of substances for adsorbing nitrogen oxides from the exhaust gas of engines designed to work with an excess of oxygen in the air/gasoline mix, capable of adsorbing NO and of converting it into NO_2 by virtue of the action of the excess oxygen that is present in the mix.

When the engine runs with an oxygen deficit (air/gasoline mix rich in gasoline), the adsorbed nitrogen dioxide reacts with the reducing gases that are present in the mix (CO and unburnt hydrocarbons), becoming N_2 and oxidizing the reducing gases to CO_2 and H_2O.

The adsorbers used in the European application are essentially constituted by mixtures of barium carbonate and copper oxide formed locally during preparation by decomposition of copper nitrate and barium acetate with Ba/Cu ratios within broad ranges (from 1:3 to 3:1).

Said adsorbers, however, are entirely inactive in fixing nitrogen oxides in the absence of oxygen or in case of oxygen deficit, such as when the engine, at startup, runs with gasoline-rich air/gasoline mixes.

Furthermore, the temperature window in which the adsorbers are active is shifted toward high temperatures, thus preventing adsorption when the engine is running cold.

Disclosure of the invention

It has now been unexpectedly found that compounds

having the formula $Ba_2Cu_3O_{5+d}$, where d is a number from 0.6 to 1, are capable of selectively absorbing nitrogen oxides NO_x from gaseous mixtures rich in carbon dioxide, possibly containing pollutants such as CO, SO_2, hydrocarbons and mixtures thereof. Absorption occurs at temperatures between approximately 180°C and 480°C, working at atmospheric pressure.

It has furthermore been found, and it is another aspect of the invention, that nitrogen oxide absorption kinetics is accelerated considerably by the presence of water vapor in the mixtures. In the case of NO_2, the presence of oxygen and moisture shifts the absorption toward relatively low temperatures comprised between approximately 180°C and ambient temperature. Preferably, NO_2 absorption is performed at temperatures above 35°C-40°C.

Ways of carrying out the Invention

By effect of the absorption of considerable amounts of NO_x oxides, compounds $Ba_2Cu_3O_{5+d}$ decompose forming barium nitrite and mono- and divalent copper oxides, if they are exposed to NO in the absence of oxygen, barium nitrate and bivalent copper oxide, if they are exposed to NO_2 or NO in the presence of oxygen.

The thermogravimetric curves plotted in figures 1 and 2 show the absorption of NO and NO_2 as a function of the temperature (absorption of mixtures of 2.5% NO and 3% O_2 in helium, with a space velocity of 3000/h and 2.5% NO_2 and 2% O_2 in helium/nitrogen with a space velocity of 3000/h and a heating rate of 20°C/min (percentages expressed by volume)).

By heating to temperatures above approximately 480°C, the compounds that have formed begin to decompose, releasing the nitrogen oxides and restoring the $Ba_2Cu_3O_{5+d}$ structure of the starting compounds.

At temperatures above 480°C, barium nitrite and nitrate and copper oxide begin to react with each other, forming the compound $Ba_2Cu_3O_6$ and releasing, respectively, NO and NO_2 and possibly oxygen. In the range between 480° and 700°C, $Ba_2Cu_3O_6$ coexists alongside with barium nitrite and nitrate and with copper oxide; the $Ba_2Cu_3O_6$ fraction increases with time and temperature.

The selectivity of the $Ba_2Cu_3O_{5+d}$ with respect to CO_2 depends considerably on the preparation method.

It has been found, and it is another aspect of the invention, that the above compounds, and particularly the compound $Ba_2Cu_3O_6$, considerably increase their resistance to carbonatation if they are prepared starting from barium nitrate and copper oxide intimately mixed in a cationic ratio of 2:3, subsequently heating the mixture to 640°C-650°C in an air stream until the barium nitrate is completely decomposed and then cooling the mixture in air stream at a rate of no more than 20°C/min.

The air can be replaced with oxygen/nitrogen mixtures or oxygen/inert gas mixtures containing up to 25 g/m^3 of water vapor and up to 400 ppm of CO_2.

It has furthermore been found that the presence of nitrogen oxides during the cooling of the material, or their addition to the reaction atmosphere to complete the synthesis, facilitate the formation of the carbonatation-resistant materials.

The curve of carbonatation as a function of temperature which is typical of the compound $Ba_2Cu_3O_6$ thus prepared as above specified is reported in figure 3 (stream of 10% CO_2, 10% H_2O, complement with mixtures of nitrogen and argon, exposure 5 hours, percentages by volume).

For comparison, the circles indicate the carbonatation behaviour of a non-resistant compound $BaCuO_{2.5}$ prepared according to the methods described in literature.

The carbonatation curve of the compound supported on alumina is similar to the curve of the above mentioned compound. The preparation is made by immersing porous aluminum oxide, dehydrated beforehand, in a near-saturated solution of barium nitrate and copper nitrate in deionized water, using a barium ion/copper ion ratio of 2:3 and working at temperatures between 20°C and 80°C.

The material, impregnated with the solution, is dried at 110°C-150°C and then subjected to the above described heat treatment (reaction at 640°C-650°C and then cooling at a rate of no more than 20°C/min).

The procedure can be repeated in order to increase the filling of the pores of the aluminum oxide until saturation is reached.

Approximately 3.5% by weight of supported compound is obtained for each impregnation/heat treatment cycle.

The curve of figure 3 shows that the compound $Ba_2Cu_3O_6$ prepared as mentioned above is not sensitive to carbonatation up to approximately 420°C (less than 0.4% increase in weight after 5h of exposure). The increase is less than 2% at 500°C, again after 5h of exposure.

Resistance to carbonatation decreases considerably if

the compound $Ba_2Cu_3O_6$ is prepared at 800°C and then cooled quickly to ambient temperature (rate of approximately 5°C/sec).

Table 1 reports the weight increases by isothermal treatments in NO 1% by volume, 99% N_2 of $Ba_2Cu_3O_6$, in comparison with the "compound" $Ba_2CuO_{2.5}$ prepared according to the methods described in literature.

Table 1

"$BaCuO_{2.5}$"	300°C	400°C	500°C
12 hours	17.4%	17.1%	7.9%
36 hours	17.3%	17.4%	11.5%
60 hours	17.5%	17.4%	12.9%

$Ba_2Cu_3O_6$	300°C	400°C	500°C
12 hours	17.8%	16.5%	11.7%
36 hours	19.5%	19.8%	19.3%
60 hours	21.7%	21.5%	18.2%

The table shows that the compounds $BaCuO_{2.5}$ ceases to absorb after approximately 12h at temperatures between 300°C and 400°C, whilst absorption continues at 500°C. Absorption at 500°C is slightly more than half the absorption of $Ba_2Cu_3O_6$, which instead continues to absorb for prolonged periods at all temperatures from 300°C to 500°C.

The Raman spectrum of the carbonatation-resistant compound $Ba_2Cu_3O_6$ (prepared as herein before indicated) shown in figure 4 shows that the maximum intesity peak in the wave number range from 0 to 800 cm^{-1} appears at wave

number of 598±5 cm^{-1} , and that at wave number 633±3 cm^{-1} there is a mode whose intensity is between 0% and 30% of the intensity of the mode that appears at 598±5 cm^{-1}, or that said mode is absent.

It is also found that at wave number 560±5 cm^{-1} there is a mode whose intensity is 30% less than the intensity of the mode that appears at 598±5 cm^{-1}. A symmetric band is centered around wave number 520±7 cm^{-1} and has an intensity between 20% and 40% of the intensity of the mode that appears at 598±5 cm^{-1}.

The Raman spectra were recorded with a Dilor LabRam apparatus, using a laser beam at 632.8 nm with an intensity of 1 mW, focused on sample portions measuring 1 micron in diameter.

X-ray diffraction measurements of powders and of single crystals show that the compound $Ba_2Cu_3O_6$ crystalizes in the rhombic system, with cells characterized by the lattice parameters 4.18 Å < a < 4.35 Å, 6.83 Å < a < 7.33 Å and c = 11.39 ± 0.02 Å, which are the result of the distortion of a hexagonal packing in which 4.05 Å < a < 4.28 Å, c = 11.39 ± 0.02 Å and the angle δ changes from 120^{o} to a value between 115^{o} and 118^{o}.

The X-ray diffraction spectrum (powder diffraction) of the carbonatation-resistant compounds shows that the intensity of the reflections that can be detected at the angles $2\theta = 29.7^{o} \pm 0.05^{o}$ and $2\theta = 30.3^{o} \pm 0.05^{o}$ is very weak and lower than 10% of the intensity of the intense reflection at $2\theta = 29.00^{o} \pm 0.05^{o}$. The lower the intensity of these reflections, the higher the resistance to carbonatation.

The powder X-ray diffraction measurements were made using a Philips X-pert diffractometer constituted by a PW1830/40 generator, PW3719 goniometer and PW3710 control unit using Cu Kα radiation.

Advantageously, in order to increase the exposed surface area, the compounds used in the absorption method of the invention are supported on porous carriers having surface area higher than $50m^2/g$ preferably higher than 100 m^2/g and more preferably comprised in the range of 150-500 m^2/g, which are inert towards the reactants used for preparing the compounds.

Examples of said carriers are alumina, titania, zirconia boron nitride, silicon carbide.

As mentioned, the compounds according to the invention are applied particularly in the absorption of NO_x oxides from the exhaust gas of internal-combustion engines.

By virtue of the capability to absorb and desorb oxides at temperatures in the range between approximately 200^oC and 700^oC, the compounds are used in mufflers preferably placed in a portion of the exhaust pipe which is at a temperature between approximately 200^oC and 500^oC when the motor is running cold and at temperatures above approximately 550^oC when the motor is running steady.

Another application of interest of the compounds relates to the absorption of nitrogen dioxide (NO_2) from the fumes of plants such as those for nitric acid and for preparing silicon.

Other applications of the compounds relate to the absorption of NO_x oxides from the exhaust fumes of domestic heating systems or from fuel-burning electric power

stations.

In the case of the absorption of nitrogen oxides from the exhaust fumes of fixed plants, such as heating systems or fuel-burning power stations, the compounds Ba_2Cu_3O5+d, once they have been converted into Ba nitrites and nitrates, can be restored to the initial fully active form by heating.

It has been found that the compounds $Ba_2Cu_3O_{5+d}$ which have already been subjected to absorption of NO_x oxides and have not been fully decomposed into barium nitrate and cupric oxide oxidize hydrocarbons to CO_2 and H_2O and CO to CO_2 even in the absence of oxygen at temperatures lower than those of pure compounds $Ba_2Cu_3O_{5+d}$.

Following test illustrates the above behaviour.

Since the compounds decompose into barium nitrate and cupric oxide which do not contribute to the catalytic reaction, the maximum activity is found in the materials which have been exposed to NO_x oxides just until the decomposition starting point.

Porous alumina was impregnated in a solution of $Ba(NO_3)_2$ and $Cu(NO_3)_2$ in a cationic ratio of 2:3, dried at 150°C and then treated at 650°C until full nitrate decomposition was achieved. The resulting product was quickly cooled to ambient temperature and was found to be constituted by 3.5% by weight of the compound $Ba_2Cu_3O_{5+d}$. Part of this material was exposed for 1 hour to a stream of gas composed of 90% synthetic air, 2% H_2O and 8% NO_2. Under these conditions, approximately 50% of the compound $Ba_2Cu_3O_6$ decomposed to barium nitrate and copper nitrate. The material was then heated in air at 250°C to convert the

copper nitrate into copper oxide. The treatment with oxygen can be omitted when the material is used in the oxidation reaction at 250°C or higher temperatures.

0.5 grams of material thus prepared were introduced in a reactor to measure the catalytic yield in methane oxidation. The gas in the reactor was constituted by a mixture of methane/oxygen/nitrogen in the proportions 2/18/80, flowing at 700 cc/min (84000/hour).

As the temperature increased, the yields listed in Table 2 were found; these yields are expressed as the percentage of methane converted into CO_2 + H_2O and compared with the yields of a sample of the same material in pure form.

It has been found that the activity of the compounds $Ba_2Cu_3O_{5+d}$ can be significantly increased by promoting them with oxides selected from cerium oxide, zirconium oxide and the oxides of the rare earth metals particularly lanthanium and cerium. The amount of the promoter generally is up to 10% by weight expressed as metal.

Table 2

Temperature (°C)	Yield of the material after NO_2 absorption (%)	Yield of material in pure form (%)
300	0.0	0.0
350	3.0	0.0
400	3.8	1.6
450	9.8	6.7
500	20.0	16.1

550	91.8	40.2
600	100.0	100.0

The disclosures in Italian Patent Application No. BO97A000453 from which this application claims priority are incorporated herein by reference.

CLAIMS

1. A method for selectively absorbing nitrogen oxides NO_x from gaseous mixtures containing carbon dioxide or carbon dioxide and water and optionally contaminants chosen among CO, SO_2, hydrocarbons and mixtures thereof, comprising contacting the gaseous mixtures with absorber compounds having the formula $Ba_2Cu_3O_{5+d}$, where d is a number from 0.6 to 1.

2. A method according to claim 1, wherein absorption is performed in the presence of oxygen.

3. A method according to claims 1 and 2, wherein the copper-barium compound has the formula $Ba_2Cu_3O_6$.

4. A method according to claims 1, 2 and 3, wherein absorption is performed at temperatures between 180 and 480°C.

5. A method according to claims 1 to 4, wherein the nitrogen oxides are absorbed from gas mixtures formed of the exhaust gas of internal-combustion engines.

6. A method according to claim 5, wherein the compounds are used in mufflers located in a portion of the exhaust pipe that is at temperatures between 200°C and 550°C when the engine runs cold and in a portion that reaches temperatures above 550°C when the engine runs warm.

7. A method for absorbing NO_2 from exhaust fumes of nitric acid plants or silicon production plants, wherein the fumes are passed over absorbers which comprise compounds $Ba_2Cu_3O_{5+d}$, where d is from 0.6 to 1.

8. A method according to claim 7, wherein absorption is performed at a temperature between 40 and 180°C.

9. A method for absorbing NO_x nitrogen oxides from the exhaust fumes of domestic heating systems or fuel-burning power stations, wherein the fumes are passed over absorbers which comprise compounds $Ba_2Cu_3O_{5+d}$, where d is from 0.6 to 1.

10. Compounds $Ba_2Cu_3O_{5+d}$, where d is a number from 0.6 to 1, characterized by resistance to carbonatation in a stream of 10% CO_2, 10% H_2O, the complement being a mixture of nitrogen and argon, measured by the increase in weight of the compound, of less than 0.4% at 420°C after 5 hours of exposure and less than 2% at 500°C again after 5 hours of exposure.

11. The compound $Ba_2Cu_3O_6$ having the carbonatation-resistance characteristics indicated in claim 10.

12. Compounds $Ba_2Cu_3O_{5+d}$, where d is a number from 0.6 to 1, characterized by a Raman spectrum having the maximum intensity peak in the wave number range from 0 to 800 cm^{-1} at a wave number of 598±5 cm^{-1}, and in which at wave number 633±3 cm^{-1} there is a mode whose intensity is 30% less than the intensity of the mode at 598±5 cm^{-1}, or said mode is absent.

13. The compound $Ba_2Cu_3O_6$ having the Raman spectrum as characterized in claim 12.

14. Compounds $Ba_2Cu_3O_{5+d}$ according to claim 12, wherein in the Raman spectrum there is, at wave number 560±5 cm^{-1}, a mode whose intensity is 30% less than the intensity of the mode at 598±5 cm^{-1}.

15. The compound $Ba_2Cu_3O_6$ having the Raman spectrum as characterized in claim 14.

16. Compounds $Ba_2Cu_3O_{5+d}$ according to claim 14, having

a Raman spectrum according to claim 14 which comprises a symmetric band which is centered at wave number 520±7 cm^{-1} and has an intensity between 20% and 40% of the intensity of the mode at 598±5 cm^{-1}.

17. The compound $Ba_2Cu_3O_6$ having the Raman spectrum as characterized in claim 16.

18. Compounds according to claims 10 to 17 supported on inert porous carriers having surface area higher than 50 m^2/g.

19. Compounds according to claims 10 to 18 which have been exposed to No_x oxides until a point of not complete decomposition of the compounds to barium nitrate and cupric oxide is reached.

20. Compounds according to claim 19, wherein the exposition to NO_x oxides has been discontinued at the point of the starting decomposition of the compounds.

21. Compounds according to claims 18 to 20 containing a promoter selected from the group consisting of cerium oxide, zirconium oxide and the oxides of the rare earth metals.

22. A process for the preparation of the compounds of claims 10 to 17 comprising heating a mixture of barium nitrate and copper oxide in a cationic ratio of 2:3 at a temperature of 640°-650°C in air stream until barium nitrate is completely decomposed and then cooling the reaction mixture in air stream at a ratio of no more than 20°C/min.

23. A process according to claim 22, wherein the air stream is replaced with oxygen/nitrogen or oxygen/inert gas mixtures containing up to 25g/m^3 of water vapor and up to

400ppm of CO_2.

24. A process according to claims 22 and 23, wherein the reaction atmosphere and/or the cooling atmosphere is added with nitrogen oxides.

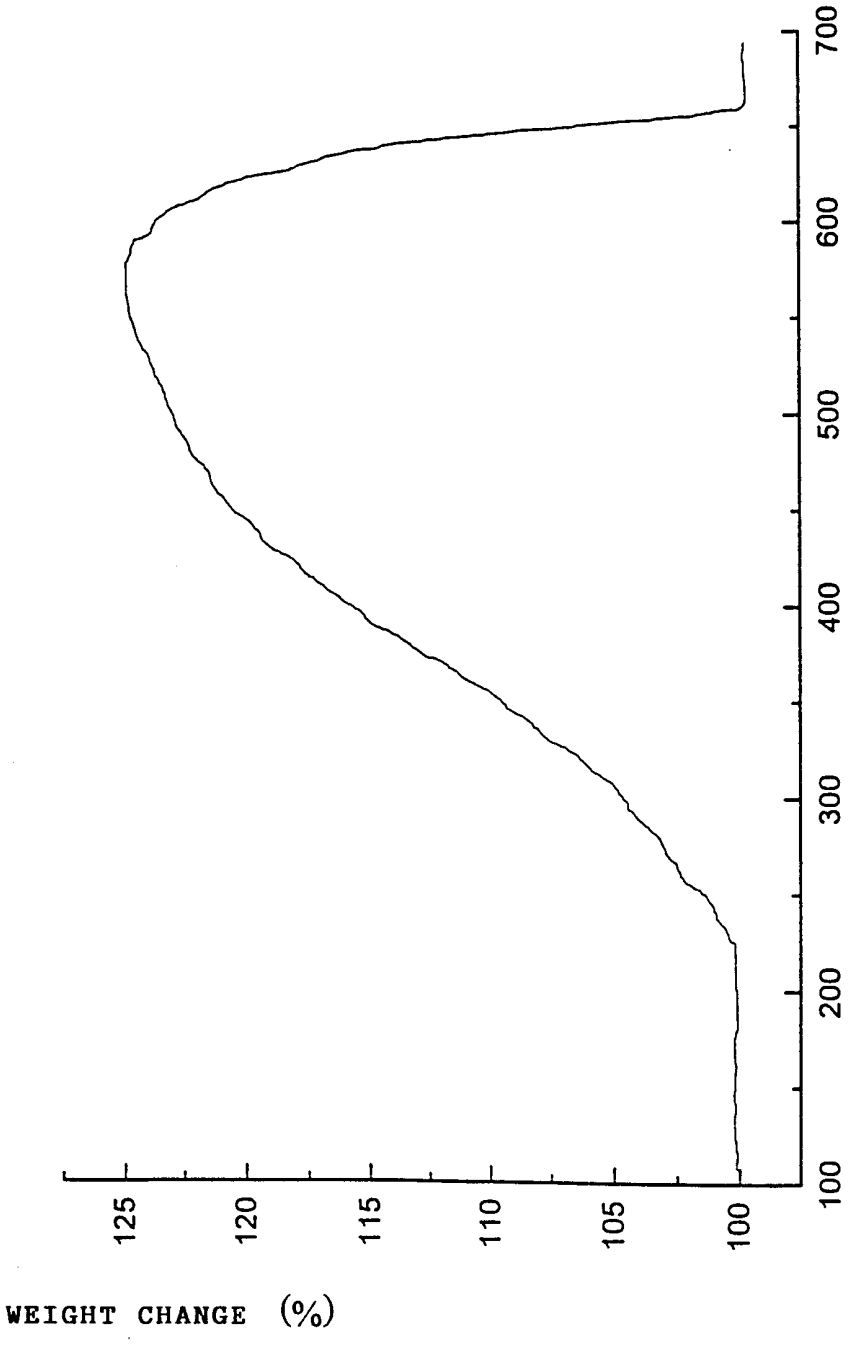

125
120
115
110
105
100
WEIGHT CHANGE (%)
100
200
300
400
500
600
700
Temp [°C]

Fig. 1

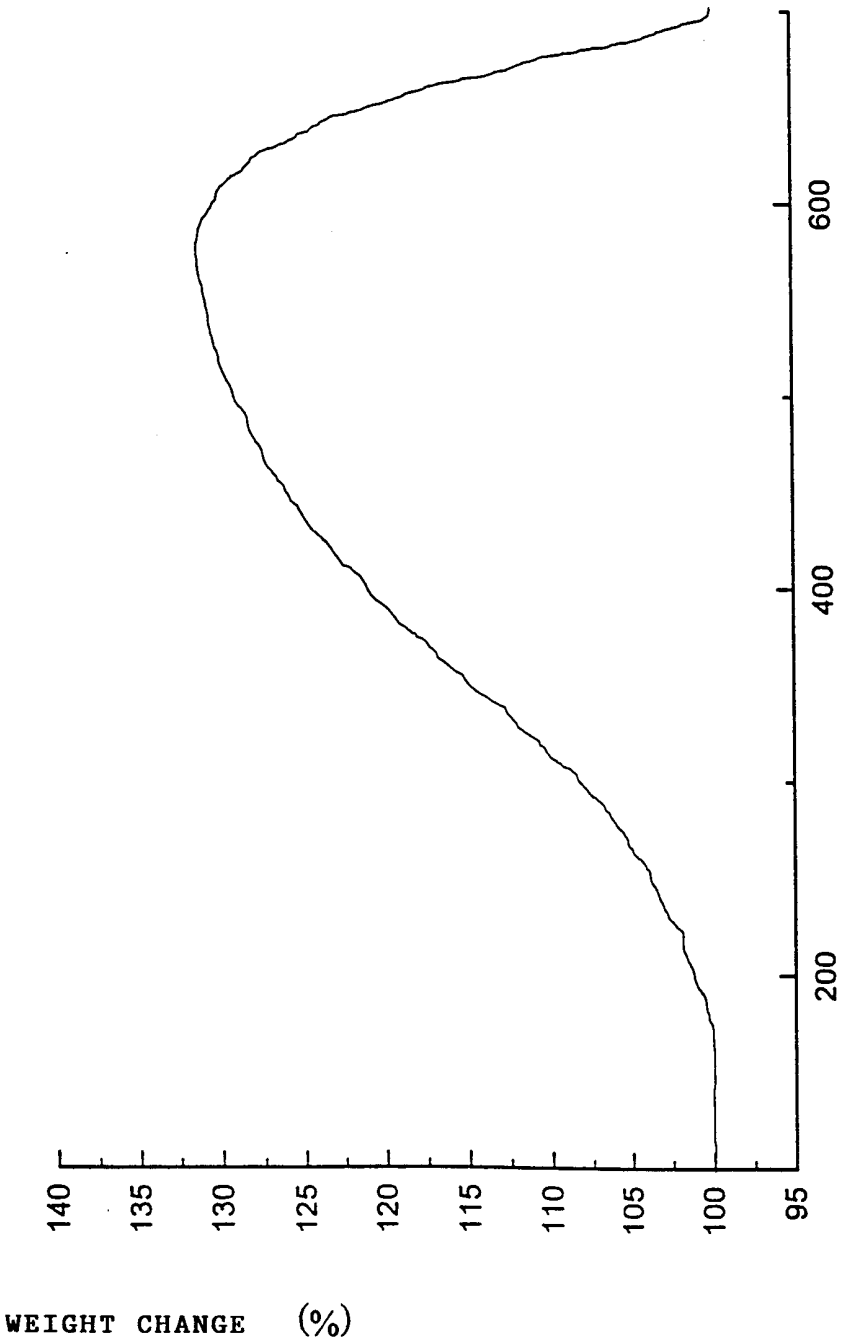

140
135
130
125
120
115
110
105
100
95
200
400
600
Temp [°C]
WEIGHT CHANGE (%)

Fig. 2

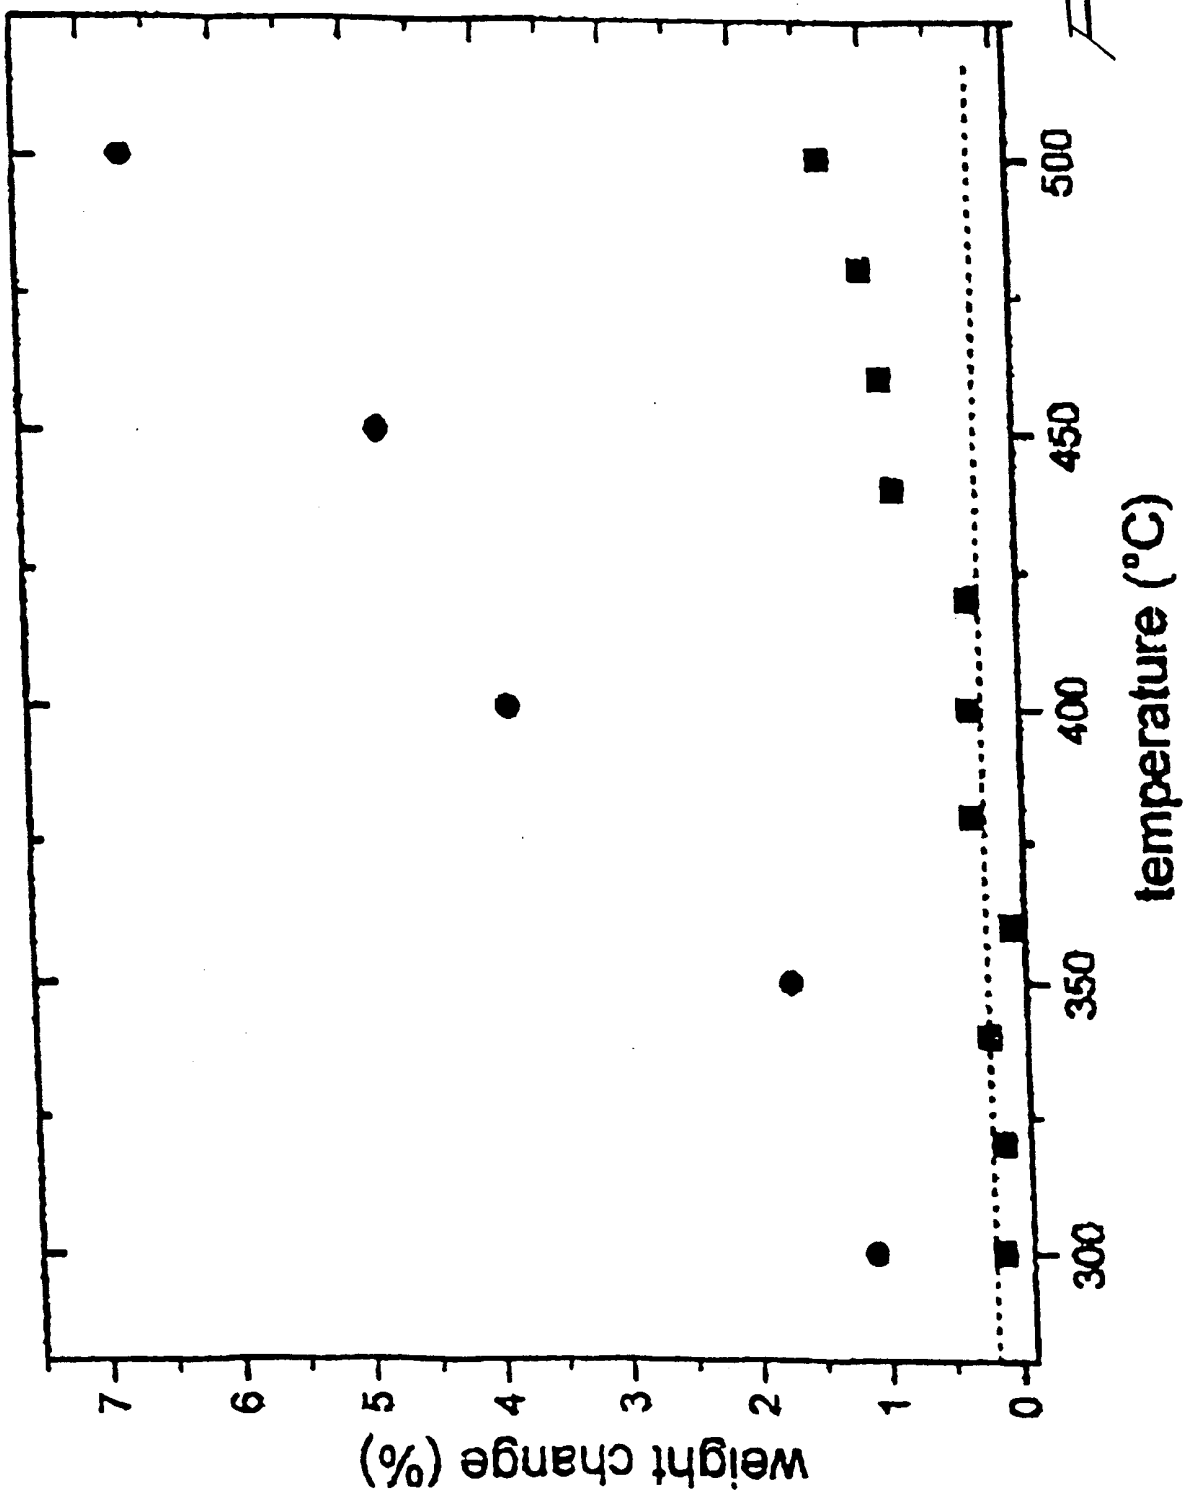
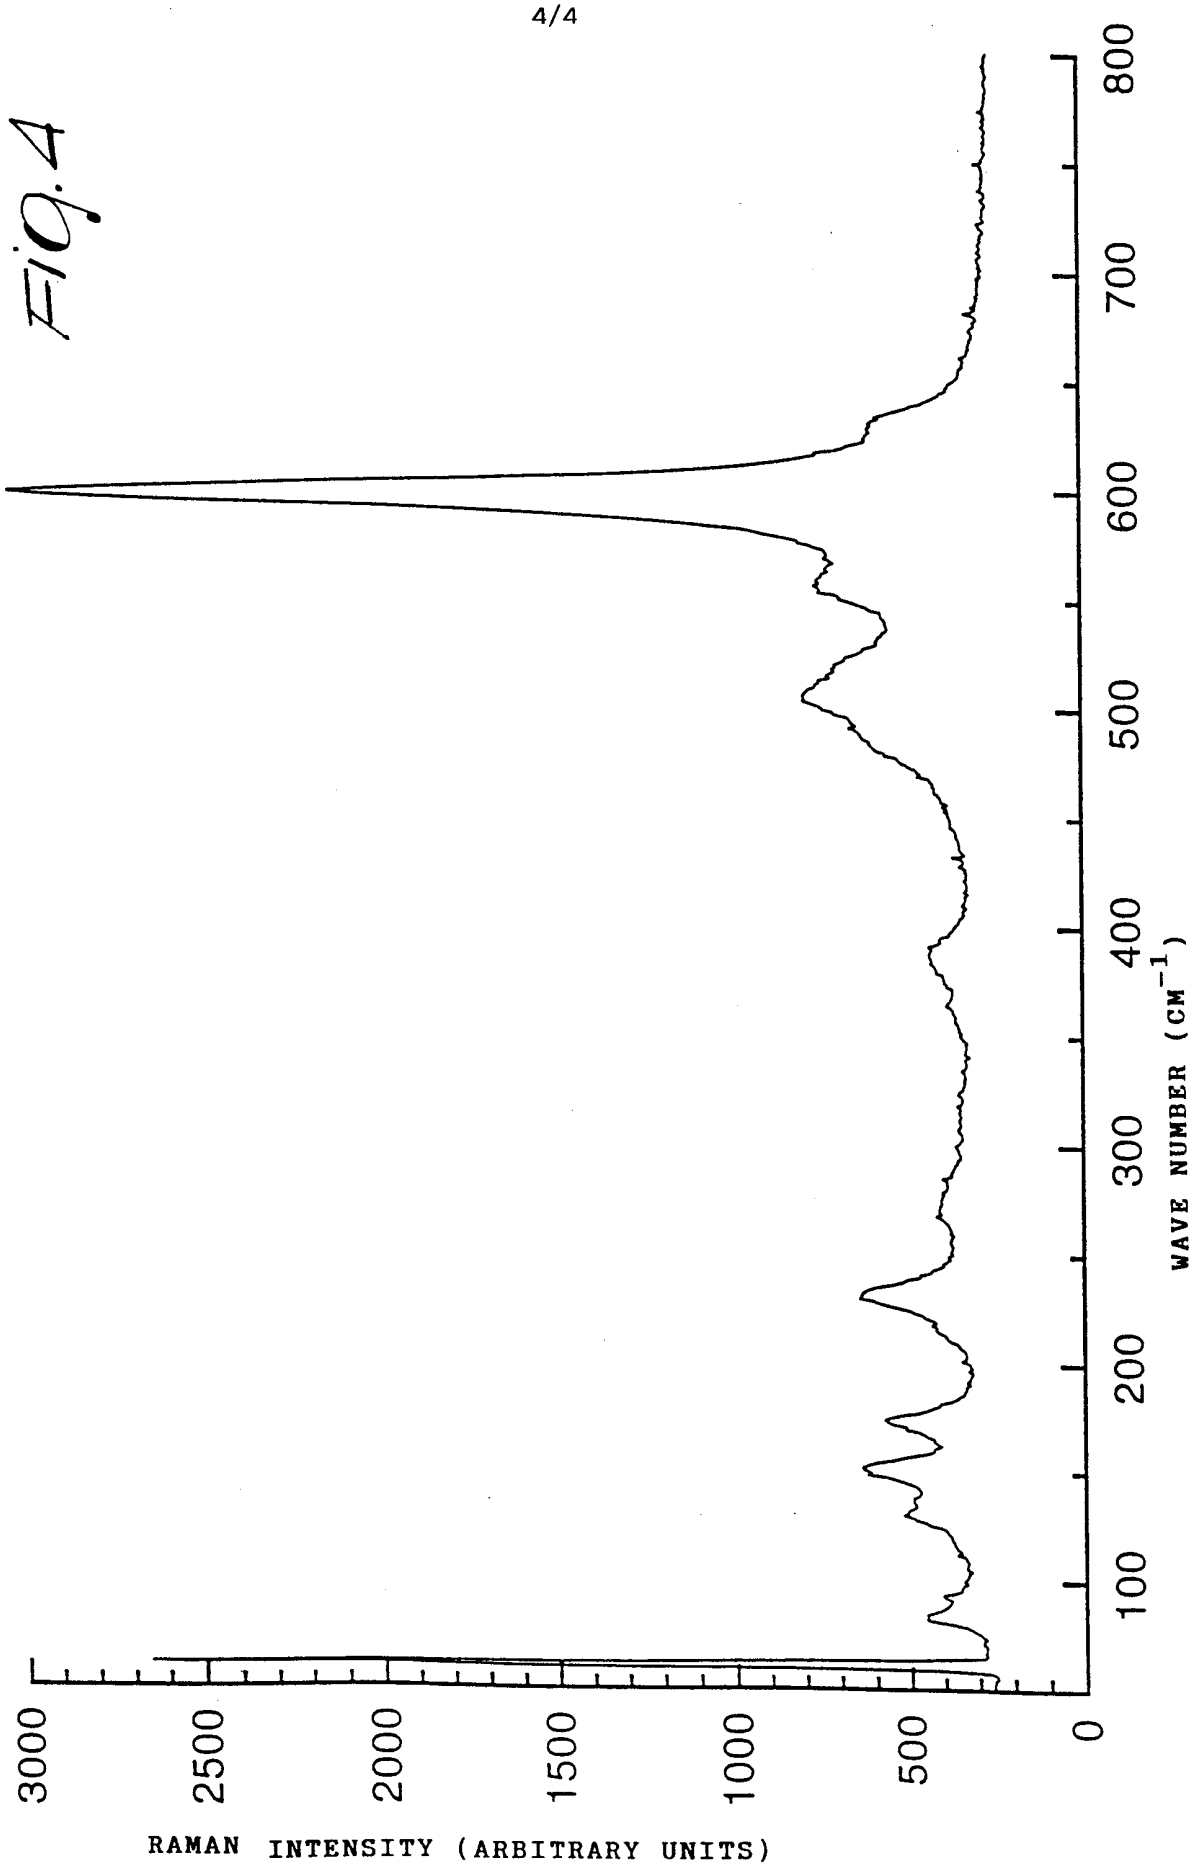


Fig. 3

Fig.4


3000
2500
2000
1500
1000
500
0
RAMAN INTENSITY (ARBITRARY UNITS)
100
200
300
400
500
600
700
800
WAVE NUMBER (CM^{-1})

INTERNATIONAL SEARCH REPORT

Interr nal Application No
PCT/EP 98/04432

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B01D53/02 B01J20/04 B01J20/30 C01G1/02

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B01D B01J C01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 97 28884 A (CONSIGLIO NAZIONALE DELLE RICERCHE) 14 August 1997 see the whole document	1-24
A	US 5 238 913 A (NICHOLAS V. COPPA) 24 August 1993 see claims	10-21

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 October 1998	25/11/1998

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Bogaerts, M

1

INTERNATIONAL SEARCH REPORT

information on patent family members

Interr ıal Application No
PCT/EP 98/04432

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9728884 A	14-08-1997	IT B0960063 A	12-08-1997
		AU 1723397 A	28-08-1997
		AU 1768397 A	28-08-1997
		WO 9728887 A	14-08-1997
US 5238913 A	24-08-1993	DE 4310278 A	07-10-1993
		JP 6013731 A	21-01-1994