



(51) International Patent Classification:

F02M 37/08 (2006.01) F04C 11/00 (2006.01)
F04C 2/10 (2006.01) F04C 15/00 (2006.01)

(21) International Application Number:

PCT/EP20 17/082 189

(22) International Filing Date:

11 December 2017 (11.12.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

102016000125212 12 December 2016 (12.12.2016) IT

(71) Applicant: ROBERT BOSCH GMBH [DE/DE]; Postfach 30 02 20, 70442 Stuttgart (DE).

(72) Inventors: SCAMARCIO, Antonio; Corso R. Margherita 45, 74016 Massafra (IT). MEDORO, Nello; Via Martiri di via Fani 45, 76015 Trinitapoli (IT).

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: ELECTRIC GEAR PUMP

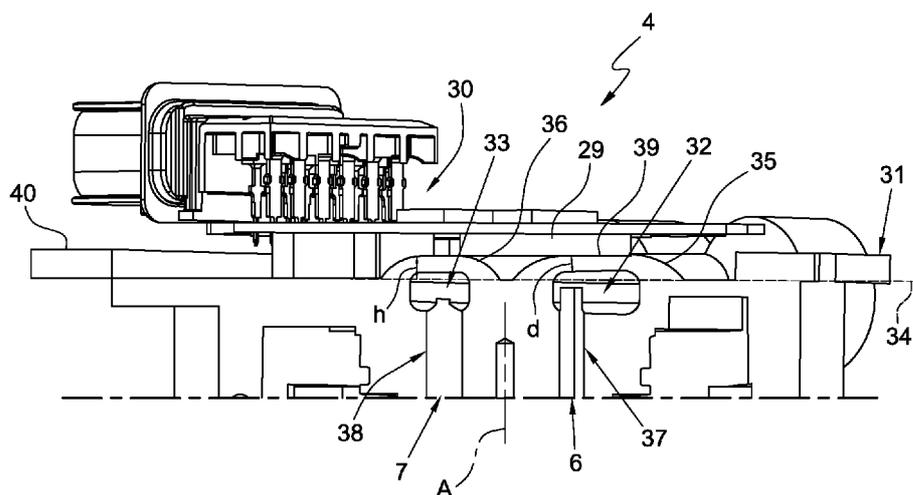


FIG. 3

(57) Abstract: An electric gear pump comprising: a gerotor rotatable about an axis of rotation A; a support base for the gerotor; a cover which can be joined to the base; a feed duct and a delivery duct; electronic components of the control unit which are fastened on the outer surface of the cover; wherein the feed and delivery ducts are at least partly formed in the cover and comprise an axial section parallel to the axis A and a radial section parallel to the outer surface of the cover; wherein the outer surface of the cover comprises an inset portion; wherein at least a portion of the radial sections of the feed and delivery ducts is configured so as to project externally from the inset portion of the outer surface of the cover and form projecting support portions for the electronic components of the control unit.



5 Description

Title

ELECTRIC GEAR PUMP

10 The present invention relates to an electric gear pump. In particular the present invention relates to an electric gear pump of the gerotor type.

Furthermore, the present invention relates to a pump assembly comprising in series:

15

- a low-pressure pump (the aforementioned electric gear pump of the gerotor type), for drawing fuel, preferably diesel fuel, and for a first compression thereof; and

20

- a high-pressure pump, preferably of the pumping piston type, for a further compression of the fuel and for feeding the high-pressure fuel to an internal combustion engine.

25

Nowadays it is known to use systems for feeding fuel, in particular diesel fuel, to an internal combustion engine comprising a high-pressure pump, for feeding the internal combustion engine, and a low-pressure pump for feeding fuel to the high-pressure pump. The high-pressure pump comprises at least one pumping piston moved by a shaft and housed inside a cylinder fed with low-pressure fuel. At present there exist at least two different types of low-pressure pump for these

30 systems.

The first type comprises a gear pump driven by the same shaft for driving the pistons of the high-pressure pump. In particular, this gear pump may be a "gerotor" pump. As is known, the gerotor pump comprises an externally toothed

rotor rotated by the shaft and housed inside an internally toothed rotor. During rotation, the teeth of the externally toothed rotor engage with the teeth of the internally toothed rotor which has one more tooth than the externally toothed rotor. The two rotors, which rotate both in an absolute sense and relatively or one with respect to the other one, pump fuel from an inlet, which is connected to the tank, towards an outlet, which is connected to the high-pressure pump.

The second type of gear pump comprises gear pumps which are not driven by the shaft driving the pumping pistons, but pumps driven electrically or electromagnetically. According to this type of pump, at present in gerotor pumps at least one of the internally toothed rotor and the externally toothed rotor supports magnetic modules, such as stacks of iron laminations, which interact electromagnetically with a stator arranged on the outside of the internally toothed rotor and comprising electrical windings. When current is supplied to these windings electromagnetic conditions are created such that the gerotor starts to rotate performing the desired pumping action between the tank and the high-pressure pump.

In this type of gerotor electric gear pump, the stator provided with electrical windings, which may also be defined "electric motor" since it induces the movement of the gerotor, is situated on the same level as the gerotor in order to increase the electromagnetic interaction. This concentric arrangement of gerotor and stator today requires the presence of a bearing arranged between the outer wall of the internally toothed rotor of the gerotor and the stator. The gerotor electric gear pump comprises finally a support base for the gerotor and a cover which is joined to the base and inside which the fuel feed and delivery ducts are formed.

The electronic control of these gerotor electric gear pumps is assigned to an associated control unit. In particular, this control unit, which comprises a plurality of electronic components, is nowadays directly fastened to the cover of the gerotor gear pumps so as to be located in the vicinity of the feed and delivery channels and favour the transfer of heat from the electronic components to be cooled to the fuel passing inside the ducts.

5 In order to favour further this heat exchange, the feed and delivery ducts are configured so as to comprise an axial portion or section, namely parallel to the axis of the gerotor, and a radial portion or section, which extends parallel to the outer surface of the cover which supports the electronic components of the control unit.

10 In order to ensure a greater heat dispersion, the outer surface of the cover comprises reliefs which act as a support for the aforementioned electronic components.

Based on this known technology one object of the present invention is to provide an alternative gear pump, preferably an alternative gerotor electric gear pump.

15 In particular, it is an object of the present invention to provide a gerotor electric gear pump which is able to improve the corresponding pumps of the prior art mentioned above in a simple and low-cost manner from both a functional and a constructional point of view.

20 In accordance with these objects the present invention relates to an electric gear pump comprising:

- a gerotor rotatable about an axis of rotation A;

25 - a support base for the gerotor;

- a cover which can be joined to the base;

- a feed duct and a delivery duct;

30 - electronic components of the control unit fastened on the outer surface of the cover.

In particular:

- 4 -

- the feed and delivery ducts are at least partly formed in the cover and comprise an axial section parallel to the axis A and a radial section parallel to the outer surface of the cover;

5 - the outer surface of the cover comprises an inset portion;

- at least one portion of the radial sections of the feed and delivery ducts is configured so as to project externally from the inset portion of the outer surface of the cover and form projecting support portions for the electronic components of the control unit.

10

Advantageously, in this way, the distance between the electronic components to be cooled and the fuel through-flow ducts is reduced to the sole thickness of the outer wall of the channels projecting from the outer surface of the cover. This arrangement, contrary to that which occurs in the prior art where the cooling reliefs on the outer surface of the cover do not form part of the duct walls, allows a reduction in the axial volume of the gear pump and optimization of the heat flow between the electronic components to be cooled and fuel circulating inside the feed and delivery ducts. Obviously, the radial section of the ducts may also not be perfectly parallel, but may be slightly inclined relative to the outer surface of the cover.

15

20

According to a first embodiment of the invention, the fuel flow section of the feed and delivery ducts, in particular the edge close to the outer surface of the cover, is substantially flush with the inset portion of the outer surface of the cover from which it therefore projects only by the associated top covering portion.

25

Advantageously, in this way the cover has a high structural strength.

According to another embodiment of the invention, the fuel flow section of the feed and delivery ducts projects externally at least partly from the inset portion of the outer surface of the cover. According to this embodiment, therefore, the ducts project from the inset portion of the outer surface of the cover not only by the associated top covering portion, but also by at least a part of the side portion.

30

- 5 -

In this embodiment the distance d between the electronic components to be cooled and the fuel passing inside the ducts is less than the projecting height h of the ducts with respect to the outer surface of the cover.

5 Advantageously, in this way the heat flow takes place along a greater heat-exchange portion.

In particular, according to the invention, the projecting portions of the ducts have a dome-like section in which the roof portion is preferably flat.

10 Advantageously, in this way, a stable flat fastening surface is provided for the electronic components to be cooled.

In particular, the outer surface of the cover comprises a raised perimetral edge in which the projecting portions of the ducts are flush with this raised perimetral edge.

15 Advantageously, in this way, a stable flat fastening surface is provided for the electronic components to be cooled, said surface extending beyond the projecting portions as far as the perimetral edge of the outer surface of the cover.

20 In particular, according to the invention, the outer surface has at least one projection or relief projecting with respect to the outer surface of the cover. This projection may project from the outer surface of the cover by a height less than or equal to that of the projecting portions and the raised perimetral edge.

25 Advantageously, in this way the dispersion of the heat is increased without adversely affecting the stable fastening of the electronic components on the projecting portions of the ducts.

30 Obviously the present invention includes, on the one hand, a pump assembly for feeding fuel from a tank to an internal combustion engine comprising in series an electric gear pump as described above and high-pressure pump and, on the other hand, the cover alone of the electric gear pump as a possible spare part

- 6 -

able to improve the existing pumps in use.

Further characteristic features and advantages of the present invention will become clear from the description below of a non-limiting example of
5 embodiment, with reference to the figures of the attached drawings, in which:

- Figure 1 is a schematic view of an example of a pump assembly for feeding fuel, preferably, diesel fuel, from a tank to an internal combustion engine, in which a low-pressure gear pump and a high-pressure pumping piston pump are
10 arranged in series;

- Figure 2 shows a schematic view of a gerotor low-pressure gear pump according to the prior art;

- Figure 3 shows a cross-sectional view of an example of embodiment of a gerotor low-pressure electric gear pump according to the present invention.
15

- Figure 4 shows a perspective view of the outer surface of the cover of the pump according to Figure 3.
20

Figure 1 is a schematic view of an example of a pump assembly for feeding fuel, preferably diesel fuel, from a tank to an internal combustion engine, in which a low-pressure pump and a high-pressure pump are arranged in series. In particular, Figure 1 shows a pump assembly 1 comprising:
25

- a low-pressure electric gear pump 4;

- a high-pressure pump 5;

- a low-pressure intake duct 6 for feeding the fuel from the tank 2 to the electric gear pump 4;
30

- a low-pressure delivery duct 7 for feeding the fuel from the electric gear pump 4 to the high-pressure pump 5;

- 7 -

- high-pressure delivery ducts 8 for feeding the fuel from the high-pressure pump 5 to the internal combustion engine 3.

5 In this example the internal combustion engine 3 is shown only in schematic form and comprises a common header 17 fed by the high-pressure delivery ducts 8 and a plurality of injectors 18 configured to atomize and inject the high-pressure fuel into the cylinders of the internal combustion engine 3 (not shown). In Figure 1 the high-pressure pump 5 is shown only in schematic form and comprises two
10 pumping pistons 11 fed with the low-pressure fuel at feed valves 12 and connected to delivery valves 13 for feeding the high-pressure fuel to the engine 3. Figure 1 further shows a filter 10 arranged downstream of the low-pressure pump 4, a fuel metering device 14 downstream of the filter 10, an overflow valve 15 between the filter 10 and the fuel metering device 14, a pressure limiting valve
15 19 connected to the header 17 and a delivery valve 20 connected to the tank 2. The arrows shown in Figure 1 indicate the flow path of the fuel within the pump assembly 1.

Figure 2 shows an electric gear pump 4 of the gerotor type according to the prior
20 art. This electric gear pump 4 comprises:

- a gerotor 9 rotatable about an axis of rotation A, comprising an externally toothed rotor 21 and an internally toothed rotor 22 arranged on the outside of the
25 externally toothed rotor 21;
- a stator 25 provided with electrical windings 26 and arranged on the outside of and on the same level as the gerotor 9.
- a support base 24 for the gerotor 9;
- 30 - a cover 27 which can be joined to the base 24 and in which the feed duct 6 and the delivery duct 7 are at least partly formed;
- electronic components 29 of the control unit 30 for the electric gear pump 4

- 8 -

which are fastened to the outer surface 31 of the cover 27 so as to release heat to the fuel passing inside the feed duct 6 and delivery duct 7.

5 For this purpose the feed duct 6 and delivery duct 7 comprise an axial section 37, 38 parallel to the axis of rotation A and a radial section 32, 33 orthogonal to the axis of rotation A and parallel to the outer surface 31 of the cover 27, which is preferably flat. As can be seen in Figure 2, it is known to provide cooling reliefs 41 projecting from the outer surface 31 of the cover 27, in particular from its inset portion schematically indicated by the reference number 34 in Figure 2.
10 According to the prior art, the ducts 6, 7 are formed inside the cover 27 underneath this inset portion 34 without cooperating with the cooling reliefs 41.

As can be seen, the electronic components 29 of the control unit 30 to be cooled (which are only schematically shown) are fastened to the outer surface 31 of the cover 27 above the cooling reliefs 41.
15

In this configuration, therefore, the distance D between the electronic components 29 to be cooled and the fuel passing inside the ducts is greater than the height H of the reliefs 41 with respect to the inset portion 34 of the outer surface 31 of the cover 27. The heat, which is schematically indicated by the arrows C in Figure 2, must therefore follow an ideal path greater than the height H of the reliefs 41 with respect to the inset portion 34 of the outer surface 31 of the cover 27.
20

25 Figure 3 shows a partial cross-sectional view of a gerotor low-pressure electric gear pump according to the present invention.

As can be readily seen, according to the invention the distance d which separates the electronic components 29 of the control unit 30 to be cooled and the fuel passing inside the radial sections 32, 33 of the feed duct 6 and the delivery duct 7 is the same as, or preferably smaller than, as shown in Figure 3, the height h of the reliefs present on the inset portion 34 of the outer surface 31 of the cover 27. This configuration is achieved by incorporating the feed duct 6 and the delivery duct 7 inside the said cooling reliefs so that at least a portion of
30

the radial sections 32, 33 projects externally from the inset portion 34 of the outer surface 31 of the cover 27 and forms projecting support portions 35, 36 for the electronic components 29 of the control unit 30.

5 Figure 4 shows a perspective view of the outer surface of the cover of the pump according to Figure 3.

10 This figure shows how the ducts 6, 7, in particular the radial sections 32, 33, form the aforementioned projecting portions 35, 36. These projecting portions 35, 36, since they are simply formed by the thickness of the duct wall, have a dome-like section where the roof 39 is flat so as to facilitate supporting and engagement with the electronic components 29 of the control unit 30. The embodiment in Figure 4 shows a raised outer edge 40 of the cover 27 which projects from the inset portion 34 of the outer surface 31 by the same height h as the aforementioned projecting portions 35 and 36.

15

20 Finally it is clear that the invention described here may be subject to modifications and variations without departing from the scope of the accompanying claims.

5 Claims

1. An electric gear pump (4) comprising:

- a gerotor (9) rotatable about an axis of rotation (A);

- a support base (24) for the gerotor (9);

10 - a cover (27) joined to the base (24);

- a feed duct (6) and a delivery duct (7);

- electronic components (29) of a control unit (30) fastened on the outer surface (31) of the cover (27);

15 wherein the feed duct (6) and delivery duct (7) are at least partly formed in the cover (27) and comprise an axial portion (37, 38) parallel to the axis (A) and a radial portion (32, 33) parallel to the outer surface (31) of the cover (27);

wherein the outer surface (31) of the cover (27) comprises an inset portion (34);

20 wherein at least one portion of the radial sections (32, 33) of the feed duct (6) and delivery duct (7) is configured so as to project externally from the inset portion (34) of the outer surface (31) of the cover (27) and form projecting support portions (35, 36) for the electronic components (29) of the control unit (30).

25 2. Pump as claimed in Claim 1, wherein the section of the feed duct (6) and the delivery duct (7) is flush with the inset portion (34) of the outer surface (31) of the cover (27).

30 3. Pump as claimed in Claim 1, wherein the section of the feed duct (6) and the delivery duct (7) projects externally at least partly from the inset portion (34) of the outer surface (31) of the cover (27).

4. Pump as claimed in any one of the preceding claims, wherein the projecting portions (35, 36) have a dome-like section.

5. Pump as claimed in Claim 4, wherein the roof portion (39) of the dome-

like sections of the projecting portions (35, 36) is flat.

5 6. Pump as claimed in any one of the preceding claims, whereon the outer surface (31) of the cover (27) comprises a raised perimetral edge (40), the projecting portions (35, 36) being flush with the raised perimetral edge (40).

10 7. Pump as claimed in any one of the preceding claims, wherein the outer surface (31) has at least one projection with respect to the outer surface (31) of the cover (27).

8. Pump as claimed in Claim 7, wherein the projection projects from the outer surface (31) of the cover (27) by a height less than that of the projecting portions (35, 36).

15 9. Pump as claimed in Claim 7, wherein the projection is flush with the projecting portions (35, 36).

20 10. A pump assembly for feeding fuel from a tank (2) to an internal combustion engine (3); the pump assembly (1) comprising in series a low-pressure electric gear pump (4) and a high-pressure pump (5); wherein the electric gear pump (4) is designed according to any one of the preceding claims.

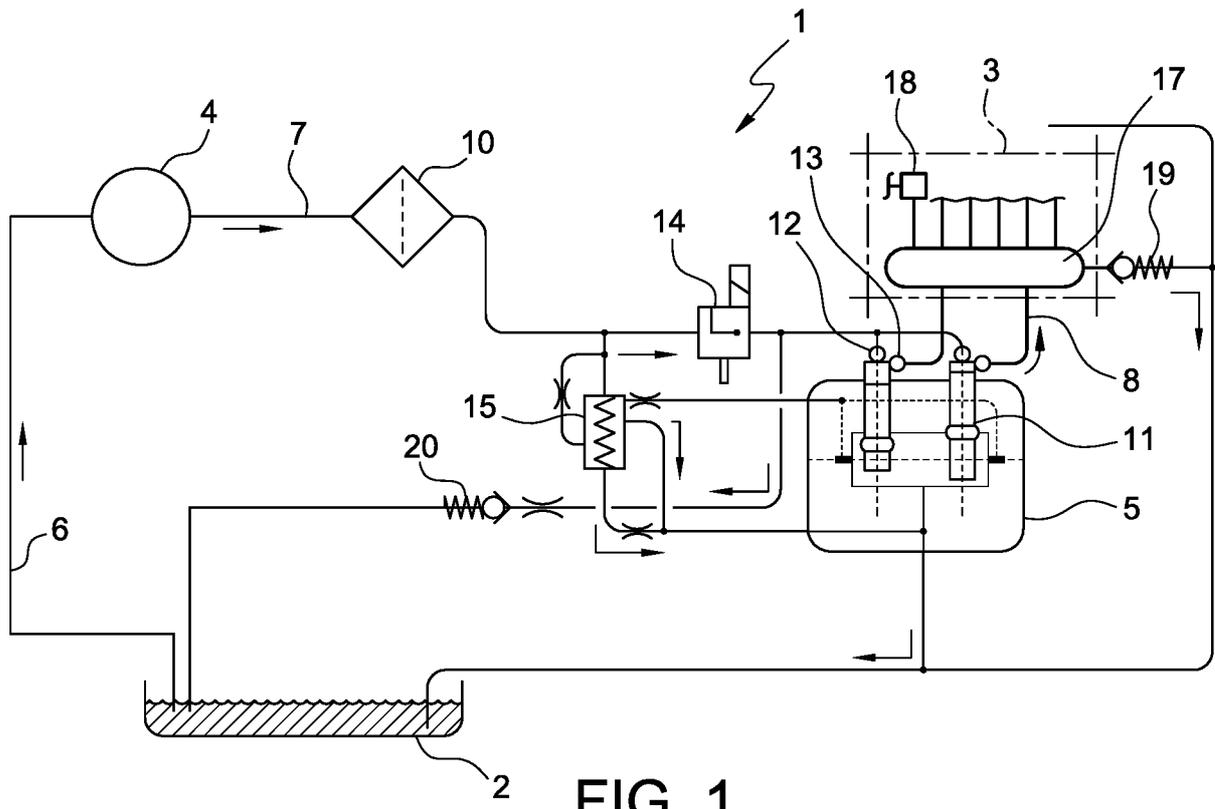


FIG. 1

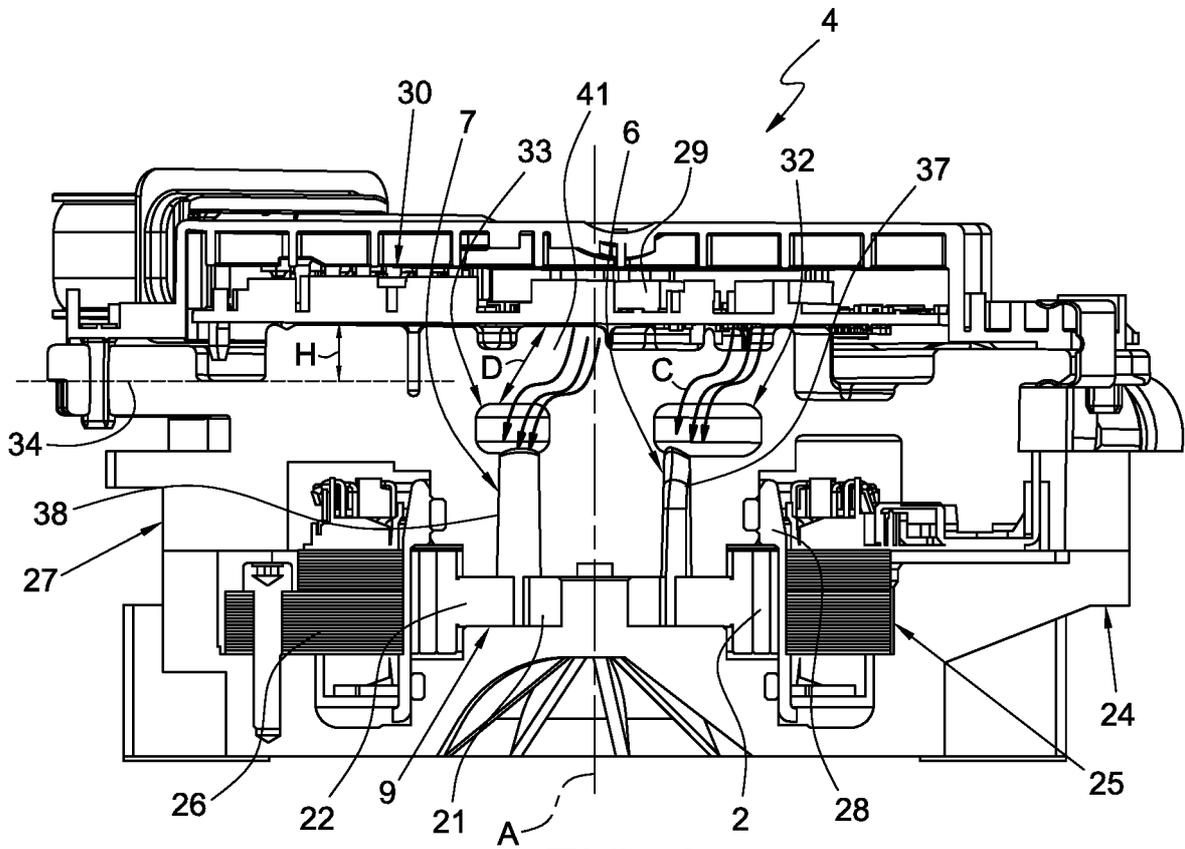


FIG. 2

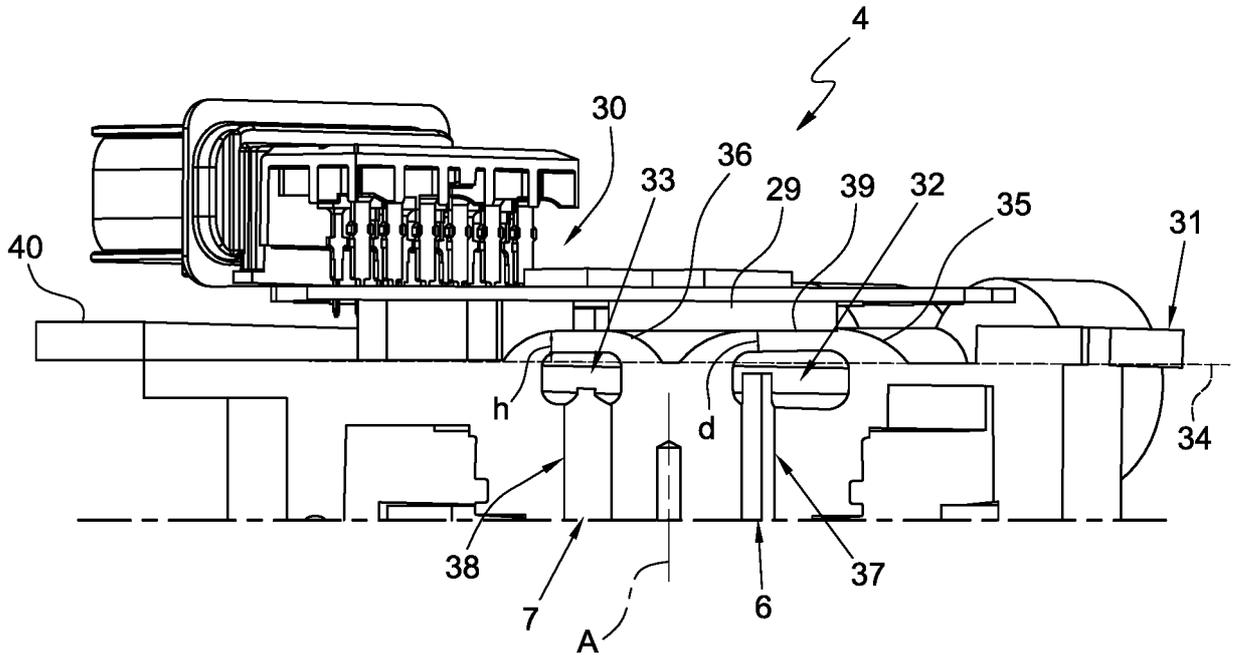


FIG. 3

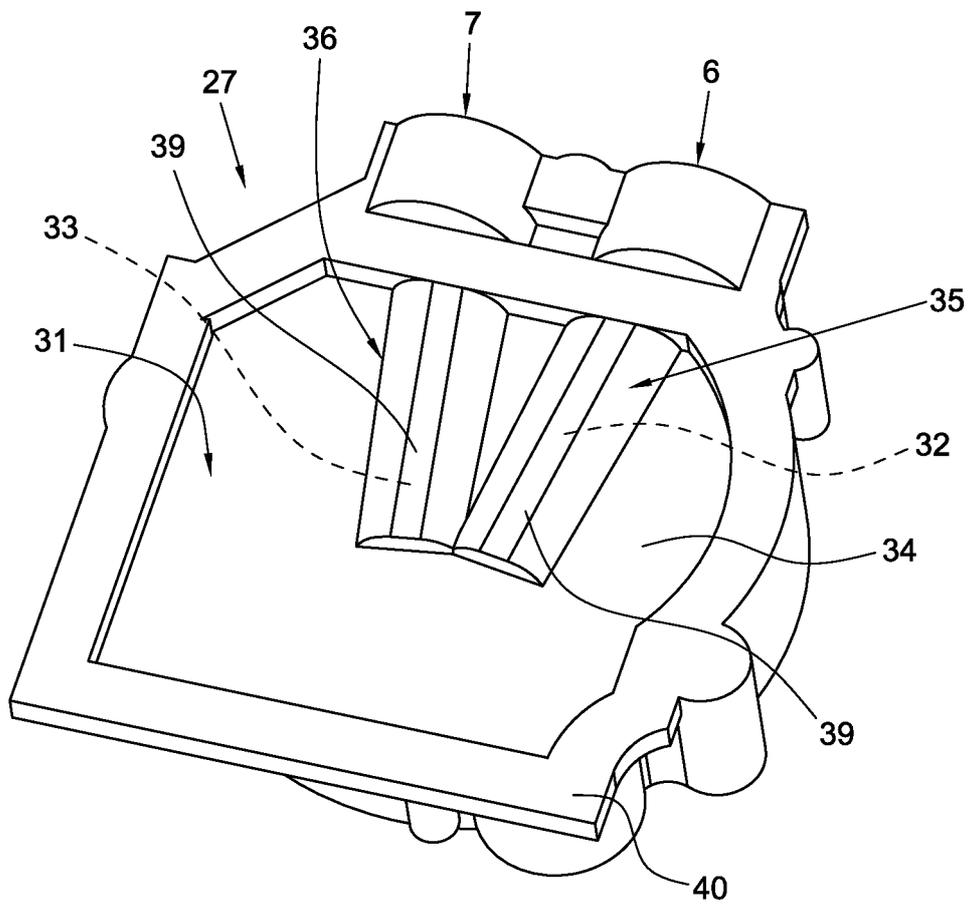


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/082189

A. CLASSIFICATION OF SUBJECT MATTER
INV. F02M37/08 F04C2/10 F04C11/00 F04C15/00
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
F02M F04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal , WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	wo 2014/067545 AI (PI ERBURG PUMP TECHNOLOGY GMBH [DE]) 8 May 2014 (2014-05-08) figures 1,2 page 5, line 22 - line 25 page 7, line 3 - line 10 -----	1-10
A	US 2010/290934 AI (HADAR GI L [CA] ET AL) 18 November 2010 (2010-11-18) figures 1-11 paragraph [0037] - paragraph [0038] -----	1-10
A	JP 2010 150964 A (AISIN SEI KI) 8 July 2010 (2010-07-08) figure 1 abstract -----	1-10
	----- -/- .	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 2 March 2018	Date of mailing of the international search report 12/03/2018
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Durante, Andrea
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/082189

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2005 098268 A (KOYO SEIKO CO) 14 April 2005 (2005-04-14) figure 1 abstract	1-10

A	US 2010/130327 A1 (MORGAN JR CHRISTOPHER CARLETON [US]) 27 May 2010 (2010-05-27) figure 1	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2017/082189
--

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014067545 A1	08-05-2014	CN 104769221 A	08-07-2015
		EP 2920423 A1	23-09-2015
		JP 5926463 B2	25-05-2016
		JP 2015533200 A	19-11-2015
		US 2015300355 A1	22-10-2015
		WO 2014067545 A1	08-05-2014

US 2010290934 A1	18-11-2010	NONE	

JP 2010150964 A	08-07-2010	JP 5505683 B2	28-05-2014
		JP 2010150964 A	08-07-2010

JP 2005098268 A	14-04-2005	NONE	

US 2010130327 A1	27-05-2010	NONE	
