



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2469269 A1 2003/08/07

(21) 2 469 269

(12) DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2003/01/23  
(87) Date publication PCT/PCT Publication Date: 2003/08/07  
(85) Entrée phase nationale/National Entry: 2004/06/03  
(86) N° demande PCT/PCT Application No.: EP 2003/000650  
(87) N° publication PCT/PCT Publication No.: 2003/064558  
(30) Priorités/Priorities: 2002/02/01 (02405067.6) EP;  
2002/09/12 (02405796.0) EP

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> C09K 11/06, C07D 487/04, H01L 51/20,  
H05B 33/14  
(71) Demandeur/Applicant:  
CIBA SPECIALTY CHEMICALS HOLDING INC., CH  
(72) Inventeurs/Inventors:  
YAMAMOTO, HIROSHI, JP;  
DAN, NORIHISA, JP  
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : COMPOSITIONS FLUORESCENTES COMPRENANT DES DICETOPYRROLOPYRROLES  
(54) Title: FLUORESCENT COMPOSITIONS COMPRISING DIKETOPYRROLOPYRROLES

(57) Abrégé/Abstract:

The present invention relates to compositions comprising a guest chromophore and a host chromophore, wherein the absorption spectrum of the guest chromophore overlaps with the fluorescence emission spectrum of the host chromophore, wherein the host chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and wherein the guest chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and their use for the preparation of inks, colorants, pigmented plastics for coatings, non-impact-printing material, color filters, cosmetics, polymeric ink particles, toners, dye lasers and electroluminescent devices. A luminescent device comprising a composition according to the present invention is high in the efficiency of electrical energy utilisation and high in luminance.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number  
**WO 2003/064558 A1**

(51) International Patent Classification<sup>7</sup>: H05B 33/14, H01L 51/20, C07D 487/04

**C09K 11/06,**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/EP2003/000650

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 23 January 2003 (23.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

02405067.6	1 February 2002 (01.02.2002)	EP
02405796.0	12 September 2002 (12.09.2002)	EP

(71) Applicant (for all designated States except US): **CIBA SPECIALTY CHEMICALS HOLDINGS INC.** [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH).

Published:

— with international search report

(72) Inventors; and

(48) Date of publication of this corrected version:

3 June 2004

(75) Inventors/Applicants (for US only): **YAMAMOTO, Hiroshi** [JP/JP]; 2-1-4-302, Kofuen,, Nishinomiya-shi, Hyogo 662-0832 (JP). **DAN, Norihisa** [JP/JP]; 79-14, Hashimoto kurigadani, Yawata-shi, Kyoto 614-8327 (JP).

(15) Information about Correction:

see PCT Gazette No. 23/2004 of 3 June 2004, Section II

(74) Agent: **CIBA SPECIALTY CHEMICALS HOLDING INC.**; Patentabteilung, Klybeckstrasse 141, 4057 Basel (CH).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2003/064558 A1

(54) Title: FLUORESCENT COMPOSITIONS COMPRISING DIKETOPYRROLOPYRROLES

(57) **Abstract:** The present invention relates to compositions comprising a guest chromophore and a host chromophore, wherein the absorption spectrum of the guest chromophore overlaps with the fluorescence emission spectrum of the host chromophore, wherein the host chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and wherein the guest chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and their use for the preparation of inks, colorants, pigmented plastics for coatings, non-impact-printing material, color filters, cosmetics, polymeric ink particles, toners, dye lasers and electroluminescent devices. A luminescent device comprising a composition according to the present invention is high in the efficiency of electrical energy utilisation and high in luminance.

## Fluorescent compositions comprising diketopyrrolopyrroles

The present invention relates to fluorescent compositions comprising a guest chromophore and a host chromophore, wherein the absorption spectrum of the guest chromophore

5 overlaps with the fluorescence emission spectrum of the host chromophore, wherein the host chromophore is a diketopyrrolopyrrole having a photoluminescence emission peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and wherein the guest chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and their use for the preparation of  
10 inks, colorants, pigmented plastics for coatings, non-impact-printing material, color filters, cosmetics, polymeric ink particles, toners, dye lasers and electroluminescent devices. A luminescent device comprising a composition according to the present invention is high in the efficiency of electrical energy utilisation and high in luminance.

15 It is presently common to prepare organic electroluminescent ("EL") devices which contain an organic fluorescent substance by a vacuum evaporation process, e.g. described in Appl. Phys. Lett., 51, 913 (1987). In general, two types of such vacuum evaporation processes are applied according to the constitution of light emitting material: a one-component type process and a two-component type (or "Host-Guest type" or "binary system") process (e.g. described  
20 in J. Appl. Phys., 65, 3610 (1989)).

For emitting a light of red, green or blue color in a one-component system, the light emitting materials themselves have to emit an intense fluorescence of red, green or blue color.


25 Further, a vacuum evaporation process has to give a deposited film of uniform quality, and the film thus formed has to be endowed with appropriate ("carrier") mobility for positive holes and/or electrons i.e. properties of a semiconductor.

Numerous materials emitting light in the green- or blue-colored region are known.

30 JP-B2 2,749,407 (Pioneer Electron Corp. & Nippon Kayaku Co. Ltd.) describes as a light emitting material N,N'-bis(2,5-di-tert.-butylphenyl)-3,4,9,10-perylenedicarboximide. However, its luminance is as low as 27 cd/m<sup>2</sup>, which is insufficient for commercial applications.

35 JP-A2 2,296,891 (Ricoh) claims an electroluminescent element comprising a positive electrode, a negative electrode and one organic compound layer or a plurality of organic compound layers held between the positive and negative electrodes, but no hole transporting

substance. At least one layer of said organic compound layers is a layer containing a pyrrolopyrrole compound represented by the following formula II<sup>“</sup>

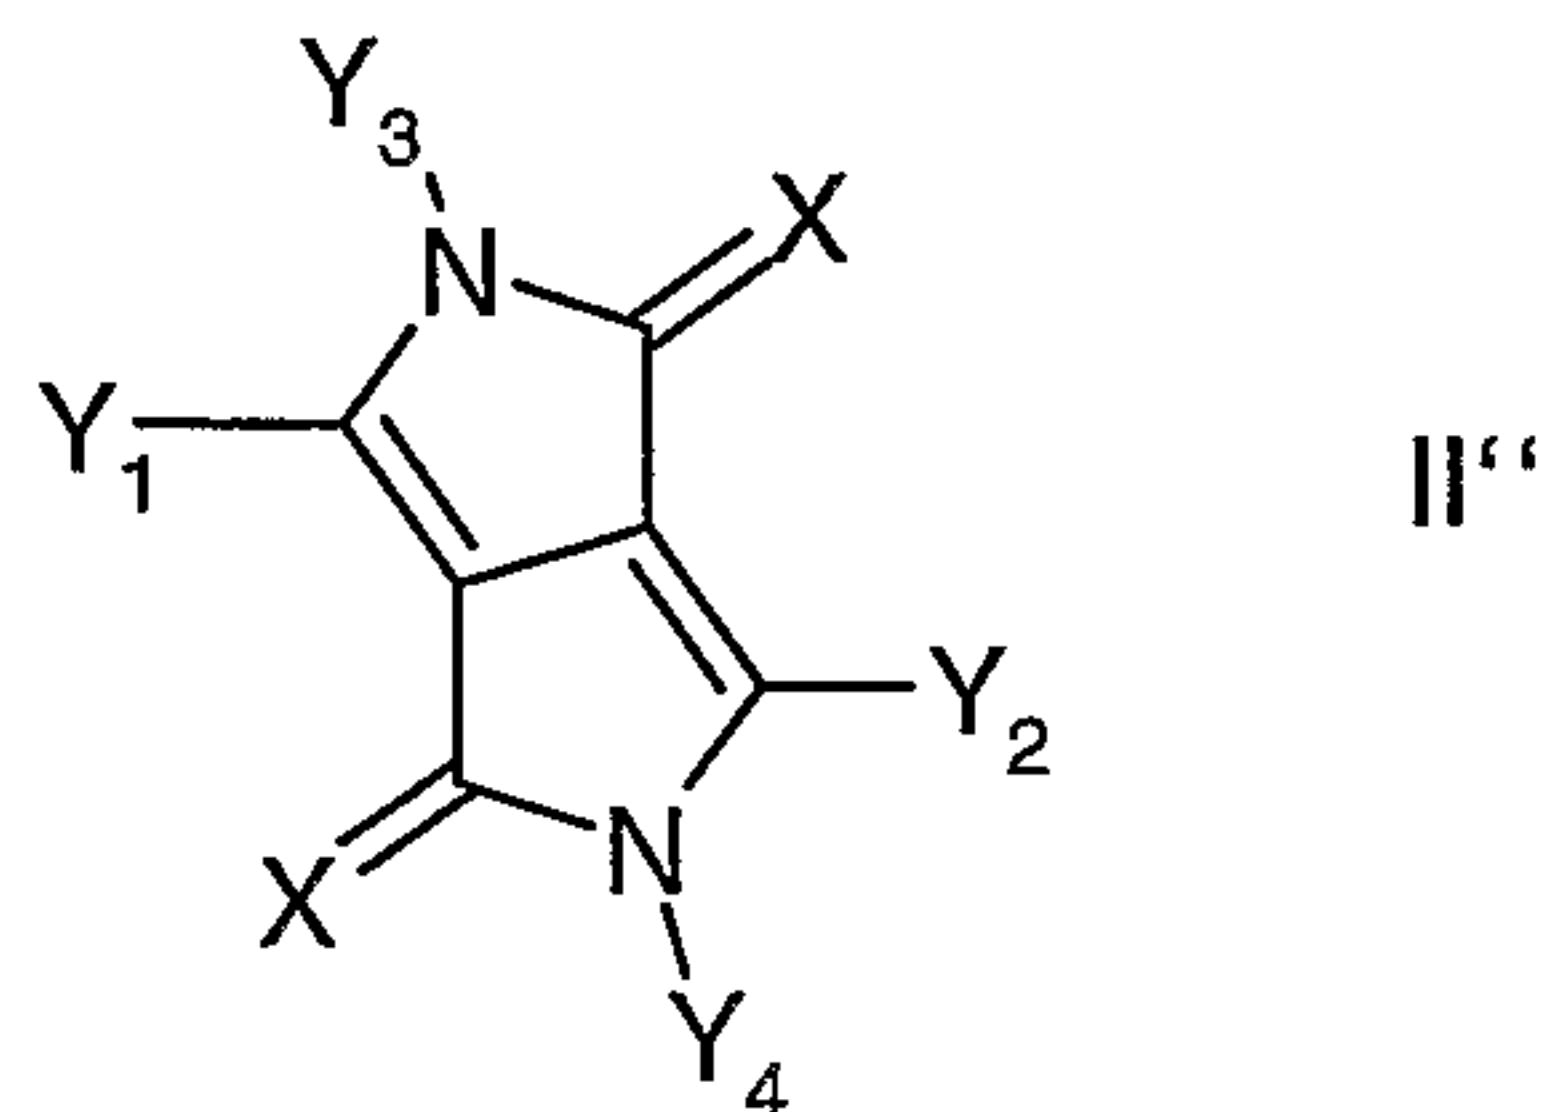

wherein Y<sub>1</sub> and Y<sub>2</sub> independently from each other represent a substituted or unsubstituted alkyl, cycloalkyl or aryl group, Y<sub>3</sub> and Y<sub>4</sub> independently represent a hydrogen atom or a substituted or unsubstituted alkyl or aryl group, and X represents an oxygen or a sulfur atom. Only four compounds are mentioned explicitly, namely wherein X stands for oxygen in all cases, and wherein (a) Y<sub>3</sub> = Y<sub>4</sub> = methyl and Y<sub>1</sub> = Y<sub>2</sub> = p-tolyl, (b) Y<sub>3</sub> = Y<sub>4</sub> = methyl and Y<sub>1</sub> = Y<sub>2</sub> = hydrogen, (c) Y<sub>3</sub> = Y<sub>4</sub> = hydrogen and Y<sub>1</sub> = Y<sub>2</sub> = p-tolyl, and (d) Y<sub>3</sub> = Y<sub>4</sub> = Y<sub>1</sub> = hydrogen and Y<sub>2</sub> = p-chlorophenyl. However, according to JP-A2 5,320,633 (see below), a follow-up study of the same inventors revealed that an emission of light is only observed, if the DPP-compounds II<sup>“</sup> are used together with other compounds. This observation is supported by comparative example 2 of JP-A2 5,320,633, which shows that no emission is observed, if DPP II<sup>“</sup> is used alone, i.e. without the addition of tris(8-hydroxyquinolino)aluminium (“Alq<sub>3</sub>”).

15

JP-A2 5,320,633 (Sumitomo) claims an organic EL device having a light emitting layer comprising a light emitting material in an amount of 0.005 to 15 parts by weight of a DPP compound between a pair of electrodes, wherein at least one electrode being transparent or semi-transparent. Although the main claim is silent about the use of Alq<sub>3</sub>, it is clear from the specification and the examples, especially from comparative example 2, that Alq<sub>3</sub> is an essential feature in the claimed EL element or device.


20

JP-A2 9003448 (Toyo Ink) claims an organic EL element having between a pair of electrodes a luminous layer containing a DPP compound as electron-transporting material or an organic compound thin film layer including a luminous layer and an electron-injecting layer wherein the electron-injecting layer contains a DPP compound as the electron-transporting material. In addition, another EL element further comprising a hole-injecting layer is claimed. The disadvantage of the claimed EL devices is that according to the examples always Alq<sub>3</sub> and a phenanthrene diamine (as hole-injecting material) have to be used.

30


EP-A 499,011 describes electroluminescent devices comprising DPP-compounds. Particularly, in example 1 the DPP-derivative of formula III<sup>‘</sup>

3

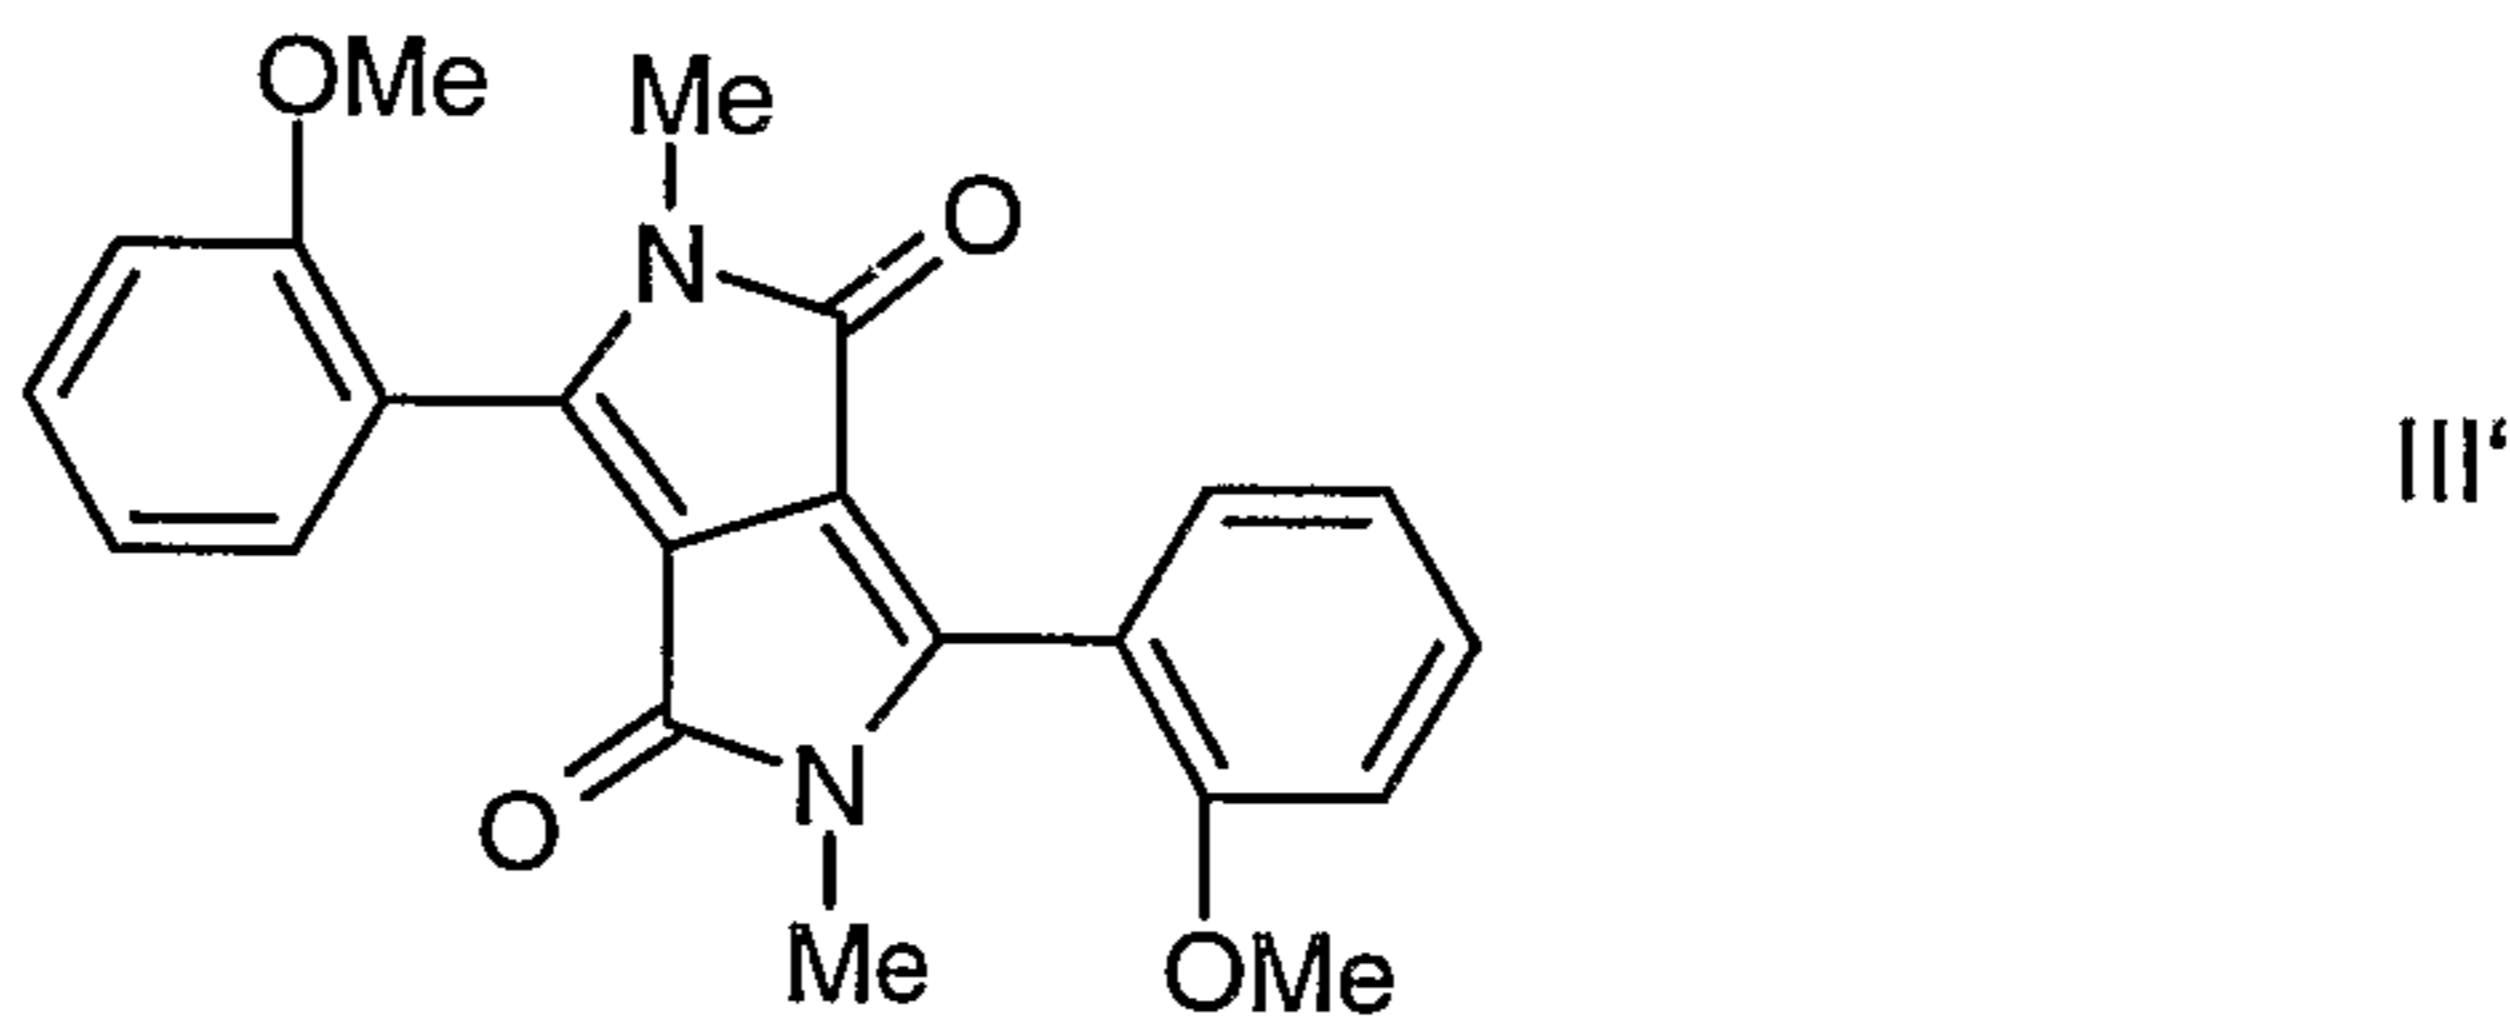

is disclosed.


WO 98/33862 describes the use of the DPP-compound of formula IV'

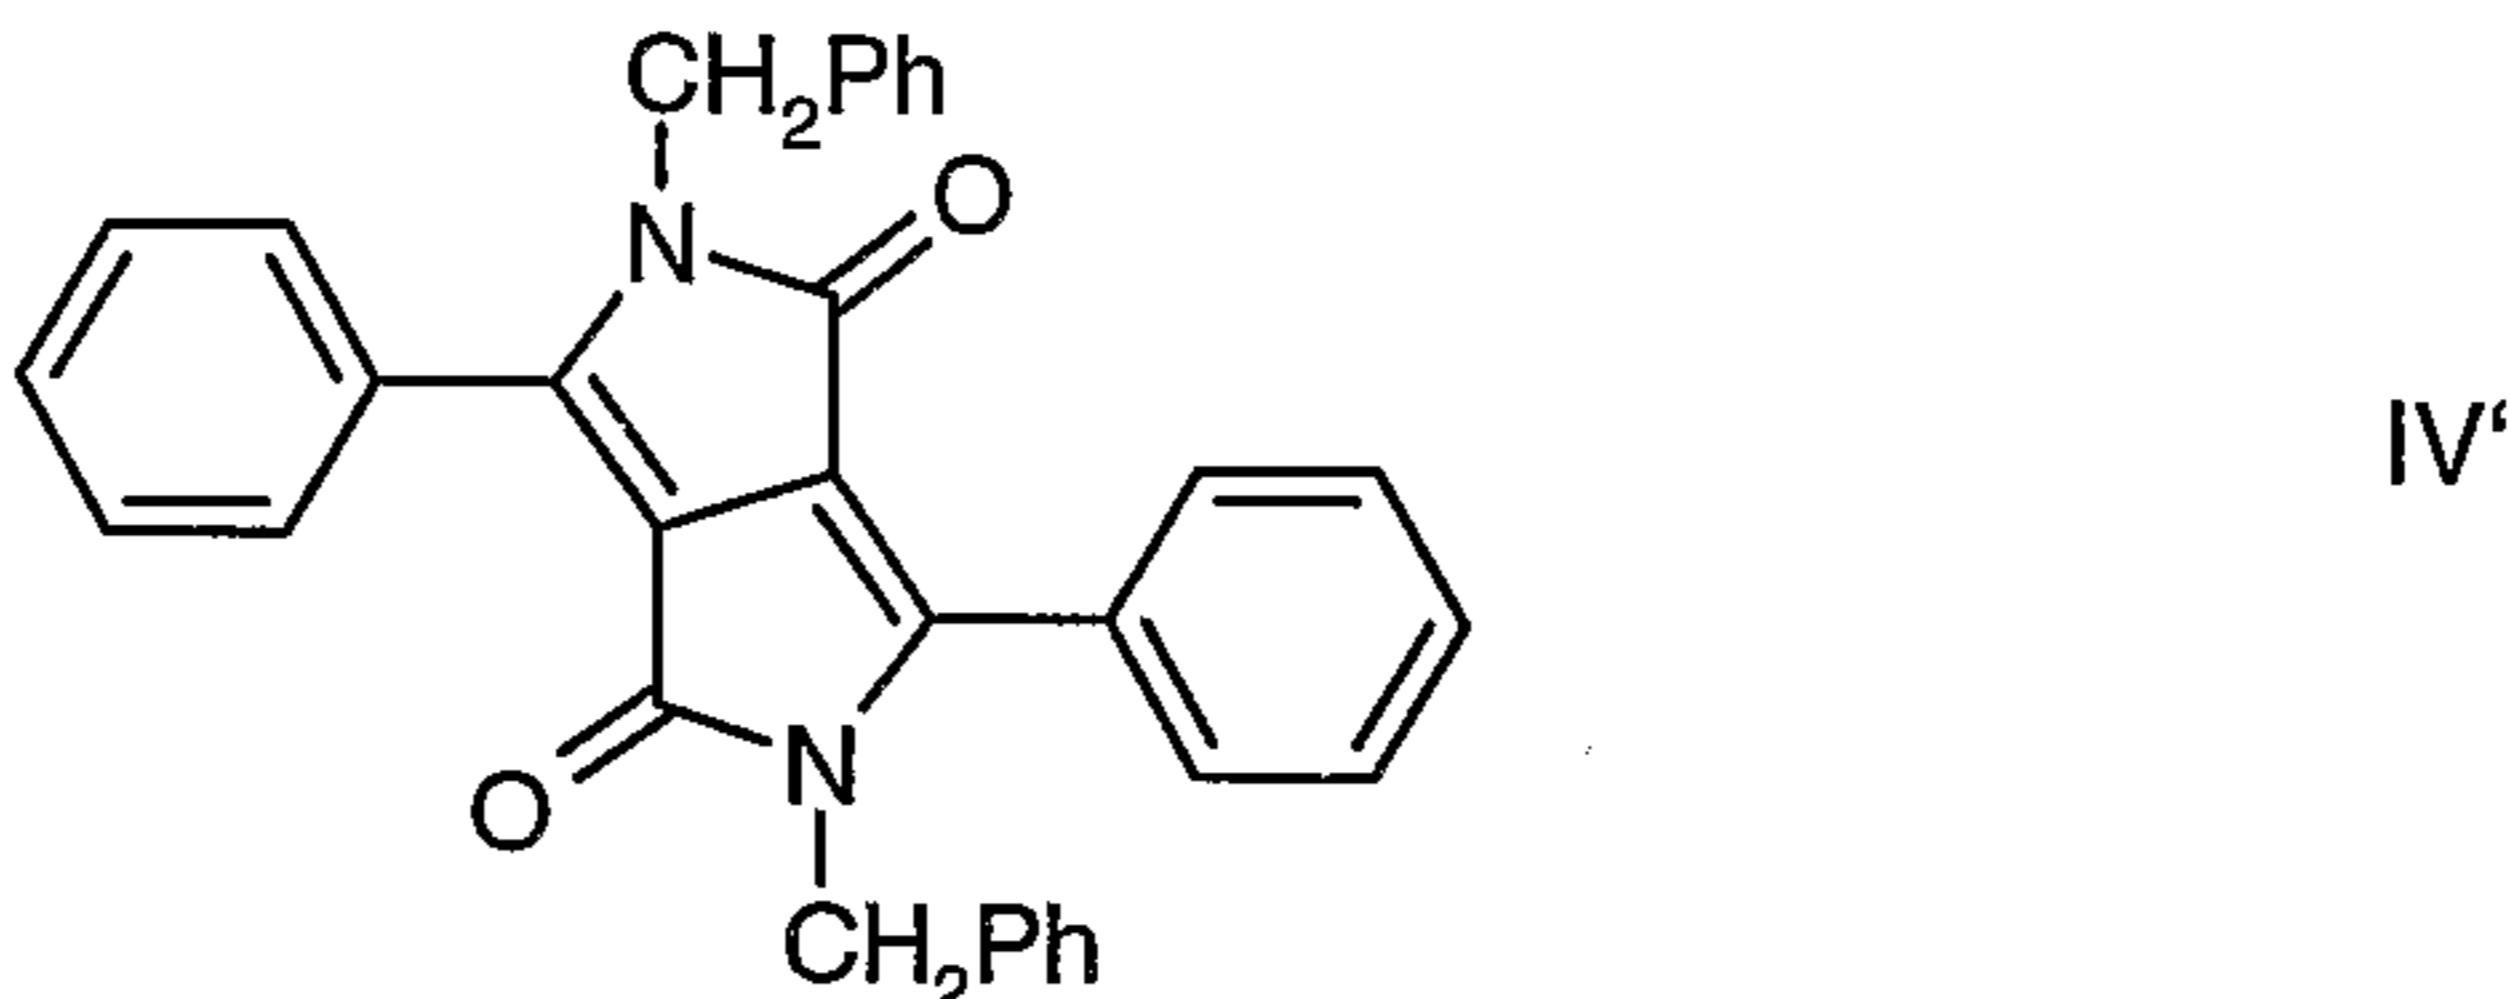

5


as a guest molecule in electroluminescent devices.

EP-A-1087005 relates to fluorescent diketopyrrolopyrroles ("DPPs") of the formula I'

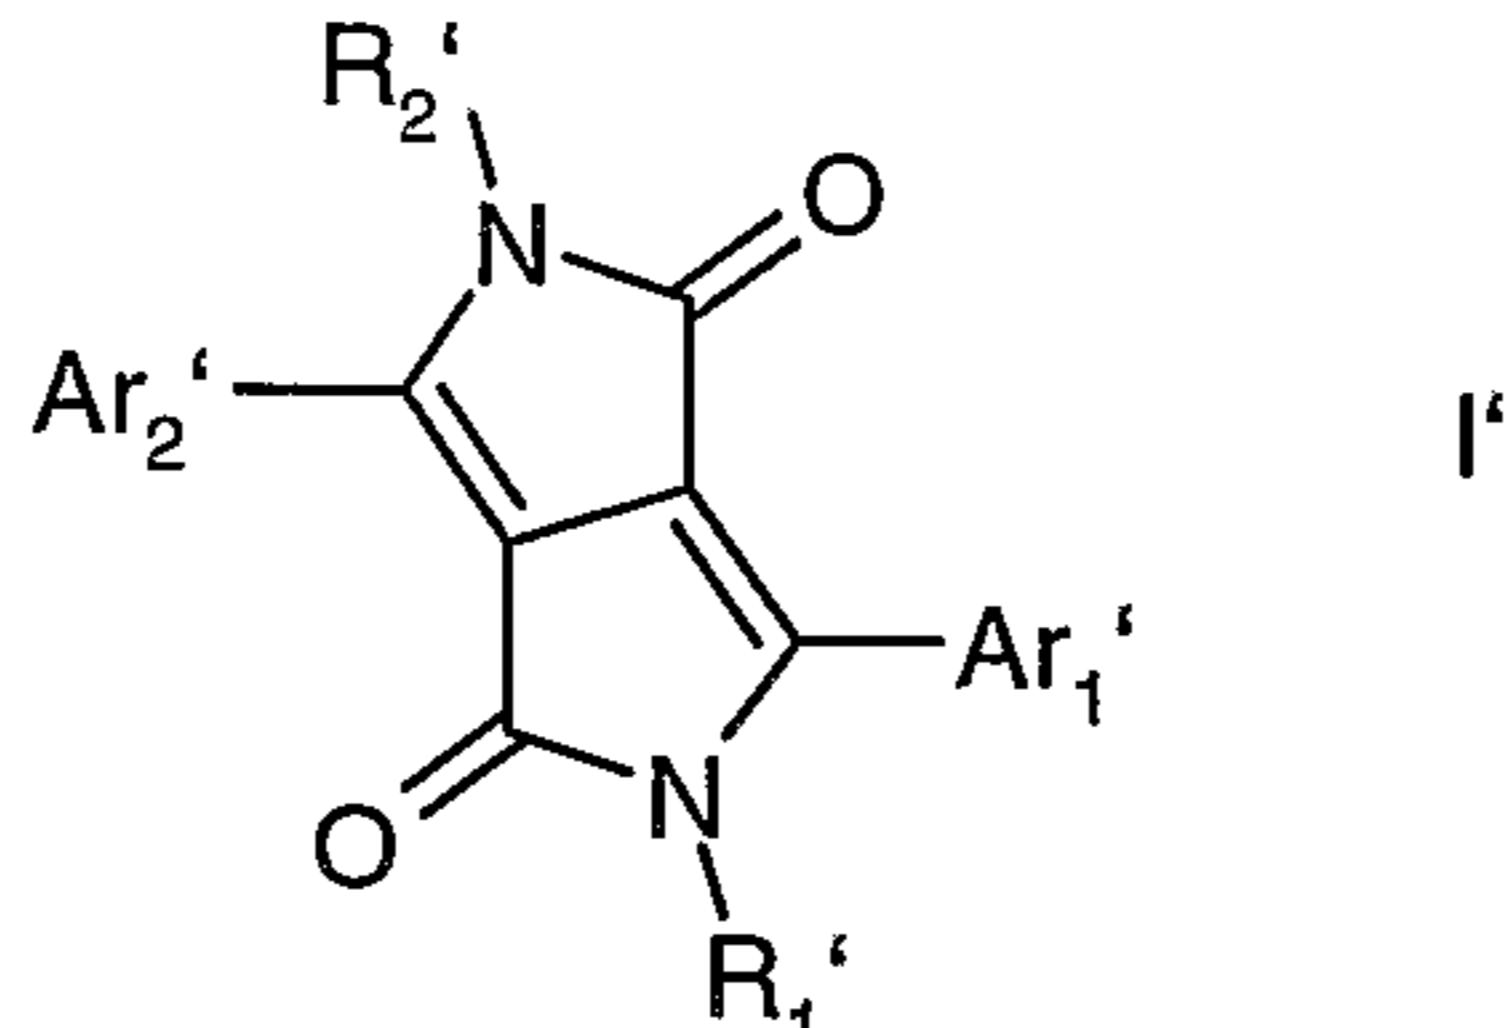

10 wherein  $\text{R}_1'$  and  $\text{R}_2'$ , independently from each other, stand for  $\text{C}_1\text{-C}_{25}\text{-alkyl}$ , allyl which can be substituted one to three times with  $\text{C}_1\text{-C}_3\text{alkyl}$  or  $\text{Ar}_3'$ ,  $-\text{CR}_3\text{R}_4\text{-(CH}_2\text{)}_{m'}\text{-Ar}_3'$ , wherein  $\text{R}_3'$  and  $\text{R}_4'$  independently from each other stand for hydrogen or  $\text{C}_1\text{-C}_4\text{alkyl}$ , or phenyl which can be substituted on to three times with  $\text{C}_1\text{-C}_3$  alkyl,  $\text{Ar}_3'$  stands for phenyl or 1- or 2-naphthyl which can be substituted one to three times with  $\text{C}_1\text{-C}_8$  alkyl,  $\text{C}_1\text{-C}_8$  alkoxy, halogen or phenyl, which can be substituted with  $\text{C}_1\text{-C}_8$  alkyl or  $\text{C}_1\text{-C}_8$  alkoxy one to three times, and  $m'$  stands for 0, 1, 2, 3 or 4, and wherein  $\text{C}_1\text{-C}_{25}\text{-alkyl}$  or  $-\text{CR}_3\text{R}_4\text{-(CH}_2\text{)}_{m'}\text{-Ar}_3'$ , preferably  $\text{C}_1\text{-C}_{25}\text{-alkyl}$ , can be substituted with a functional group capable of increasing the solubility in water such as a tertiary amino group,  $-\text{SO}_3^-$ , or  $\text{PO}_4^{2-}$ ,  $\text{Ar}_1$  and  $\text{Ar}_2$ , independently from each other, stand for

15

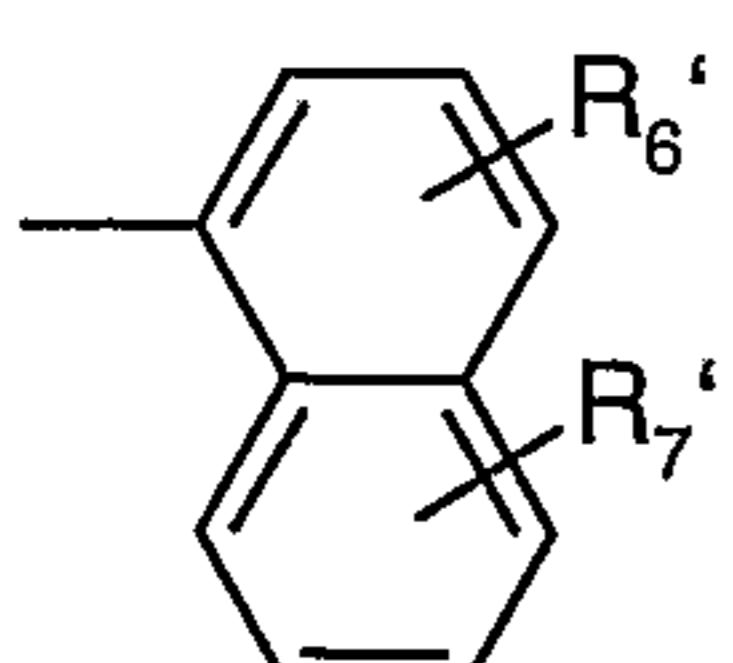

wherein R<sub>6</sub>' and R<sub>7</sub>', independently from each other, stand for hydrogen, C<sub>1</sub>-C<sub>6</sub>alkyl, -NR<sub>8</sub>'R<sub>9</sub>', -OR<sub>10</sub>', -S(O)<sub>n</sub>R<sub>8</sub>', -Se(O)<sub>n</sub>R<sub>8</sub>', or phenyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy, but do not stand simultaneously for hydrogen, wherein R<sub>8</sub>' and R<sub>9</sub>', independently from each other, stand for hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, -CR<sub>3</sub>'R<sub>4</sub>'-(CH<sub>2</sub>)<sub>m</sub>'-Ph, R<sub>10</sub>', wherein R<sub>10</sub>' stands for C<sub>6</sub>-C<sub>24</sub>-aryl, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur, wherein Ph, the aryl and heterocyclic radical can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, or halogen, or R<sub>8</sub>' and R<sub>9</sub>' stand for -C(O)R<sub>10</sub>', wherein R<sub>11</sub>' can be C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, R<sub>10</sub>', -OR<sub>12</sub>', or -NR<sub>13</sub>'R<sub>14</sub>', wherein R<sub>12</sub>', R<sub>13</sub>', and R<sub>14</sub>' stand for C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, C<sub>6</sub>-C<sub>24</sub>-aryl, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur, wherein the aryl and heterocyclic radical can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy, or -NR<sub>8</sub>'R<sub>9</sub>' stands for a five- or six-membered heterocyclic radical in which R<sub>8</sub>' and R<sub>9</sub>' together stand for tetramethylene, pentamethylene, -CH<sub>2</sub>-CH<sub>2</sub>-O-CH<sub>2</sub>-CH<sub>2</sub>-, or -CH<sub>2</sub>-CH<sub>2</sub>-NR<sub>5</sub>-CH<sub>2</sub>-CH<sub>2</sub>-, preferably -CH<sub>2</sub>-CH<sub>2</sub>-O-CH<sub>2</sub>-CH<sub>2</sub>-, and n' stands for 0, 1, 2 or 3. The DPP compounds can be used for the preparation of inks, colorants, pigmented plastics for coatings, non-impact-printing material, color filters, cosmetics, or for the preparation of polymeric ink particles, toners, dye lasers and electroluminescent devices.

EP-A-1087006 relates to an electroluminescent device comprising in this order (a) an anode, (b) a hole transporting layer, (c) a light-emitting layer, (d) optionally an electron transporting layer and (e) a cathode and a light-emitting substance, wherein the light-emitting substance is a diketopyrrolopyrrole ("DPP") represented by formula I'.

Further fluorescent DPP compounds and their use in electroluminescent devices are disclosed in EP 01810636.

30

Surprisingly, it was found that luminescent devices, which are high in the efficiency of electrical energy utilisation and high in luminance, can be obtained if specific combinations of DPP compounds are used as light emitting substances.


35

Accordingly, the present invention relates to compositions comprising a guest chromophore and a host chromophore, wherein the absorption spectrum of the guest chromophore


overlaps with the fluorescence emission spectrum of the host chromophore, wherein the host chromophore is a diketopyrrolopyrrole having a photoluminescence emission peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and wherein the guest chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm,

5 preferably 500 to 600 nm, most preferred 520 to 580 nm

In a preferred embodiment, the present invention relates to compositions comprising a diketopyrrolopyrrole (“DPP”) represented by formula I

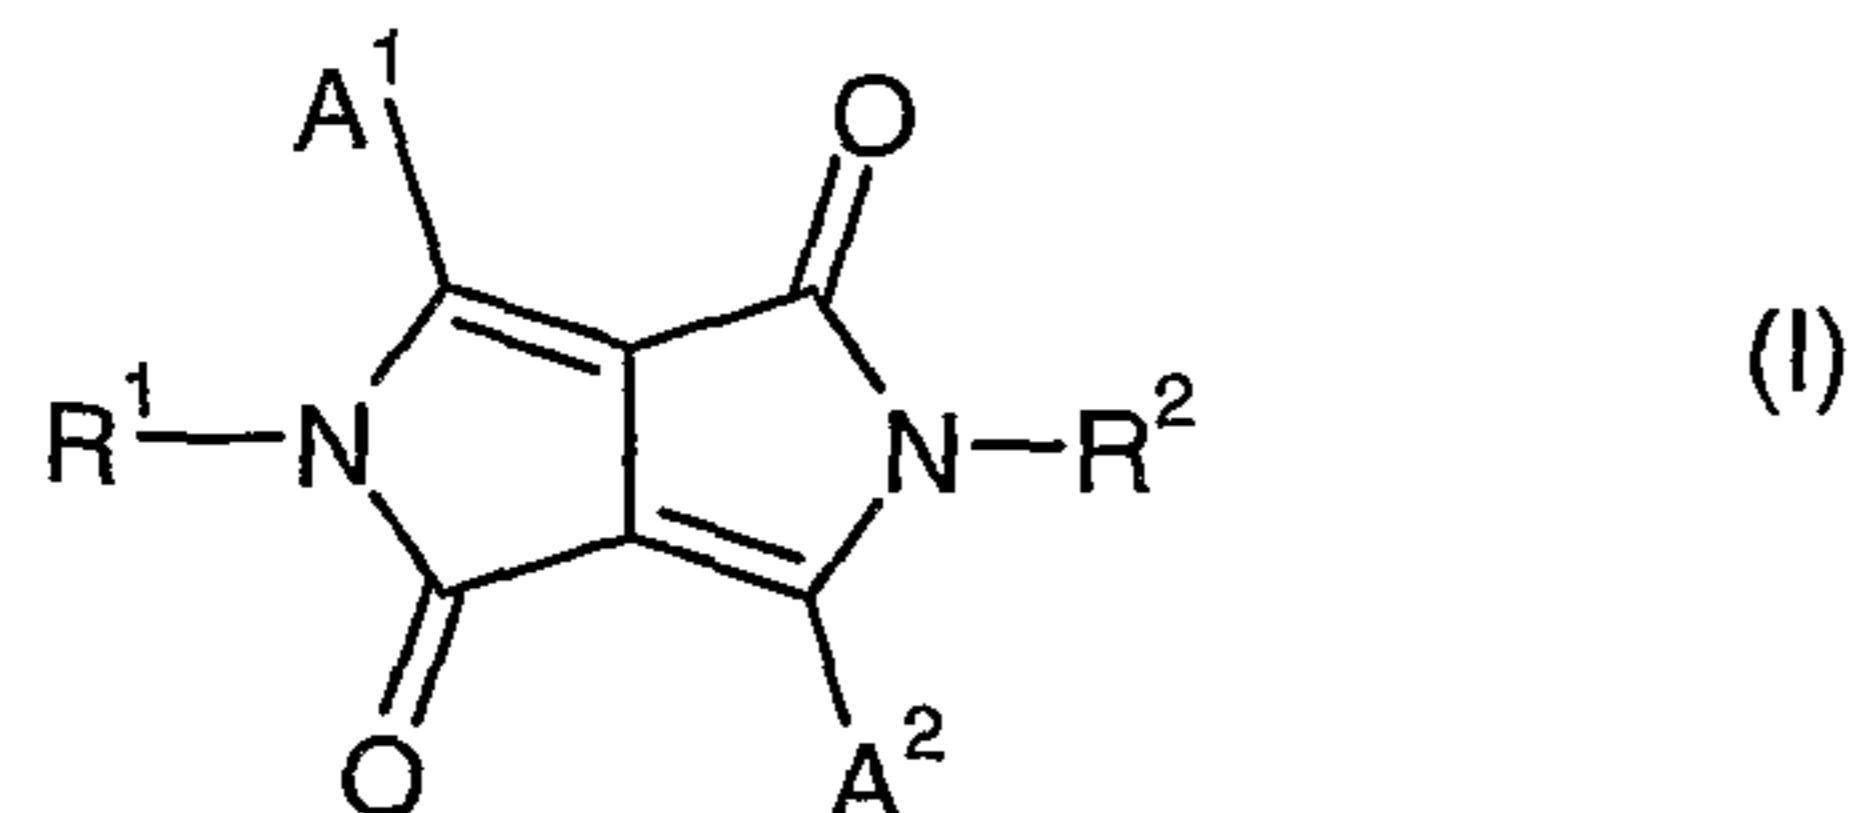


10 and a DPP represented by formula II

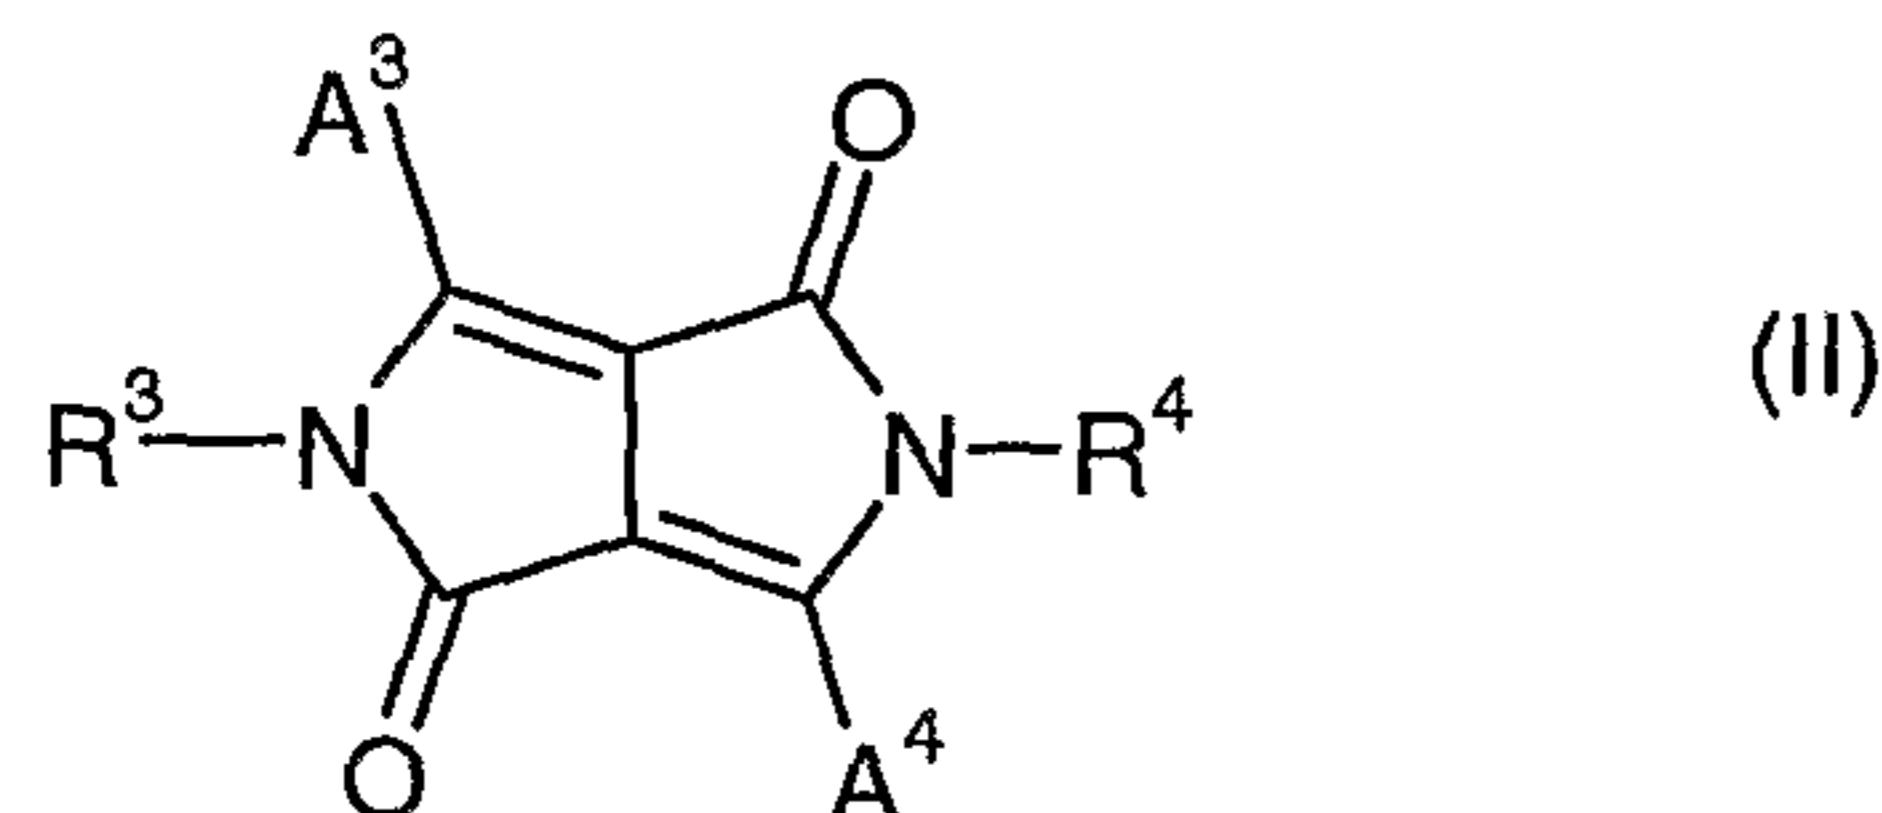

wherein R¹, R², R³ and R⁴ independently from each other stand for C<sub>1</sub>-C<sub>25</sub>-alkyl, which can be substituted by fluorine, chlorine or bromine, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>5</sub>-C<sub>12</sub>-cycloalkyl which can be condensed one or two times by phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>4</sub>-alkyl, halogen, nitro or cyano, silyl, A<sup>5</sup> or -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, wherein R<sup>11</sup> and R<sup>12</sup> independently from each other stand for hydrogen, fluorine, chlorine, bromine, cyano or C<sub>1</sub>-C<sub>4</sub>alkyl, which can be substituted by fluorine, chlorine or bromine, or phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>3</sub>alkyl, A<sup>5</sup> stands for phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen, nitro, cyano, phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, -NR<sup>13</sup>R<sup>14</sup> wherein R<sup>13</sup> and R<sup>14</sup> represent hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>6</sub>-C<sub>24</sub>-aryl, in particular phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen or cyano, or phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, and m stands for 0, 1, 2, 3 or 4,


25 A<sup>1</sup> and A<sup>2</sup> independently from each other stand for

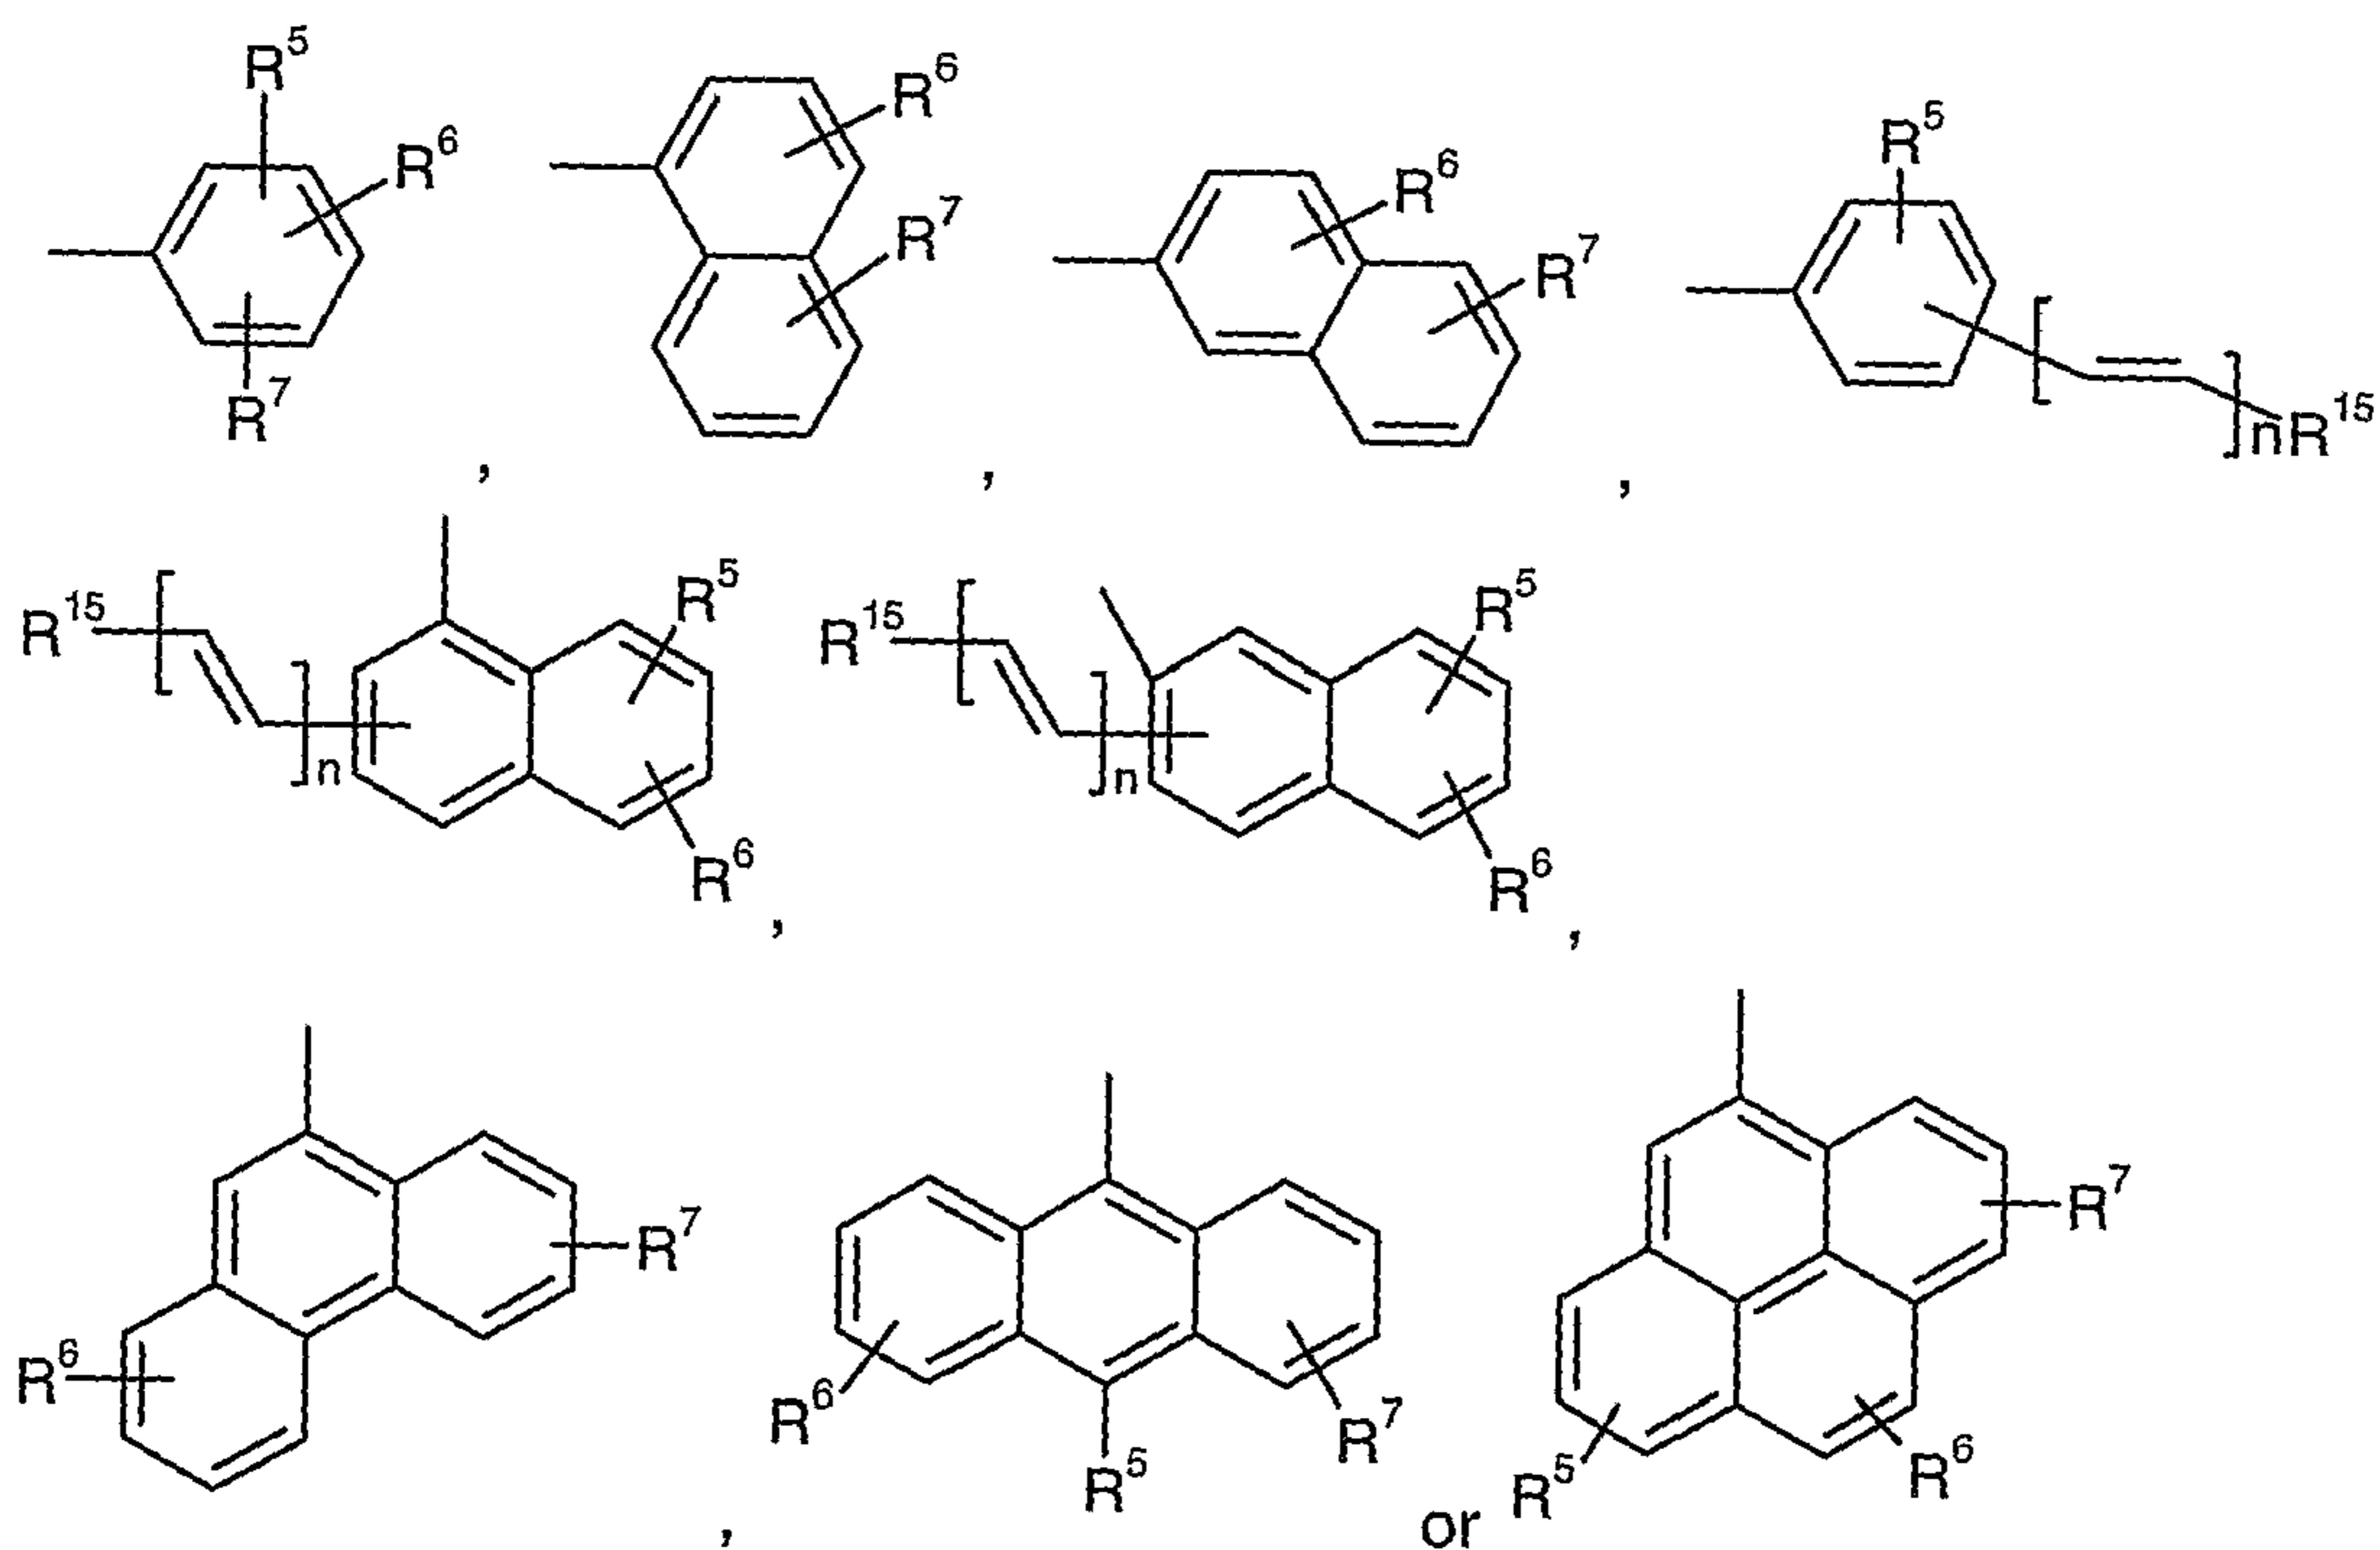


wherein

5  $R^5, R^6, R^7$  independently from each other stands for hydrogen,  $C_1-C_{25}$ -alkyl,  $C_1-C_{25}$ -alkoxy,  $-OCR^{11}R^{12}-(CH_2)_m-A^5$ , cyano, halogen,  $-OR^{10}$ ,  $-S(O)_pR^{13}$ , or phenyl, which can be substituted one to three times with  $C_1-C_8$ alkyl or  $C_1-C_8$ alkoxy, wherein  $R^{10}$  stands for  $C_6-C_{24}$ -aryl, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur,  $R^{13}$  stands for  $C_1-C_{25}$ -alkyl,  $C_5-C_{12}$ -cycloalkyl,  $-CR^{11}R^{12}-(CH_2)_m-Ph$ ,  $R^{15}$  stands for  $C_6-C_{24}$ -aryl,  $p$  stands for 0, 1, 2 or 3 and  $n$  stands for 0, 1, 2, 3 or 4,

10  $A^3$  and  $A^4$  independently from each other stand for

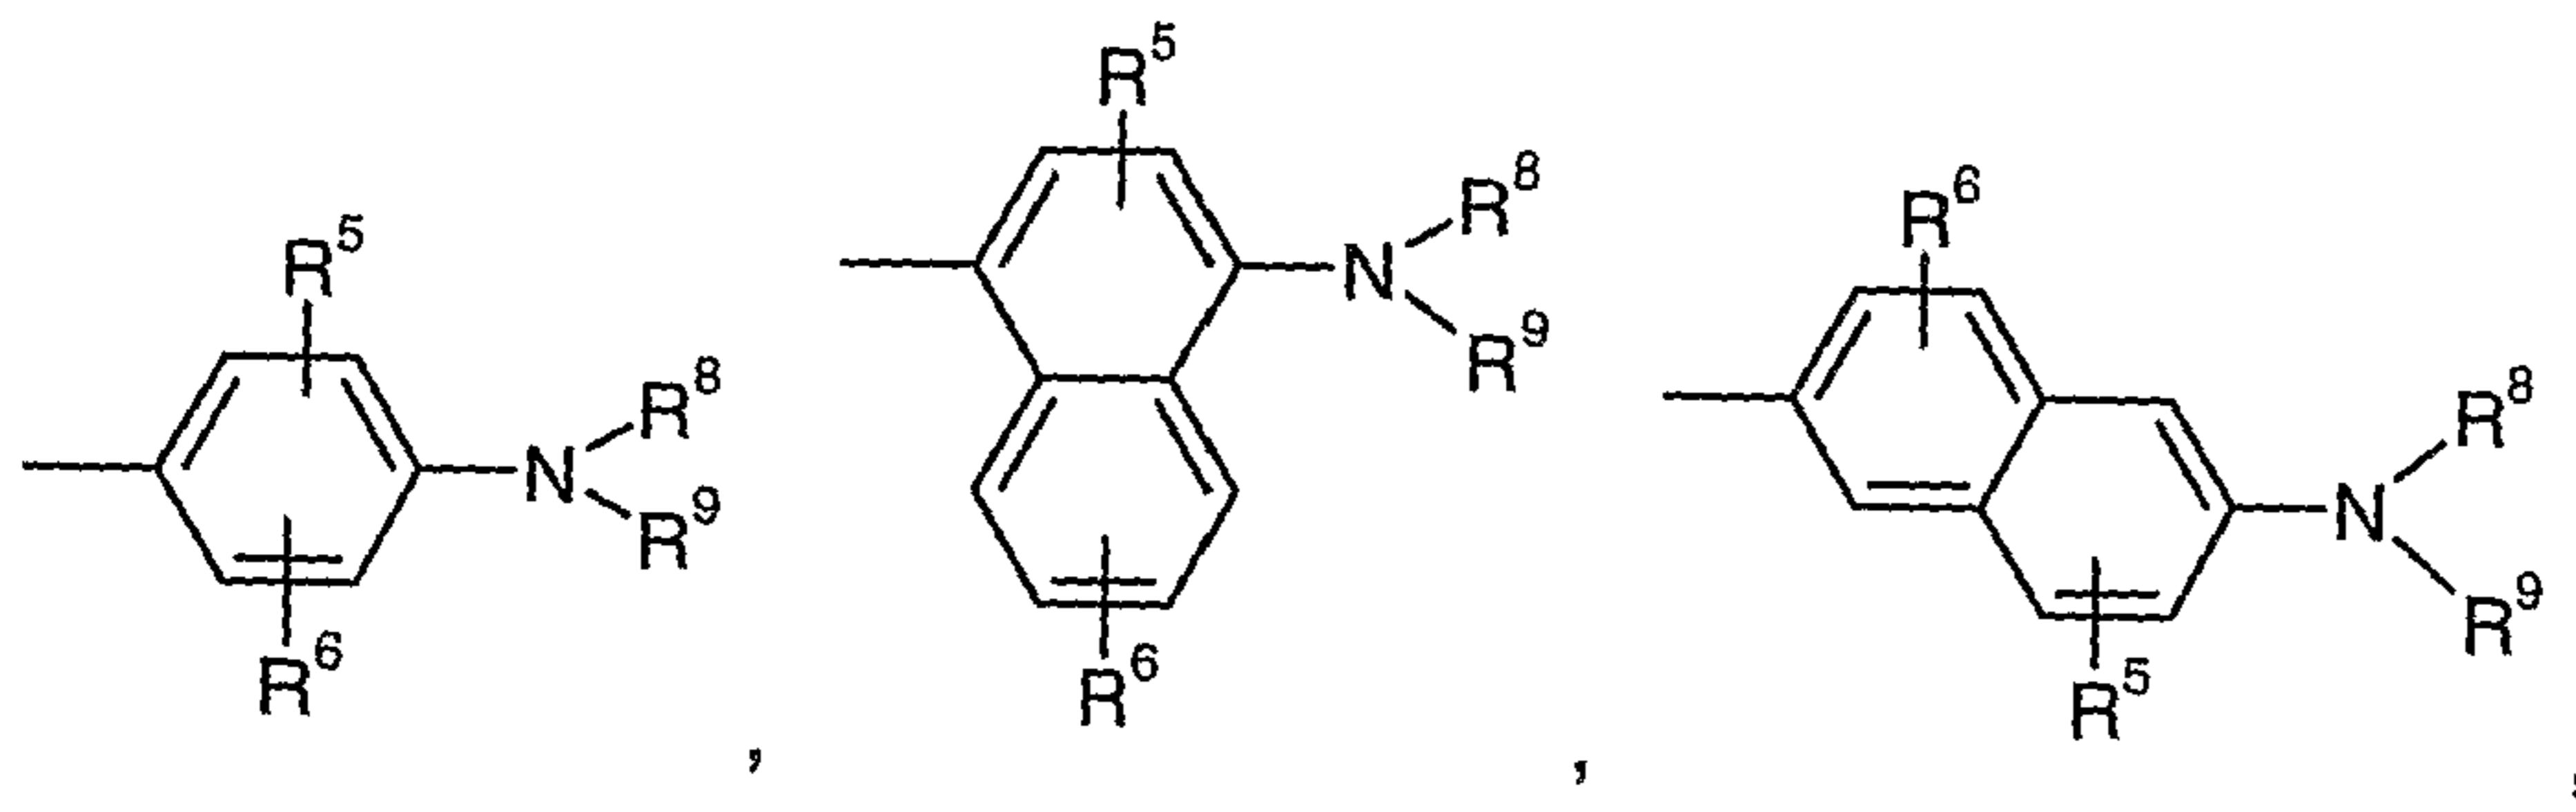


15

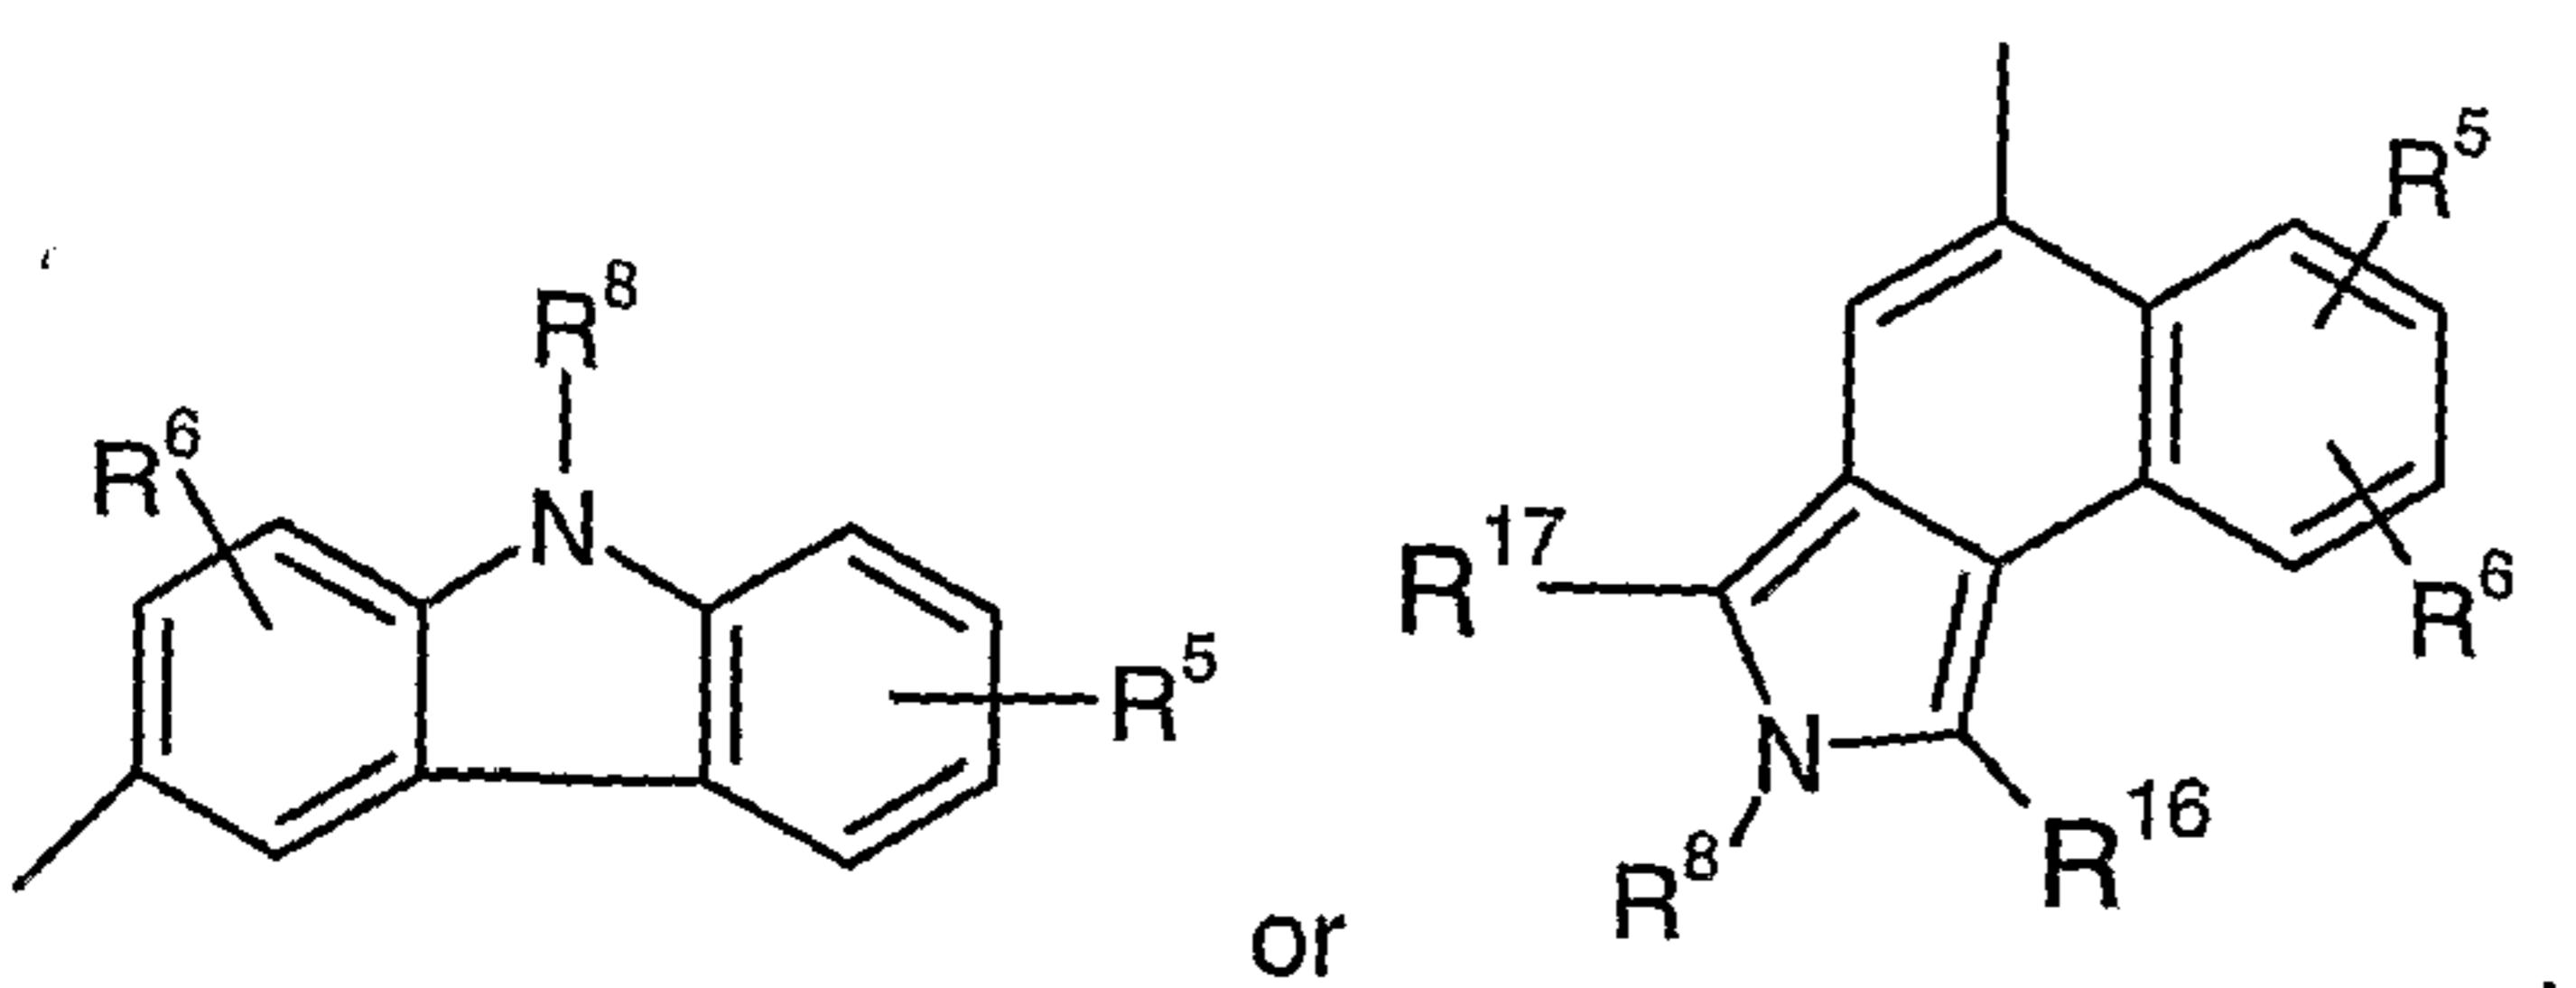


wherein R<sup>8</sup> and R<sup>9</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, C<sub>6</sub>-C<sub>24</sub>-aryl, in particular A<sup>1</sup>, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur, and R<sup>16</sup> and R<sup>17</sup> independently from each other stand for hydrogen and C<sub>6</sub>-C<sub>24</sub>-aryl, in particular phenyl; an electroluminescent device comprising the above-mentioned composition and the use of the composition for coloring a high molecular weight organic material, i.e. the use of the composition for the preparation of inks, colorants, pigmented plastics for coatings, non-impact-printing material, color filters, cosmetics, polymeric ink particles, toners, dye lasers and electroluminescent devices.

The present invention provides red or orange fluorescent compositions with a high heat stability, a good solubility in polymers, hydrocarbon based fuels, lubricants etc., a high light stability, and the ability to be used in plastics, especially polyamides, without decomposition and loss of lightfastness, and in paints and with a high electroluminescent (EL) emission intensity.


R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> independently from each other stand for C<sub>1</sub>-C<sub>25</sub>-alkyl, preferably C<sub>1</sub>-C<sub>8</sub>alkyl, in particular n-butyl, tert.-butyl and neopentyl, C<sub>5</sub>-C<sub>12</sub>cycloalkyl or C<sub>5</sub>-C<sub>12</sub>-cycloalkyl which can be condensed one or two times by phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>4</sub>-alkyl, halogen and cyano, in particular cyclohexyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl and/or C<sub>1</sub>-C<sub>8</sub>alkoxy, in particular 2,6-di-isopropylcyclohexyl, or

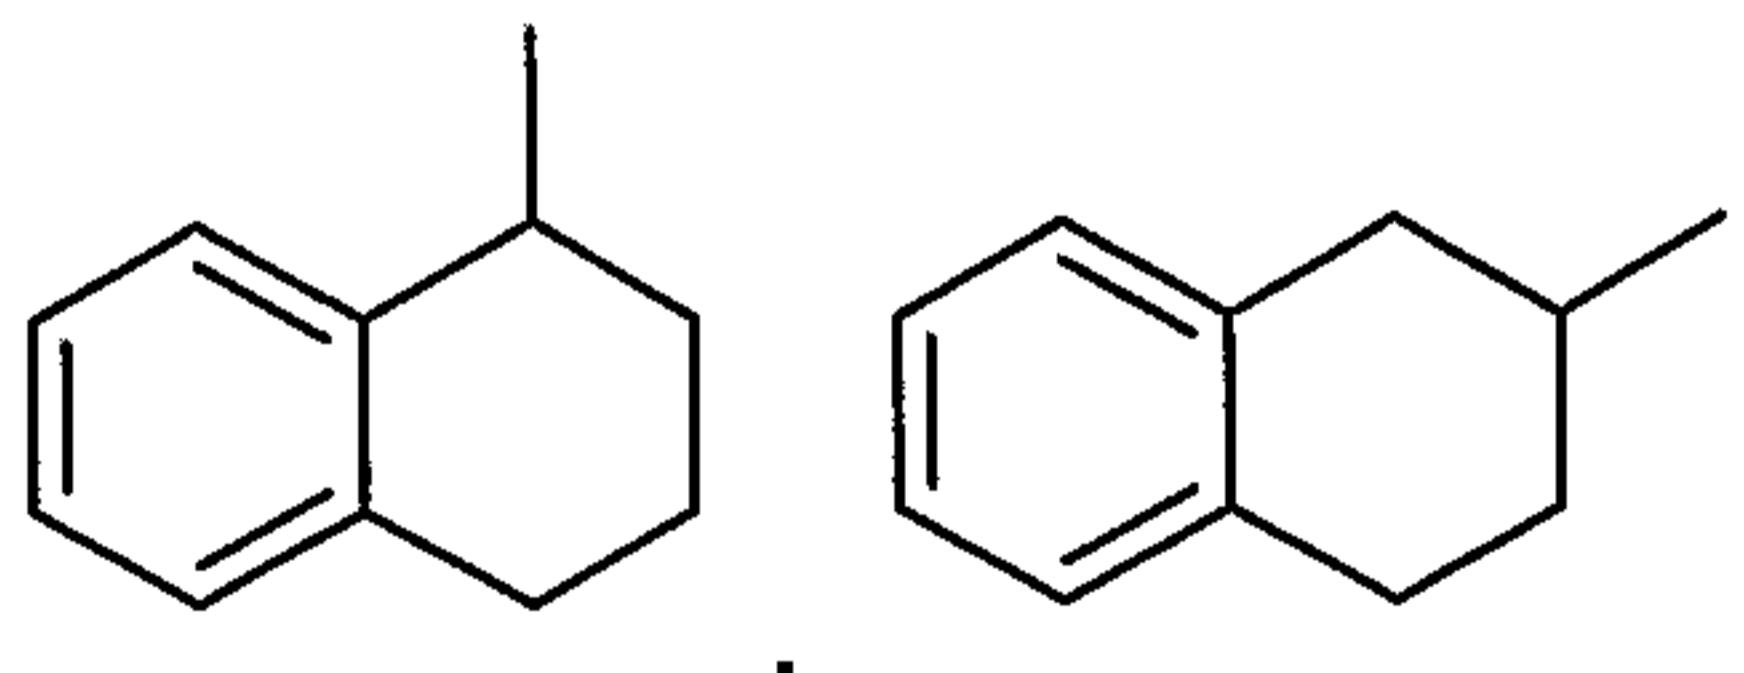




, silyl, in particular trimethylsilyl, A<sup>5</sup> or -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, wherein R<sup>11</sup> and R<sup>12</sup> independently from each other stand for hydrogen or C<sub>1</sub>-C<sub>4</sub>alkyl, or phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>3</sub>alkyl, A<sup>5</sup> stands for phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen, cyano, phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, or -NR<sup>13</sup>R<sup>14</sup>, wherein R<sup>13</sup> and R<sup>14</sup> represent C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>6</sub>-C<sub>24</sub>-aryl, in particular phenyl or 1- or 2-naphthyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen or cyano or phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, in particular 3,5-dimethylphenyl, 3,5-di-tert.-butylphenyl, 3-methylphenyl and 2,6-di-isopropylphenyl, and m stands for 0, 1, 2, 3 or 4, in particular 0 or 1.

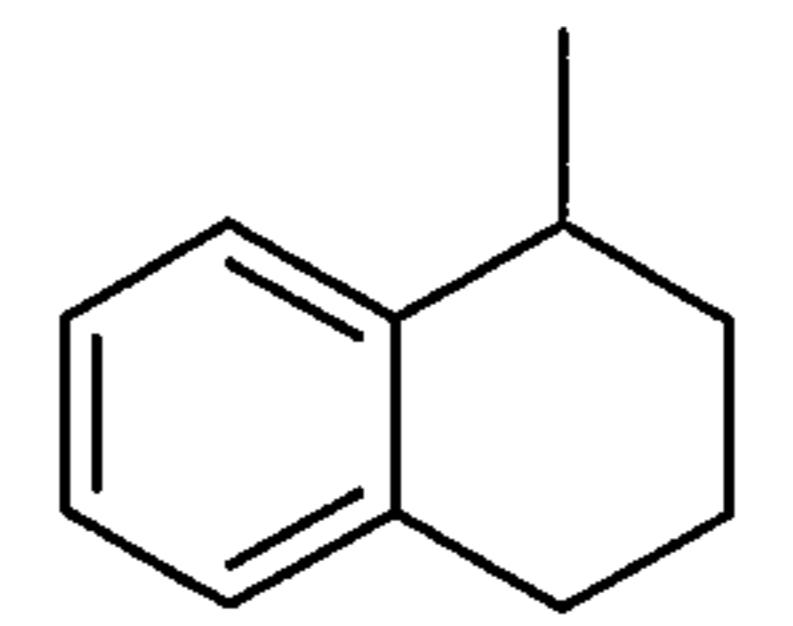



Preferably R<sup>1</sup> and R<sup>2</sup> are independently of each other C<sub>1</sub>-C<sub>8</sub>alkyl,

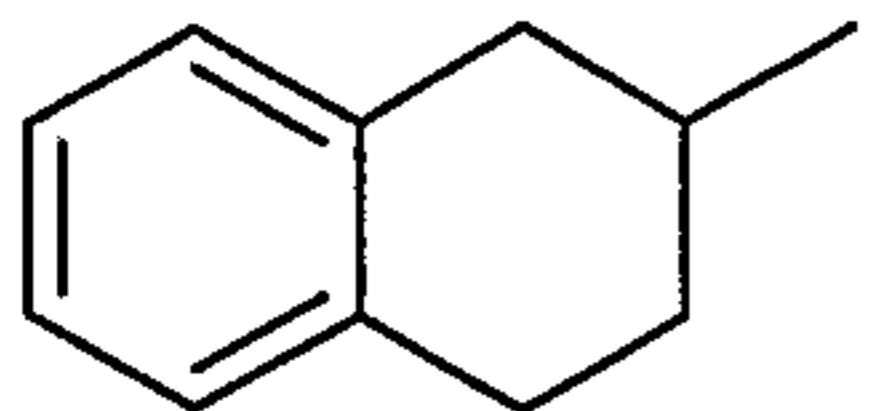

or -CR<sup>11</sup>R<sup>12</sup>-A<sup>5</sup>, wherein R<sup>11</sup> is hydrogen, R<sup>12</sup> is hydrogen, in particular

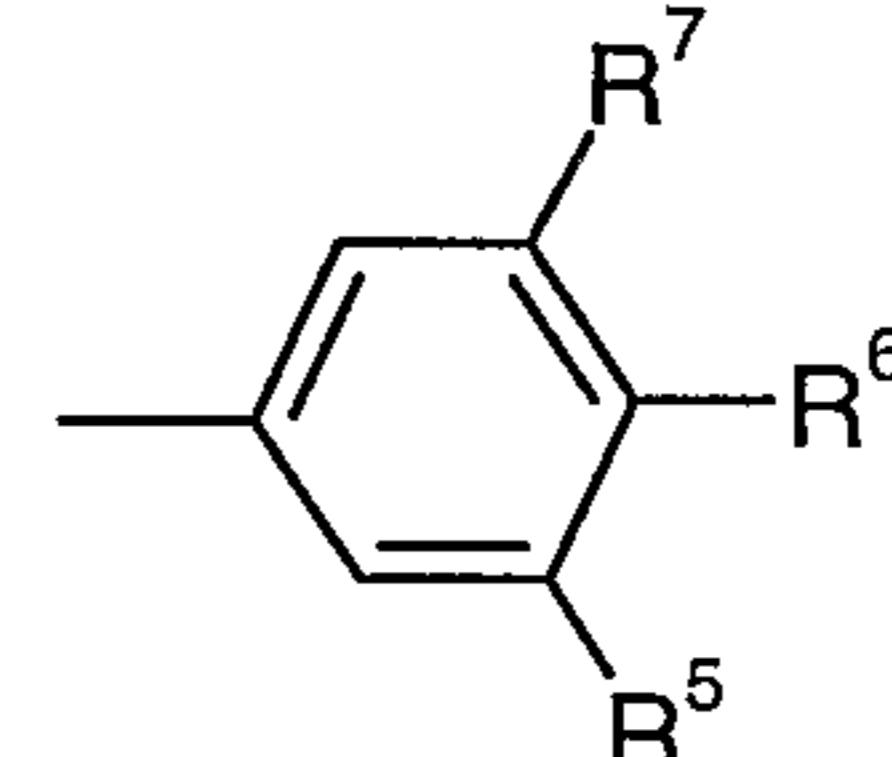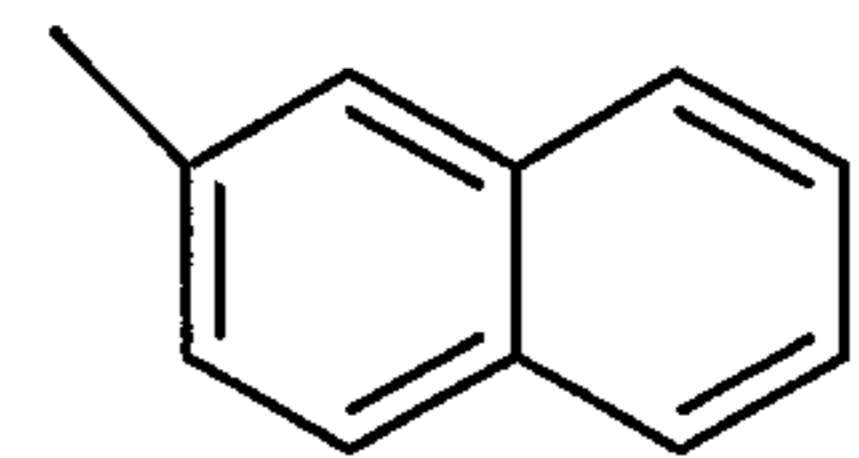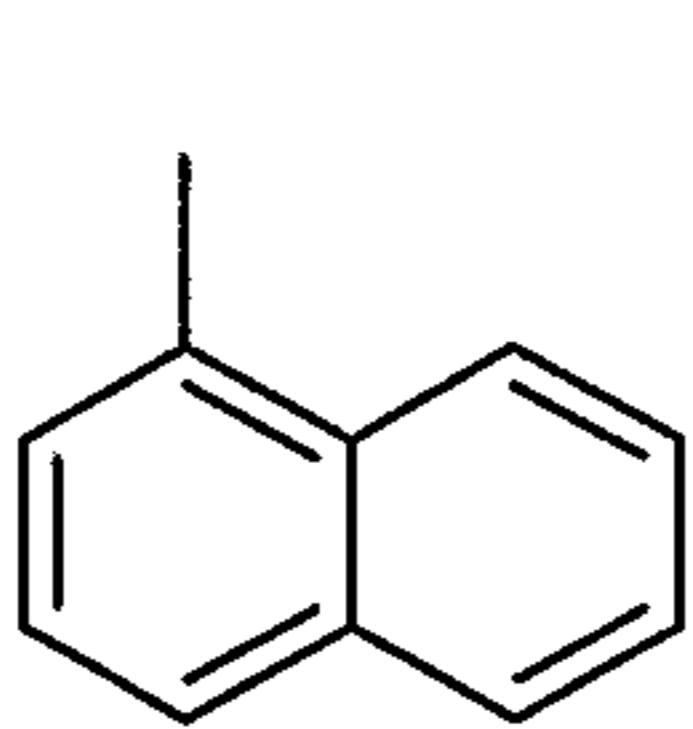


methyl or phenyl and A<sup>5</sup> is , or , wherein R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> are independently of each other hydrogen, C<sub>1</sub>-C<sub>4</sub>-alkyl, or halogen, in particular Br,

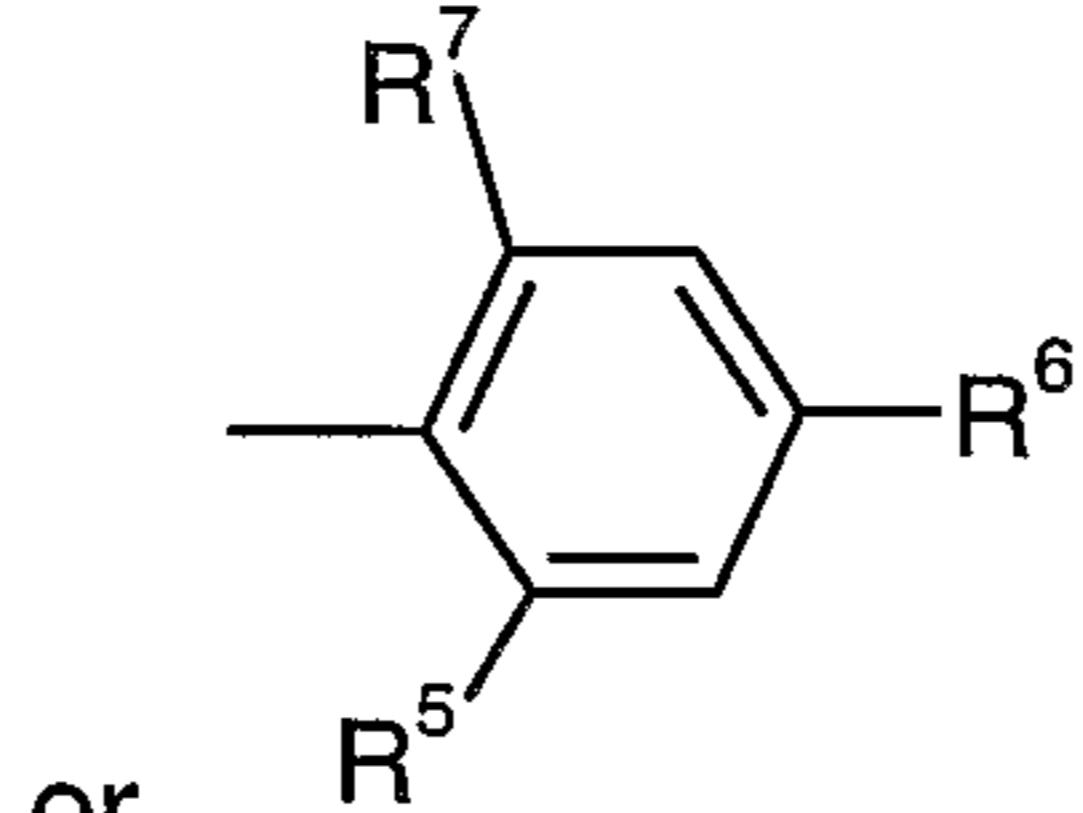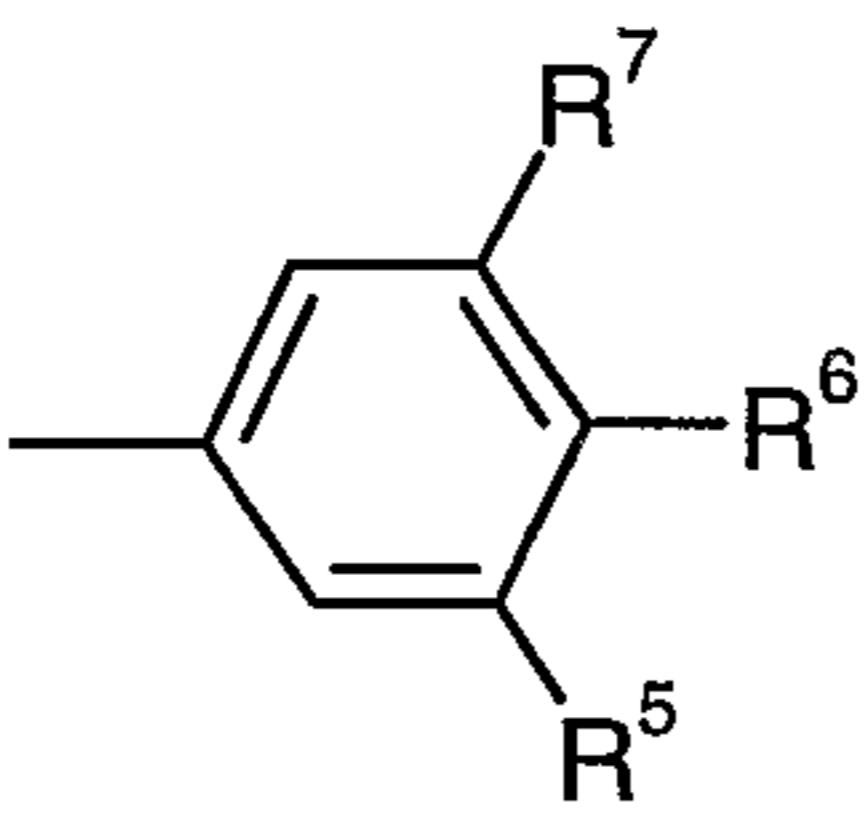


5 wherein groups , wherein R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> are hydrogen; R<sup>6</sup> is C<sub>1</sub>-C<sub>4</sub>-alkyl, phenyl or Br and R<sup>5</sup> and R<sup>7</sup> are hydrogen; R<sup>5</sup> is C<sub>1</sub>-C<sub>4</sub>-alkyl and R<sup>6</sup> and R<sup>7</sup> are hydrogen; or R<sup>6</sup> is hydrogen and R<sup>5</sup> and R<sup>7</sup> are C<sub>1</sub>-C<sub>4</sub>-alkyl are most preferred.

Preferably R<sup>3</sup> and R<sup>4</sup> are independently of each other C<sub>1</sub>-C<sub>8</sub>-alkyl or -CR<sup>11</sup>R<sup>12</sup>-A<sup>5</sup>, wherein R<sup>11</sup>

10 is hydrogen, R<sup>12</sup> is methyl or phenyl, in particular hydrogen and A<sup>5</sup> is

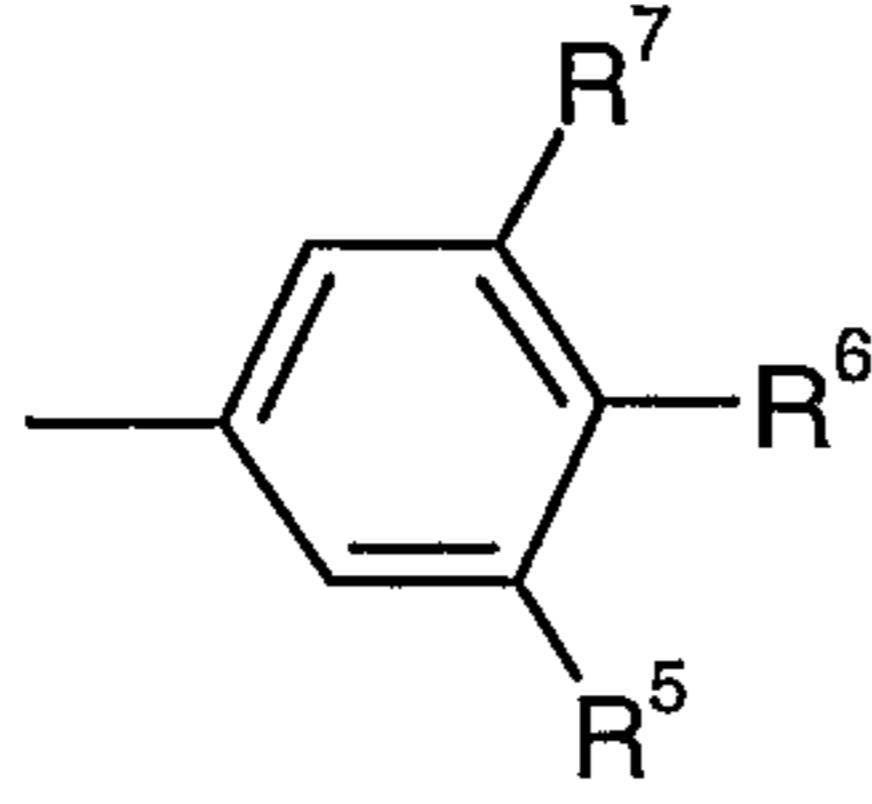

, wherein R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> are independently of each other hydrogen, C<sub>1</sub>-C<sub>4</sub>-

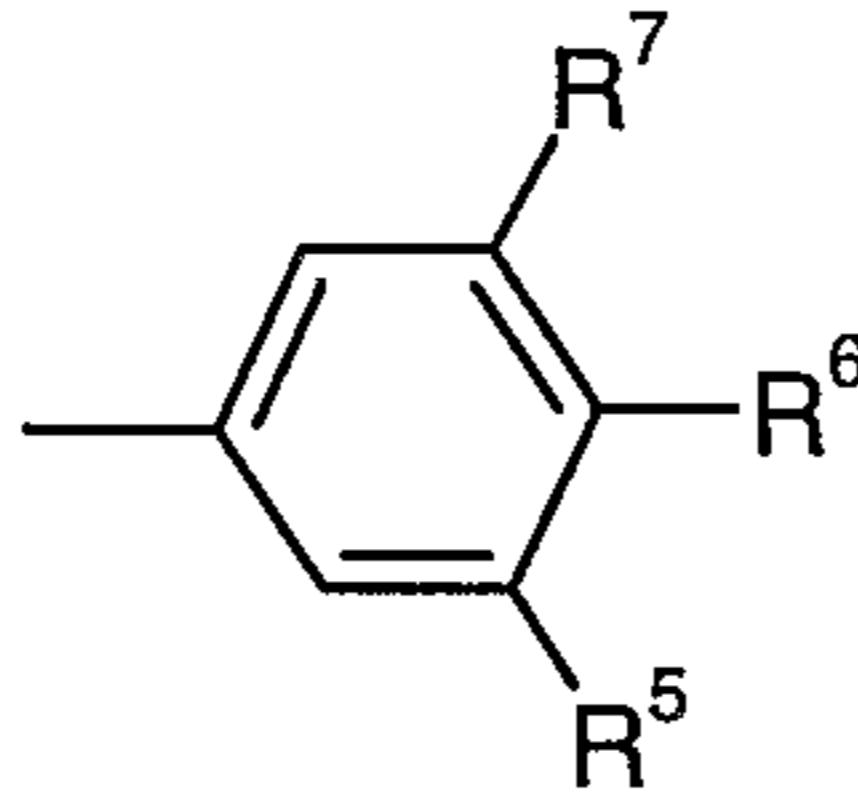


alkyl, or CN, wherein groups , wherein R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> are hydrogen; R<sup>6</sup> is CN or C<sub>1</sub>-C<sub>4</sub>-alkyl and R<sup>5</sup> and R<sup>7</sup> are hydrogen, R<sup>5</sup> and R<sup>6</sup> are CN and R<sup>7</sup> is hydrogen; R<sup>5</sup> is C<sub>1</sub>-C<sub>4</sub>-alkyl and R<sup>6</sup> and R<sup>7</sup> are hydrogen; or R<sup>6</sup> is hydrogen and R<sup>5</sup> and R<sup>7</sup> are C<sub>1</sub>-C<sub>4</sub>-alkyl are most preferred.

The weight ratio of the DPP compound of the formula I to the DPP compound of the formula II is in general 50:50 to 99.99:0.01, preferably 90:10 to 99.99:0.01, more preferably 95:5 to 99.9:0.1, most preferably 98:2 to 99.9:0.1.


5 The DPP compounds of the formula I and II are distinguished by the substituents A<sup>1</sup> and A<sup>2</sup> and A<sup>3</sup> and A<sup>4</sup>, respectively.

A<sup>1</sup> and A<sup>2</sup> independently from each other stand for

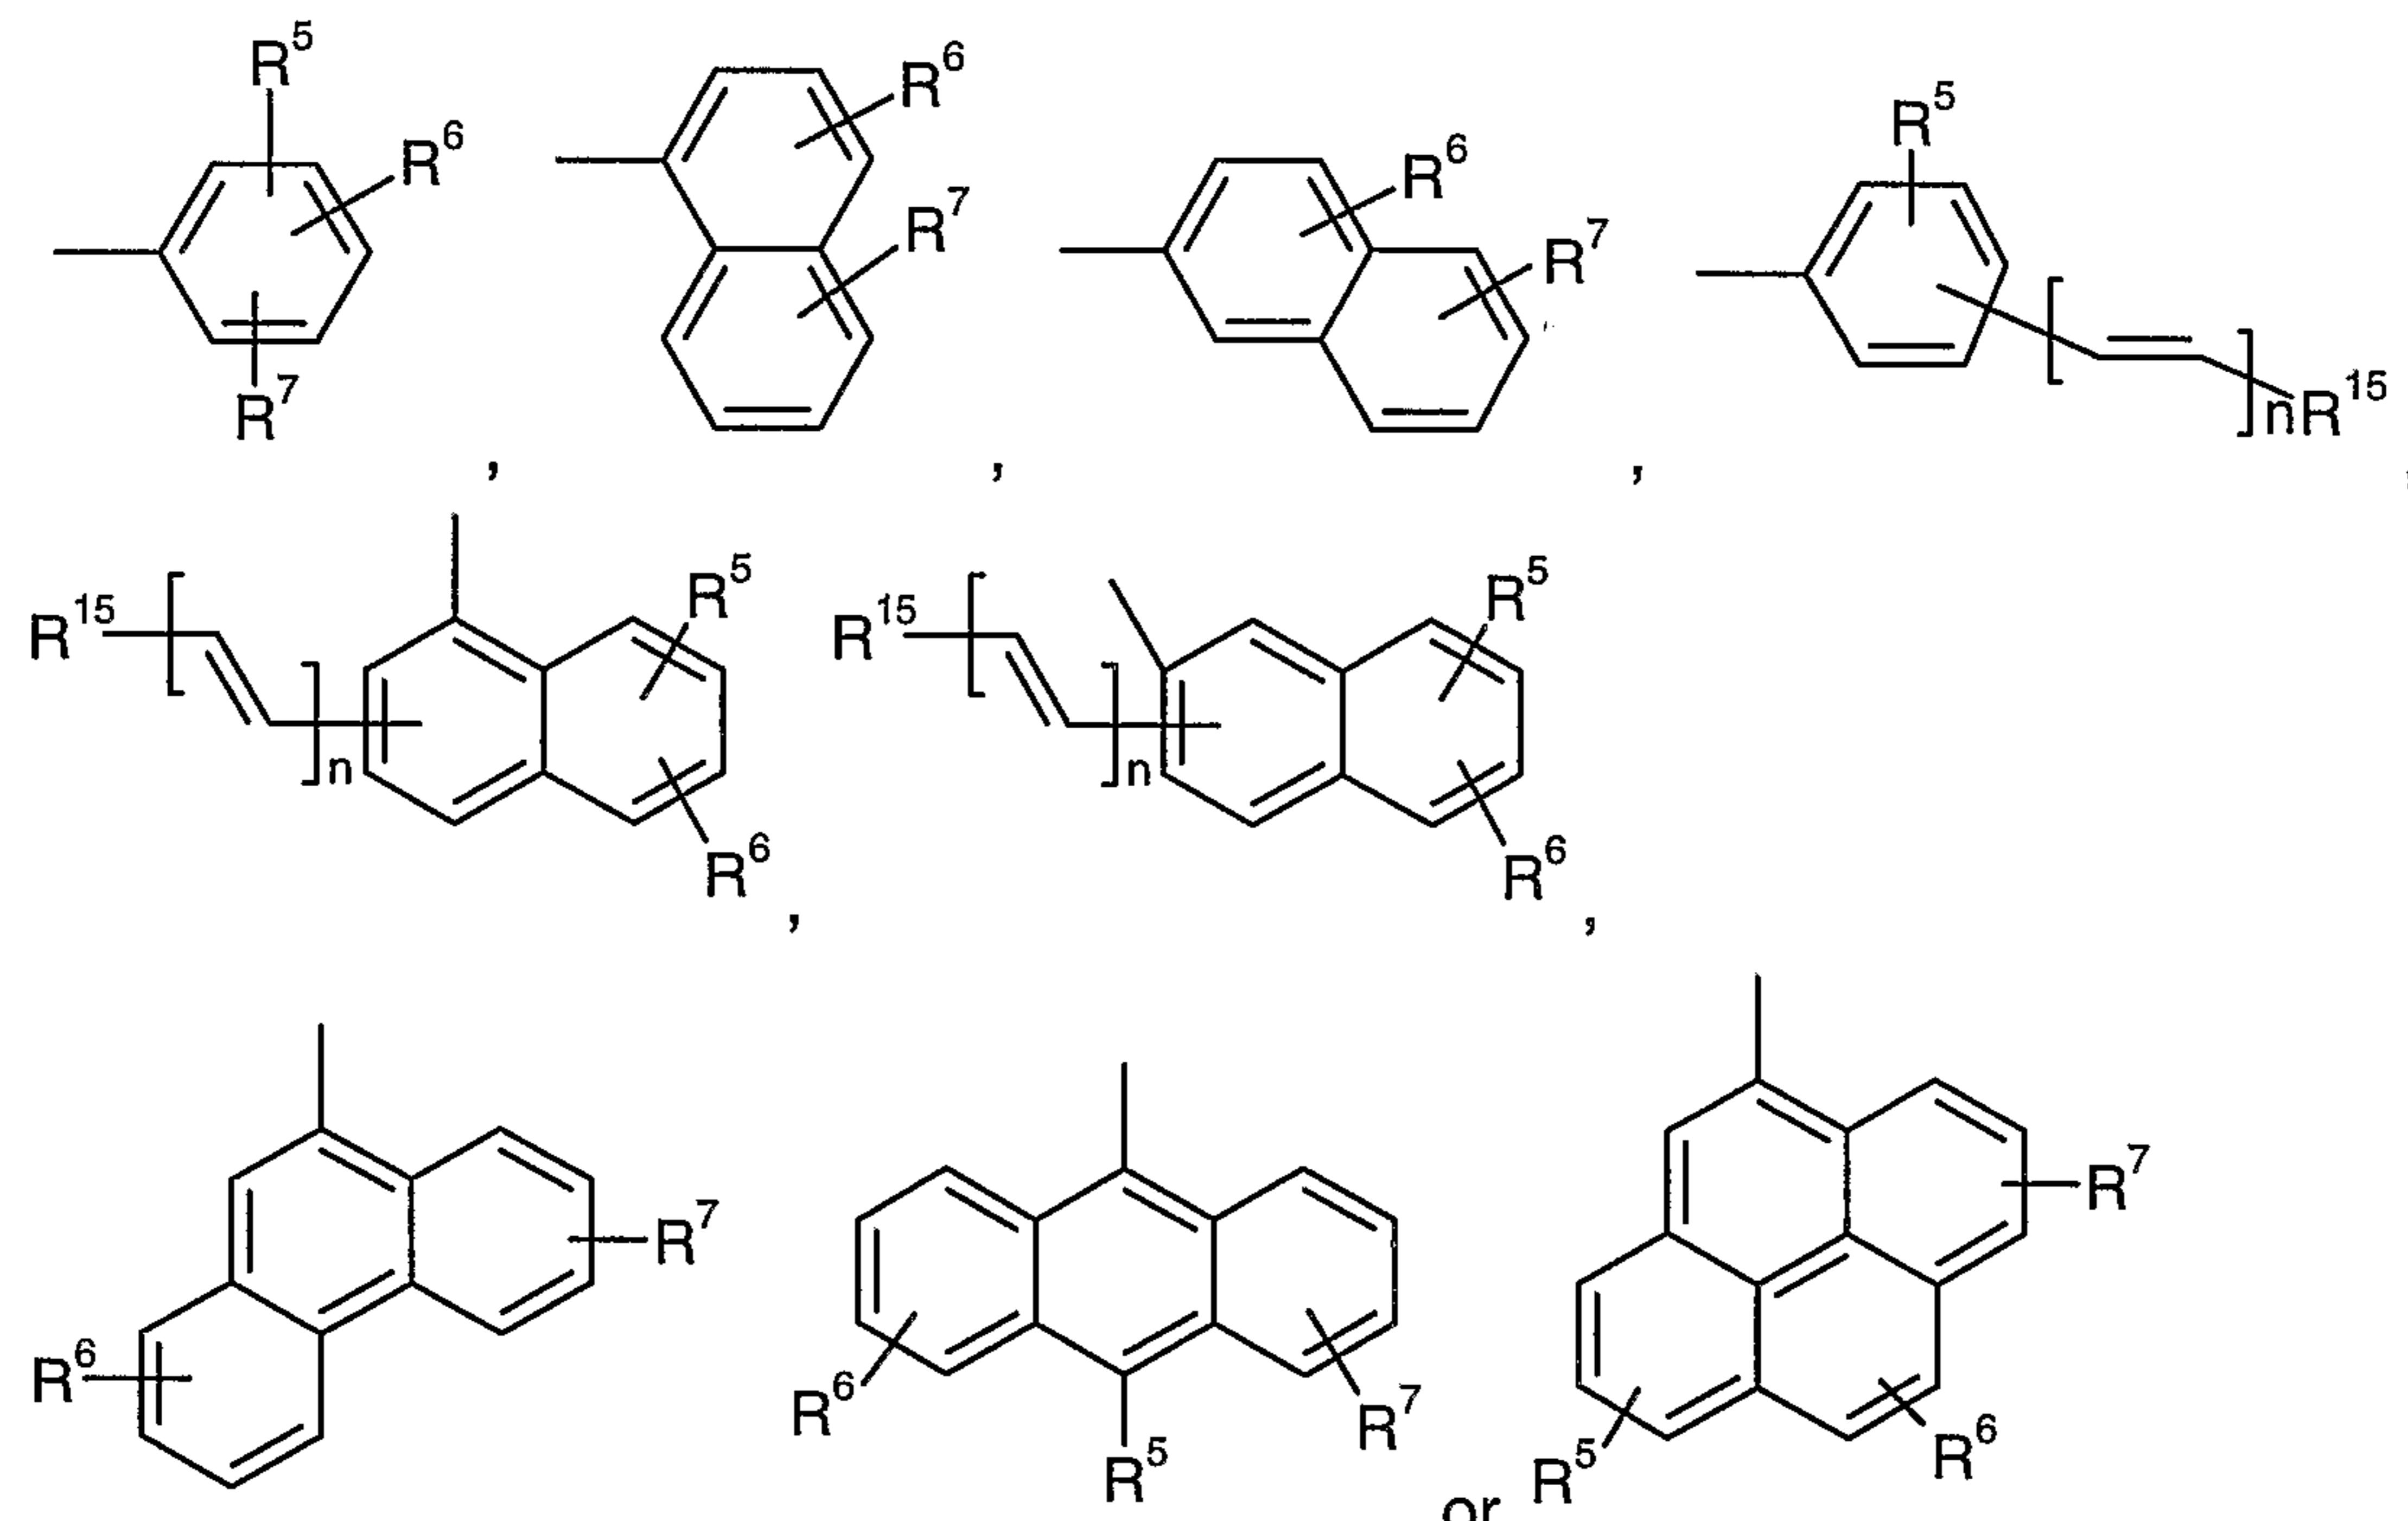


wherein R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup>, n and R<sup>15</sup> have the above-mentioned meanings.

15 If the phenyl or naphthyl substituent is substituted by a vinyl group, A<sup>1</sup> and A<sup>2</sup> independently from each other can stand for

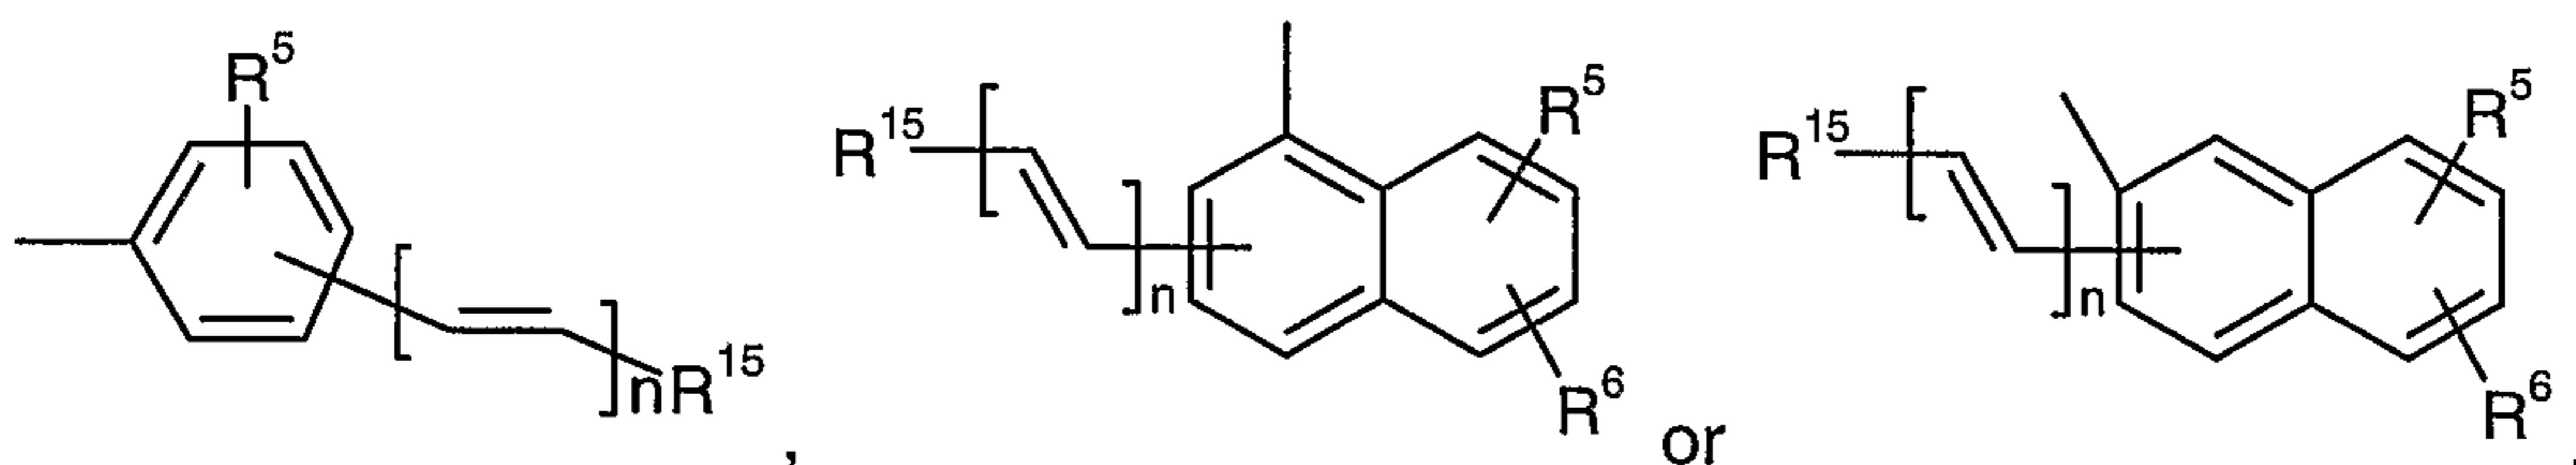


20 wherein n is an integer of 1 to 4, in particular 1 or 2, R<sup>5</sup> and R<sup>6</sup> independently from each other can stand for hydrogen, C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy and R<sup>15</sup> is C<sub>6</sub>-C<sub>24</sub>aryl, such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, phenanthryl, terphenyl, pyrenyl, 2- or 9-fluorenyl or anthracenyl, preferably C<sub>6</sub>-C<sub>12</sub>aryl such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, which may be unsubstituted or substituted by C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy, wherein groups of the following formula are preferred:


10

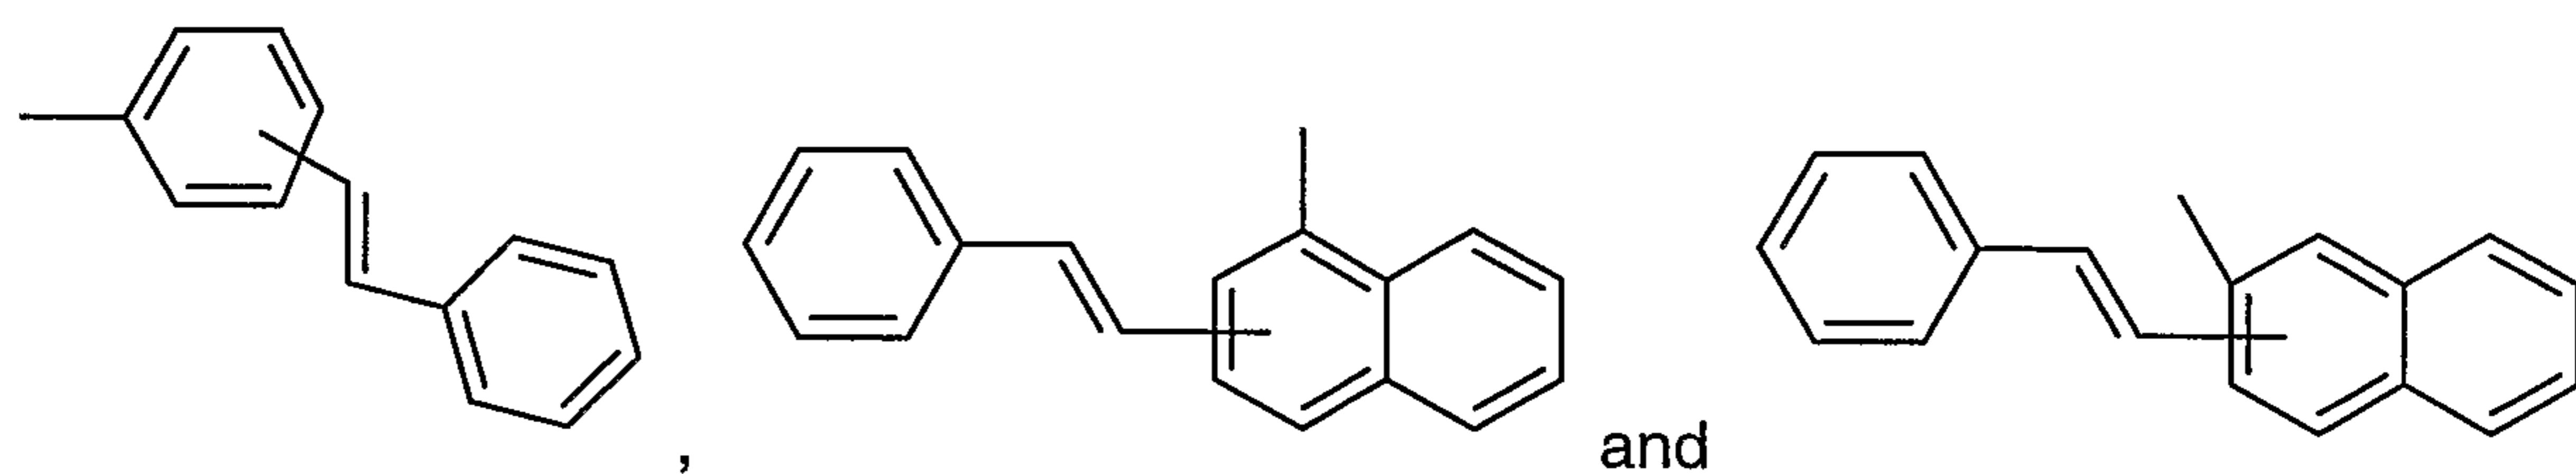

If A<sup>1</sup> and A<sup>2</sup> independently from each other stand for

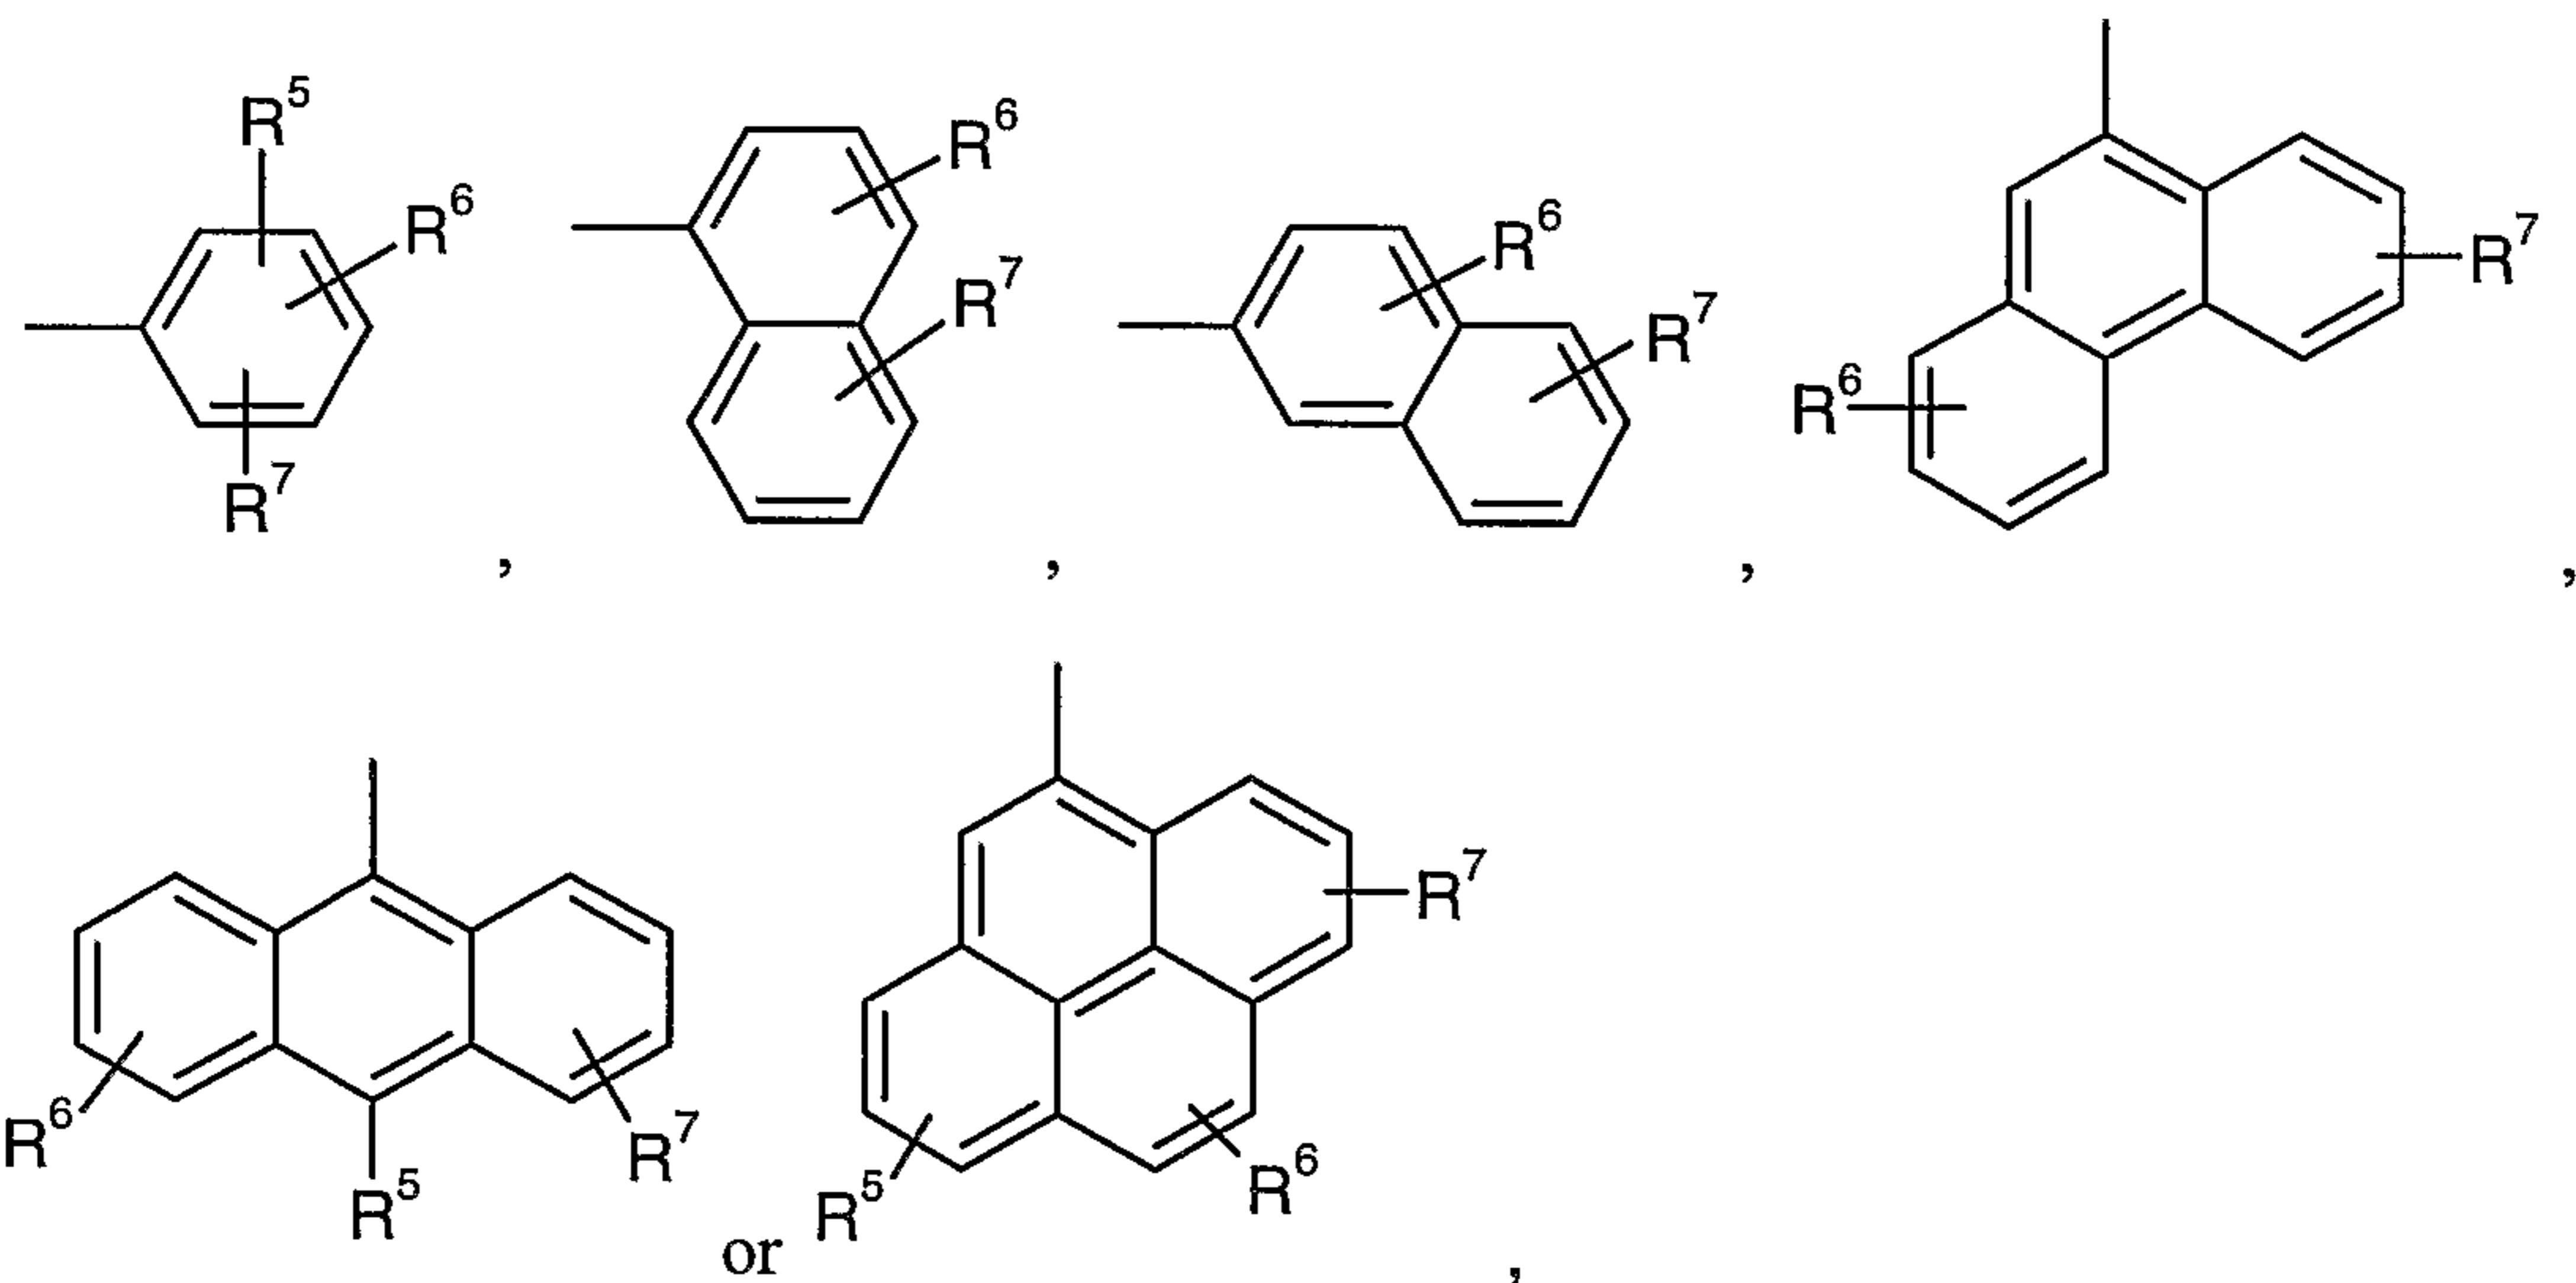


R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>8</sub>-alkyl, C<sub>1</sub>-C<sub>8</sub>-alkoxy, -OCR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, cyano, chloro, -OR<sup>10</sup>, or phenyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy, wherein R<sup>10</sup> stands for C<sub>6</sub>-C<sub>24</sub>-aryl, such as phenyl, 1-naphthyl or 2-naphthyl, R<sup>11</sup> and R<sup>12</sup> are hydrogen or C<sub>1</sub>-C<sub>4</sub>-alkyl, m is 0 or 1, A<sup>5</sup> is phenyl, 1-naphthyl or 2-naphthyl, wherein groups of the following formula are preferred:

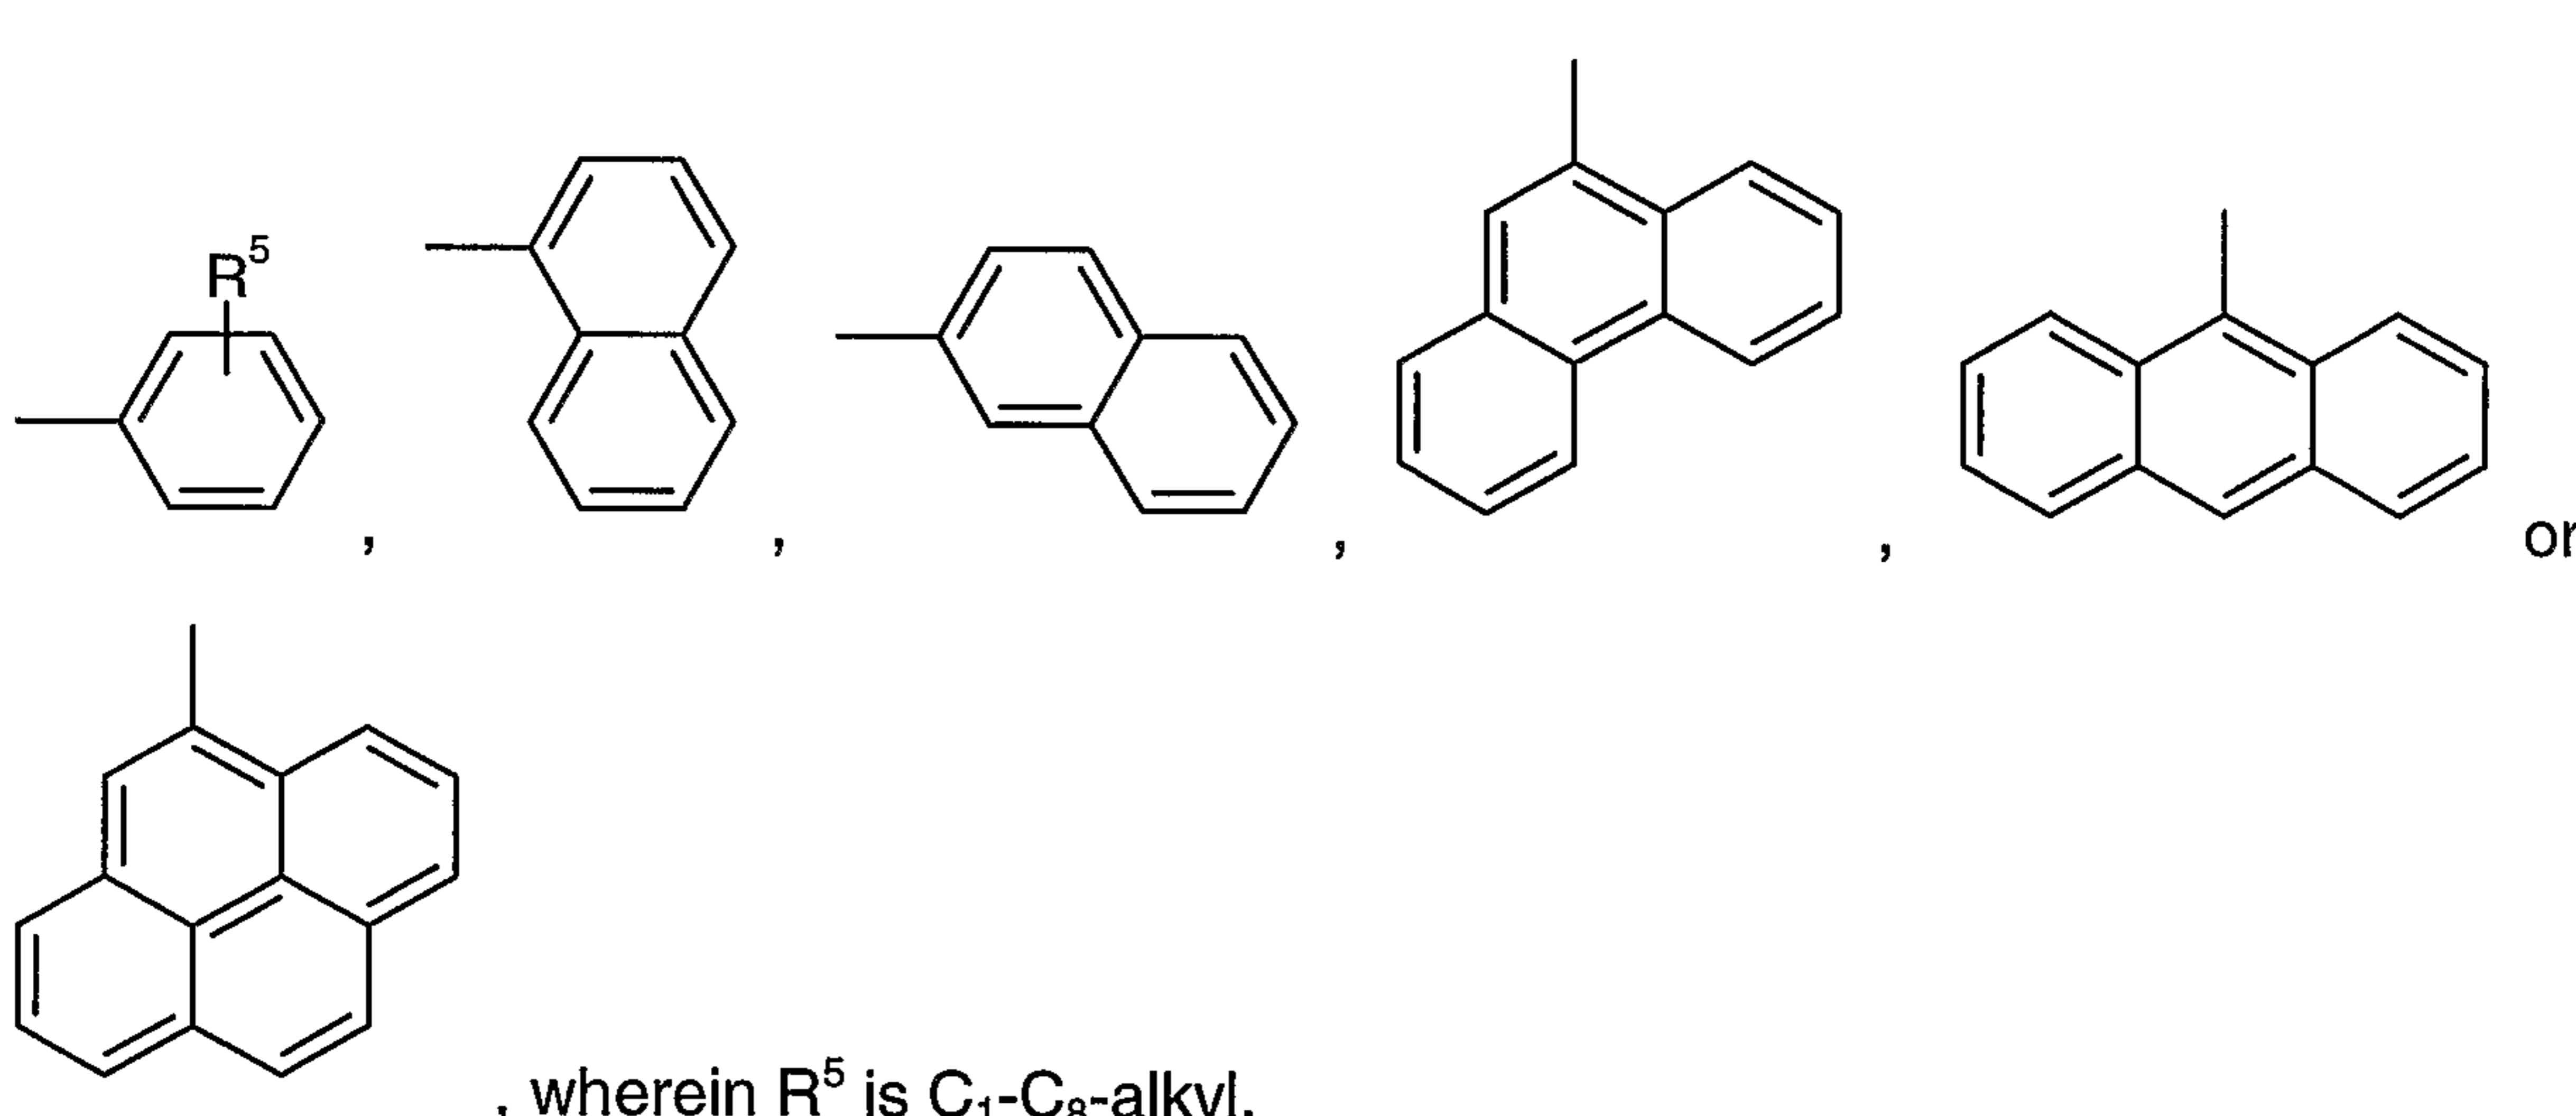

In addition, DPP compounds of the formula I are preferred, wherein R<sup>1</sup> and R<sup>2</sup> are C<sub>1</sub>-C<sub>25</sub>-alkyl, in particular C<sub>1</sub>-C<sub>25</sub>-alkyl, wherein all or part of the hydrogen atoms are replaced by fluorine atoms, a group -CR<sup>11</sup>R<sup>12</sup>-A<sup>5</sup>, wherein R<sup>11</sup> is hydrogen or C<sub>1</sub>-C<sub>4</sub>-alkyl, in particular

methyl,  $R^{12}$  is  $CF_3$  or F, and  $A^5$  is phenyl, or a group  $-CR^{11}R^{12}-A^5$ , wherein  $R^{11}$  is hydrogen,

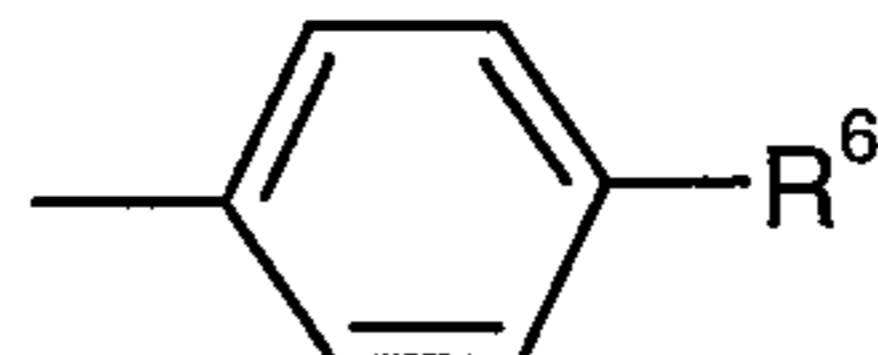


$R^{12}$  is  $C_{1-4}$ -alkyl, in particular methyl,  $A^5$  is a group  , wherein  $R^6$  is fluorine, chlorine, bromine, preferably cyano or nitro.





















5 The wording “ $C_1-C_{25}$ -alkyl, which are substituted by fluorine” comprises linear or branched  $C_1-C_{25}$ -alkyl groups wherein all or a part of the hydrogen atoms are replaced by fluorine atoms. Examples of such groups are  $-CH_2F$ ,  $-CHF_2$ ,  $-CF_3$ ,  $FH_2CCH_2-$ ,  $FH_2CCHF-$ ,  $F_2HCCH_2-$ ,  $F_2HCCHF-$ ,  $F_3CCH_2-$ ,  $F_2HCCF_2-$ ,  $F_3CCHF-$ ,  $F_3CCF_2-$ ,  $CF_3CF_2CF_2-$ ,  $CF_3CF_2CF_2CF_2-$ , or  $F_3C(CF_2)_3CF_2-$ .







10

Particularly preferred DPP compounds of the formula I are the following compounds:

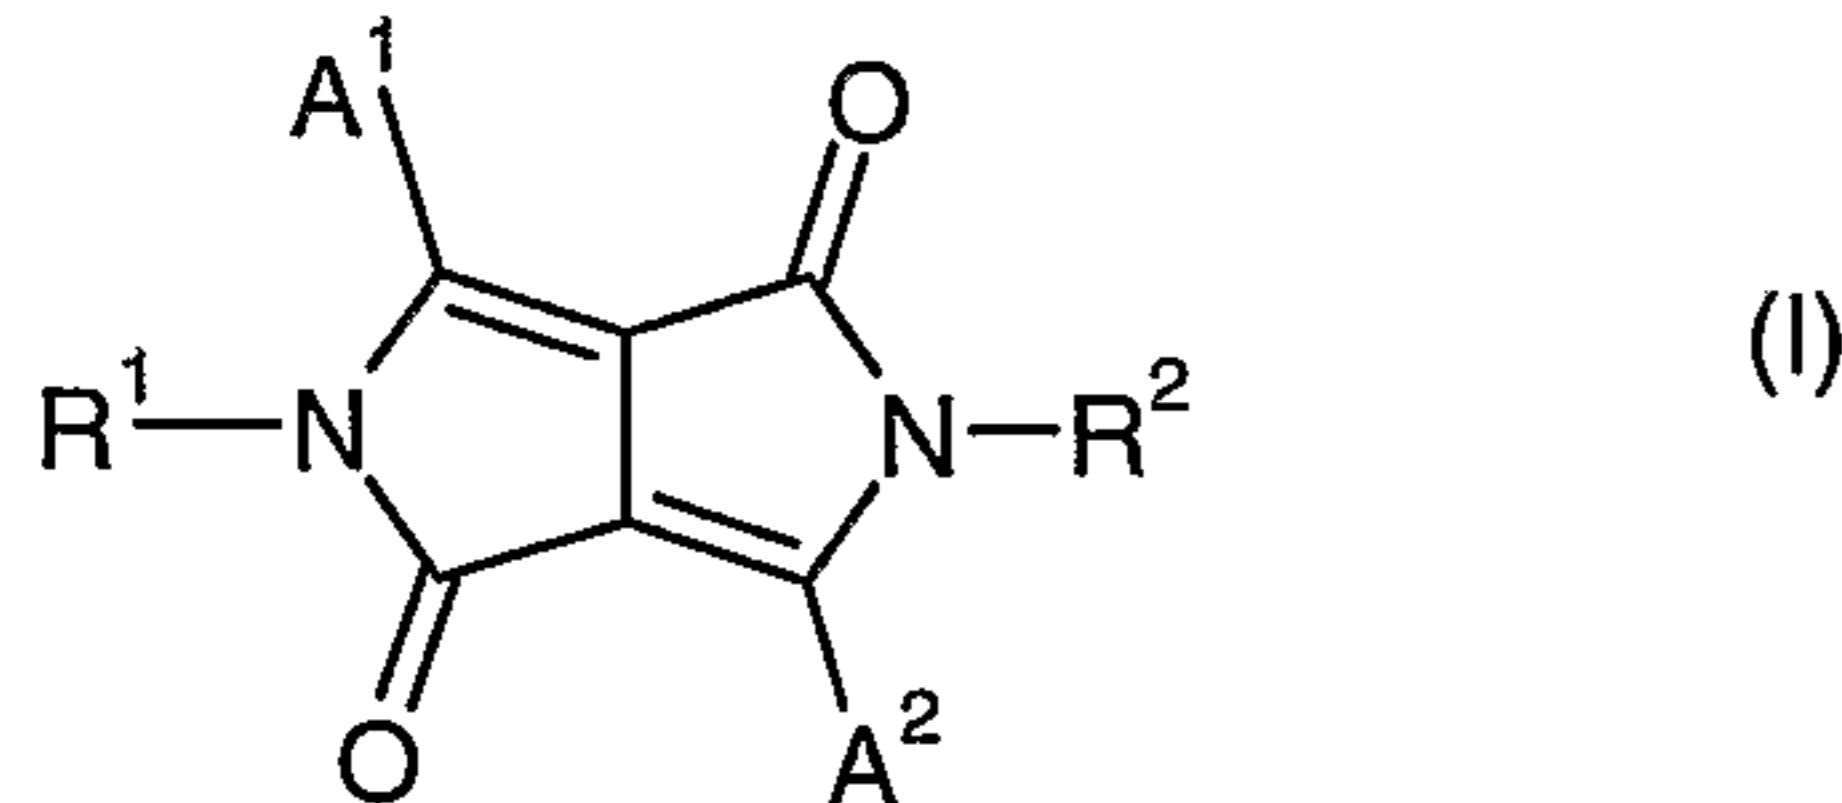


Compound	$A^1 = A^2$	$R^1 = R^2$
A-1		
A-2		
A-3		
A-4		
A-5	"	
A-6	"	$-(CH_2)_3CH_3$
A-7		
A-8		$-Si(CH_3)_3$
A-9		
A-10		

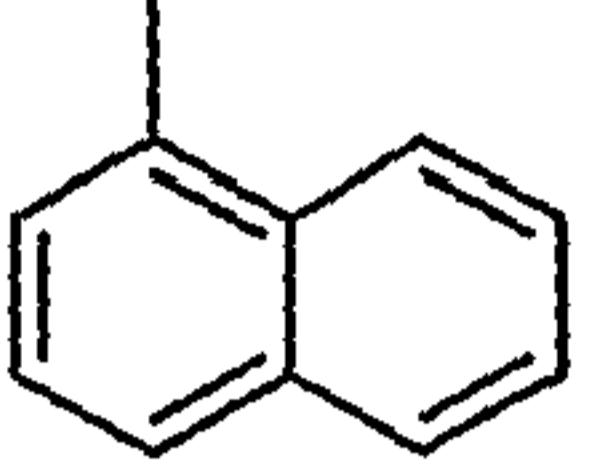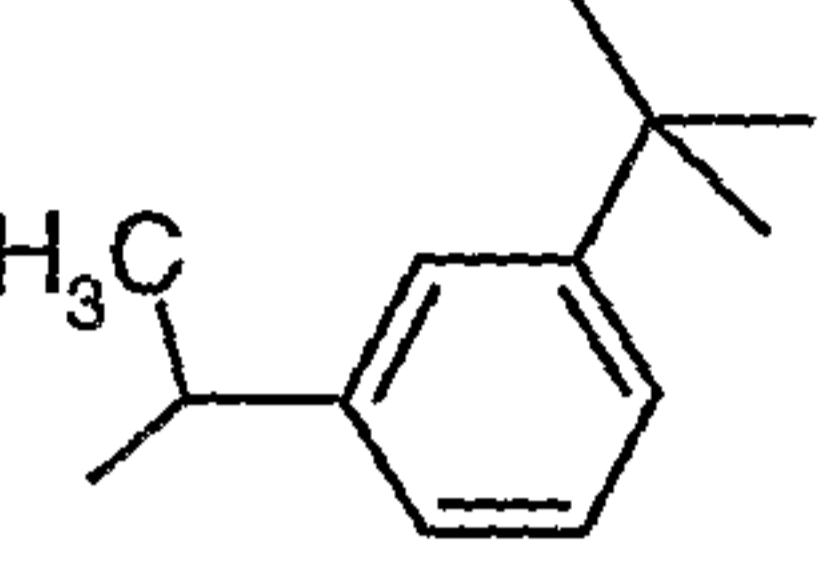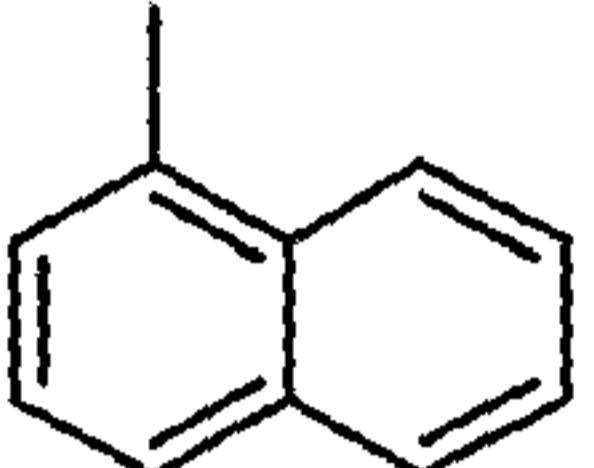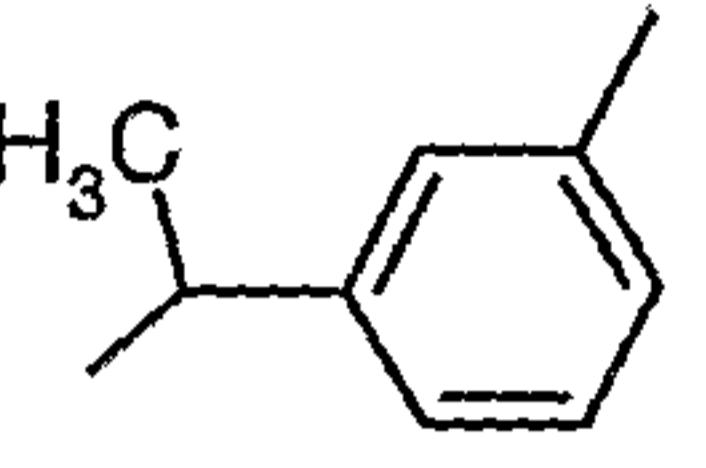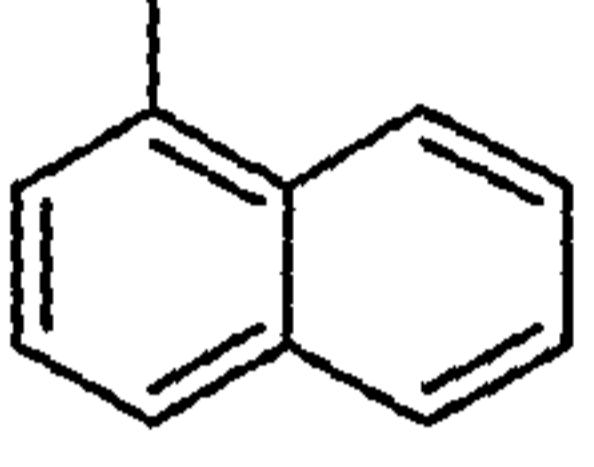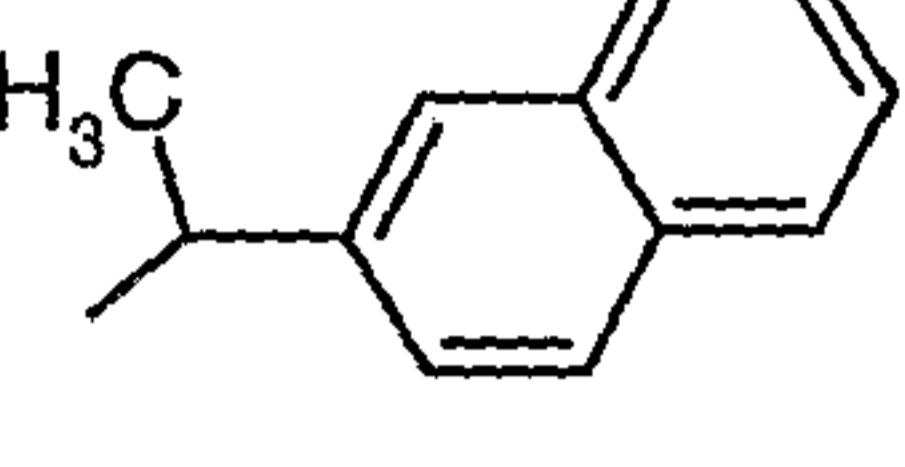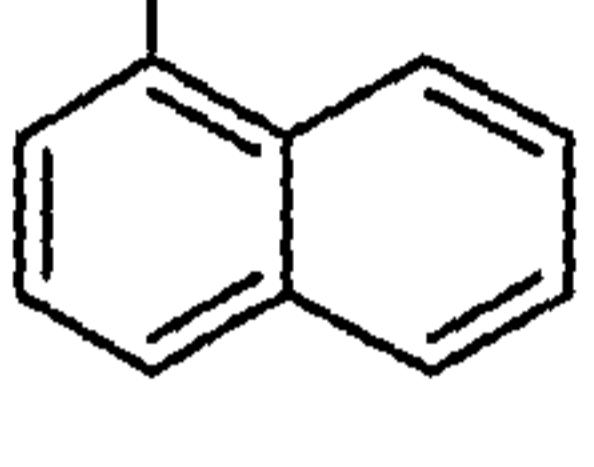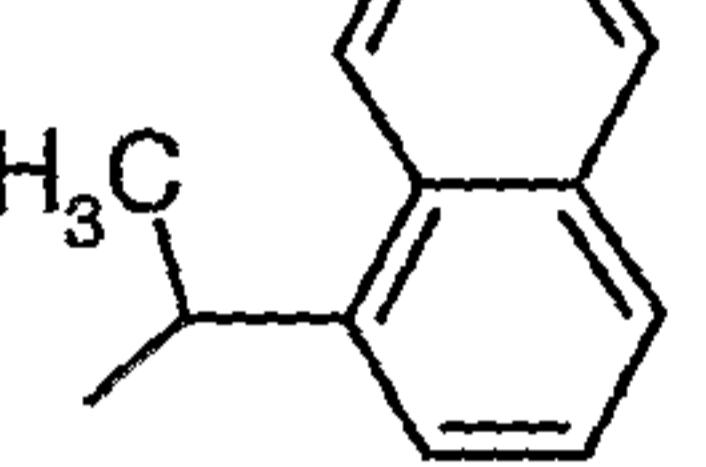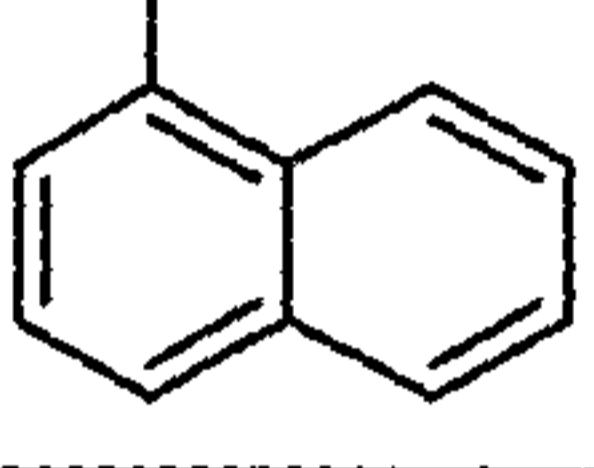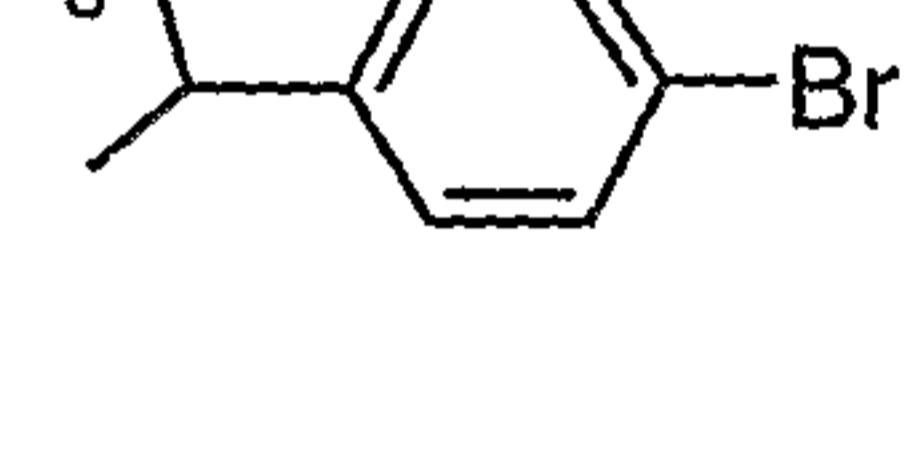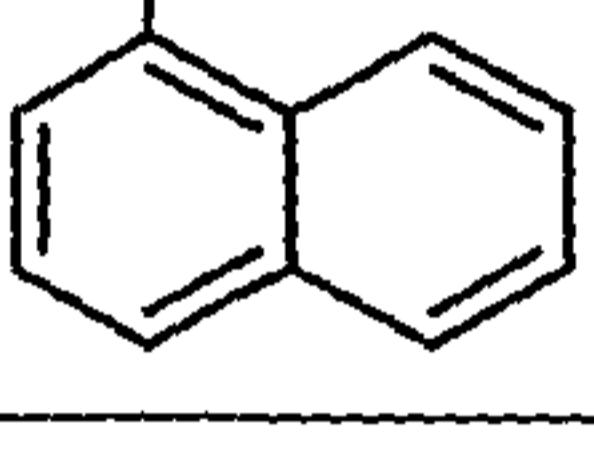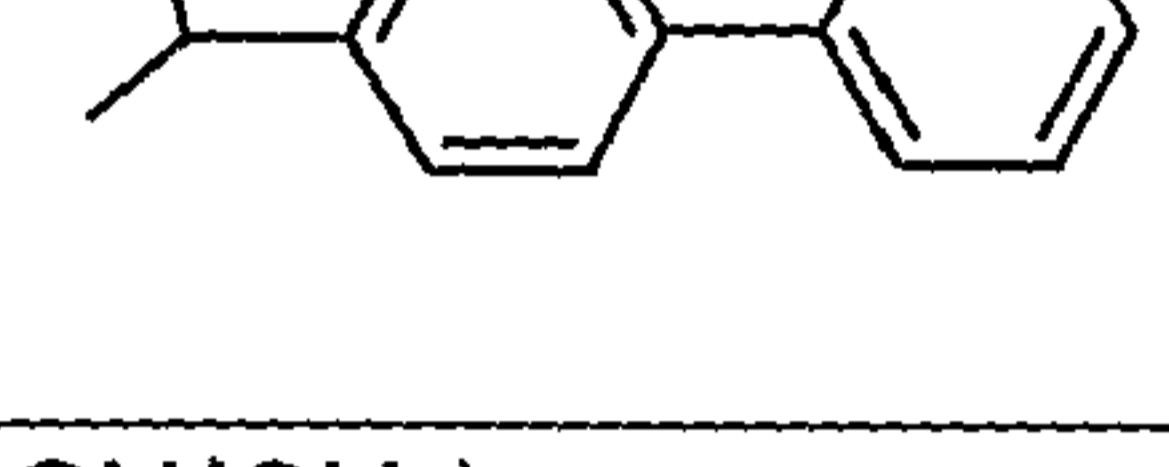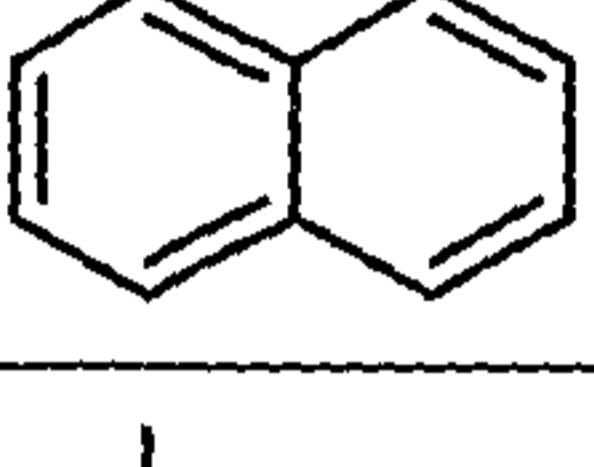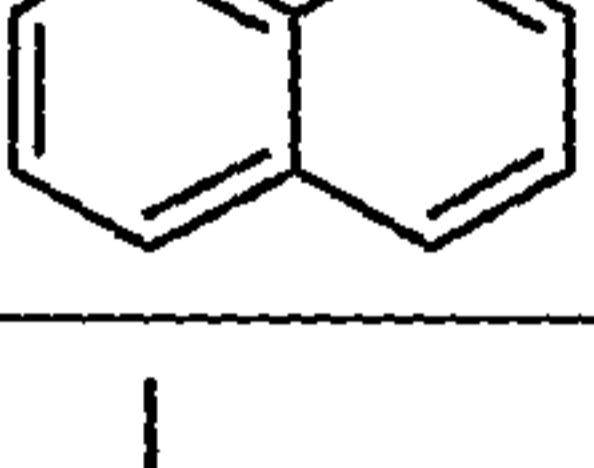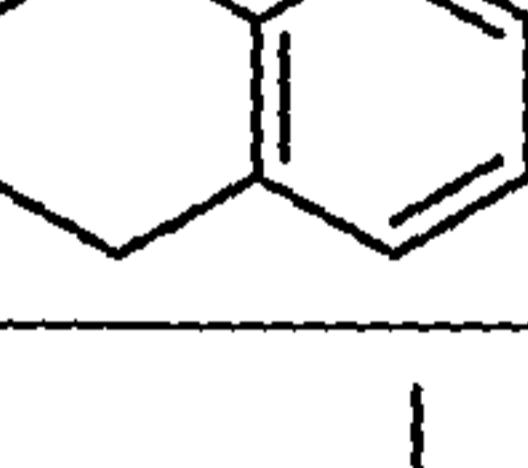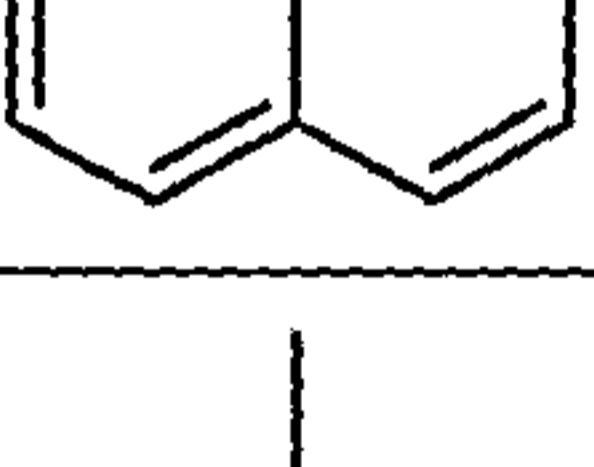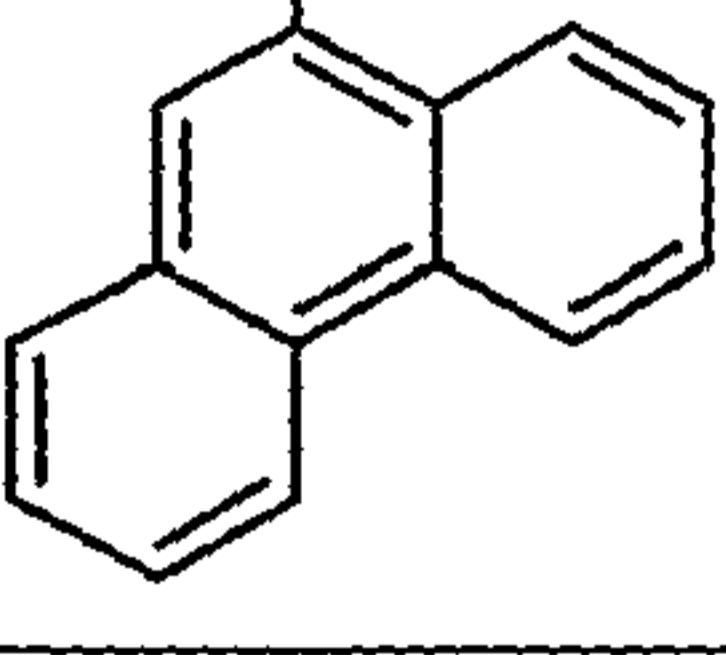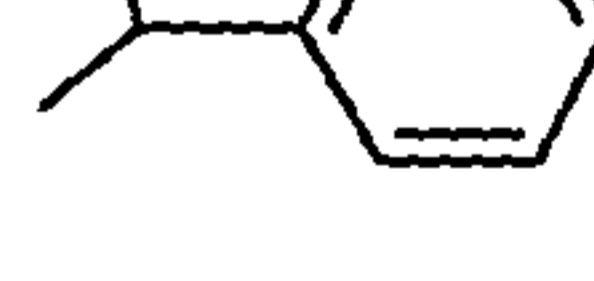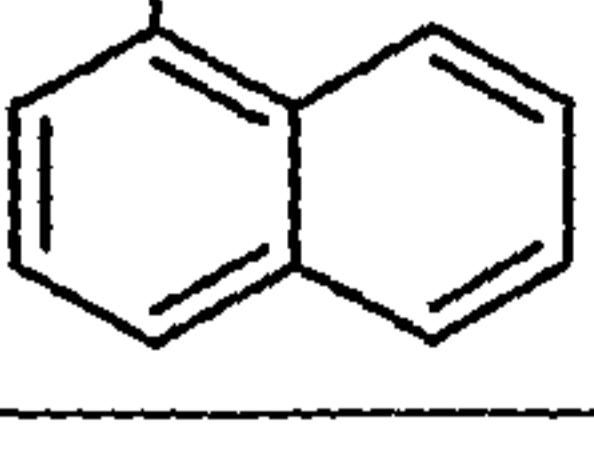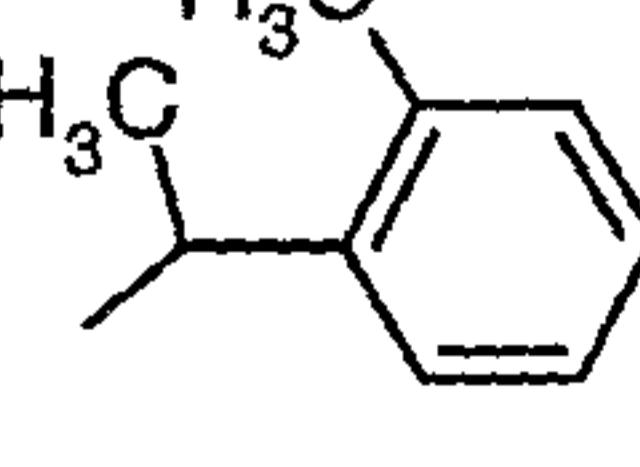
Compound	$A^1 = A^2$	$R^1 = R^2$
A-11		
A-12		
A-13		
A-14		
A-15		
A-16		
A-17		$-\text{CH}(\text{CH}_3)_2$
A-18		
A-19		
A-20		
A-21		

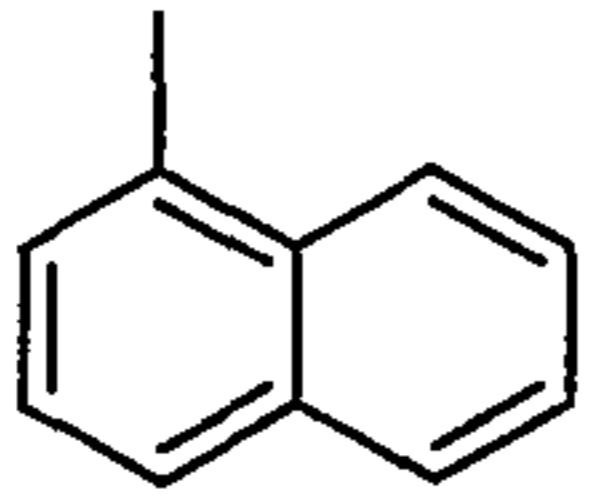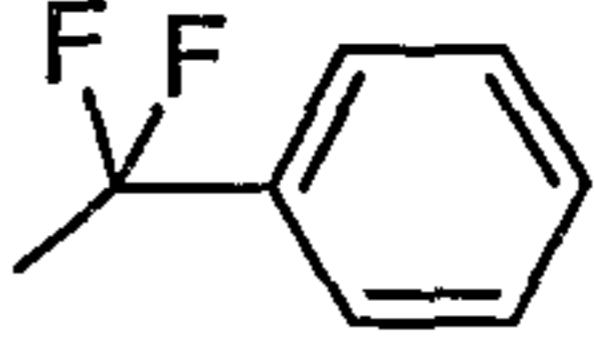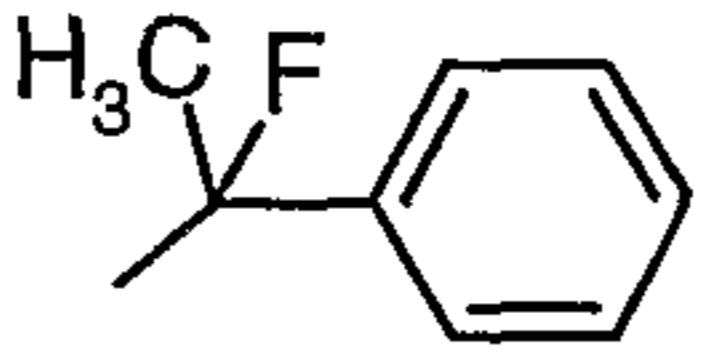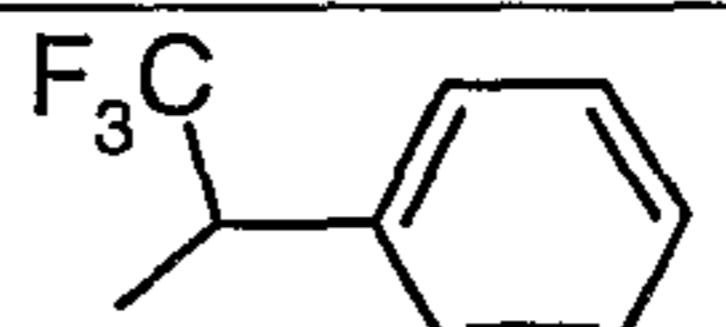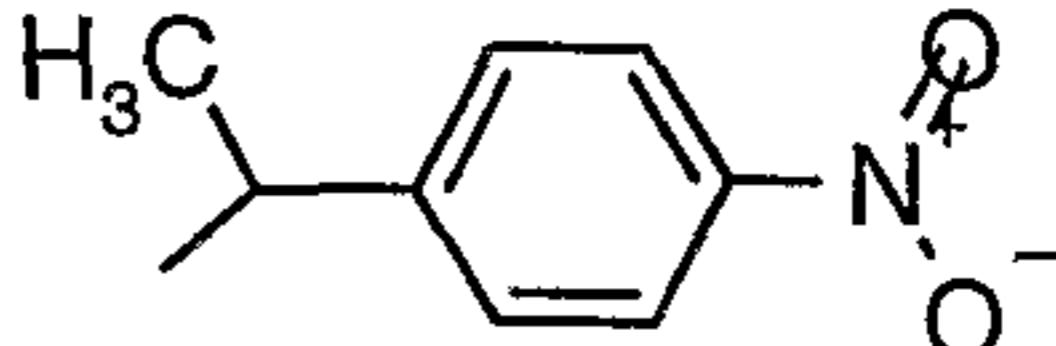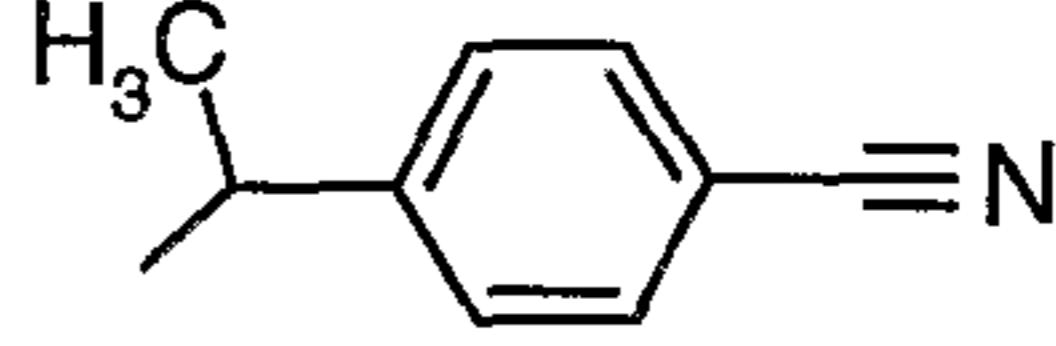Compound	$A^1 = A^2$	$R^1 = R^2$
A-22		
A-23	"	
A-24	"	$-CF_3$
A-25	"	$-CHF_2$
A-26		$-CH_2F$
A-27	"	
A-28	"	
A-29	"	

$A^3$  and  $A^4$  independently from each other stand for

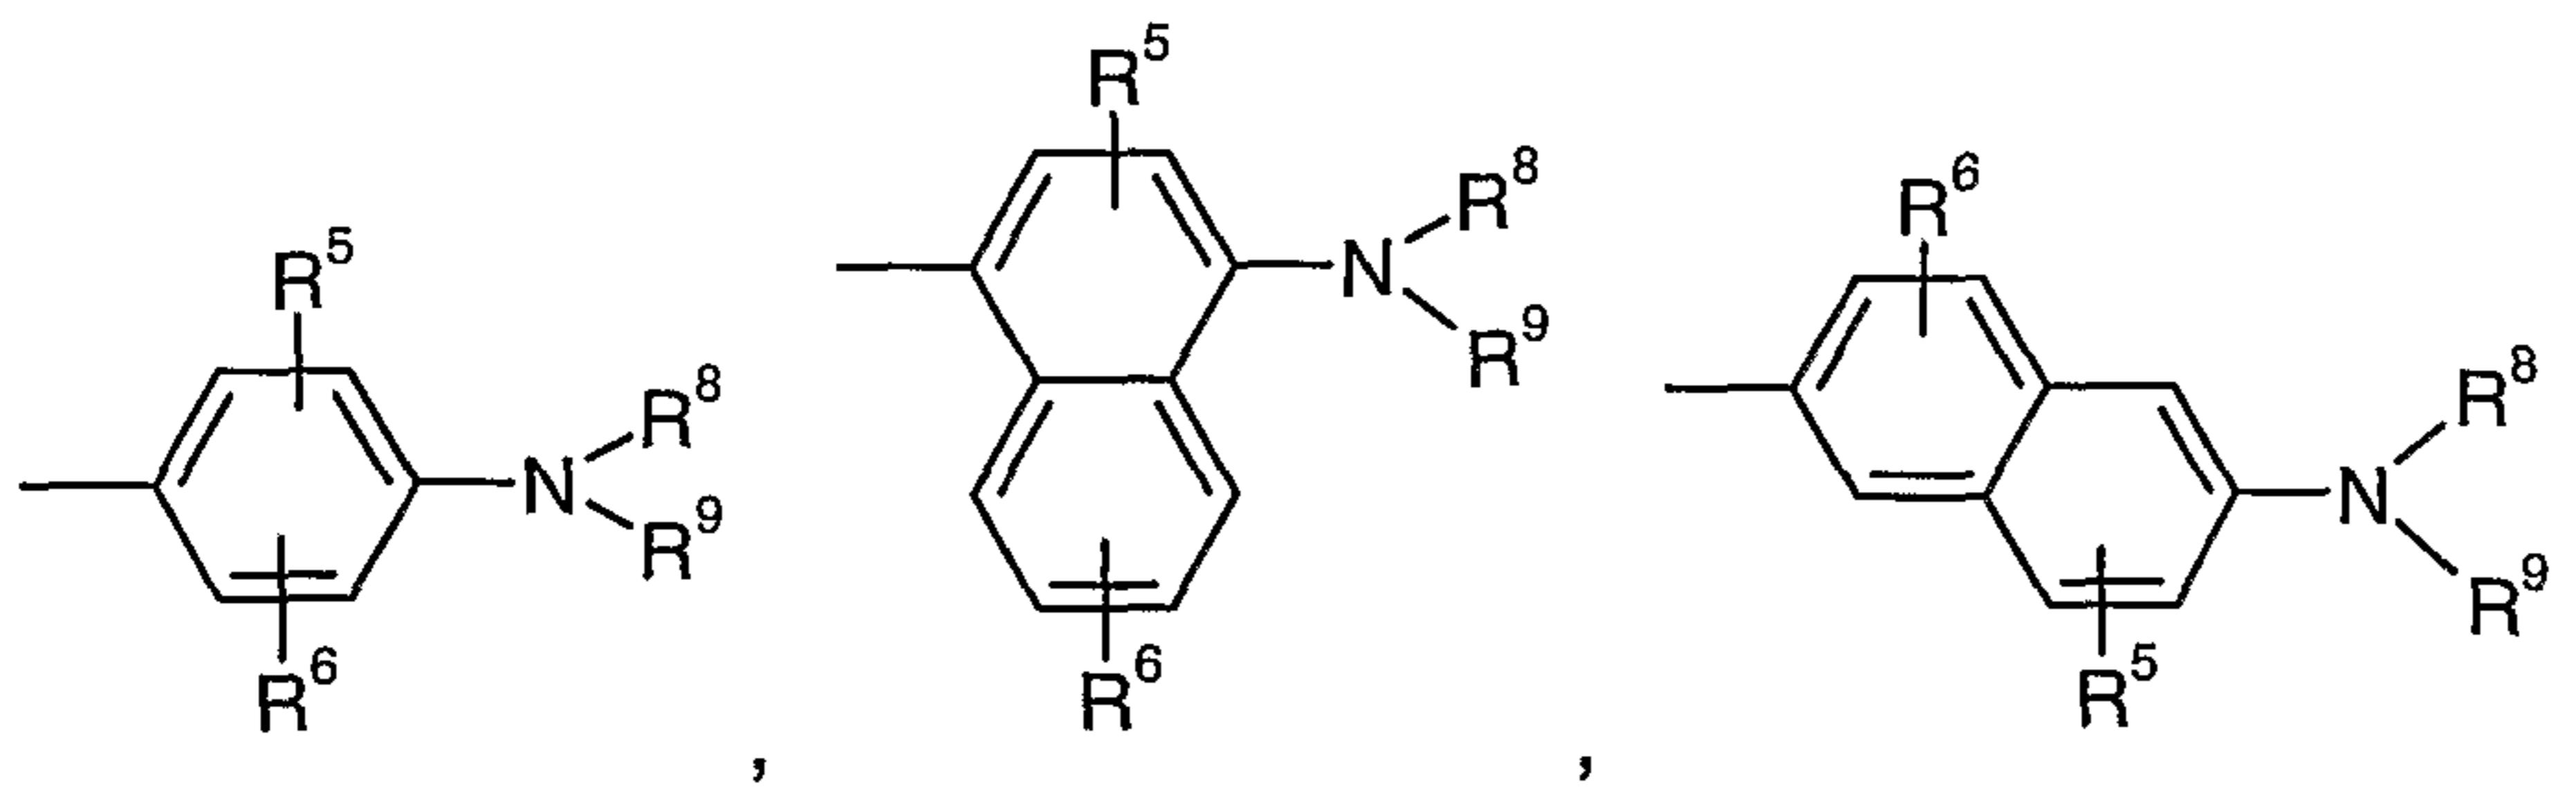


5

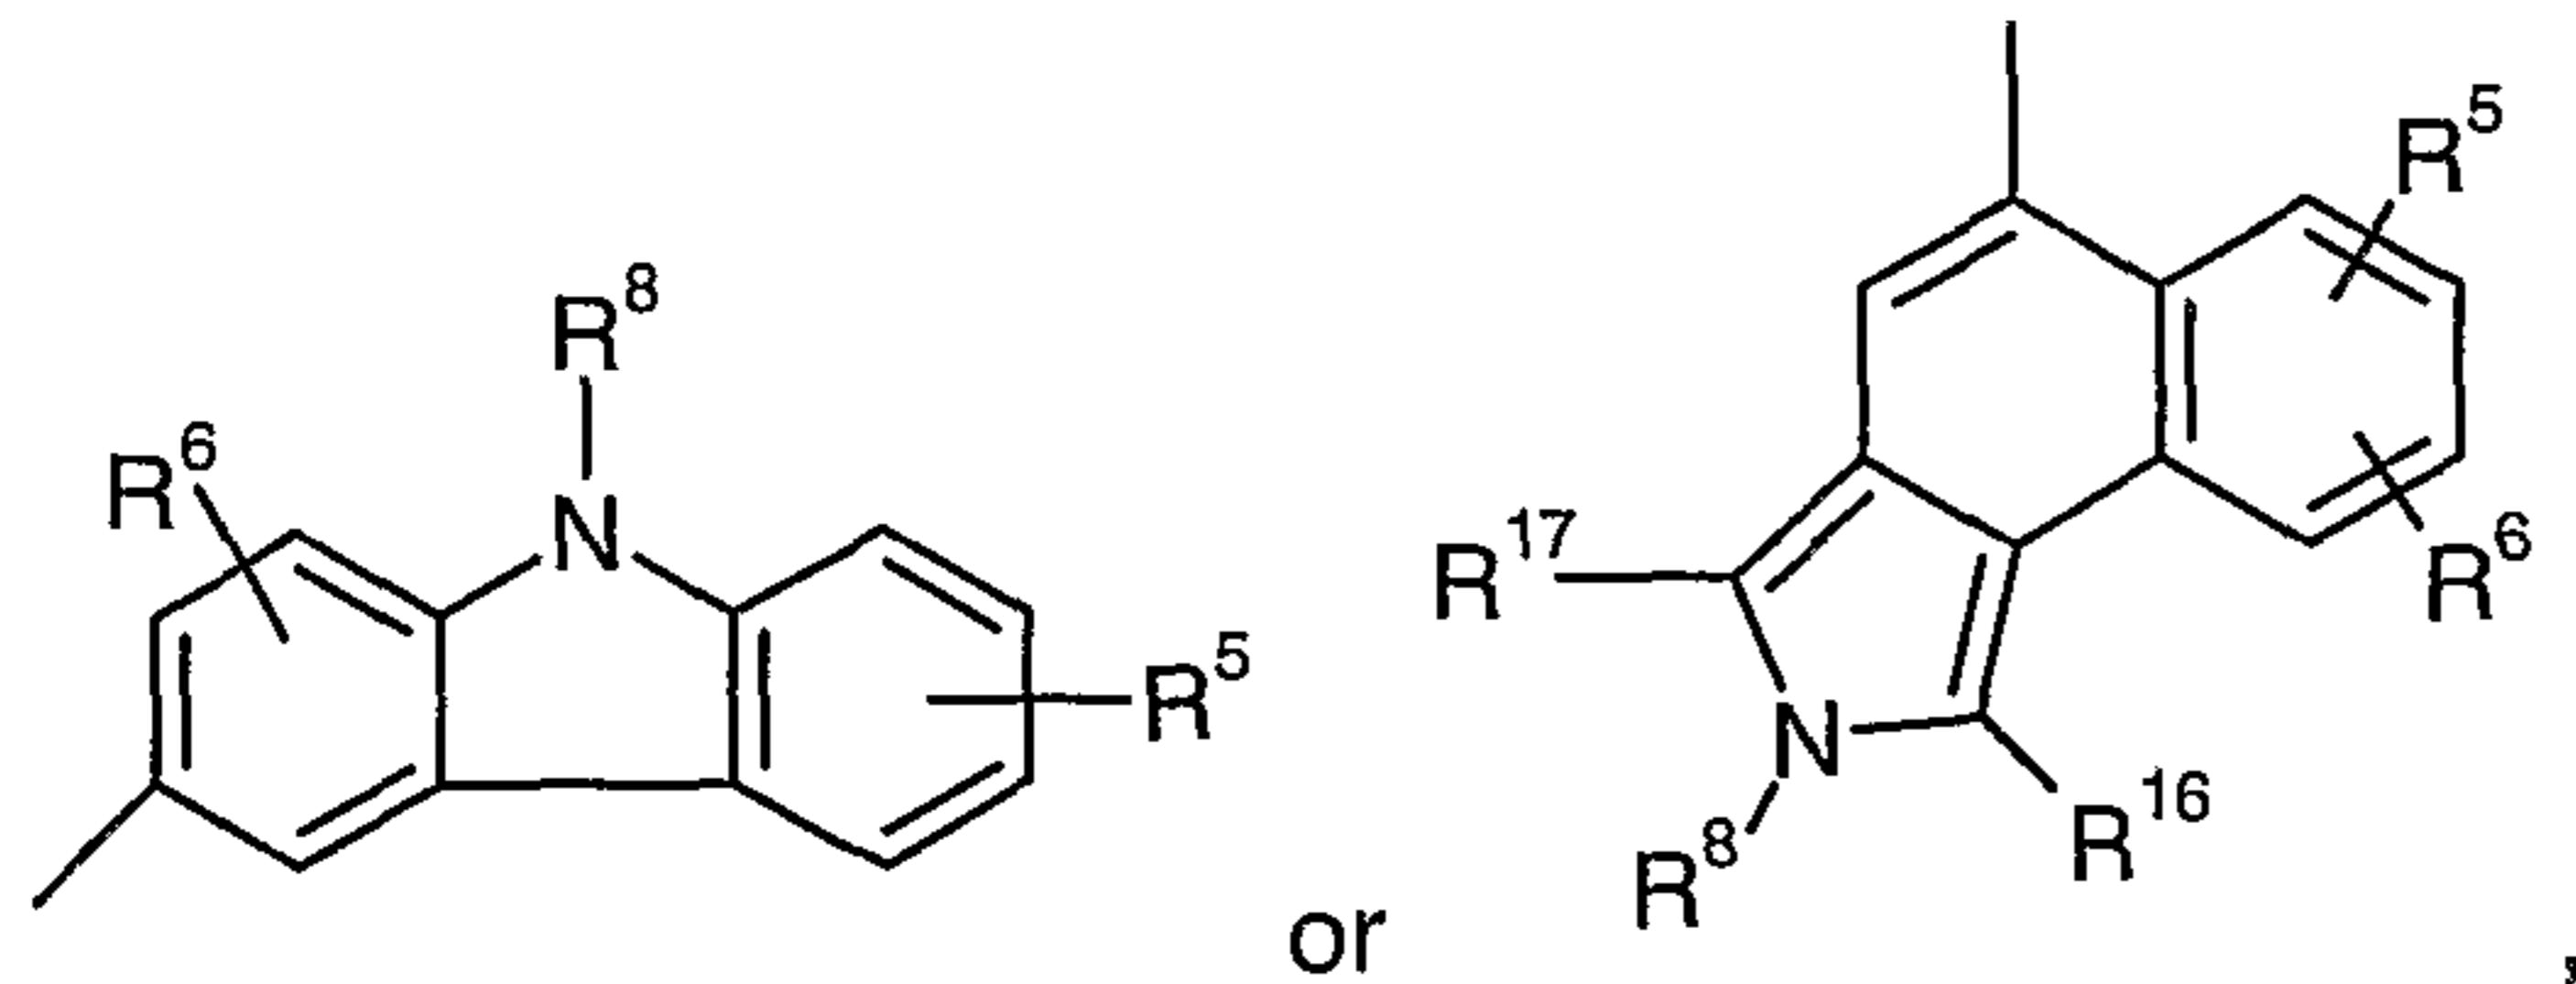


wherein  $R^5$ ,  $R^6$ ,  $R^8$ ,  $R^9$ ,  $R^{16}$  and  $R^{17}$  have the above-defined meanings.

If  $A^3$  and  $A^4$  independently from each other stand for a group of the formula

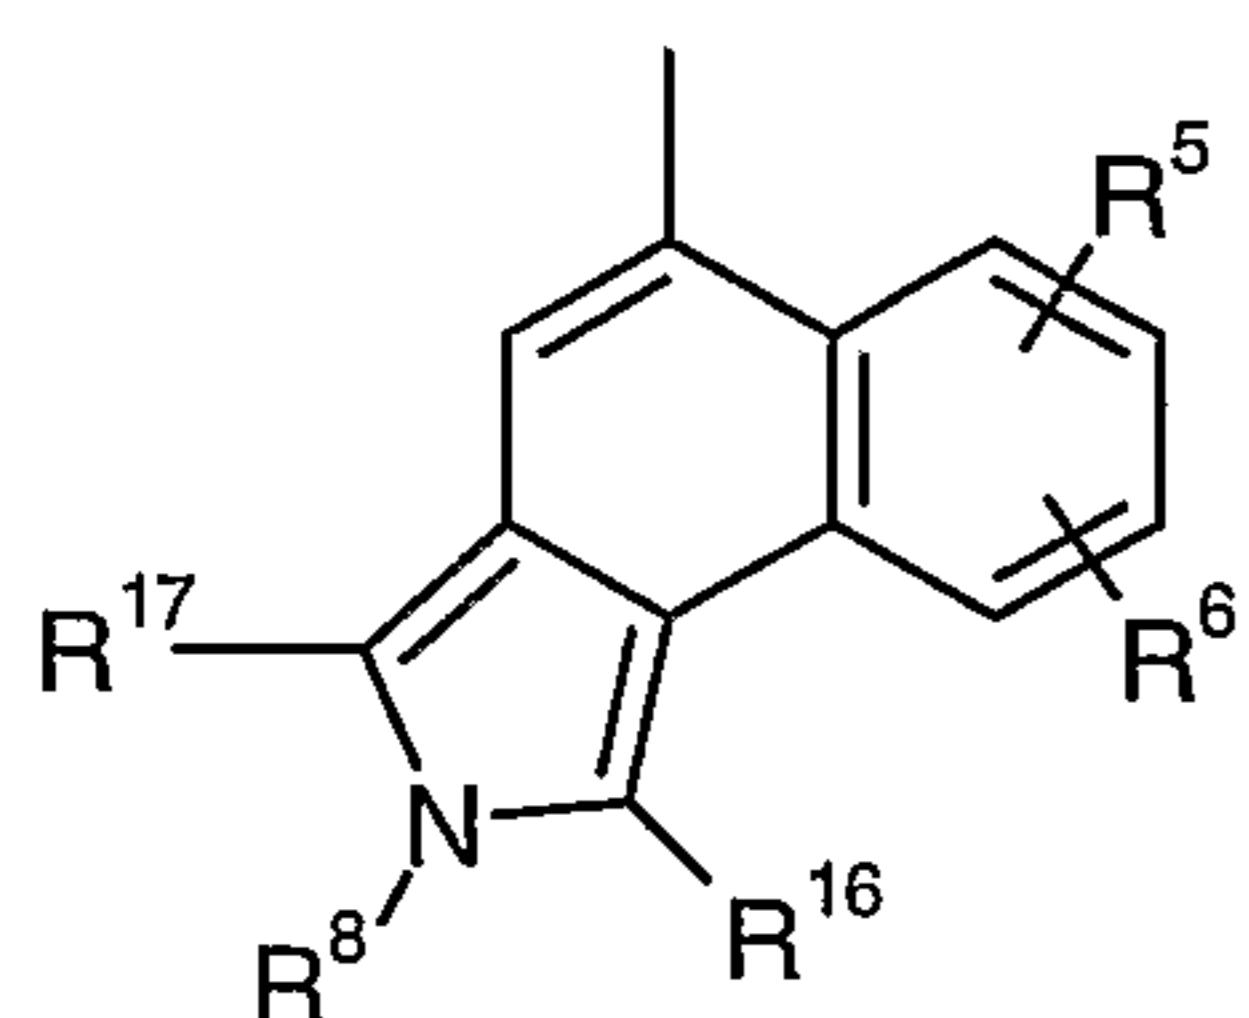


R<sup>5</sup> and R<sup>6</sup> are preferably hydrogen, R<sup>8</sup> is preferably C<sub>1</sub>-C<sub>6</sub>alkyl or phenyl and R<sup>16</sup> and R<sup>17</sup> are preferably hydrogen or phenyl.

5 If A<sup>3</sup> and A<sup>4</sup> independently from each other stand for a group of the formula

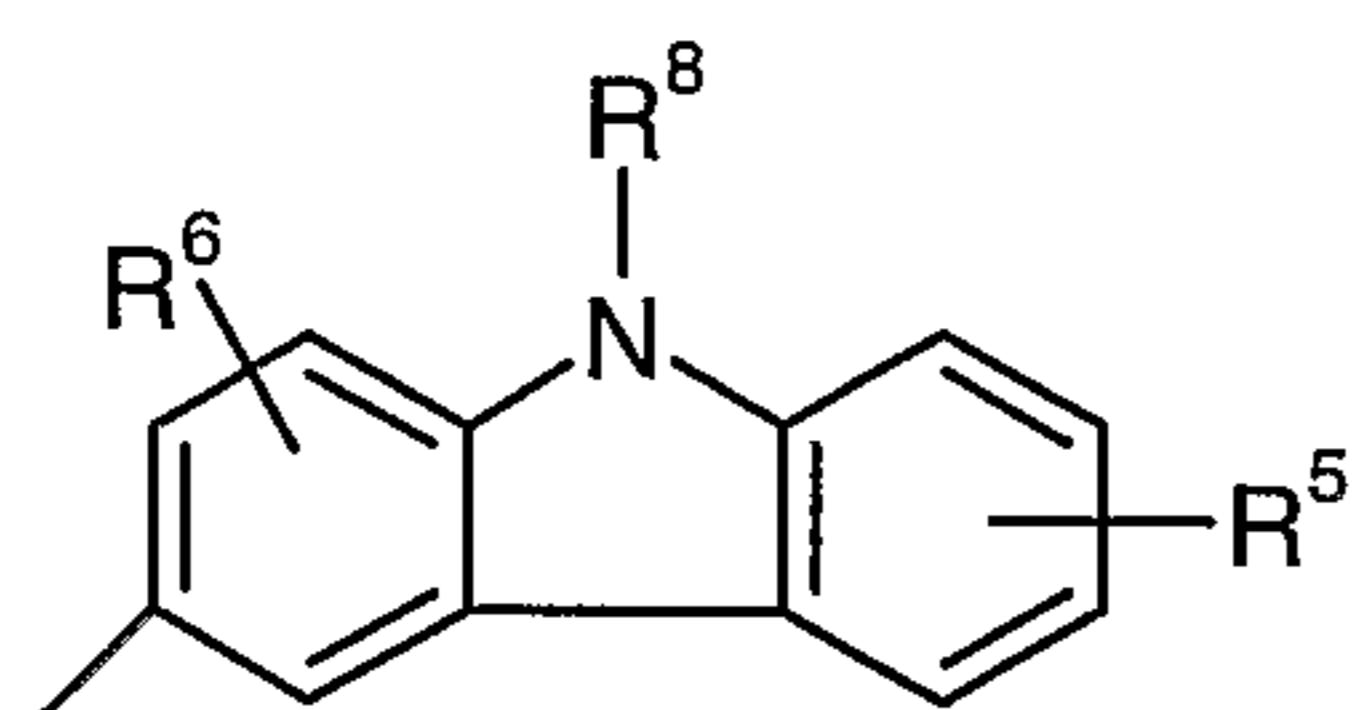

R<sup>5</sup> and R<sup>6</sup> are preferably hydrogen and R<sup>8</sup> is preferably C<sub>1</sub>-C<sub>6</sub>alkyl or phenyl.

In particular A<sup>3</sup> and A<sup>4</sup> independently of each other stand for

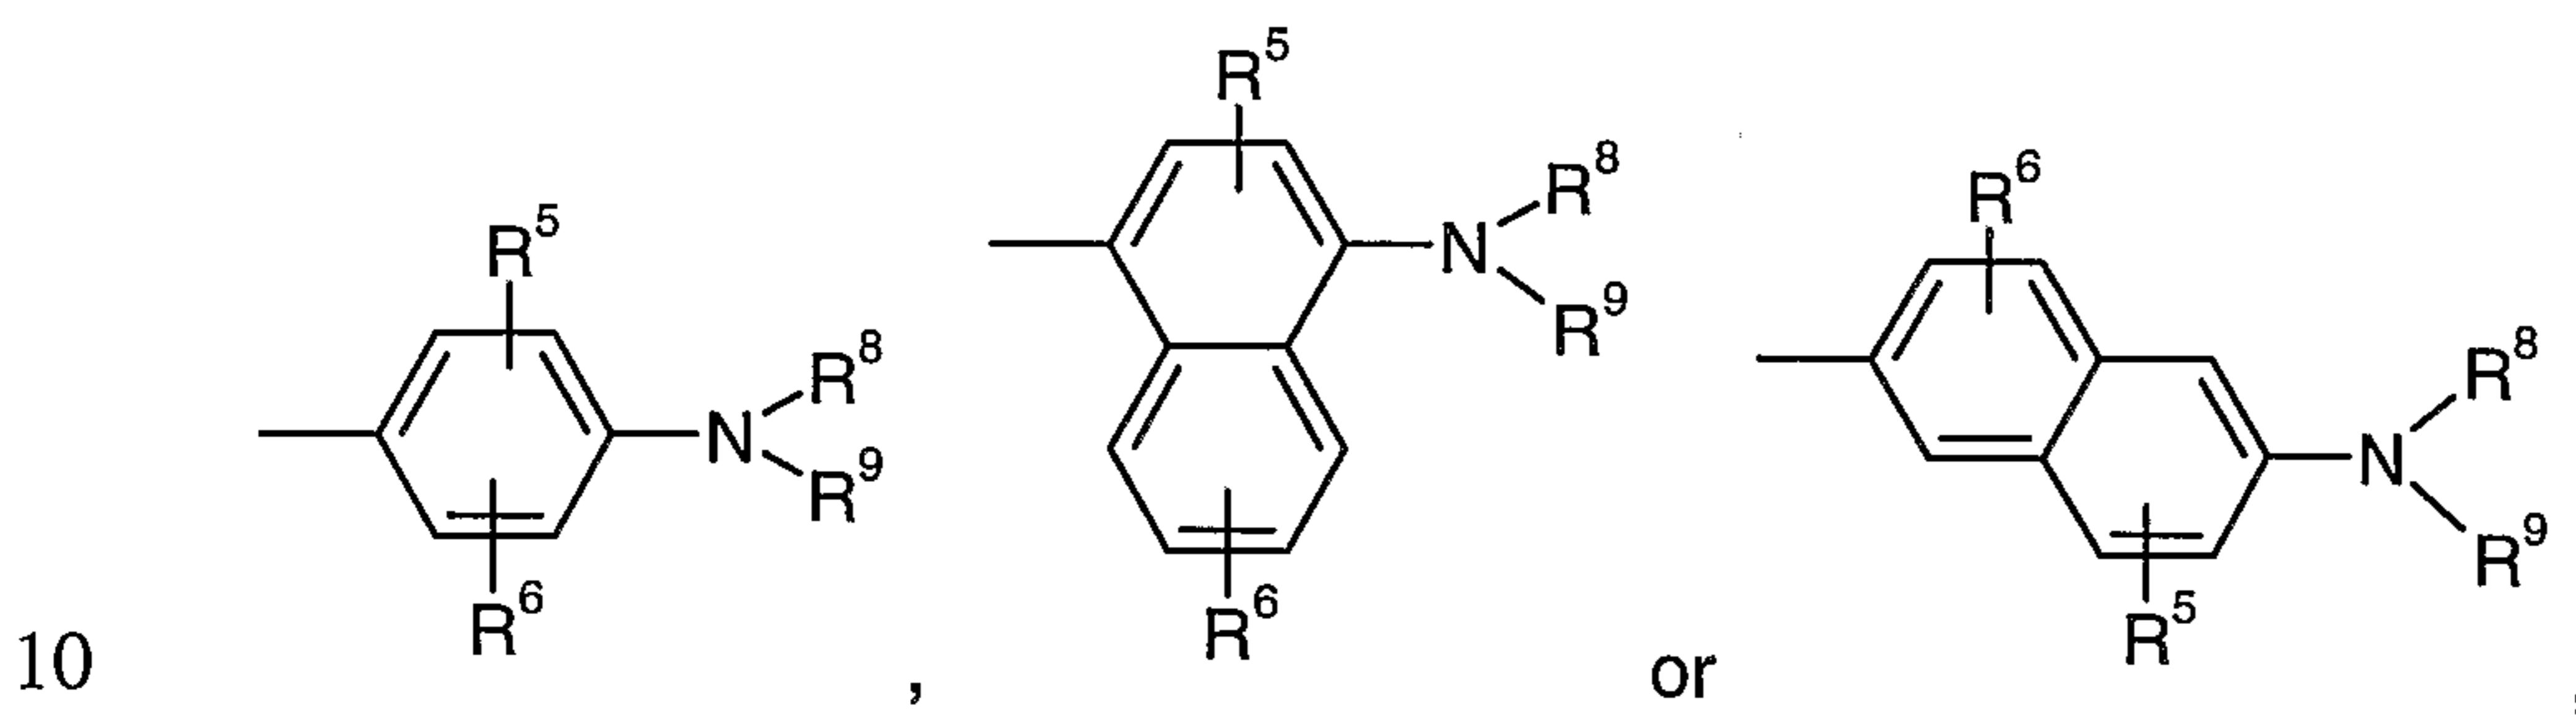


wherein R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>8</sub>-alkyl, C<sub>1</sub>-C<sub>8</sub>-alkoxy, -OCR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, cyano, chloro, -OR<sup>10</sup>, or phenyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy, wherein R<sup>10</sup> stands for C<sub>6</sub>-C<sub>24</sub>-aryl, such as phenyl, 1-naphthyl or 2-naphthyl, R<sup>11</sup> and R<sup>12</sup> are hydrogen or C<sub>1</sub>-C<sub>4</sub>-alkyl, m is 0 or 1, A<sup>5</sup> is


15 phenyl, 1-naphthyl or 2-naphthyl, R<sup>8</sup> and R<sup>9</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>8</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, in particular cyclohexyl, -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, C<sub>6</sub>-C<sub>24</sub>-aryl, such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, phenanthryl, terphenyl, pyrenyl, 2- or 9-fluorenyl or anthracenyl, preferably C<sub>6</sub>-C<sub>12</sub>aryl such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, which may be unsubstituted or substituted, in particular A<sup>1</sup>, or a saturated or  
20 unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur.

In particular groups of the following formula are preferred


16











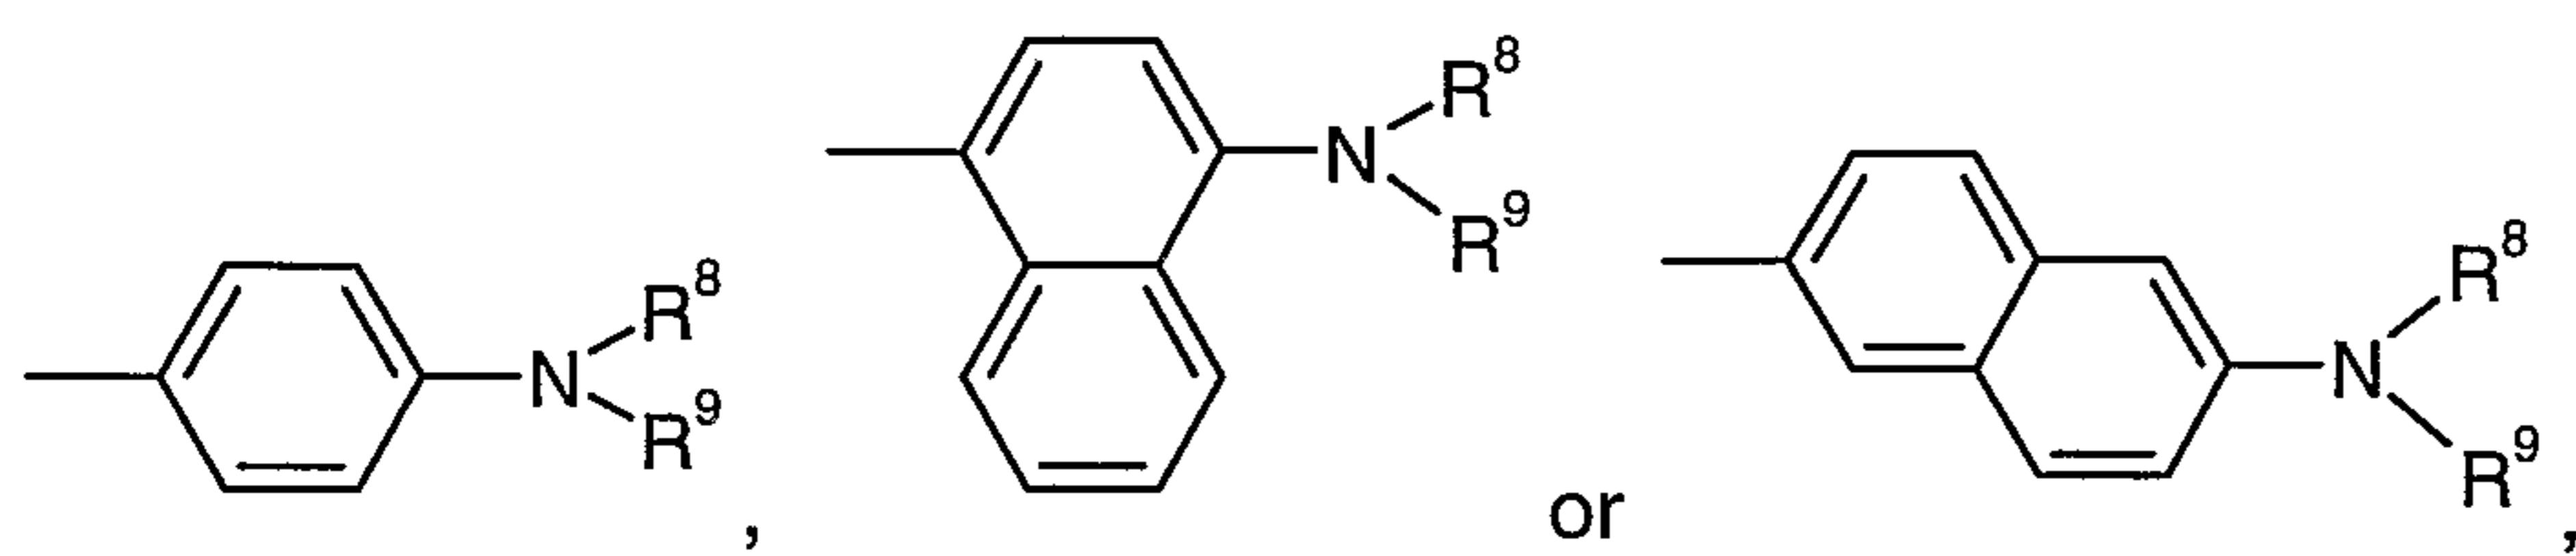














wherein  $R^8$  and  $R^9$  are independently of each other a group of the formula

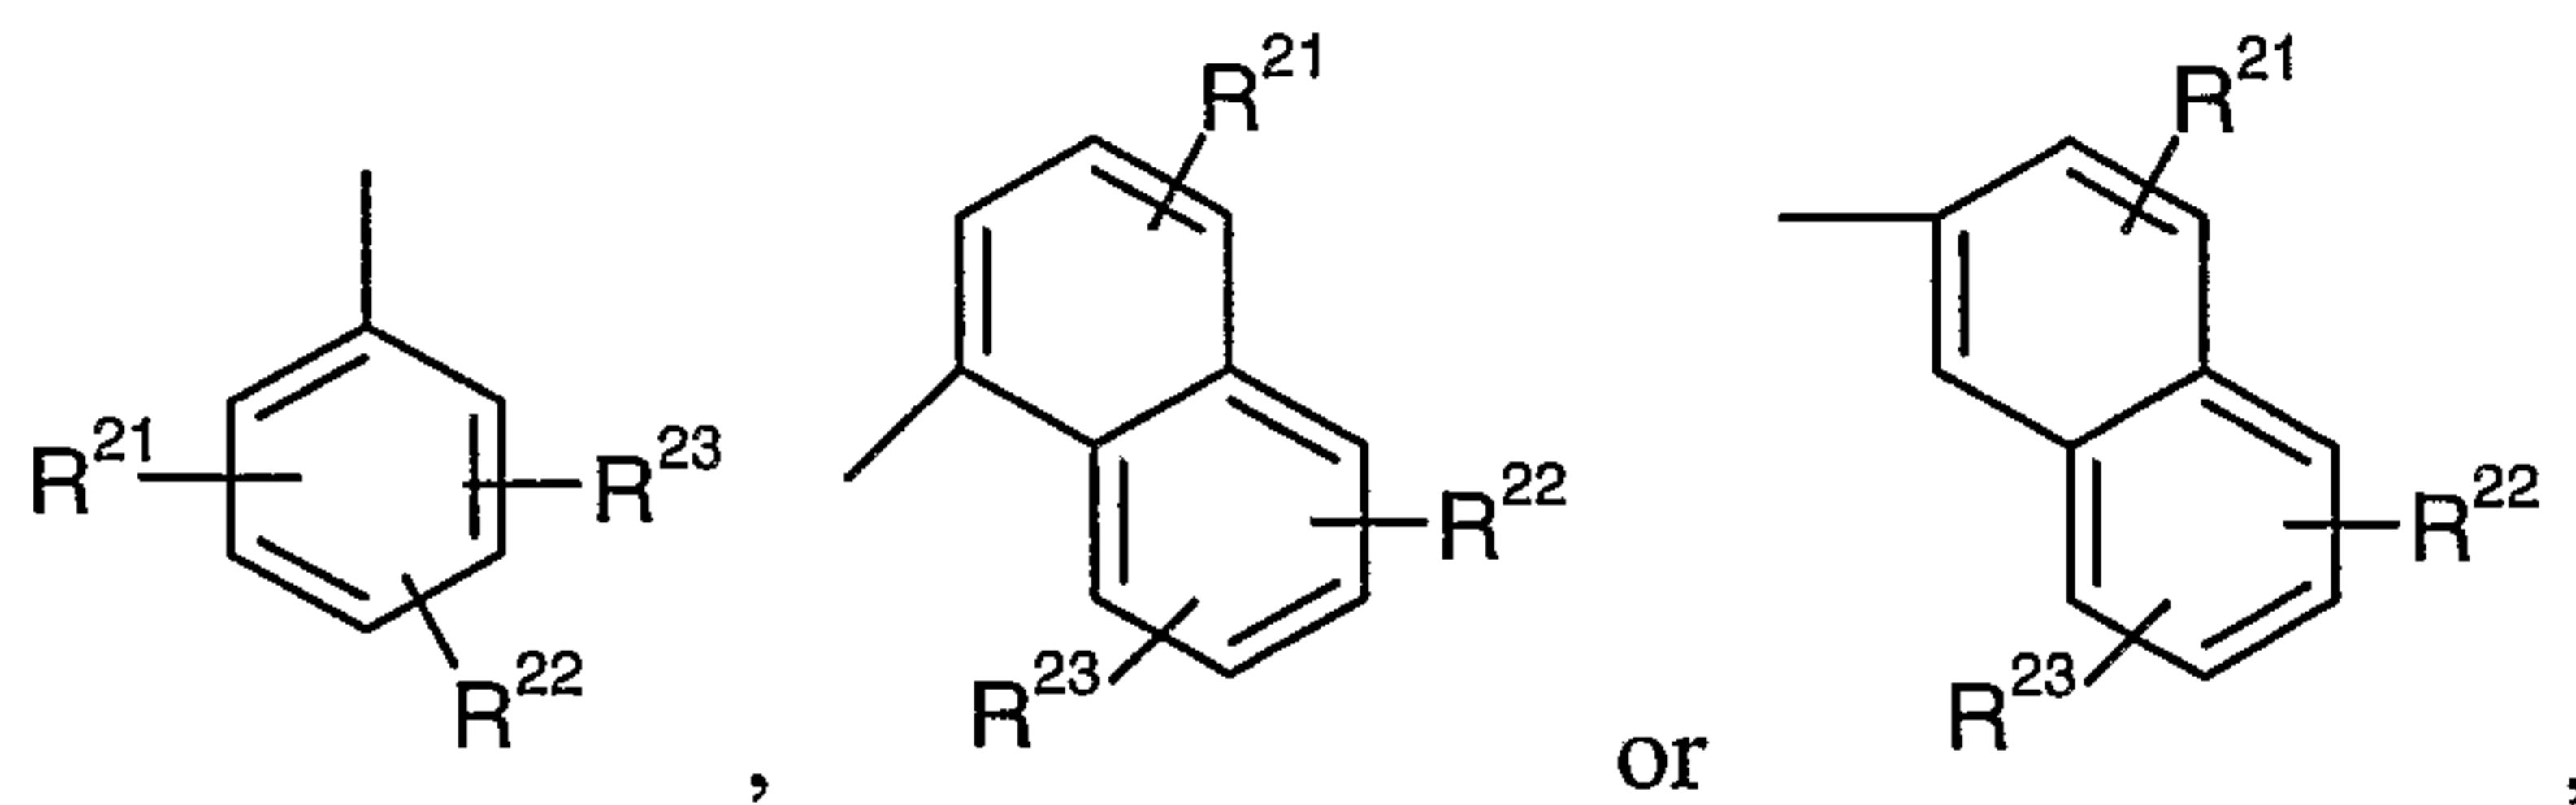

5 wherein  $R^{21}$ ,  $R^{22}$  and  $R^{23}$  are independently of each other hydrogen,  $C_1$ - $C_8$ alkyl, a hydroxyl group, a mercapto group,  $C_1$ - $C_8$ alkoxy,  $C_1$ - $C_8$ alkylthio, halogen, halo- $C_1$ - $C_8$ alkyl, a cyano group, an aldehyde group, a ketone group, a carboxyl group, an ester group, a carbamoyl group, an amino group, a nitro group, a silyl group or a siloxanyl group. Preferably  $R^{21}$ ,  $R^{22}$  and  $R^{23}$  are independently of each other hydrogen,  $C_1$ - $C_8$ alkyl,  $C_1$ - $C_8$ alkoxy or  $C_1$ - $C_8$ alkylthio.

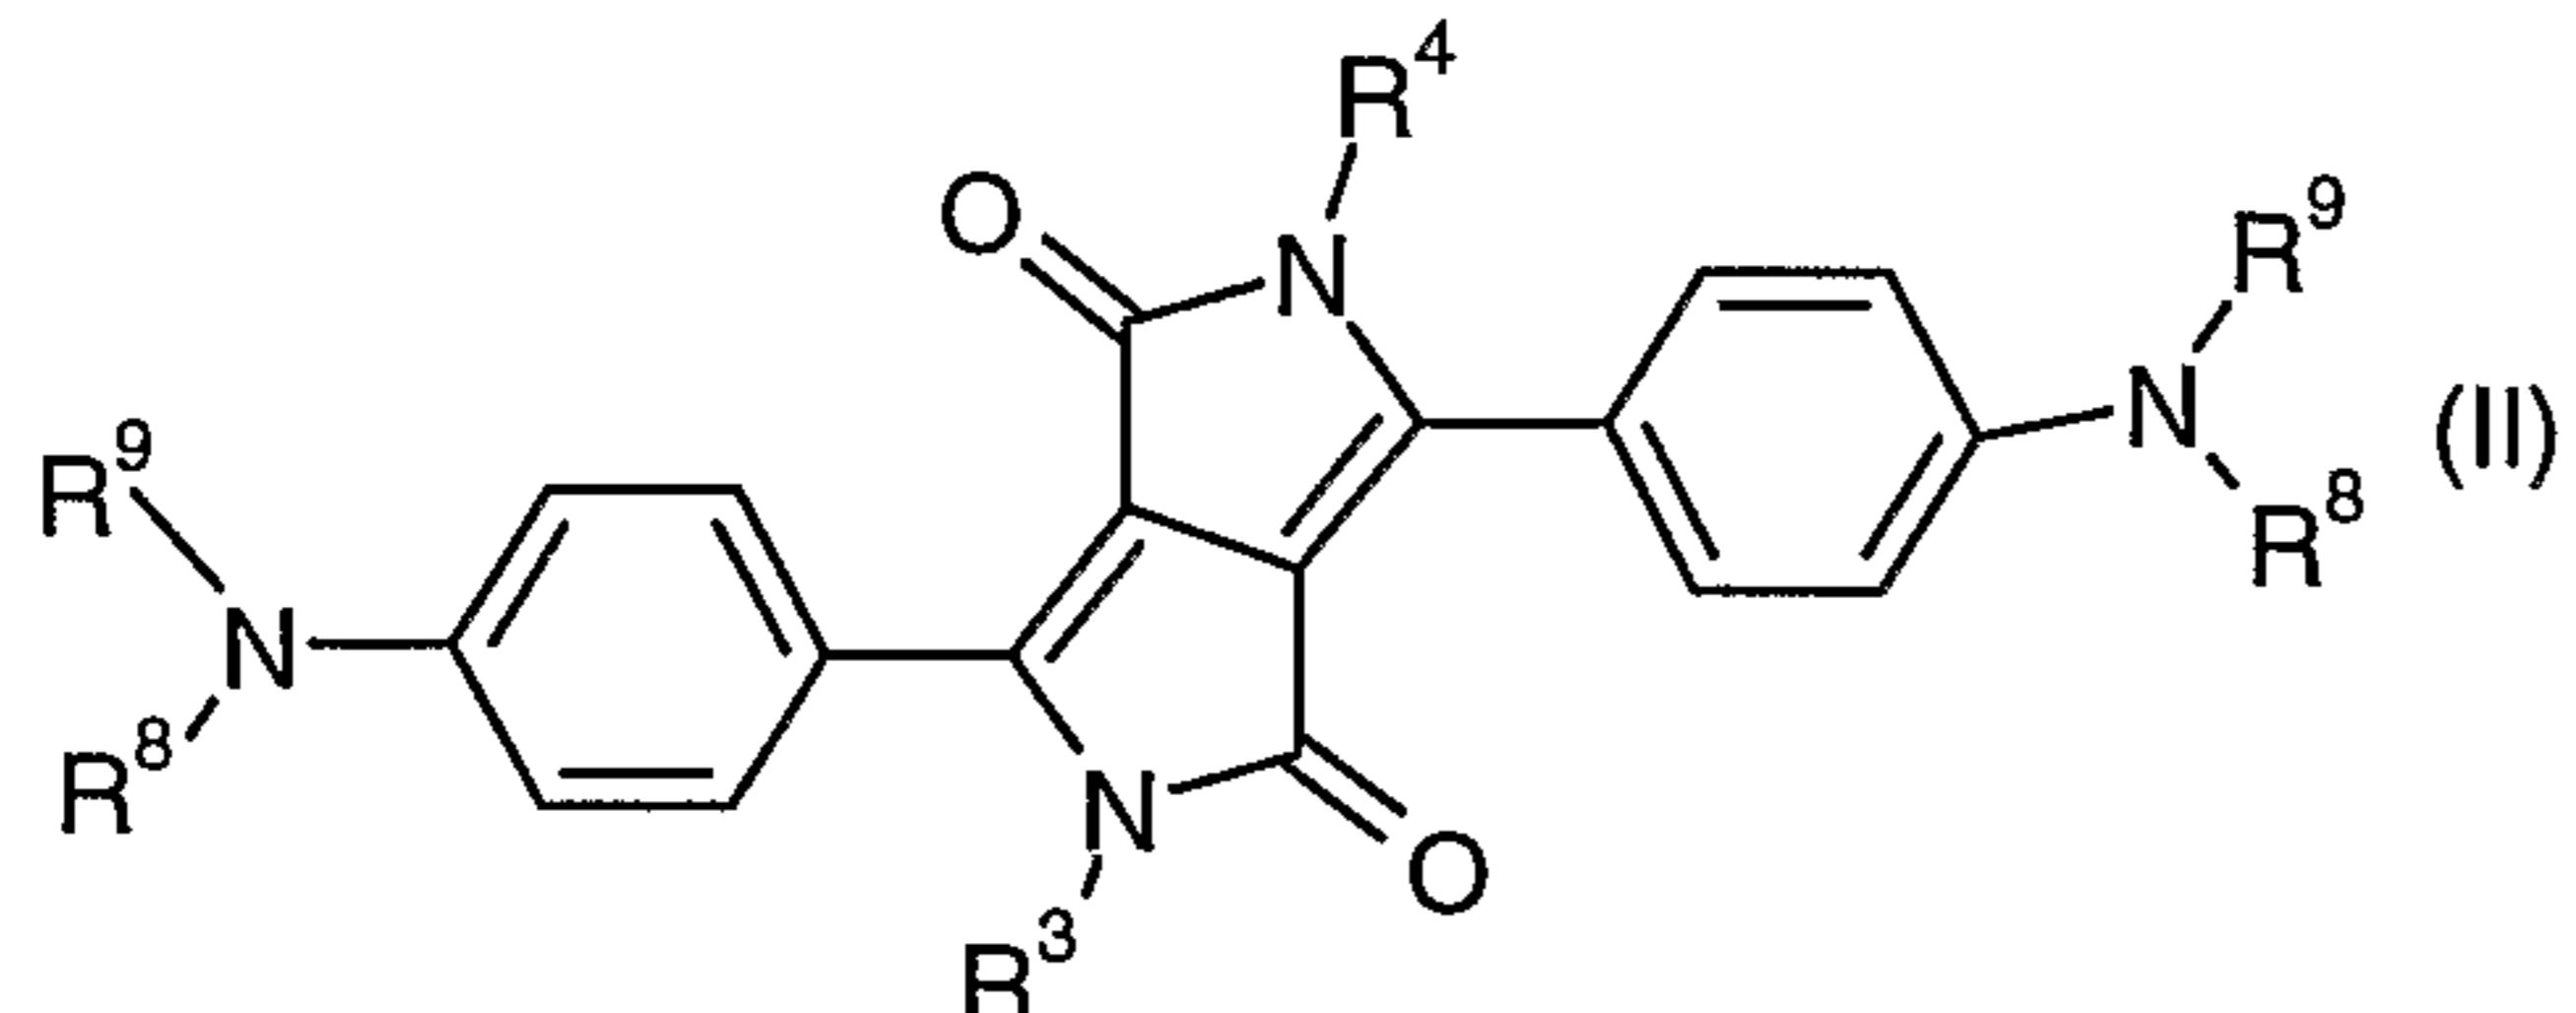

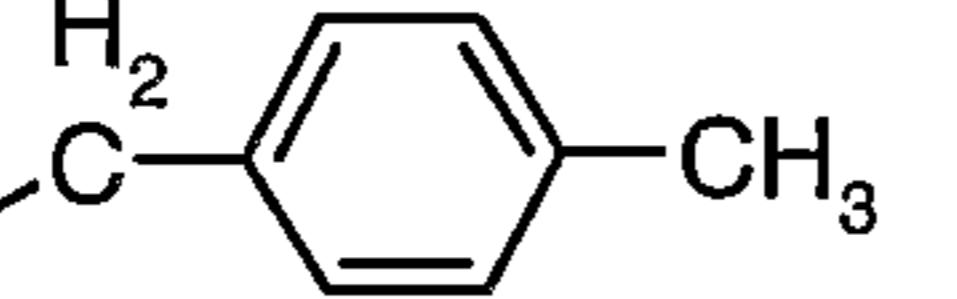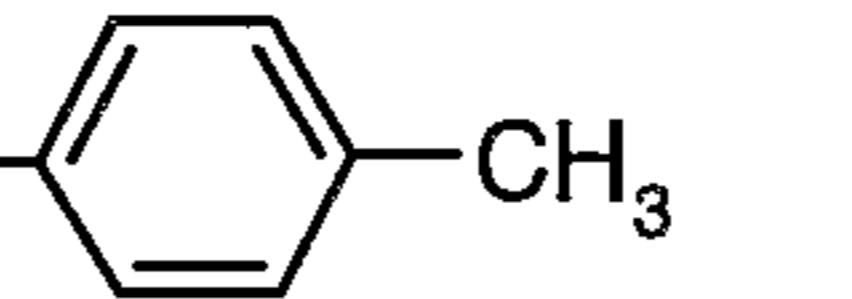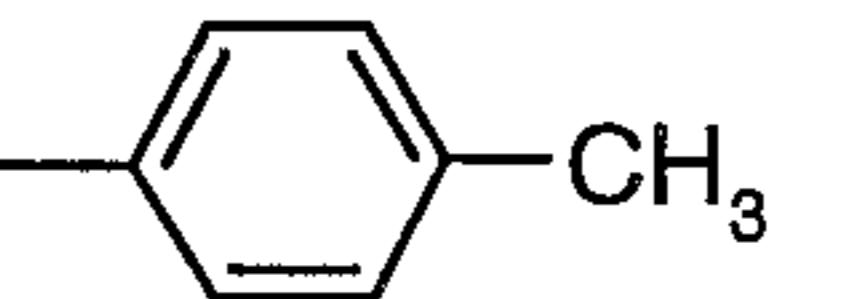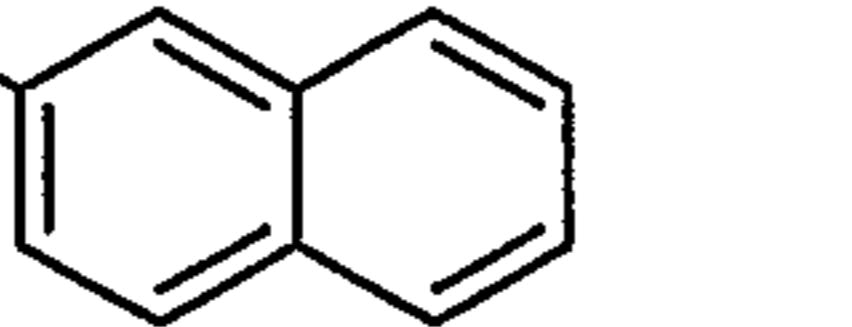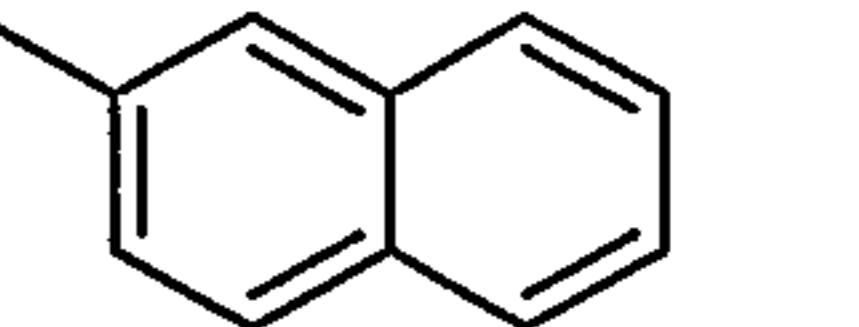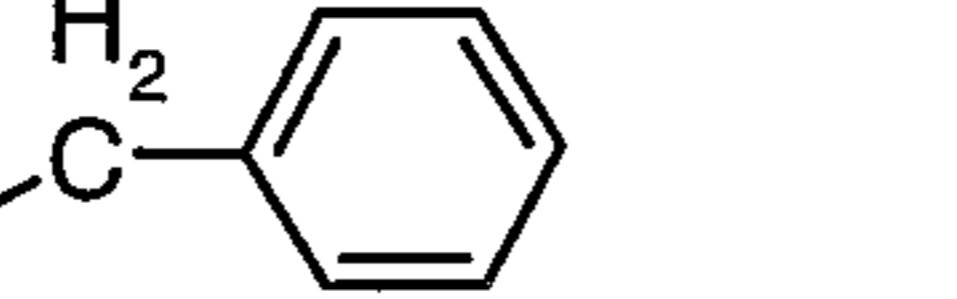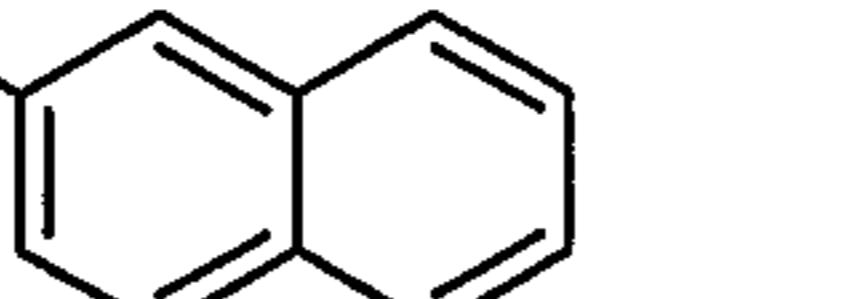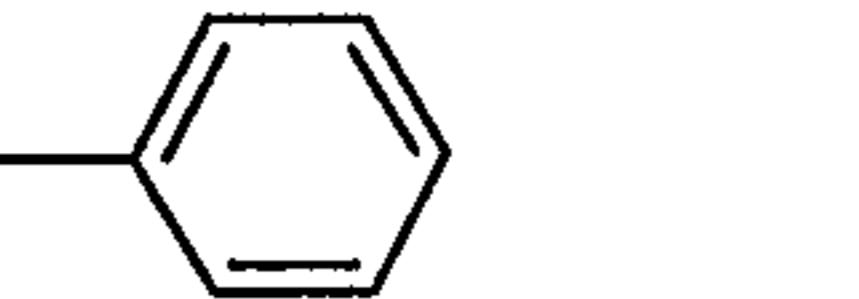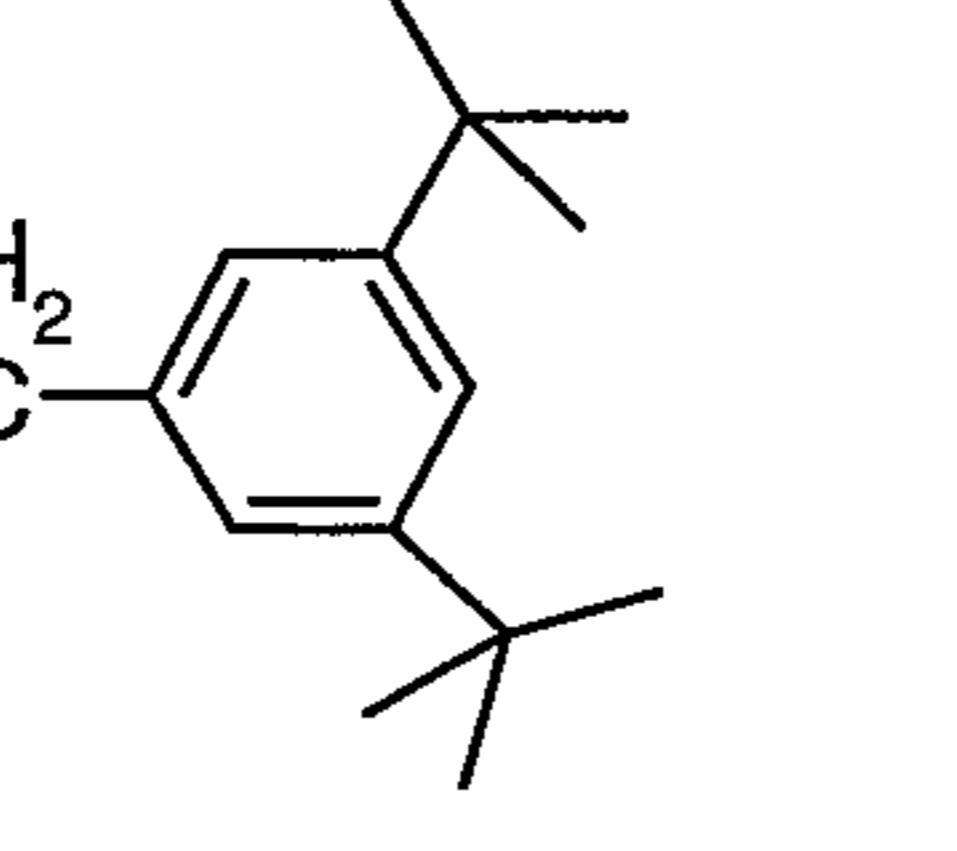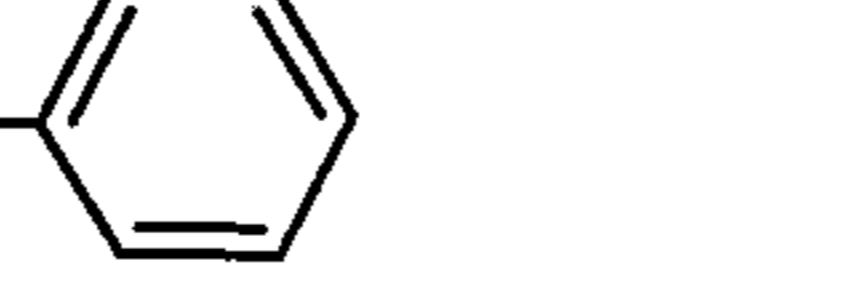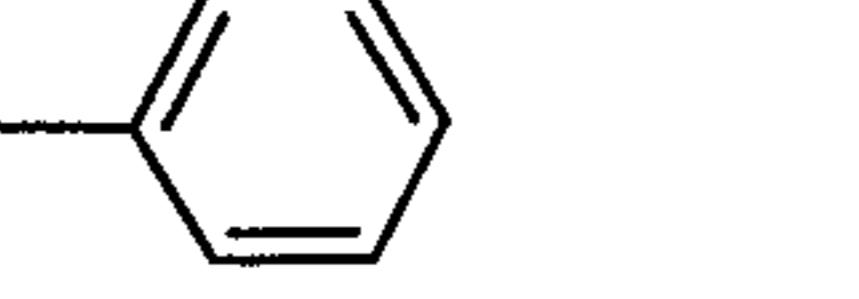Compound	$R^3 = R^4$	$R^8$	$R^9$
B-1			
B-2	$-(CH_2)_3CH_3$		
B-3			
B-4			

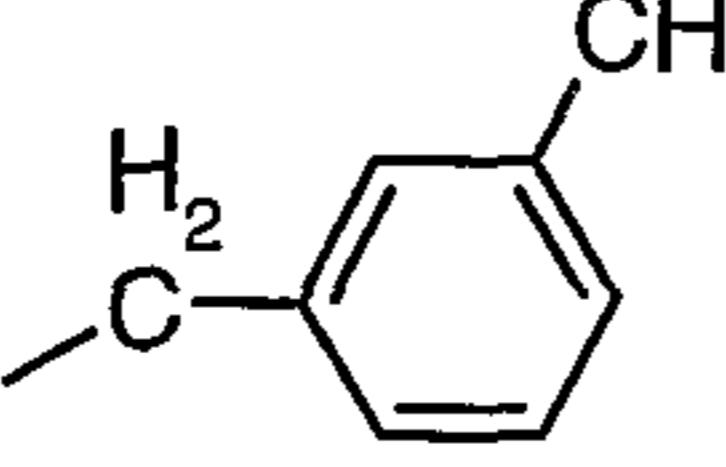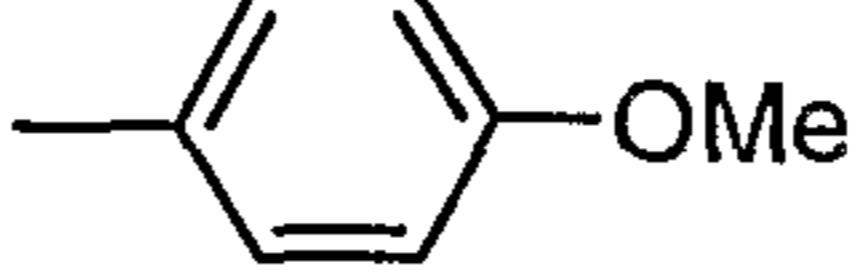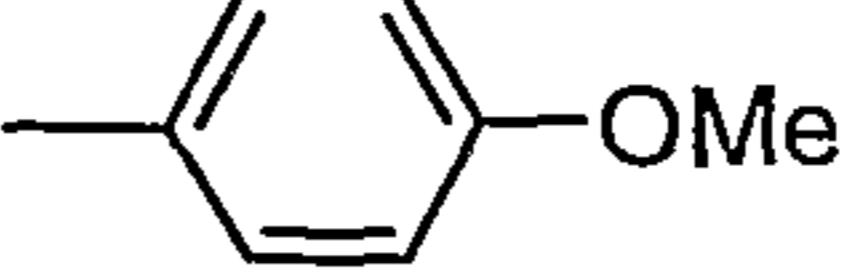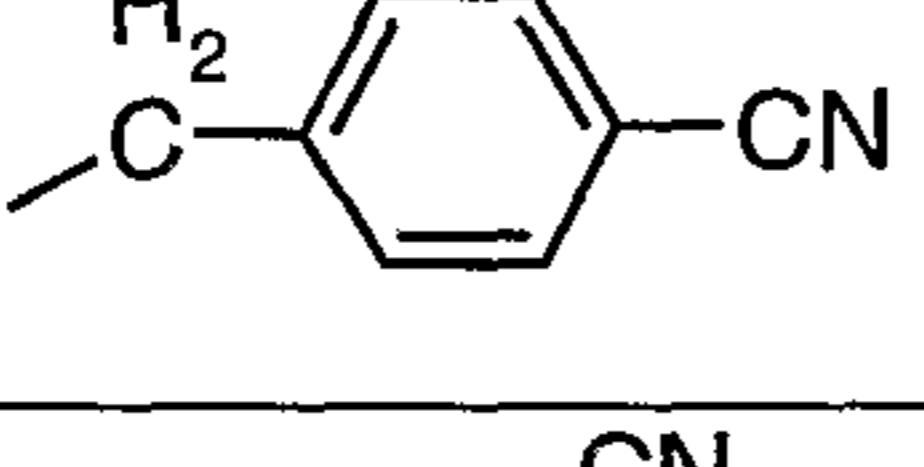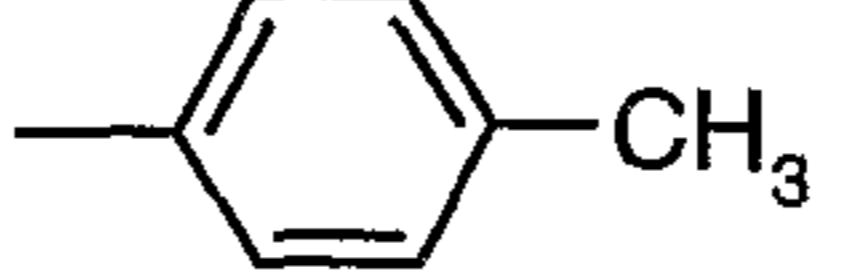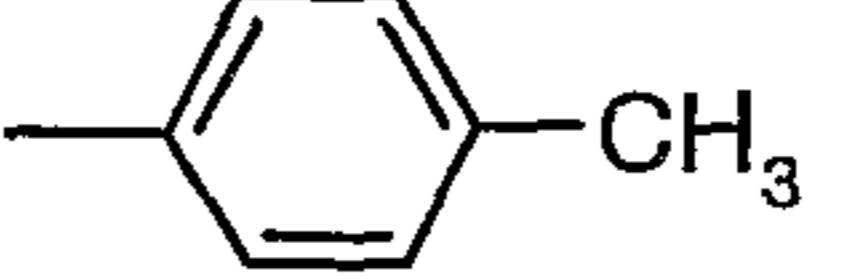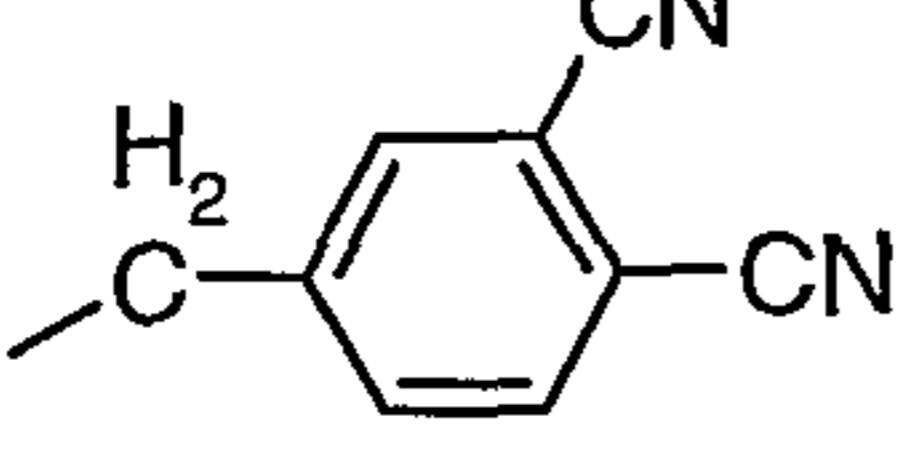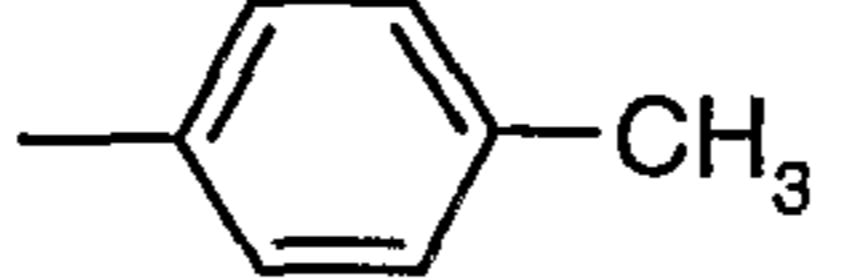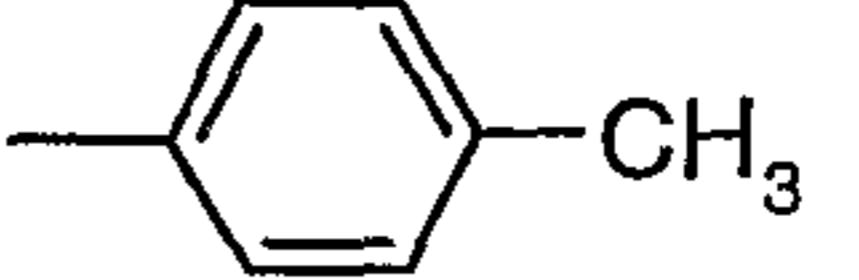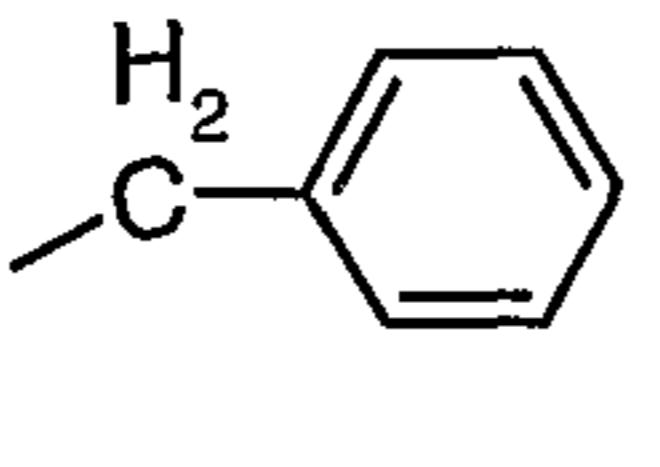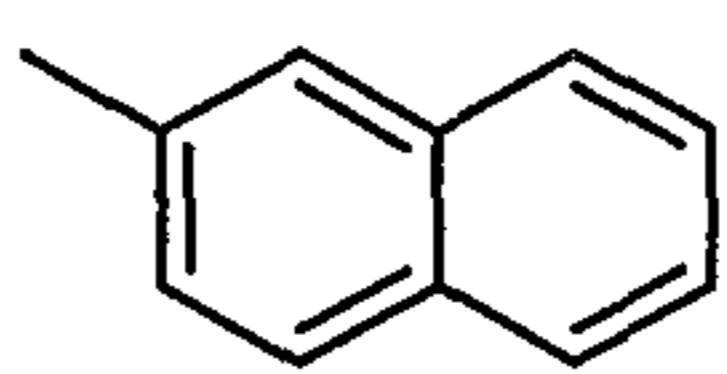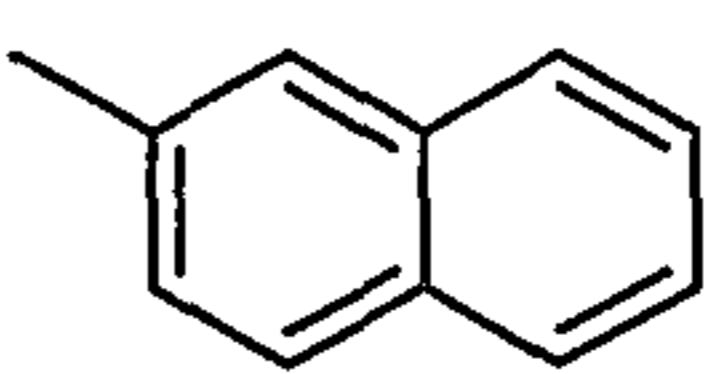B-5		"	"
B-6	"		
B-7			
B-8			
B-9			

Particularly preferred inventive compositions comprise compounds A-2 and B-1, A-2 and B-3, A-2 and B-7, A-11 and B-1 or A-11 and B-7.

5 The inventive DPP compounds of formula I or II can be synthesized according to or in analogy to methods well known in the art, such as described, for example, in US 4,579,949, EP-A 353,184, EP-A-133,156, EP-A-1,087,005 and EP-A-1,087,006.

The term "halogen" means fluorine, chlorine, bromine and iodine.

10

$C_1$ - $C_{25}$ alkyl is typically linear or branched - where possible - methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethylpropyl, n-hexyl, n-heptyl, n-octyl, 1,1,3,3-tetramethylbutyl and 2-ethylhexyl, n-nonyl, decyl, undecyl, dodecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, eicosyl, heneicosyl, docosyl, tetracosyl or pentacosyl, preferably  $C_1$ - $C_8$ alkyl such as methyl, ethyl, n-propyl,

15 isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethylpropyl, n-hexyl, n-heptyl, n-octyl, 1,1,3,3-tetramethylbutyl and 2-ethylhexyl, more preferably  $C_1$ - $C_4$ alkyl such as typically methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl;  $C_1$ - $C_3$ alkyl stands for methyl, ethyl, n-propyl, or isopropyl;  $C_1$ - $C_6$ alkyl stands for

20 methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethyl-propyl, or n-hexyl.


The "aldehyde group, ketone group, ester group, carbamoyl group and amino group" include those substituted by an aliphatic hydrocarbon group, an alicyclic hydrocarbon group, an


aromatic hydrocarbon group, a heterocyclic group or the like, wherein the aliphatic hydrocarbon group, alicyclic hydrocarbon group, aromatic hydrocarbon group and heterocyclic group may be unsubstituted or substituted. The term "silyl group" means a silicon compound group such as trimethylsilyl. The term "siloxanyl group" means a silicon compound group linking through intermediation of an ether linkage, such as trimethylsiloxanyl and the like.

Examples of C<sub>1</sub>-C<sub>8</sub>alkoxy are methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, sec.-butoxy, isobutoxy, tert.-butoxy, n-pentoxy, 2-pentoxy, 3-pentoxy, 2,2-dimethylpropoxy, n-hexaoxy, n-heptoxy, n-octoxy, 1,1,3,3-tetramethylbutoxy and 2-ethylhexoxy, preferably C<sub>1</sub>-C<sub>4</sub>alkoxy such as typically methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, sec.-butoxy, isobutoxy, tert.-butoxy. The term "alkylthio group" means the same groups as the alkoxy groups, except that the oxygen atom of ether linkage is replaced by a sulfur atom.

15 The term "aryl group" is typically C<sub>6</sub>-C<sub>24</sub>aryl, such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, phenanthryl, terphenyl, pyrenyl, 2- or 9-fluorenyl or anthracenyl, preferably C<sub>6</sub>-C<sub>12</sub>aryl such as phenyl, 1-naphthyl, 2-naphthyl, 4-biphenyl, which may be unsubstituted or substituted.

20 The term "cycloalkyl group" is typically C<sub>5</sub>-C<sub>12</sub>cycloalkyl, such as cyclopentyl, cyclohexyl, cycloheptyl, cyclooctyl, cyclononyl, cyclodecyl, cycloundecyl, cyclododecyl, preferably cyclopentyl, cyclohexyl, cycloheptyl, or cyclooctyl, may be unsubstituted or substituted. The term "cycloalkenyl group" means an unsaturated alicyclic hydrocarbon group containing one or more double bonds, such as cyclopentenyl, cyclopentadienyl, cyclohexenyl and the like, which may be unsubstituted or substituted. The cycloalkyl group, in particular a cyclohexyl group, can be condensed one or two times by phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>4</sub>-alkyl, halogen and cyano. Examples of such condensed cyclohexyl groups

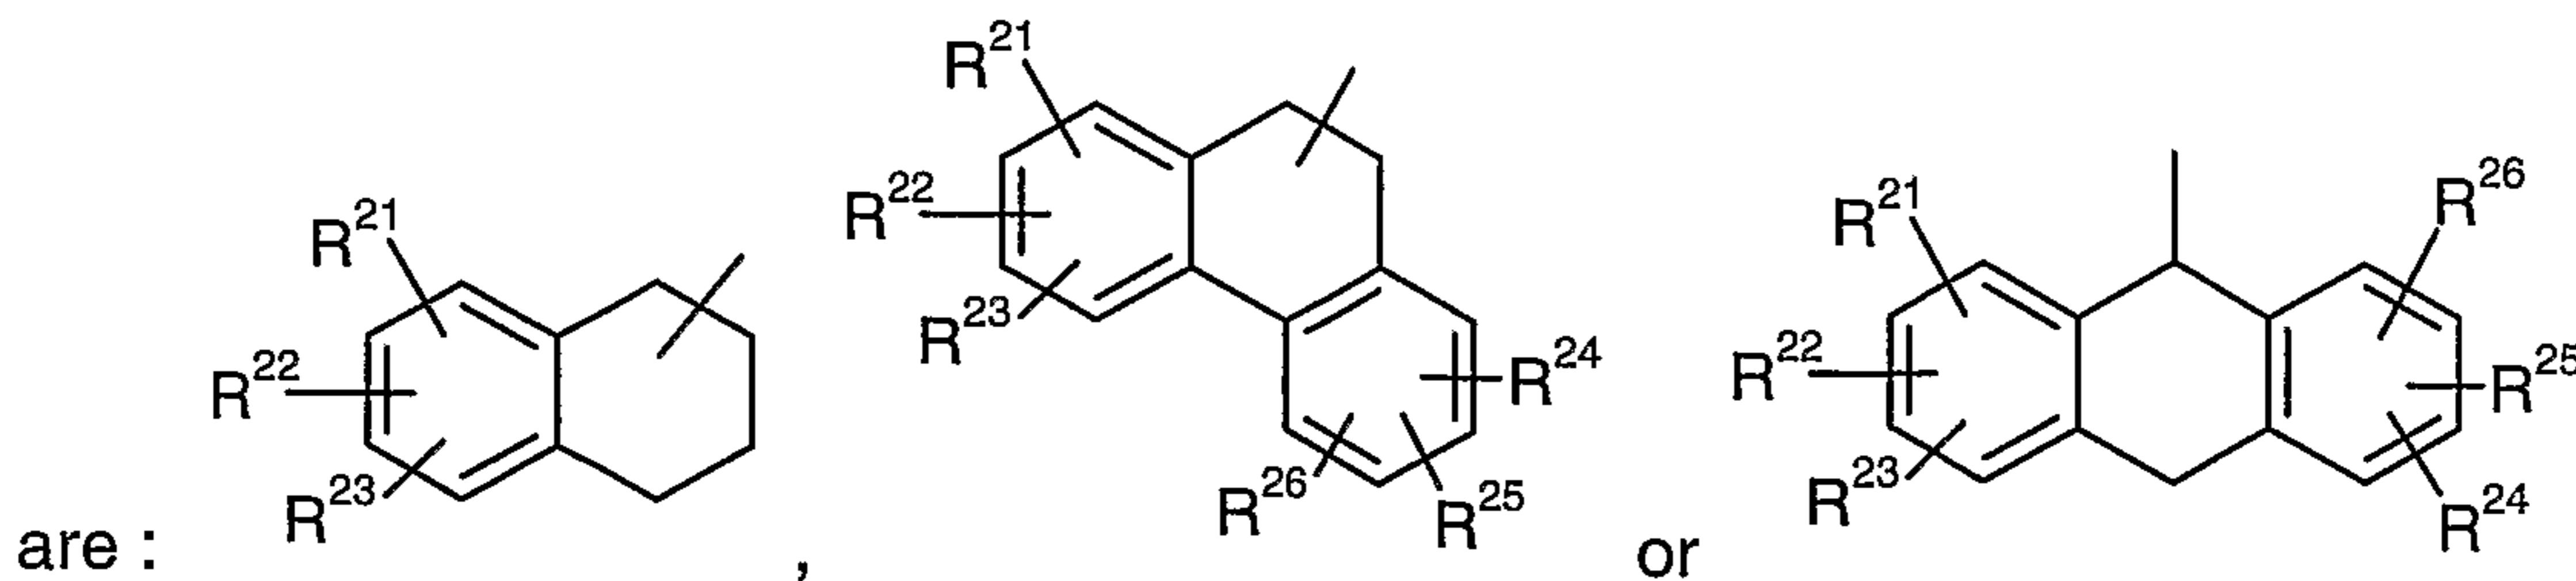

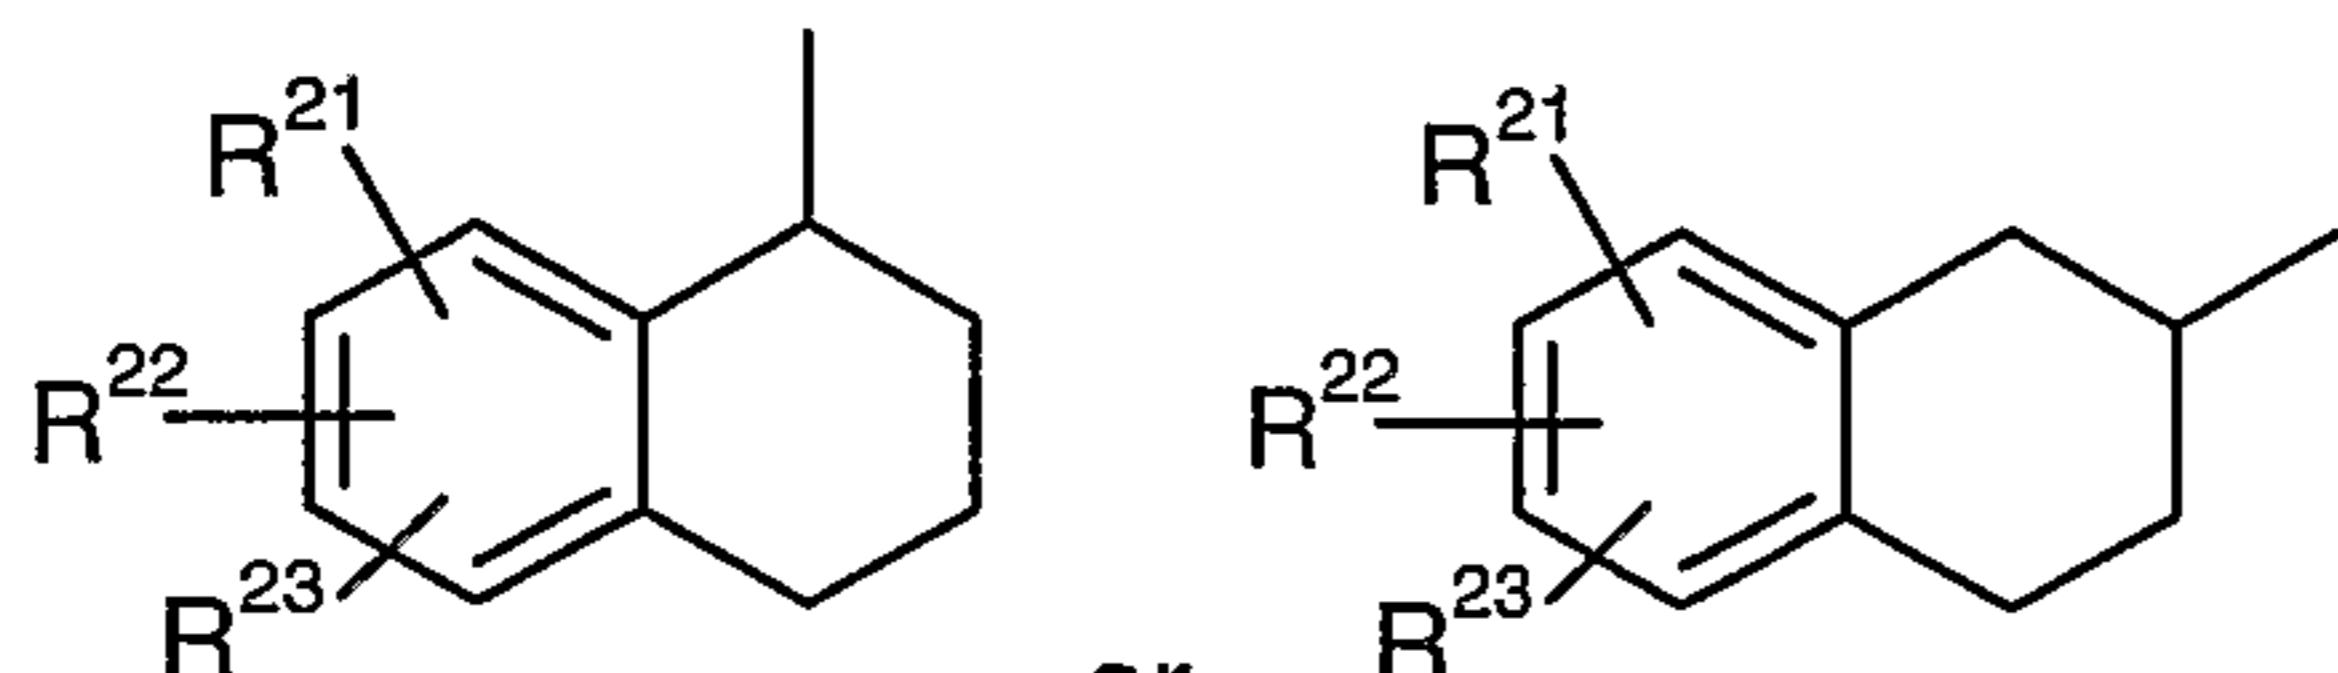

in particular or , wherein  $R^{21}$ ,  $R^{22}$ ,  $R^{23}$ ,  $R^{24}$ ,  $R^{25}$  and  $R^{26}$  are independently of each other  $C_1$ - $C_4$ -alkyl, halogen and cyano, in particular hydrogen.

The term "heterocyclic radical" is a ring with five to seven ring atoms, wherein nitrogen, oxygen or sulfur are the possible hetero atoms, and is typically an unsaturated heterocyclic radical with five to 18 atoms having at least six conjugated  $\pi$ -electrons such as thienyl,

5 benzyl, benzo[b]thienyl, dibenzo[b,d]thienyl, thianthrenyl, furyl, furfuryl, 2H-pyranyl, benzofuranyl, isobenzofuranyl, dibenzofuranyl, phenoxythienyl, pyrrolyl, imidazolyl, pyrazolyl, pyridyl, bipyridyl, triazinyl, pyrimidinyl, pyrazinyl, pyridazinyl, indolizinyl, isoindolyl, indolyl, indazolyl, purinyl, quinolizinyl, chinolyl, isochinolyl, phthalazinyl, naphthyridinyl, chinoxalinyl, 10 chinazolinyl, cinnolinyl, pteridinyl, carbazolyl, carbolinyl, benzotriazolyl, benzoxazolyl, phenanthridinyl, acridinyl, perimidinyl, phenanthrolinyl, phenazinyl, isothiazolyl, phenothiazinyl, isoxazolyl, furazanyl or phenoxazinyl, preferably the above-mentioned mono- or bicyclic heterocyclic radicals.

15 The above-mentioned substituents can be substituted by a  $C_1$ - $C_8$ alkyl, a hydroxyl group, a mercapto group,  $C_1$ - $C_8$ alkoxy,  $C_1$ - $C_8$ alkylthio, halogen, halo- $C_1$ - $C_8$ alkyl, a cyano group, an aldehyde group, a ketone group, a carboxyl group, an ester group, a carbamoyl group, an amino group, a nitro group, a silyl group or a siloxanyl group,

20 The present invention relates further to an electroluminescent device having the composition according to the present invention between an anode and a cathode and emitting light by the action of electrical energy.

Typical constitutions of latest organic electroluminescent devices are:

25 (i) an anode/a hole transporting layer/an electron transporting layer/a cathode, in which the compositions are used either as positive-hole transport composition, which is exploited to form the light emitting and hole transporting layers, or as electron transport compositions, which can be exploited to form the light-emitting and electron transporting layers, and (ii) an anode/a hole transporting layer/a light-emitting layer/an electron transporting layer/a cathode, in which the compositions form the light-emitting layer regardless of whether they exhibit positive-hole or electron transport properties in this constitution, and (iii) an anode/a hole injection layer /a hole transporting layer/a light-emitting layer/an electron transporting layer/a cathode, and

- (iv) an anode/a hole transporting layer/a light-emitting layer/ a positive hole inhibiting layer / an electron transporting layer/a cathode, and
- (v) an anode/ a hole injection layer / a hole transporting layer/a light-emitting layer/ a positive hole inhibiting layer / an electron transporting layer/a cathode.

5

Thin film type electroluminescent devices usually consist essentially of a pair of electrodes and at least one charge transporting layer in between. Usually two charge transporting layers, a hole transporting layer (next to the anode) and an electron transporting layer (next to the cathode) are present. Either one of them contains - depending on its properties as 10 hole-transporting or electron-transporting material - an inorganic or organic fluorescence substance as light-emitting material. It is also common, that a light-emitting material is used as an additional layer between the hole-transporting and the electron-transporting layer. In the above mentioned device structure, a hole injection layer can be constructed between a anode and a hole transporting layer and/or a positive hole inhibiting layer can be constructed 15 between a light emitting layer and a electron transporting layer to maximise hole and electron population in the light emitting layer, reaching large efficiency in charge recombination and intensive light emission.

The devices can be prepared in several ways. Usually, vacuum evaporation is used for the 20 preparation. Preferably, the organic layers are laminated in the above order on a commercially available indium-tin-oxide ("ITO") glass substrate held at room temperature, which works as the anode in the above constitutions. The membrane thickness is preferably in the range of 1 to 10,000 nm, more preferably 1 to 5,000 nm, more preferably 1 to 1,000 nm, more preferably 1 to 500 nm. The cathode metal, such as a Mg/Ag alloy or a binary Li-Al 25 system of ca. 200 nm is laminated on the top of the organic layers. The vacuum during the deposition is preferably less than 0.1333 Pa ( $1 \times 10^{-3}$  Torr), more preferably less than  $1.333 \times 10^{-3}$  Pa ( $1 \times 10^{-5}$  Torr), more preferably less than  $1.333 \times 10^{-4}$  Pa ( $1 \times 10^{-6}$  Torr).

As anode usual anode materials which possess high work function such as metals like gold, 30 silver, copper, aluminum, indium, iron, zinc, tin, chromium, titanium, vanadium, cobalt, nickel, lead, manganese, tungsten and the like, metallic alloys such as magnesium/copper, magnesium/silver, magnesium/aluminum, aluminum/indium and the like, semiconductors such as Si, Ge, GaAs and the like, metallic oxides such as indium-tin-oxide ("ITO"), ZnO and the like, metallic compounds such as Cul and the like, and furthermore, electroconducting 35 polymers such polyacetylene, polyaniline, polythiophene, polypyrrole, polyparaphenylene and the like, preferably ITO, most preferably ITO on glass as substrate can be used.

Of these electrode materials, metals, metallic alloys, metallic oxides and metallic compounds can be transformed into electrodes, for example, by means of the sputtering method. In the case of using a metal or a metallic alloy as a material for an electrode, the electrode can be formed also by the vacuum deposition method. In the case of using a metal or a metallic

5 alloy as a material forming an electrode, the electrode can be formed, furthermore, by the chemical plating method (see for example, *Handbook of Electrochemistry*, pp 383-387, Mazuren, 1985). In the case of using an electroconducting polymer, an electrode can be made by forming it into a film by means of anodic oxidation polymerization method onto a substrate which is previously provided with an electroconducting coating. The thickness of an

10 electrode to be formed on a substrate is not limited to a particular value, but, when the substrate is used as a light emitting plane, the thickness of the electrode is preferably within the range of from 1 nm to 100 nm, more preferably, within the range of from 5 to 50 nm so as to ensure transparency.

15 In a preferred embodiment ITO is used on a substrate having an ITO film thickness in the range of from 10 nm (100 Å) to 1  $\mu$  (10000 Å), preferably from 20 nm (200 Å) to 500 nm (5000 Å). Generally, the sheet resistance of the ITO film is chosen in the range of not more than 100  $\Omega/cm^2$ , preferably not more than 50  $\Omega/cm^2$ .

20 Such anodes are commercially available from Japanese manufacturers, such as Geomatech Co.Ltd., Sanyo Vacuum Co. Ltd., Nippon Sheet Glass Co. Ltd.

As substrate either an electronconducting or electrically insulating material can be used. In case of using an electroconducting substrate, a light emitting layer or a positive hole

25 transporting layer is directly formed thereupon, while in case of using an electrically insulating substrate, an electrode is firstly formed thereupon and then a light emitting layer or a positive hole transporting layer is superposed.

The substrate may be either transparent, semi-transparent or opaque. However, in case of

30 using a substrate as an indicating plane, the substrate must be transparent or semi-transparent.

Transparent electrically insulating substrates are, for example, inorganic compounds such as glass, quartz and the like, organic polymeric compounds such as polyethylene,

35 polypropylene, polymethylmethacrylate, polyacrylonitrile, polyester, polycarbonate, polyvinylchloride, polyvinylalcohol, polyvinylacetate and the like. Each of these substrates

can be transformed into a transparent electroconducting substrate by providing it with an electrode according to one of the methods described above.

Examples of semi-transparent electrically insulating substrates are inorganic compounds

5 such as alumina, YSZ (yttrium stabilized zirconia) and the like, organic polymeric compounds such as polyethylene, polypropylene, polystyrene, epoxy resins and the like. Each of these substrates can be transformed into a semi-transparent electroconducting substrate by providing it with an electrode according to one of the abovementioned methods.

10 Examples of opaque electroconducting substrates are metals such as aluminum, indium, iron, nickel, zinc, tin, chromium, titanium, copper, silver, gold, platinum and the like, various electroplated metals, metallic alloys such as bronze, stainless steel and the like, semiconductors such as Si, Ge, GaAs, and the like, electroconducting polymers such as polyaniline, polythiophene, polypyrrole, polyacetylene, polyparaphenylene and the like.

15

A substrate can be obtained by forming one of the above listed substrate materials to a desired dimension. It is preferred that the substrate has a smooth surface. Even if it has a rough surface, it will not cause any problem for practical use, provided that it has round unevenness having a curvature of not less than 20  $\mu\text{m}$ . As for the thickness of the substrate,

20 there is no restriction as far as it ensures sufficient mechanical strength.

As cathode usual cathode materials which possess low work function such as alkali metals, earth alkaline metals, group 13 elements, silver, and copper as well as alloys or mixtures thereof such as sodium, lithium, potassium, sodium-potassium alloy, magnesium, magnesium-silver alloy, magnesium-copper alloy, magnesium-aluminum alloy, magnesium-indium alloy, aluminum, aluminum-aluminum oxide alloy, aluminum-lithium alloy, indium, calcium, and materials exemplified in EP-A 499,011 such as electroconducting polymers e.g. polypyrrole, polythiophene, polyaniline, polyacetylene etc., preferably Mg/Ag alloys, or Li-Al compositions can be used.

25 30 In a preferred embodiment a magnesium-silver alloy or a mixture of magnesium and silver, or a lithium-aluminum alloy or a mixture of lithium and aluminum can be used in a film thickness in the range of from 10 nm (100  $\text{\AA}$ ) to 1  $\mu\text{m}$  (10000  $\text{\AA}$ ), preferably from 20 nm (200  $\text{\AA}$ ) to 500 nm (5000  $\text{\AA}$ ).

35 Such cathodes can be deposited on the foregoing electron transporting layer by known vacuum deposition techniques described above.

In a preferred embodiment of this invention a light-emitting layer can be used between the hole transporting layer and the electron transporting layer. Usually the light-emitting layer is prepared by forming a thin film on the hole transporting layer.

- 5 As methods for forming said thin film, there are, for example, the vacuum deposition method, the spin-coating method, the casting method, the Langmuir-Blodgett ("LB") method and the like. Among these methods, the vacuum deposition method, the spin-coating method and the casting method are particularly preferred in view of ease of operation and cost.
- 10 In case of forming a thin film using a composition by means of the vacuum deposition method, the conditions under which the vacuum deposition is carried out are usually strongly dependent on the properties, shape and crystalline state of the compound(s). However, optimum conditions are usually as follows: temperature of the heating boat: 100 to 400°C; substrate temperature: -100 to 350°C; pressure:  $1.33 \times 10^4$  Pa ( $1 \times 10^2$  Torr) to  $1.33 \times 10^{-4}$  Pa ( $1 \times 10^{-6}$  Torr) and deposition rate: 1 pm to 6 nm/sec.
- 15

In an organic EL element, the thickness of the light emitting layer is one of the factors determining its light emission properties. For example, if a light emitting layer is not sufficiently thick, a short circuit can occur quite easily between two electrodes sandwiching said light emitting layer, and therefore, no EL emission is obtained. On the other hand, if the light emitting layer is excessively thick, a large potential drop occurs inside the light emitting layer because of its high electrical resistance, so that the threshold voltage for EL emission increases. Accordingly, the thickness of the organic light emitting layer is limited to the range of from 5 nm to 5  $\mu$ m, preferably to the range of from 10 nm to 500 nm.

25


In the case of forming a light emitting layer by using the spin-coating method and the casting method, the coating can be carried out using a solution prepared by dissolving the composition in a concentration of from 0.0001 to 90% by weight in an appropriate organic solvent such as benzene, toluene, xylene, tetrahydrofuran, methyltetrahydrofuran, N,N-dimethylformamide, dichloromethane, dimethylsulfoxide and the like. If the concentration exceeds 90% by weight, the solution usually is so viscous that it no longer permits forming a smooth and homogenous film. On the other hand, if the concentration is less than 0.0001% by weight, the efficiency of forming a film is too low to be economical. Accordingly, a preferred concentration of the composition is within the range of from 0.01 to 80% by weight.

35


In the case of using the above spin-coating or casting method, it is possible to further improve the homogeneity and mechanical strength of the resulting layer by adding a polymer binder to the solution for forming the light emitting layer. In principle, any polymer binder may be used, provided that it is soluble in the solvent in which the composition is dissolved.

5 Examples of such polymer binders are polycarbonate, polyvinylalcohol, polymethacrylate, polymethylmethacrylate, polyester, polyvinylacetate, epoxy resin and the like. However, if the solid content composed of the polymer binder and the composition exceeds 99% by weight, the fluidity of the solution is usually so low that it is impossible to form a light emitting layer excellent in homogeneity. On the other hand, if the content of the composition is substantially 10 smaller than that of the polymer binder, the electrical resistance of said layer is very large, so that it does not emit light unless a high voltage is applied thereto. Accordingly, the preferred ratio of the polymer binder to the composition is chosen within the range of from 10:1 to 1:50 by weight, and the solid content composed of both components in the solution is preferably within the range of from 0.01 to 80% by weight, and more preferably, within the range of 0.1 15 to 60% by weight.


As hole-transporting layers known organic hole transporting compounds such as polyvinyl carbazole

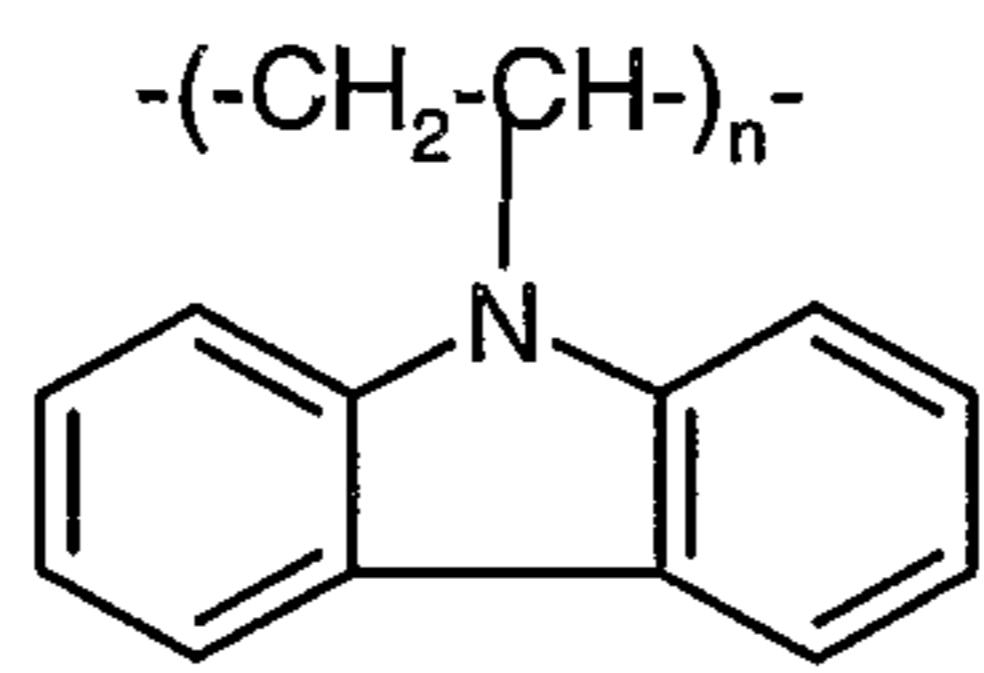

20 a TPD compound disclosed in J. Amer. Chem. Soc. 90 (1968) 3925:

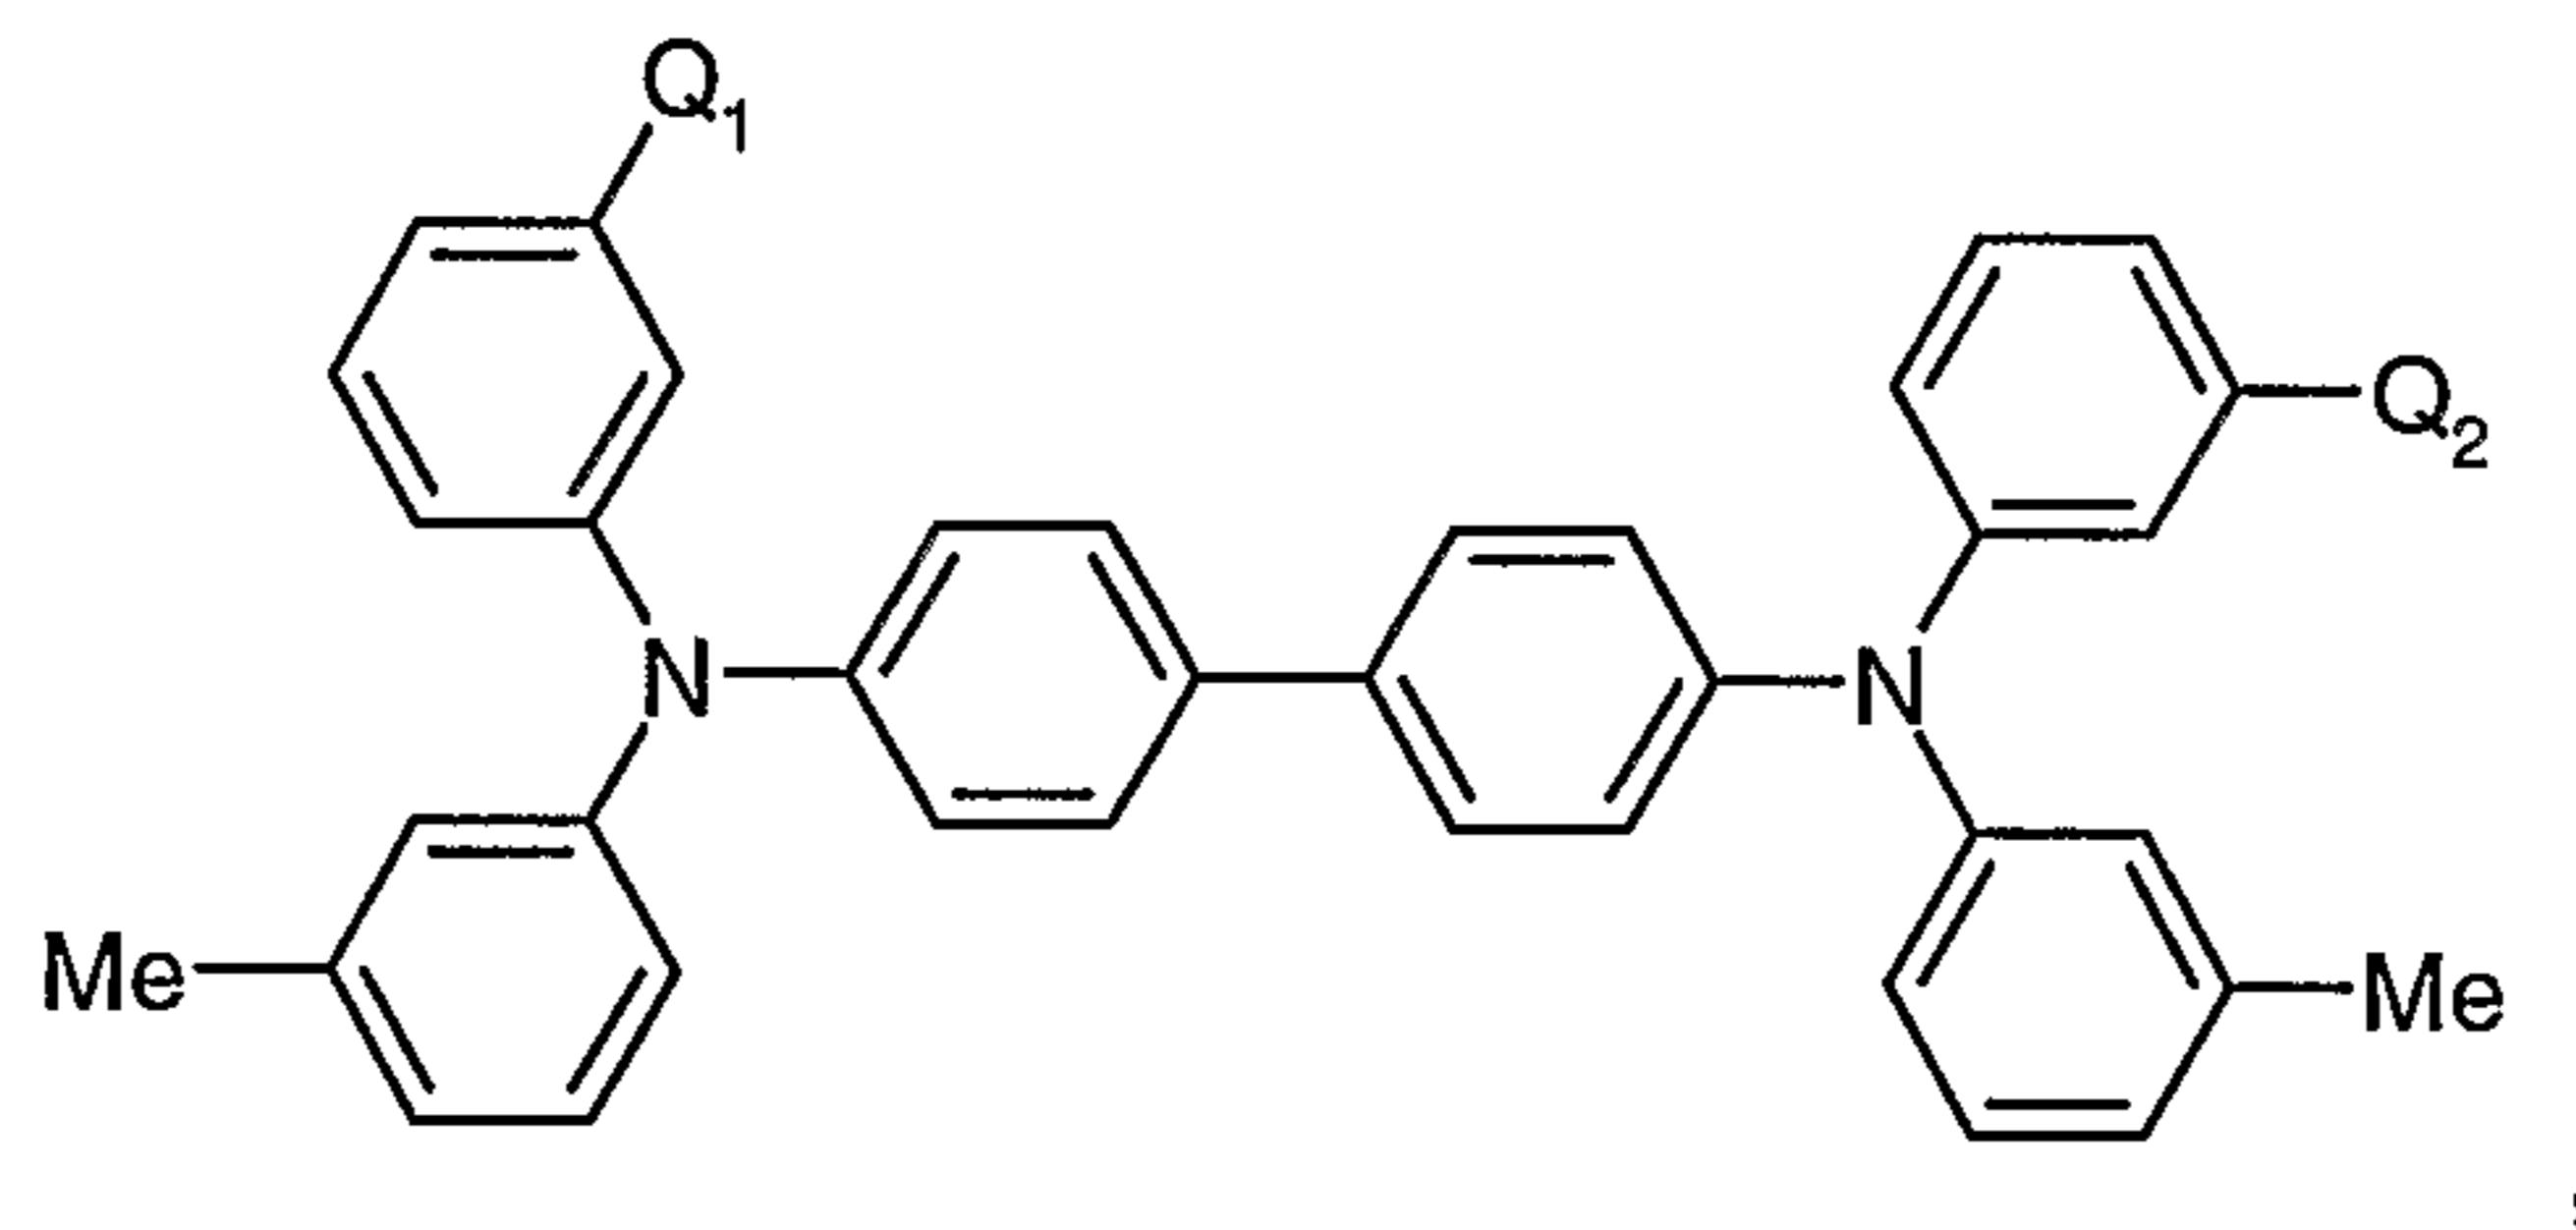


wherein  $\text{Q}_1$  and  $\text{Q}_2$  each represent a hydrogen atom or a methyl group; a compound disclosed in J. Appl. Phys. 65(9) (1989) 3610:

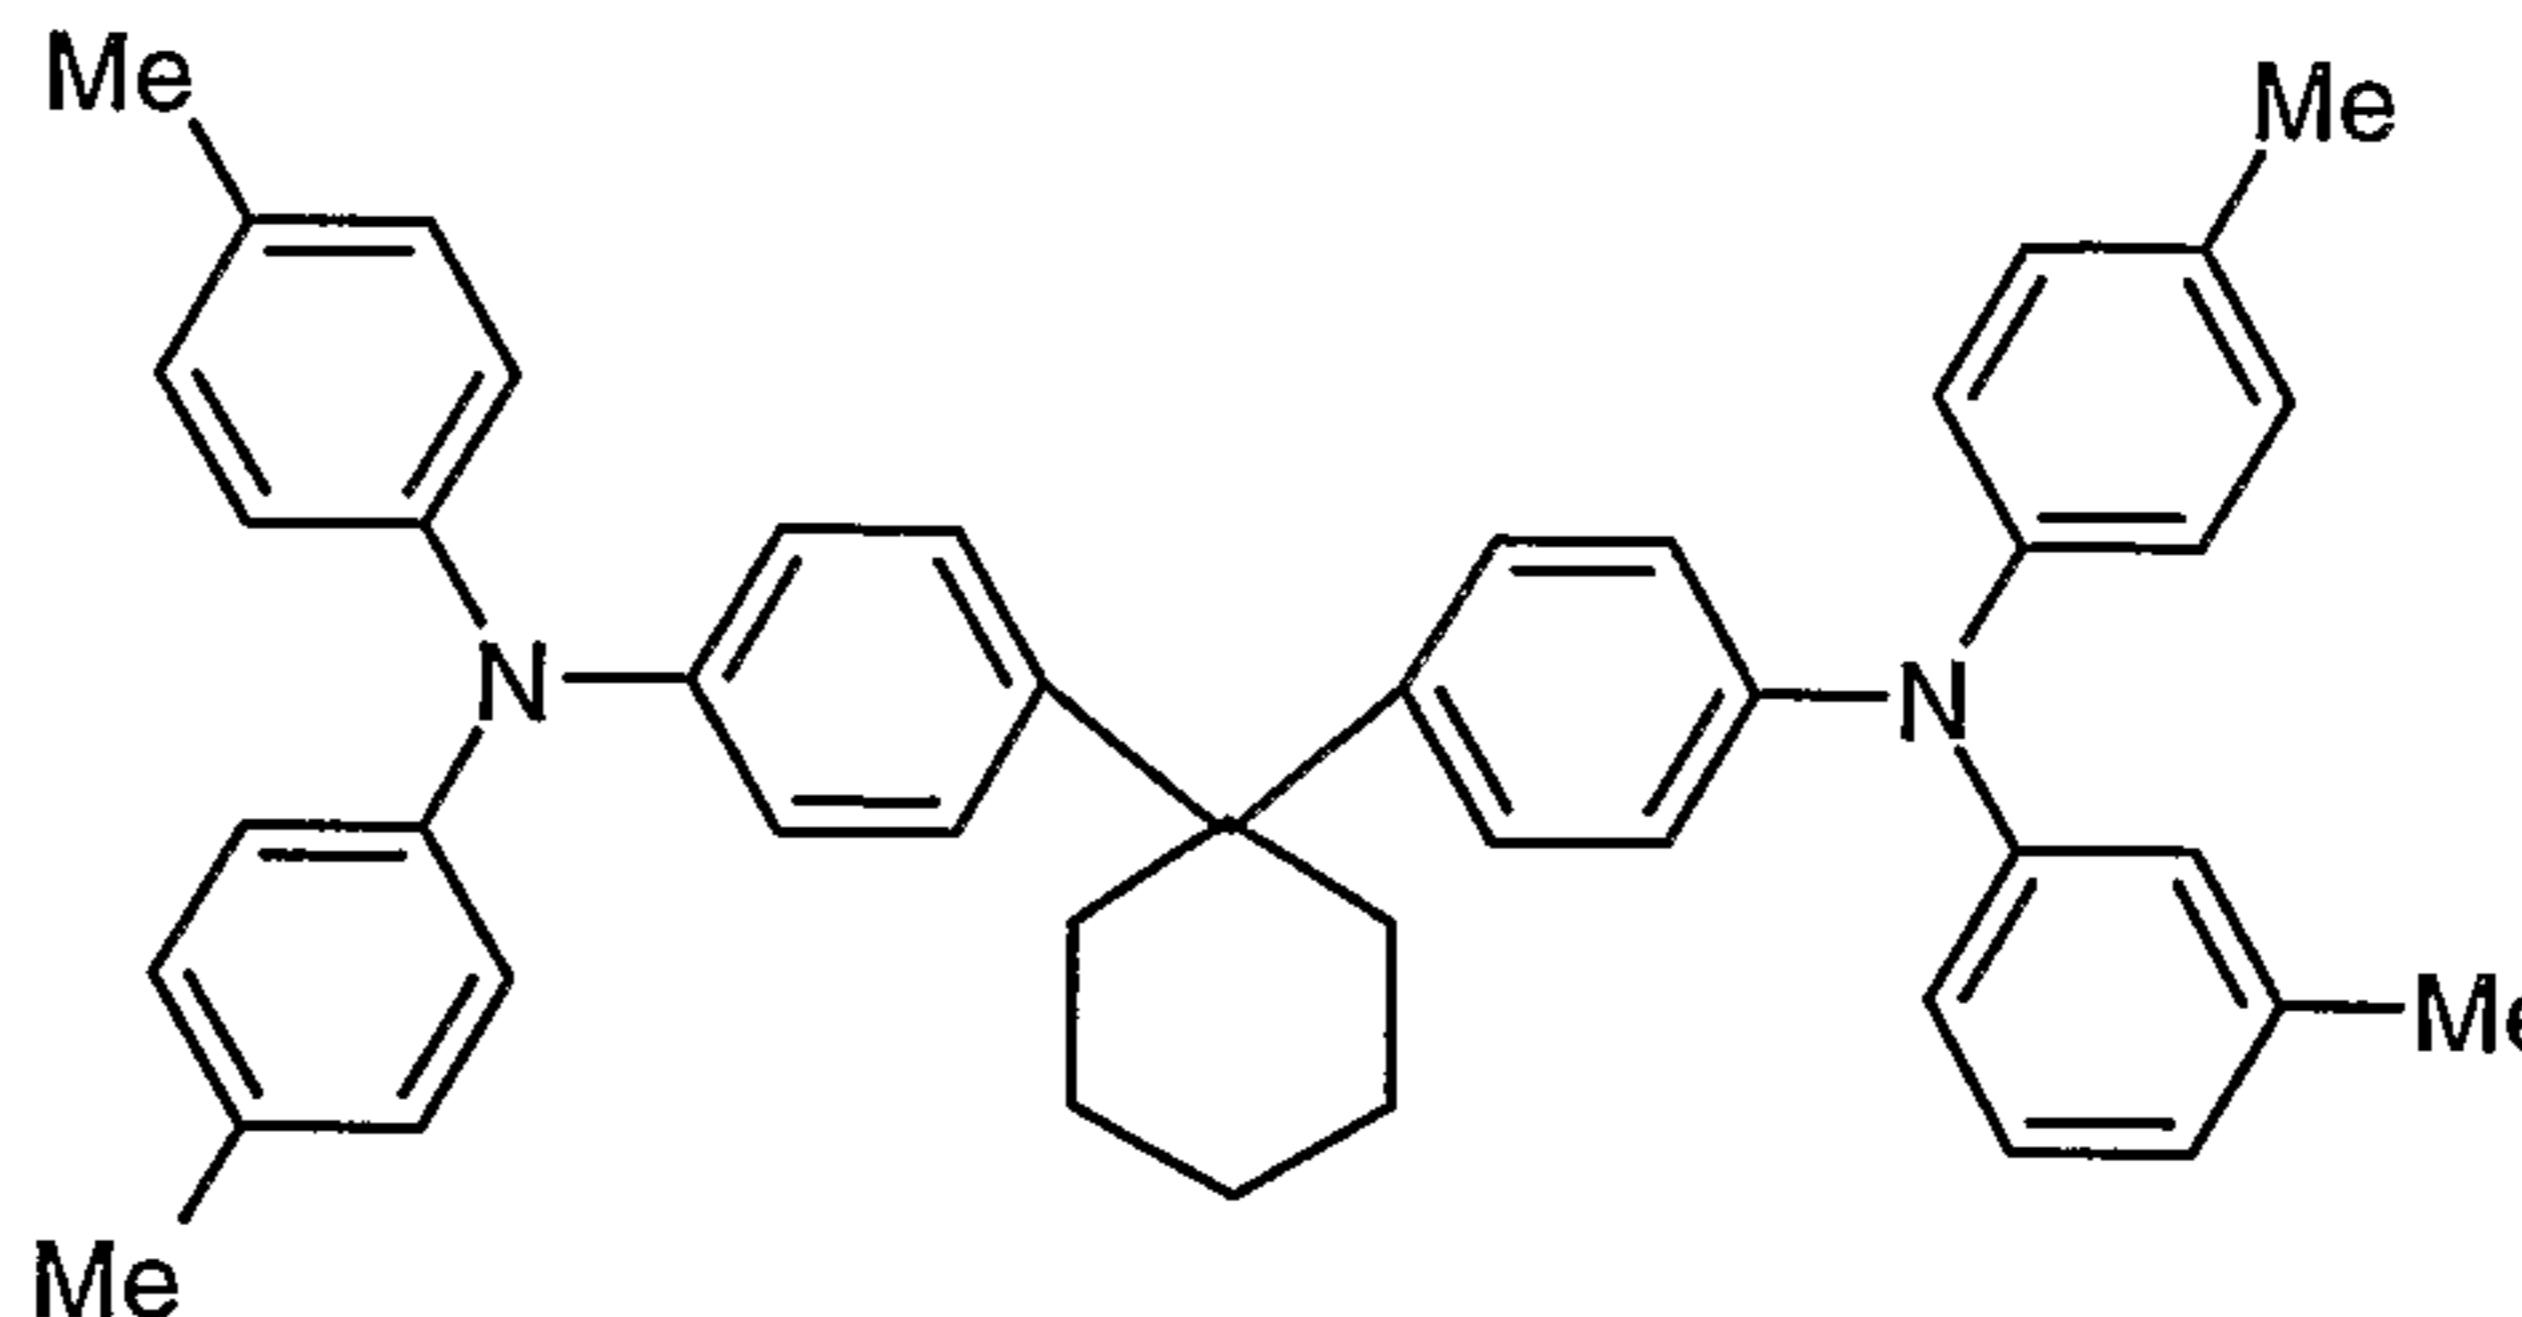

;


a stilbene based compound

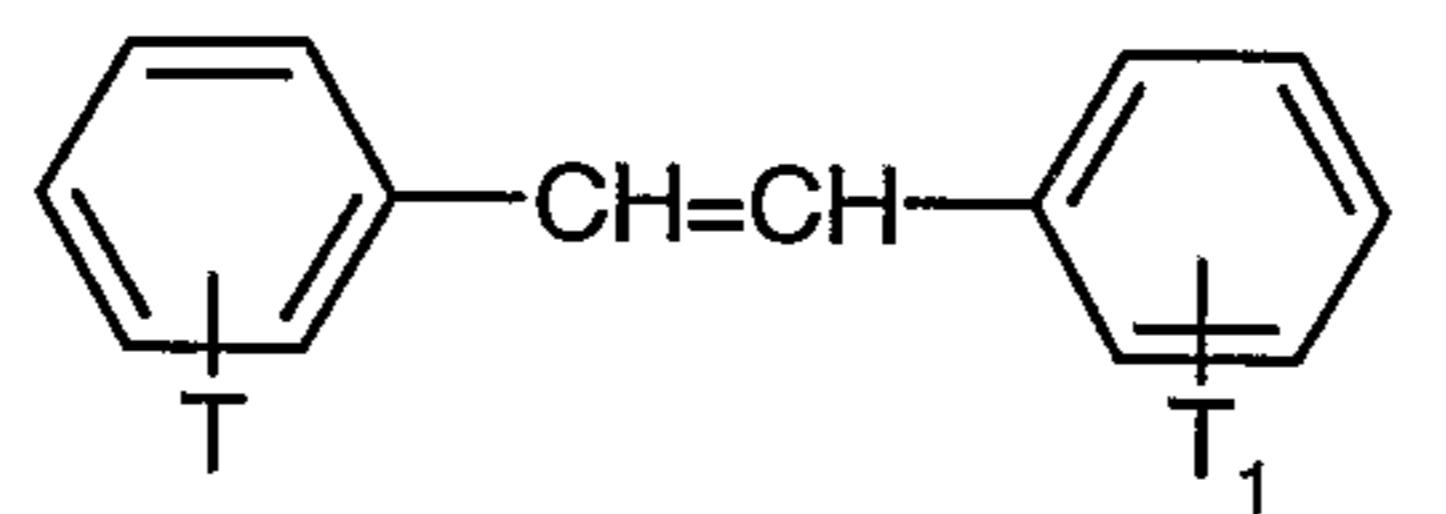

,

wherein T and T<sub>1</sub> stand for an organic radical;

5 a hydrazone based compound

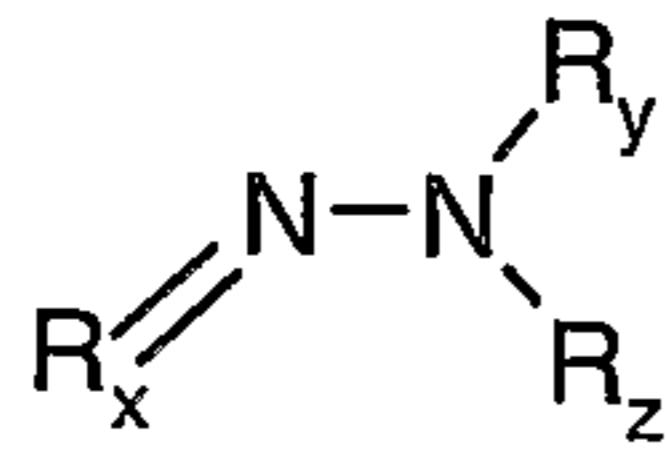

, wherein Rx, Ry and Rz stand for an organic radical,  
and the like can be used.

Compounds to be used as a positive hole transporting material are not restricted to the  
10 above listed compounds. Any compound having a property of transporting positive holes can  
be used as a positive hole transporting material such as triazole derivatives, oxadiazole  
derivatives, imidazole derivatives, polyarylalkane derivatives, pyrazoline derivative,  
pyrazolone derivatives, phenylene diamine derivatives, arylamine derivatives, amino  
substituted chalcone derivatives, oxazole derivatives, stilbenylanthracene derivatives,  
15 fluorenone derivatives, hydrazone derivatives, stilbene derivatives, copolymers of aniline  
derivatives, electro-conductive oligomers, particularly thiophene oligomers, porphyrin  
compounds, aromatic tertiary amine compounds, stilbenyl amine compounds etc.  
Particularly, aromatic tertiary amine compounds such as N,N,N',N'-tetraphenyl-4,4'-  
diaminobiphenyl, N,N'-diphenyl-N,N'-bis(3-methylphenyl)-4,4'-diaminobiphenyl (TPD), 2,2'-  
20 bis(di-p-torylaminophenyl)propane, 1,1'-bis(4-di-torylaminophenyl)-4-phenylcyclohexane,  
bis(4-dimethylamino-2-methylphenyl)phenylmethane, bis(4-di-p-tolylaminophenyl)phenyl-  
methane, N,N'-diphenyl-N,N'-di(4-methoxyphenyl)-4,4'-diaminobiphenyl, N,N,N',N'-  
tetraphenyl-4,4'-diaminodiphenylether, 4,4'-bis(diphenylamino)quaterphenyl, N,N,N-tri(p-  
tolyl)amine, 4-(di-p-tolylamino)-4'-[4-(di-p-tolylamino)stilbene, 4-N,N-diphenylamino-(2-  
25 diphenylvinyl)benzene, 3-methoxy-4'-N,N-diphenylaminostilbene, N-phenylcarbazole etc. are  
used.

Furthermore, 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl disclosed in US 5,061,569 and the compounds disclosed in EP-A 508,562, in which three triphenylamine units are bound to a nitrogen atom, such as 4,4',4''-tris[N-(3-methylphenyl)-N-phenylamino]triphenylamine, can be used.

5

A positive hole transporting layer can be formed by preparing an organic film containing at least one positive hole transporting material on the anode. The positive hole transporting layer can be formed by the vacuum deposition method, the spin-coating method, the casting method, the LB method and the like. Of these methods, the vacuum deposition method, the 10 spin-coating method and the casting method are particularly preferred in view of ease and cost.

In the case of using the vacuum deposition method, the conditions for deposition may be chosen in the same manner as described for the formation of a light emitting layer (see 15 above). If it is desired to form a positive hole transporting layer comprising more than one positive hole transporting material, the coevaporation method can be employed using the desired compounds.

In the case of forming a positive hole transporting layer by the spin-coating method or the casting method, the layer can be formed under the conditions described for the formation of 20 the light emitting layer (see above).

As in the case of forming the light emitting layer a smoother and more homogeneous positive hole transporting layer can be formed by using a solution containing a binder and at least one positive hole transporting material. The coating using such a solution can be performed 25 in the same manner as described for the light emitting layer. Any polymer binder may be used, provided that it is soluble in the solvent in which the at least one positive hole transporting material is dissolved. Examples of appropriate polymer binders and of appropriate and preferred concentrations are given above when describing the formation of a light emitting layer.

30

The thickness of the positive hole transporting layer is preferably chosen in the range of from 0.5 to 1000 nm, preferably from 1 to 100 nm, more preferably from 2 to 50 nm.

As hole injection materials known organic hole transporting compounds such as metal-free 35 phthalocyanine (H<sub>2</sub>Pc), copper-phthalocyanine (Cu-Pc) and their derivatives as described, for example, in JP64-7635 can be used. Furthermore, some of the aromatic amines defined

as hole transporting materials above, which have a lower ionisation potential than the hole transporting layer, can be used.


A hole injection layer can be formed by preparing an organic film containing at least one hole injection material between the anode layer and hole transporting layer. The hole injection 5 layer can be formed by the vacuum deposition method, the spin-coating method, the casting method, the LB method and the like. The thickness of the layer is preferably from 5 nm to 5  $\mu$ m, and more preferably from 10 nm to 100 nm.

The electron transporting materials should have a high electron injection efficiency (from the 10 cathode) and a high electron mobility. The following materials can be exemplified for electron transporting materials: tris(8-hydroxyquinolinato)-aluminum(III) and its derivatives, bis(10-hydroxybenzo[h]quinolinolato)beryllium(II) and its derivatives, oxadiazole derivatives, such as 2-(4-biphenyl)-5-(4-tert.-butylphenyl)-1,3,4-oxadiazole and its dimer systems, such as 1,3-bis(4-tert.-butylphenyl-1,3,4)oxadiazolyl)biphenylene and 1,3-bis(4-tert.-butylphenyl-1,3,4-15 oxadiazolyl)phenylene, dioxazole derivatives, triazole derivatives, coumarine derivatives, imidazopyridine derivatives, phenanthroline derivatives or perylene tetracarboxylic acid derivatives disclosed in Appl. Phys. Lett. 48 (2) (1986) 183.

An electron transporting layer can be formed by preparing an organic film containing at least 20 one electron transporting material on the hole transporting layer or on the light-emitting layer. The electron transporting layer can be formed by the vacuum deposition method, the spin-coating method, the casting method, the LB method and the like.

It is preferred that the positive hole inhibiting materials for a positive hole inhibiting layer have 25 high electron injection/transporting efficiency from the electron transporting layer to the light emission layer and also have higher ionisation potential than the light emitting layer to prevent the flowing out of positive holes from the light emitting layer to avoid a drop in luminescence efficiency.

30 As the positive hole inhibiting material known materials, such as Balq, TAZ and phenanthroline derivatives, e.g. bathocuproine (BCP), can be used:

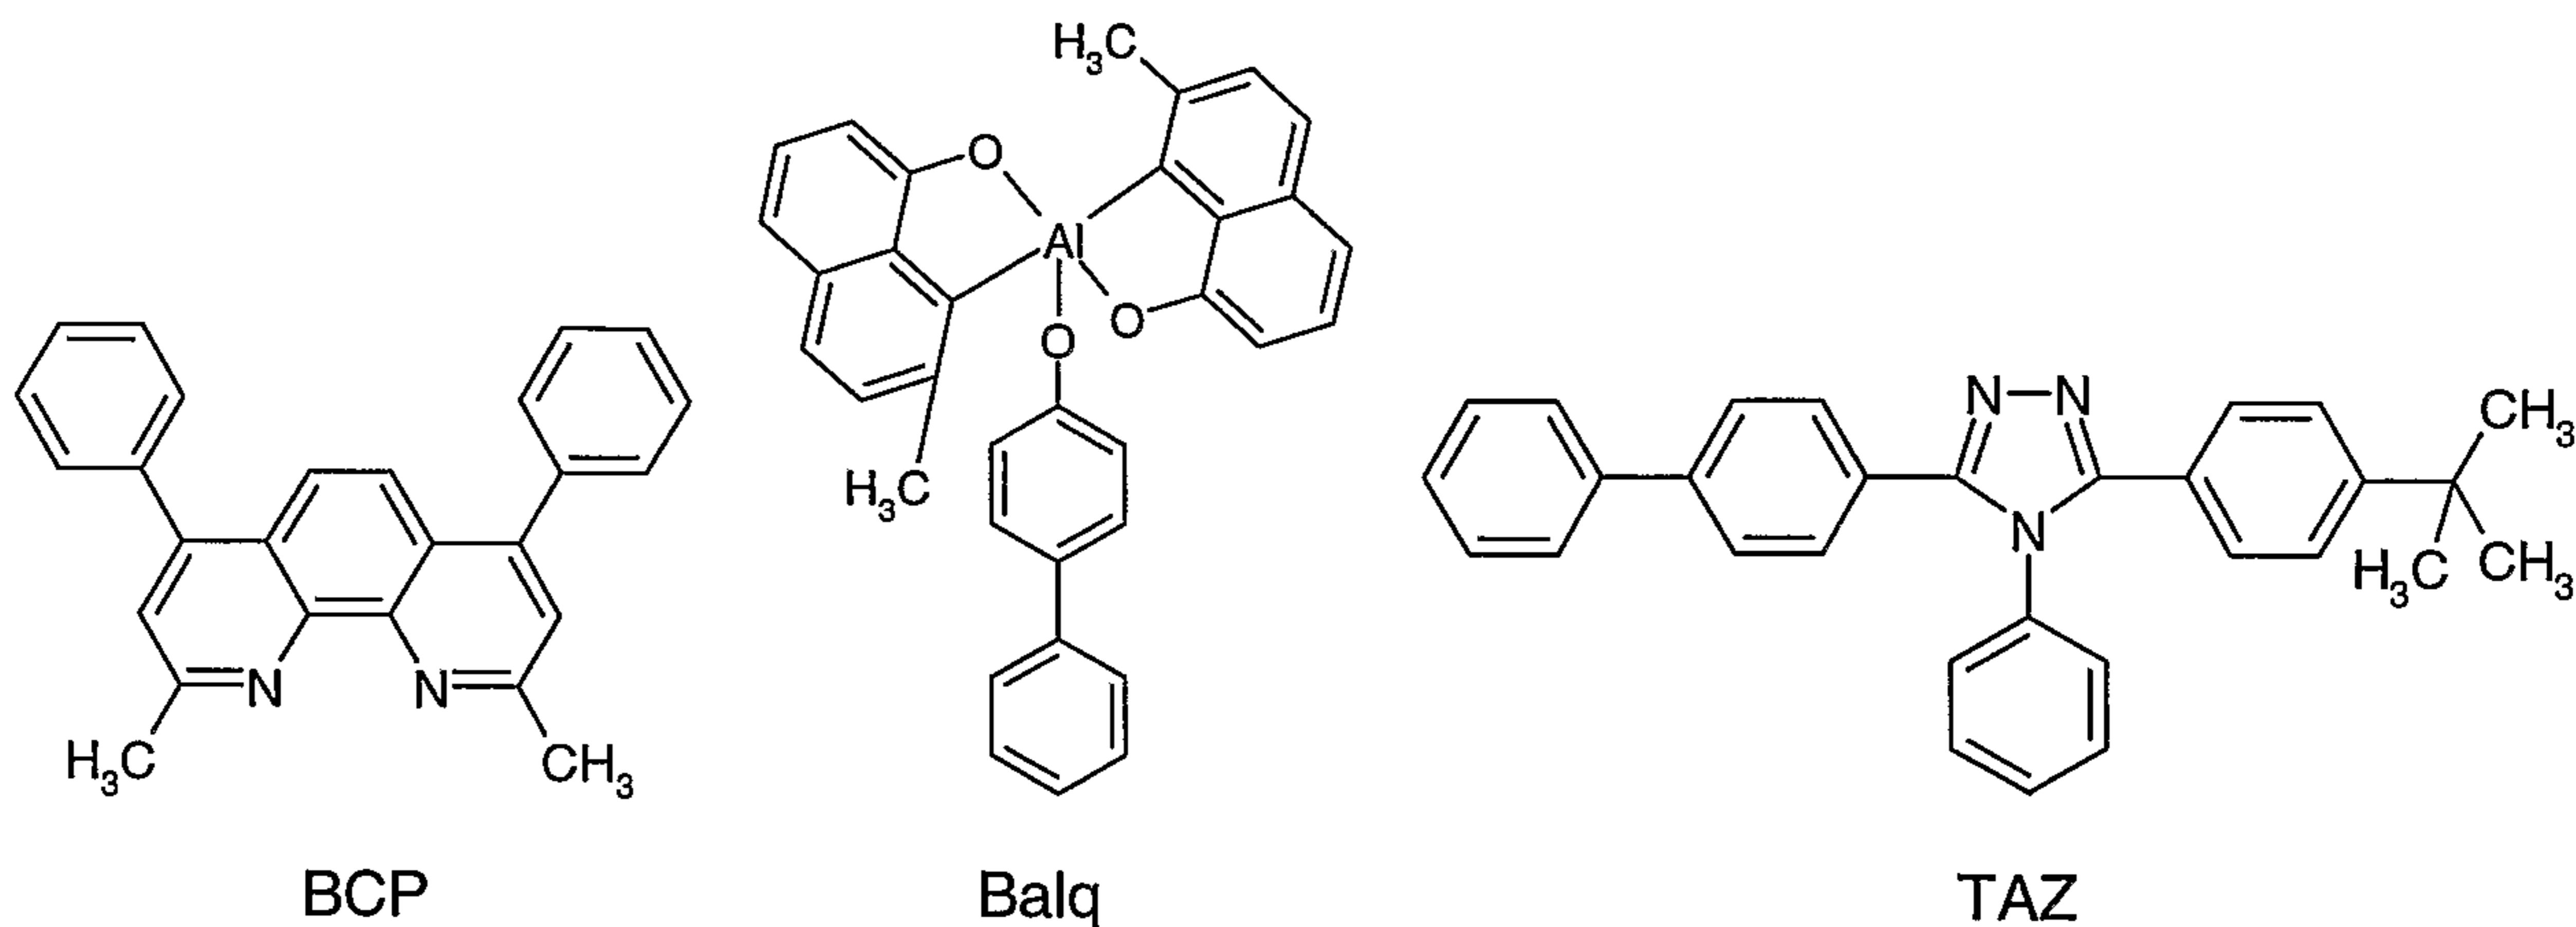

The positive hole inhibiting layer can be formed by preparing an organic film containing at

5 least one positive hole inhibiting material between the electron transporting layer and the light-emitting layer. The positive hole inhibiting layer can be formed by the vacuum deposition method, the spin-coating method, the casting method, the LB method and the like. The thickness of the layer preferably is chosen within the range of from 5 nm to 2  $\mu$ m, and more preferably, within the range of from 10 nm to 100 nm.

10

As in the case of forming a light emitting layer or a positive hole transporting layer, a smoother and more homogeneous electron transporting layer can be formed by using a solution containing a binder and at least one electron transporting material.

15 The thickness of an electron transporting layer is preferably chosen in the range of from 0.5 to 1000 nm, preferably from 1 to 100 nm, more preferably from 2 to 50 nm.

20 The light-emitting compositions have a fluorescence emission maximum in the range of from 500 to 780, preferably from 520 to 750, more preferred from 540 to 700 nm. Further, the inventive compounds preferably exhibit an absorption maximum in the range of 450 to 580 nm.

25 The light-emitting compositions usually exhibit a fluorescence quantum yield ("FQY") in the range of from  $1 > \text{FQY} \geq 0.3$  (measured in aerated toluene or DMF). Further, in general, the inventive compositions exhibit a molar absorption coefficient in the range of from 5000 to 100000.

Another embodiment of the present invention relates to a method of coloring high molecular weight organic materials (having a molecular weight usually in the range of from  $10^3$  to  $10^7$

g/mol; comprising biopolymers, and plastic materials, including fibres) by incorporating therein the inventive composition by methods known in the art.

The inventive compositions can be used, as described for the DPP compounds of formula I'

5 in EP-A-1087005, for the preparation of  
inks, for printing inks in printing processes, for flexographic printing, screen printing,  
packaging printing, security ink printing, intaglio printing or offset printing, for pre-press  
stages and for textile printing, for office, home applications or graphics applications, such  
as for paper goods, for example, for ballpoint pens, felt tips, fiber tips, card, wood, (wood)  
10 stains, metal, inking pads or inks for impact printing processes (with impact-pressure ink  
ribbons), for the preparation of  
colorants, for coating materials, for industrial or commercial use, for textile decoration and  
industrial marking, for roller coatings or powder coatings or for automotive finishes, for  
high-solids (low-solvent), water-containing or metallic coating materials or for pigmented  
15 formulations for aqueous paints, for the preparation of  
pigmented plastics for coatings, fibers, platters or mold carriers, for the preparation of  
non-impact-printing material for digital printing, for the thermal wax transfer printing process,  
the ink jet printing process or for the thermal transfer printing process, and also for the  
preparation of  
20 color filters, especially for visible light in the range from 400 to 700 nm, for liquid-crystal  
displays (LCDs) or charge combined devices (CCDs) or for the preparation of  
cosmetics or for the preparation of  
polymeric ink particles, toners, dye lasers, dry copy toners liquid copy toners, or  
electrophotographic toners, and electroluminescent devices.

25

Another preferred embodiment concerns the use of the inventive compositions for color changing media. There are three major techniques in order to realize full-color organic electroluminescent devices:

(i) use of the three primary colors blue, green and red generated by electroluminescence,

30 (ii) conversion of the electroluminescent blue or white to photoluminescent green and red via  
color changing media (CCM), which absorb the above electroluminescent blue, and  
fluorescence in green and red.

(iii) conversion of the white luminescent emission to blue, green and red via color filters.

The inventive compounds are useful for EL materials for the above category (i) and, in addition, for the above mention technique (ii). This is because the invented combinations of compounds can exhibit strong photoluminescence as well as electroluminescence.

5 Technique (ii) is, for example, known from US-B-5,126,214, wherein EL blue with a maximum wavelength of ca. 470-480 nm is converted to green and red using coumarin, 4-(dicyanomethylene)-2-methyl-6-(p-dimethylaminostyryl)-4H-pyran, pyridine, rhodamine 6G, phenoxazone or other dyes.

10 Illustrative examples of suitable organic materials of high molecular weight which can be colored with the inventive compositions are described in EP-A-1087005.

Particularly preferred high molecular weight organic materials, in particular for the preparation of a paint system, a printing ink or ink, are, for example, cellulose ethers and esters, e.g. 15 ethylcellulose, nitrocellulose, cellulose acetate and cellulose butyrate, natural resins or synthetic resins (polymerization or condensation resins) such as aminoplasts, in particular urea/formaldehyde and melamine/formaldehyde resins, alkyd resins, phenolic plastics, polycarbonates, polyolefins, polystyrene, polyvinyl chloride, polyamides, polyurethanes, polyester, ABS, ASA, polyphenylene oxides, vulcanized rubber, casein, silicone and silicone 20 resins as well as their possible mixtures with one another.

It is also possible to use high molecular weight organic materials in dissolved form as film formers, for example boiled linseed oil, nitrocellulose, alkyd resins, phenolic resins, melamine/formaldehyde and urea/formaldehyde resins as well as acrylic resins.

25 Said high molecular weight organic materials may be obtained singly or in admixture, for example in the form of granules, plastic materials, melts or in the form of solutions, in particular for the preparation of spinning solutions, paint systems, coating materials, inks or printing inks.

30 In a particularly preferred embodiment of this invention, the inventive compositions are used for the mass coloration of polyvinyl chloride, polyamides and, especially, polyolefins such as polyethylene and polypropylene as well as for the preparation of paint systems, including powder coatings, inks, printing inks, color filters and coating colors.

Illustrative examples of preferred binders for paint systems are alkyd/melamine resin paints, acryl/melamine resin paints, cellulose acetate/cellulose butyrate paints and two-pack system lacquers based on acrylic resins which are crosslinkable with polyisocyanate.

5 According to observations made to date, the inventive compositions can be added in any desired amount to the material to be coloured, depending on the end use requirements.

Hence, another embodiment of the present invention relates to a composition comprising

(a) 0.01 to 50, preferably 0.01 to 5, particularly preferred 0.01 to 2% by weight, based on 10 the total weight of the coloured high molecular organic material, of a composition according to the present invention, and

(b) 99.99 to 50, preferably 99.99 to 95, particularly preferred 99.99 to 98% by weight, based on the total weight of the coloured high molecular organic material, of a high molecular organic material, and

15 (c) optionally, customary additives such as rheology improvers, dispersants, fillers, paint auxiliaries, siccatives, plasticizers, UV-stabilizers, and/or additional pigments or corresponding precursors in effective amounts, such as e.g. from 0 to 50% by weight, based on the total weight of (a) and (b).

20 To obtain different shades, the inventive fluorescent DPP compounds of formula I may advantageously be used in admixture with fillers, transparent and opaque white, colored and/or black pigments as well as customary luster pigments in the desired amount.

For the preparation of paints systems, coating materials, color filters, inks and printing inks, 25 the corresponding high molecular weight organic materials, such as binders, synthetic resin dispersions etc. and the inventive compositions are usually dispersed or dissolved together, if desired together with customary additives such as dispersants, fillers, paint auxiliaries, siccatives, plasticizers and/or additional pigments or pigment precursors, in a common solvent or mixture of solvents. This can be achieved by dispersing or dissolving the individual 30 components by themselves, or also several components together, and only then bringing all components together, or by adding everything together at once.

Hence, a further embodiment of the present invention relates to a method of using the inventive compositions for the preparation of dispersions and the corresponding dispersions, 35 and paint systems, coating materials, color filters, inks and printing inks comprising the inventive compositions.

A particularly preferred embodiment relates to the use of the inventive compositions for the preparation of fluorescent tracers for e.g. leak detection of fluids such as lubricants, cooling systems etc., as well as to fluorescent tracers or lubricants comprising the inventive  
5 compositions.

For the pigmentation of high molecular weight organic material, the inventive compositions, optionally in the form of masterbatches, are mixed with the high molecular weight organic materials using roll mills, mixing apparatus or grinding apparatus. Generally, the pigmented  
10 material is subsequently brought into the desired final form by conventional processes, such as calandering, compression molding, extrusion, spreading, casting or injection molding.

For pigmenting lacquers, coating materials and printing inks the high molecular weight organic materials and the inventive compositions, alone or together with additives, such as  
15 fillers, other pigments, siccatives or plasticizers, are generally dissolved or dispersed in a common organic solvent or solvent mixture. In this case it is possible to adopt a procedure whereby the individual components are dispersed or dissolved individually or else two or more are dispersed or dissolved together and only then are all of the components combined.

20 The present invention additionally relates to inks comprising a coloristically effective amount of the pigment dispersion of the inventive compositions.

25 The weight ratio of the pigment dispersion to the ink in general is chosen in the range of from 0.001 to 75% by weight, preferably from 0.01 to 50% by weight, based on the overall weight of the ink.

The preparation and use of color filters or color-pigmented high molecular weight organic materials are well-known in the art and described e.g. in Displays 14/2, 1151 (1993), EP-A 784085, or GB-A 2,310,072.

30

The color filters can be coated for example using inks, especially printing inks, which can comprise pigment dispersions comprising the inventive compositions or can be prepared for example by mixing a pigment dispersion comprising an inventive composition with chemically, thermally or photolytically structurable high molecular weight organic material  
35 (so-called resist). The subsequent preparation can be carried out, for example, in analogy to

EP-A 654 711 by application to a substrate, such as a LCD (liquid crystal display), subsequent photostructuring and development.

Particular preference for the production of color filters is given to pigment dispersions comprising an inventive composition which possess non-aqueous solvents or dispersion media for polymers.

The present invention relates, moreover, to toners comprising a pigment dispersion containing an inventive composition or a high molecular weight organic material pigmented with an inventive composition in a coloristically effective amount.

The present invention additionally relates to colorants, colored plastics, polymeric ink particles, or non-impact-printing material comprising an inventive composition, preferably in the form of a dispersion, or a high molecular weight organic material pigmented with an inventive composition in a coloristically effective amount.

A coloristically effective amount of the pigment dispersion according to this invention comprising an inventive composition denotes in general from 0.0001 to 99.99% by weight, preferably from 0.001 to 50% by weight and, with particular preference, from 0.01 to 50% by weight, based on the overall weight of the material pigmented therewith.

The inventive compositions can be applied to colour polyamides, because they do not decompose during the incorporation into the polyamides. Further, they exhibit an exceptionally good lightfastness, a superior heat stability, especially in plastics.

20

The organic EL device of the present invention has significant industrial values since it can be adapted for a flat panel display of an on-wall television set, a flat light-emitting device, a light source for a copying machine or a printer, a light source for a liquid crystal display or counter, a display signboard and a signal light. The compositions of the present invention can be used in the fields of an organic EL device, an electrophotographic photoreceptor, a photoelectric converter, a solar cell, an image sensor, and the like.


30 The following examples illustrate various embodiments of the present invention, but the scope of the invention is not limited thereto. In the examples the "parts" denote "parts by weight" and the "percentages" denote "percentages by weight", unless otherwise stated.

### Examples

#### Example 1


2.03 g (6.4 mmol) of 1,4-diketo-3,6-bis(4-methylphenyl)pyrrolopyrrole are slurred in 1-methyl 35 2-pyrrolidinone for 2 hours at room temperature. 1.31 g (11.53 mmol) of potassium t-butoxide are added to the slurry under nitrogen. After stirring for 2 hours, 20.5 g (11.1 mmol) of 1-

bromoethylbenzene are added to the reaction mixture and agitated additional 2 hours. Then, the mixture is poured into 50 ml of water and the precipitate is collected by filtration and purified by column chromatography (silica gel, dichloromethane as eluent), followed by washing with methanol. After drying 780 mg of a fluorescent orange solid is obtained (mp. = 5 262 °C, yield: 24%).

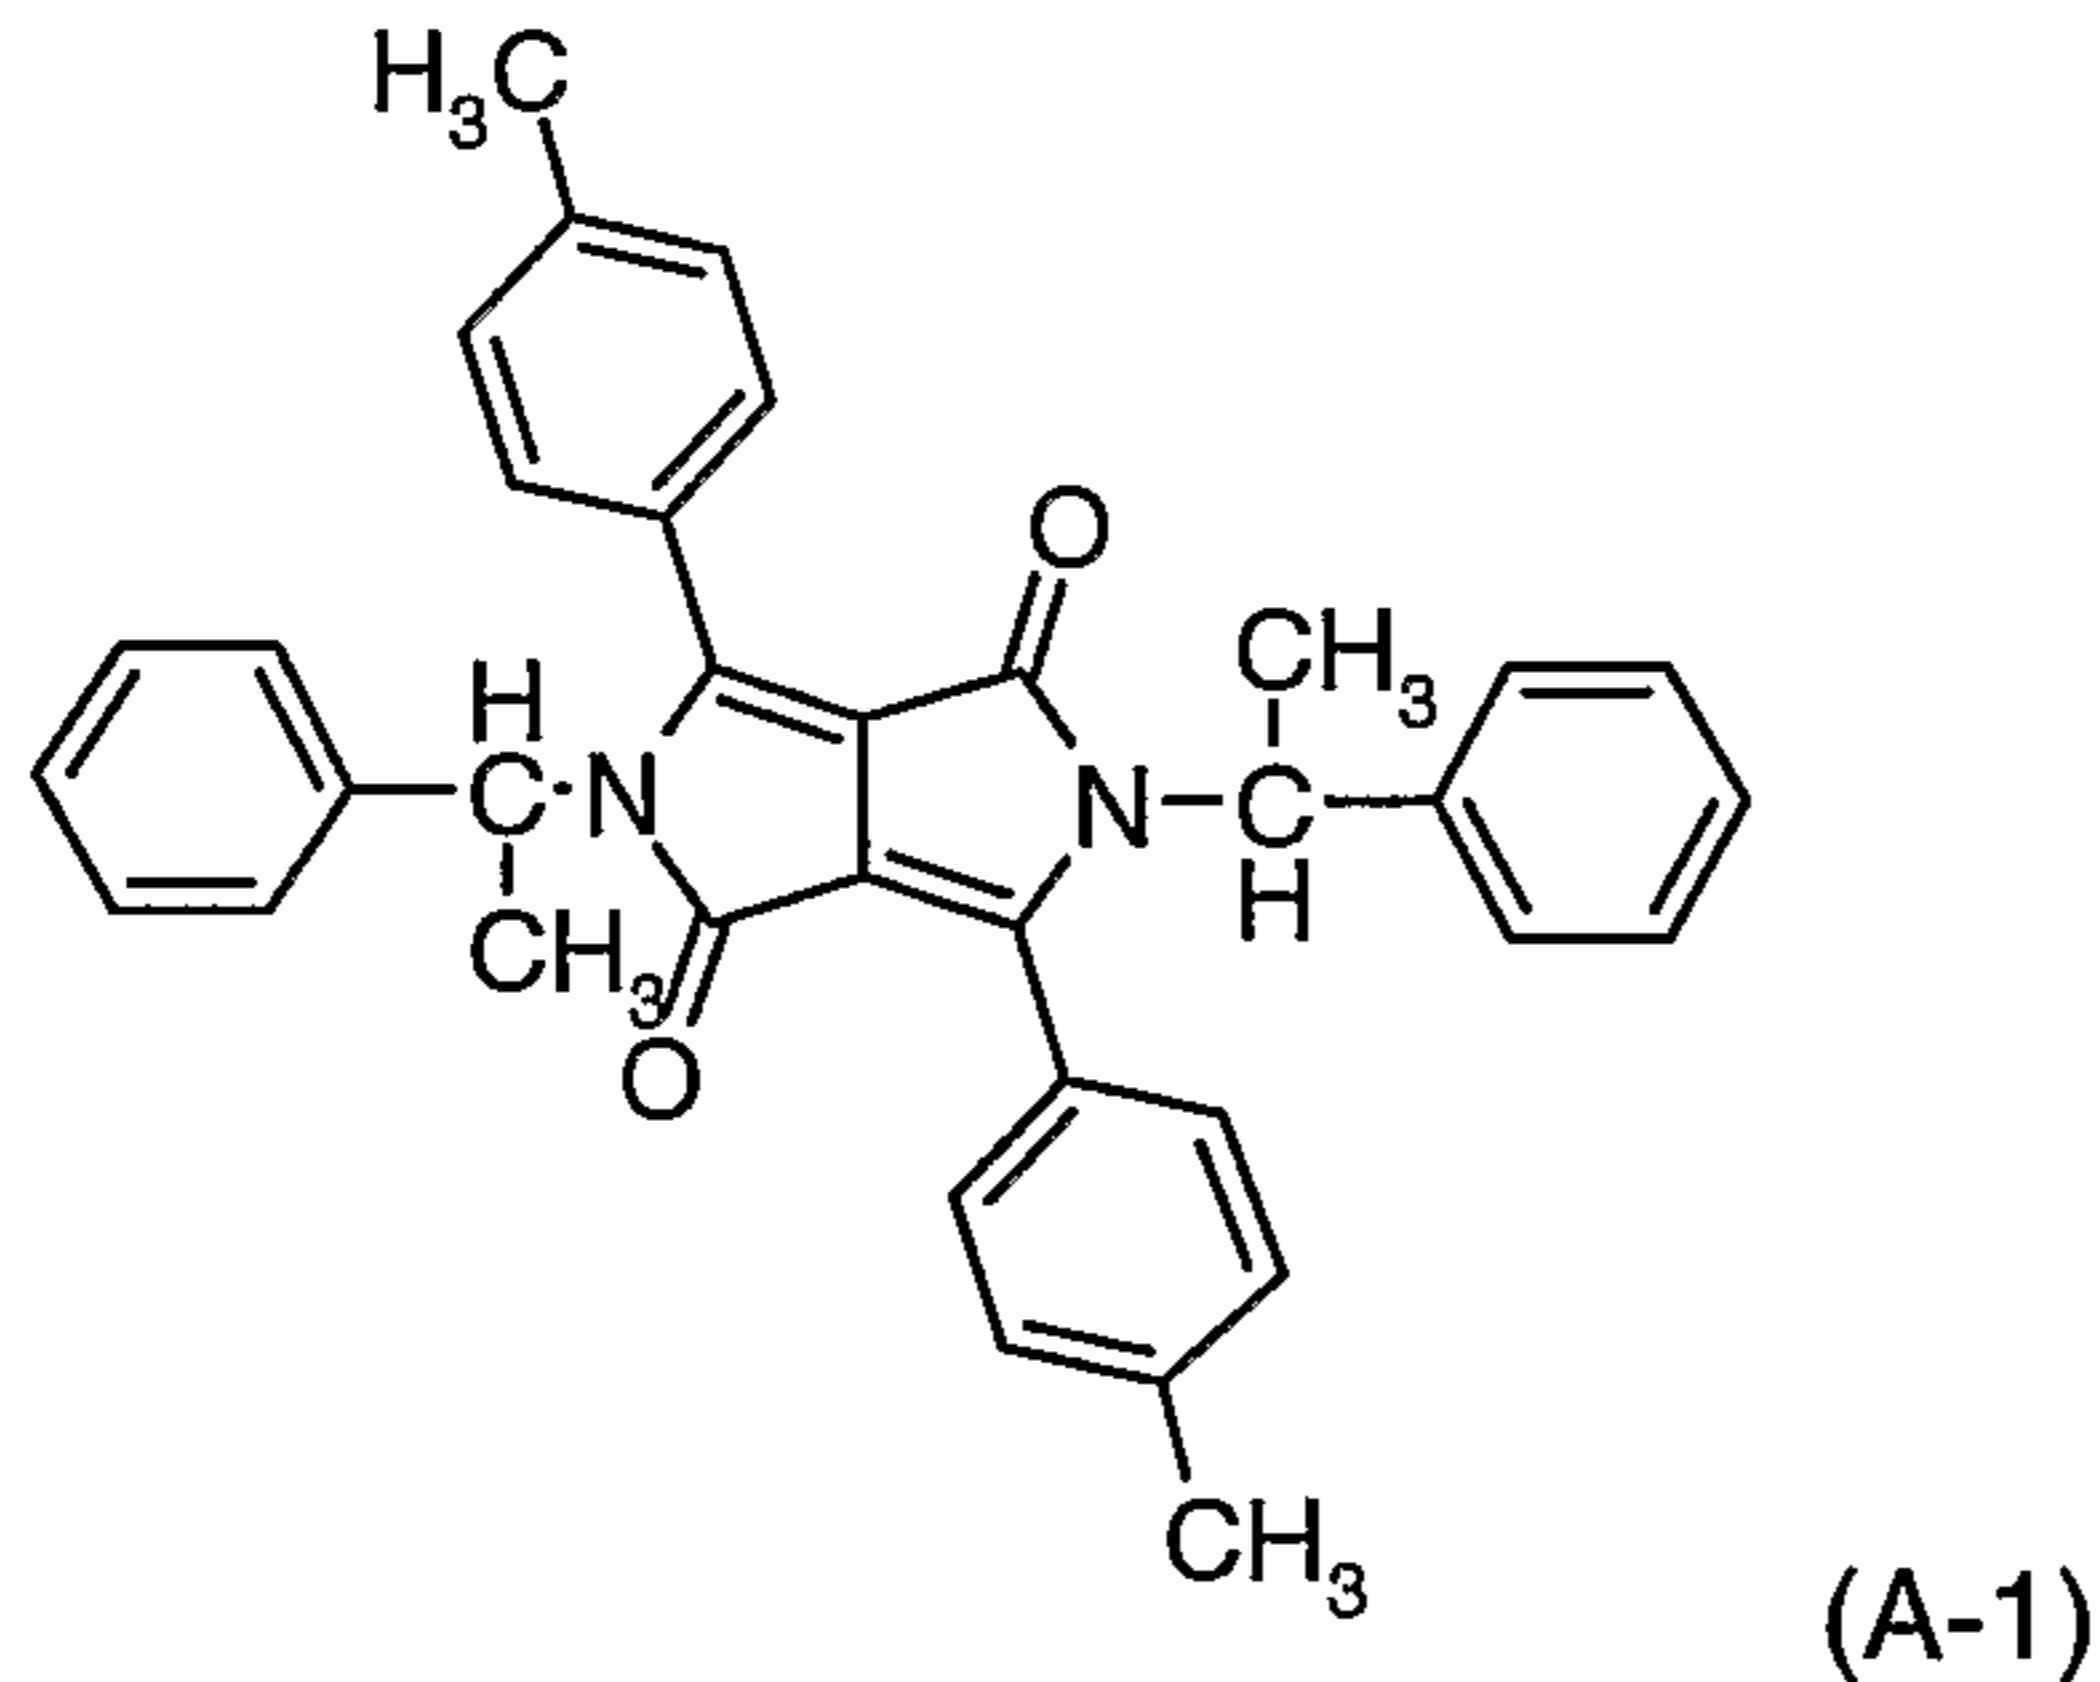

Example 2


Example 1 was repeated except that 1,4-diketo-3,6-bis(1-naphthyl)-pyrrolo-(3,4-c)-pyrrole was used as starting material. Orange solid (mp. = 263 °C, yield: 32%).

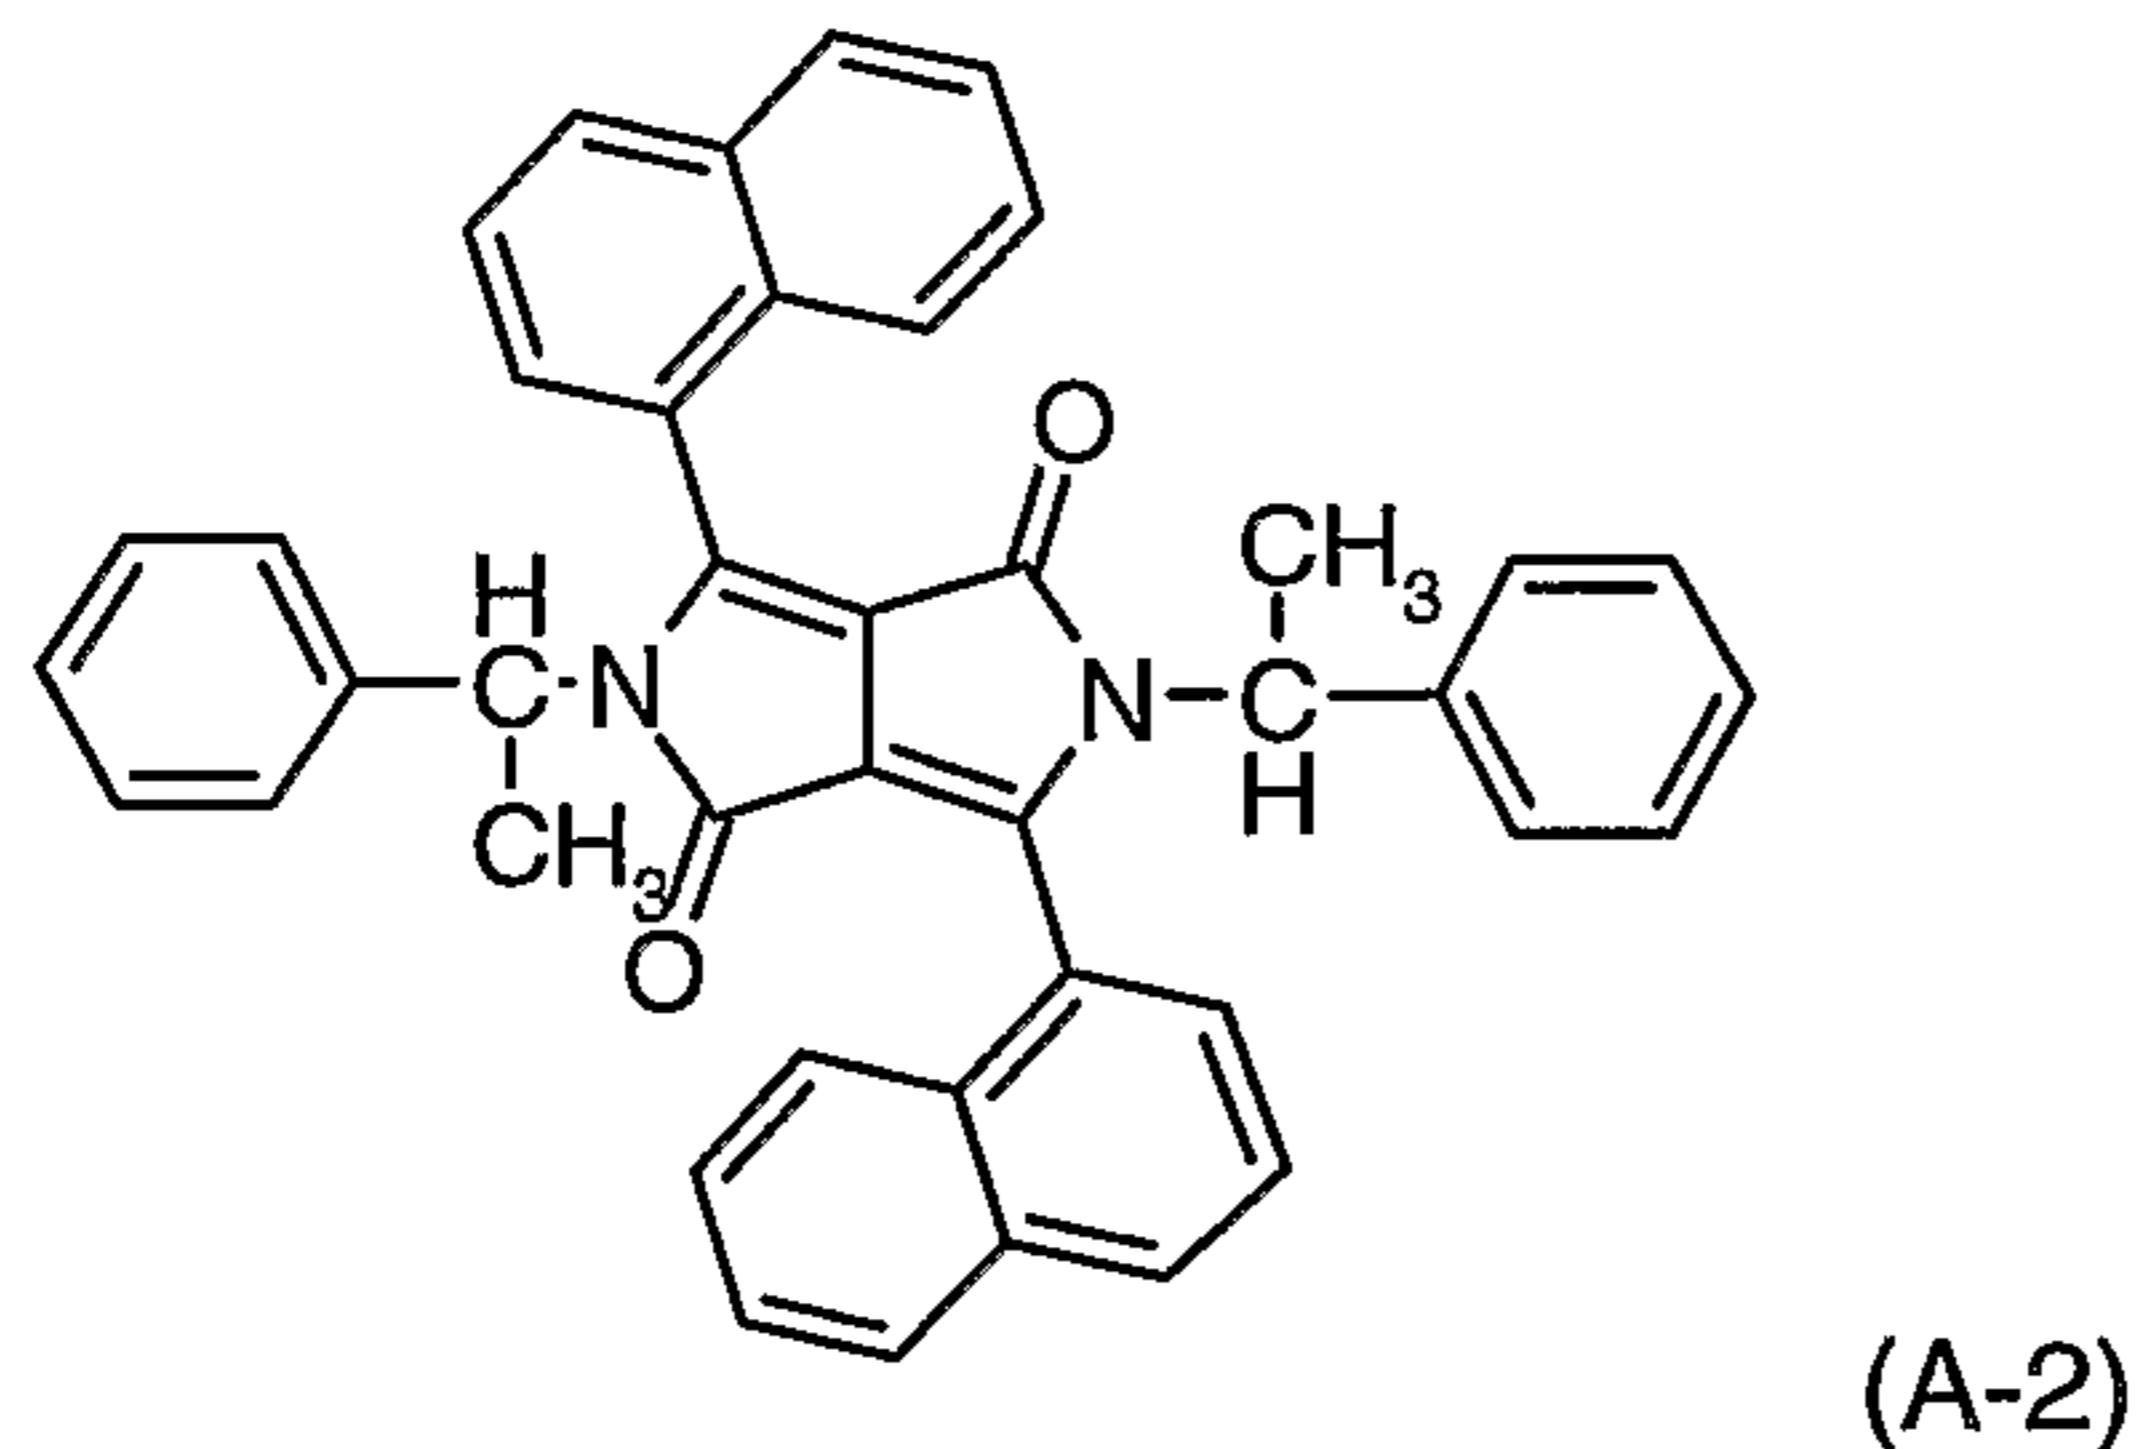

10

Example 3


(1.0 mmol) of 2,5-di-benzyl-1,4-diketo-3,6-(4-bromophenyl)pyrrolo(3,4-c)pyrrole, 2.5 mmol of di-tolylamine, 5 mg of Palladium(II)acetate, 1 mg of tert-butylphosphine and 50 ml of dry xylene were placed in a three necked flask and stirred at 120 °C under nitrogen for 13 hours. 15 After the completion of the reaction xylene was removed under reduced pressure and the residue was purified by column chromatography (silica gel, dichloromethane as eluent). After drying 0.4 g of the desired product was obtained as red solid (mp. = 395 °C).

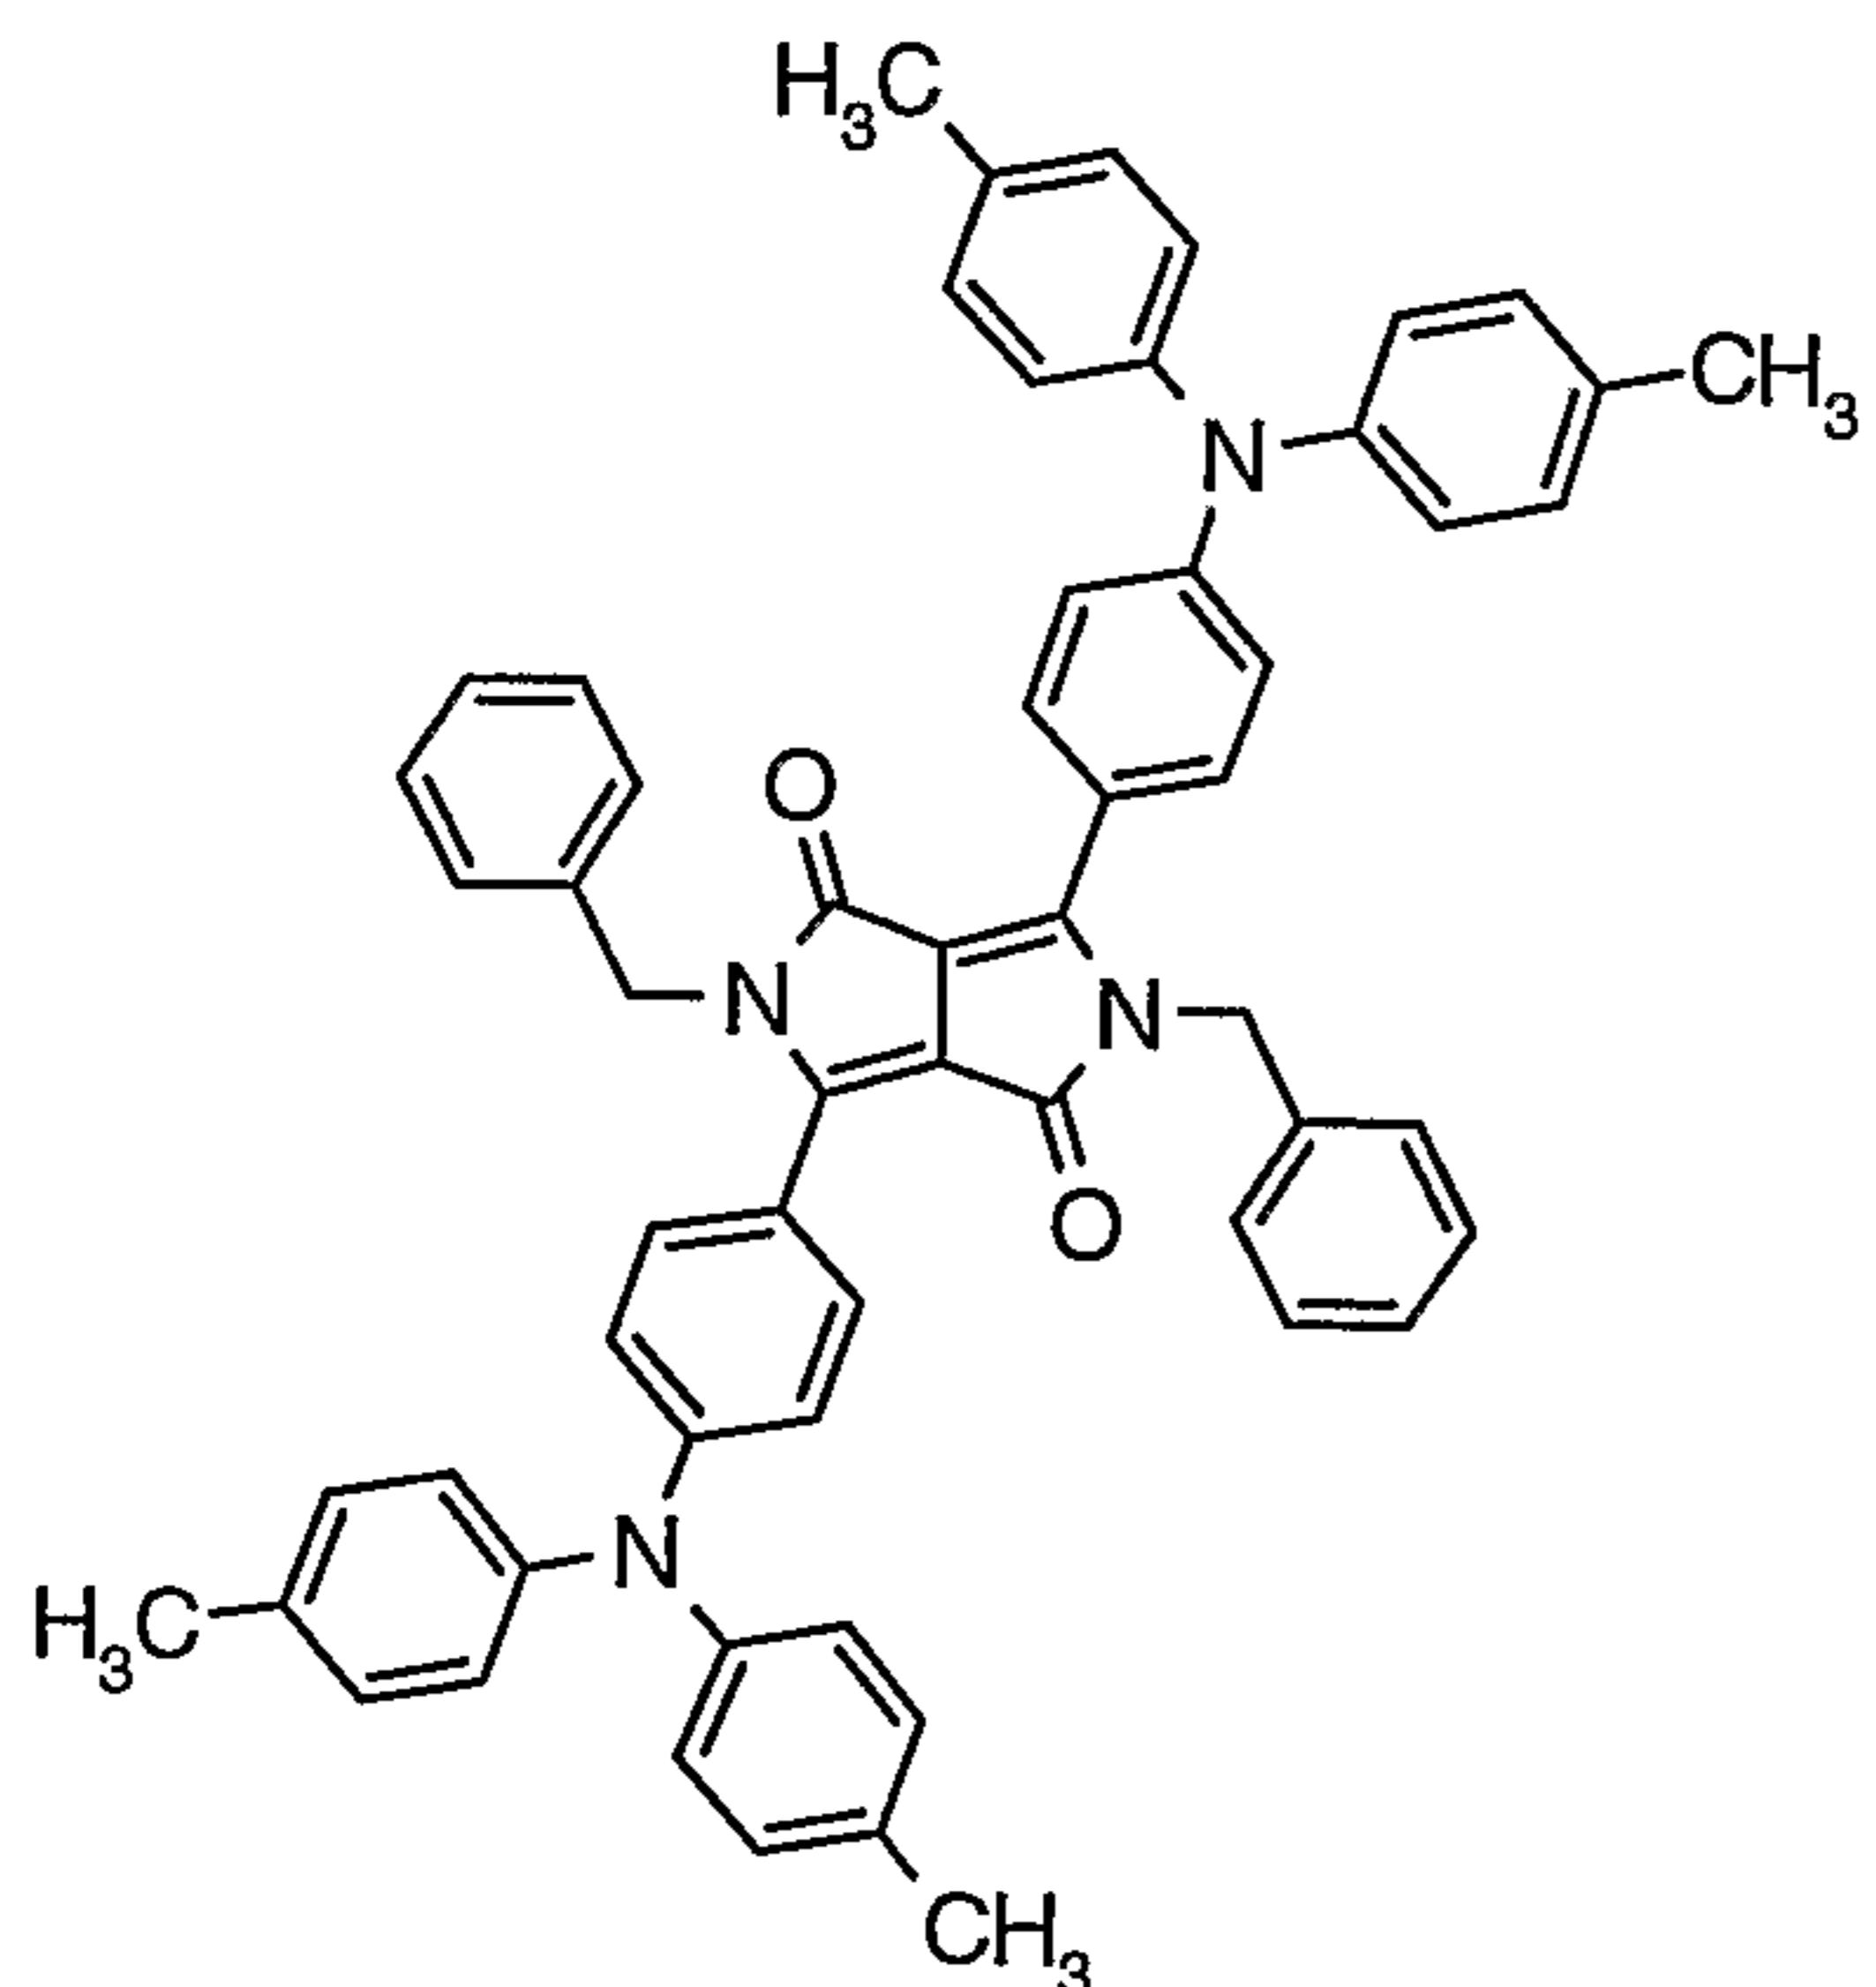

(B-1)

Example 4

Example 3 is repeated, except that 2,5-di-butyl-1,4-diketo-3,6-(4-bromophenyl)pyrrolo(3,4-c)pyrrole is used as starting material and bis(2-naphthyl)amine is used as reagent, whereby a red solid is obtained (mp. = 222-224 °C, yield: 46%).

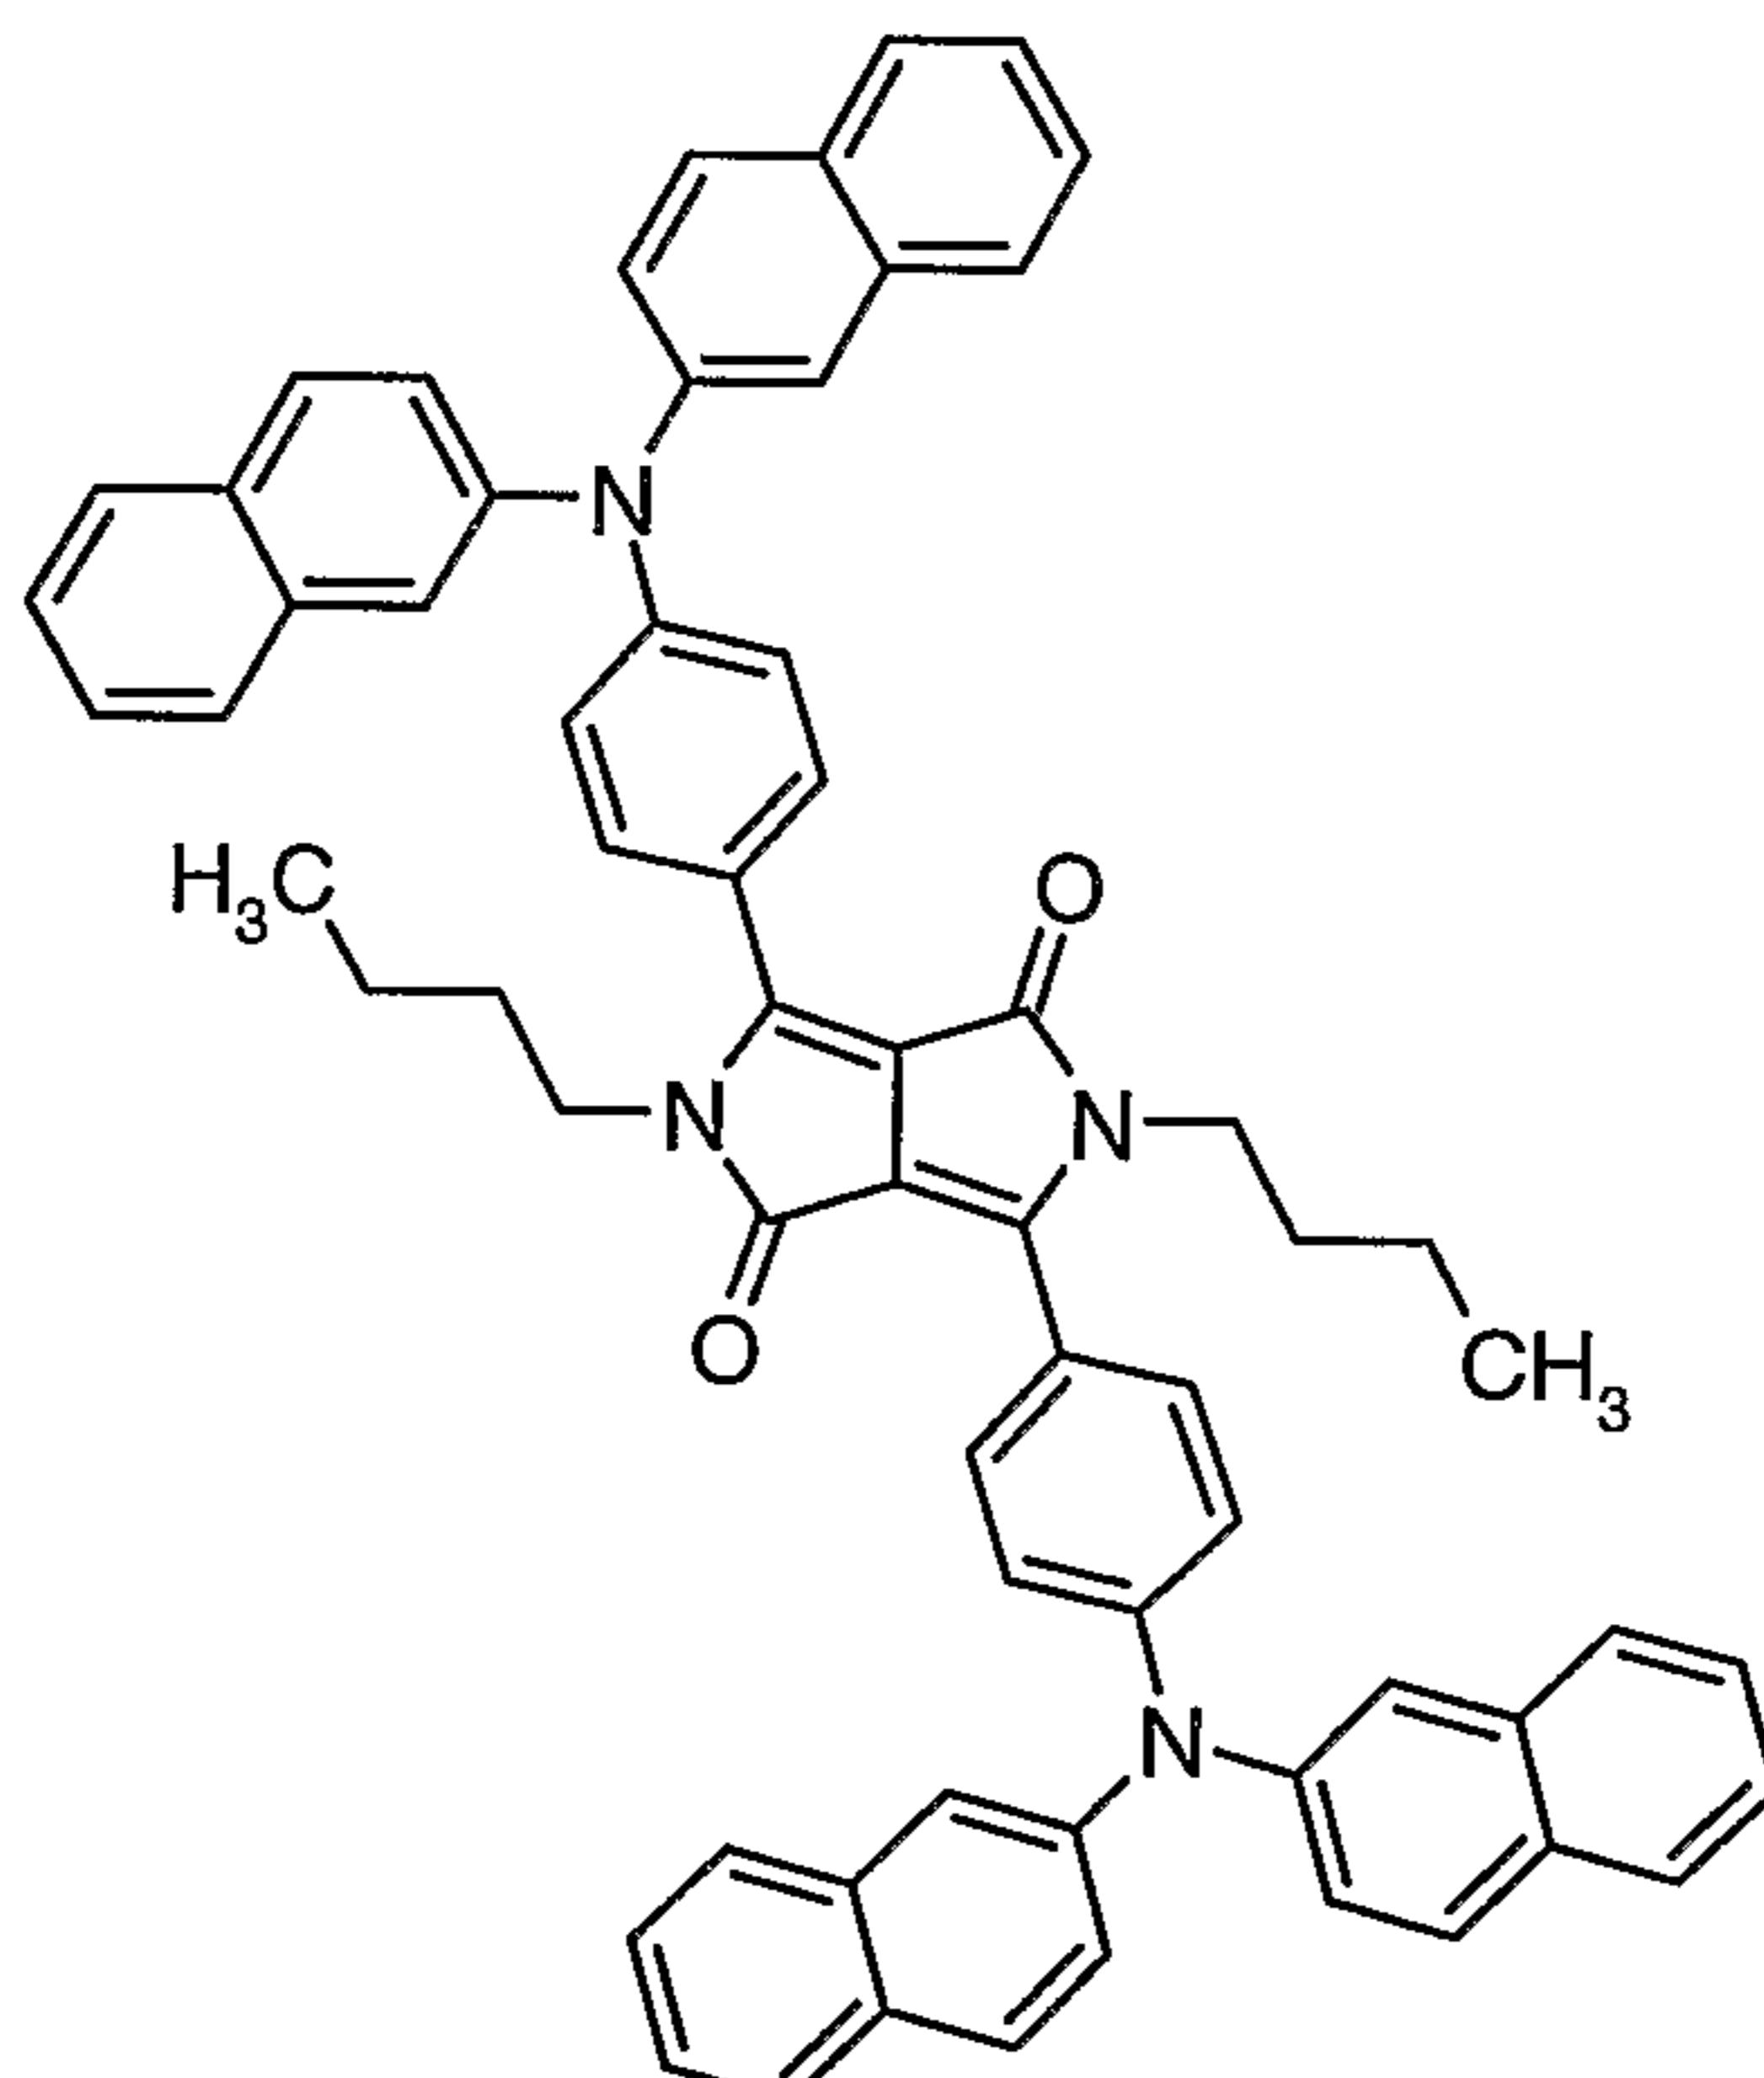


(B-2)

Example 5


Example 3 is repeated, except that 2-naphthylphenylamine is used instead of di-tolylamine, whereby a red solid is obtained (mp. = 361 °C, yield: 53%).

36

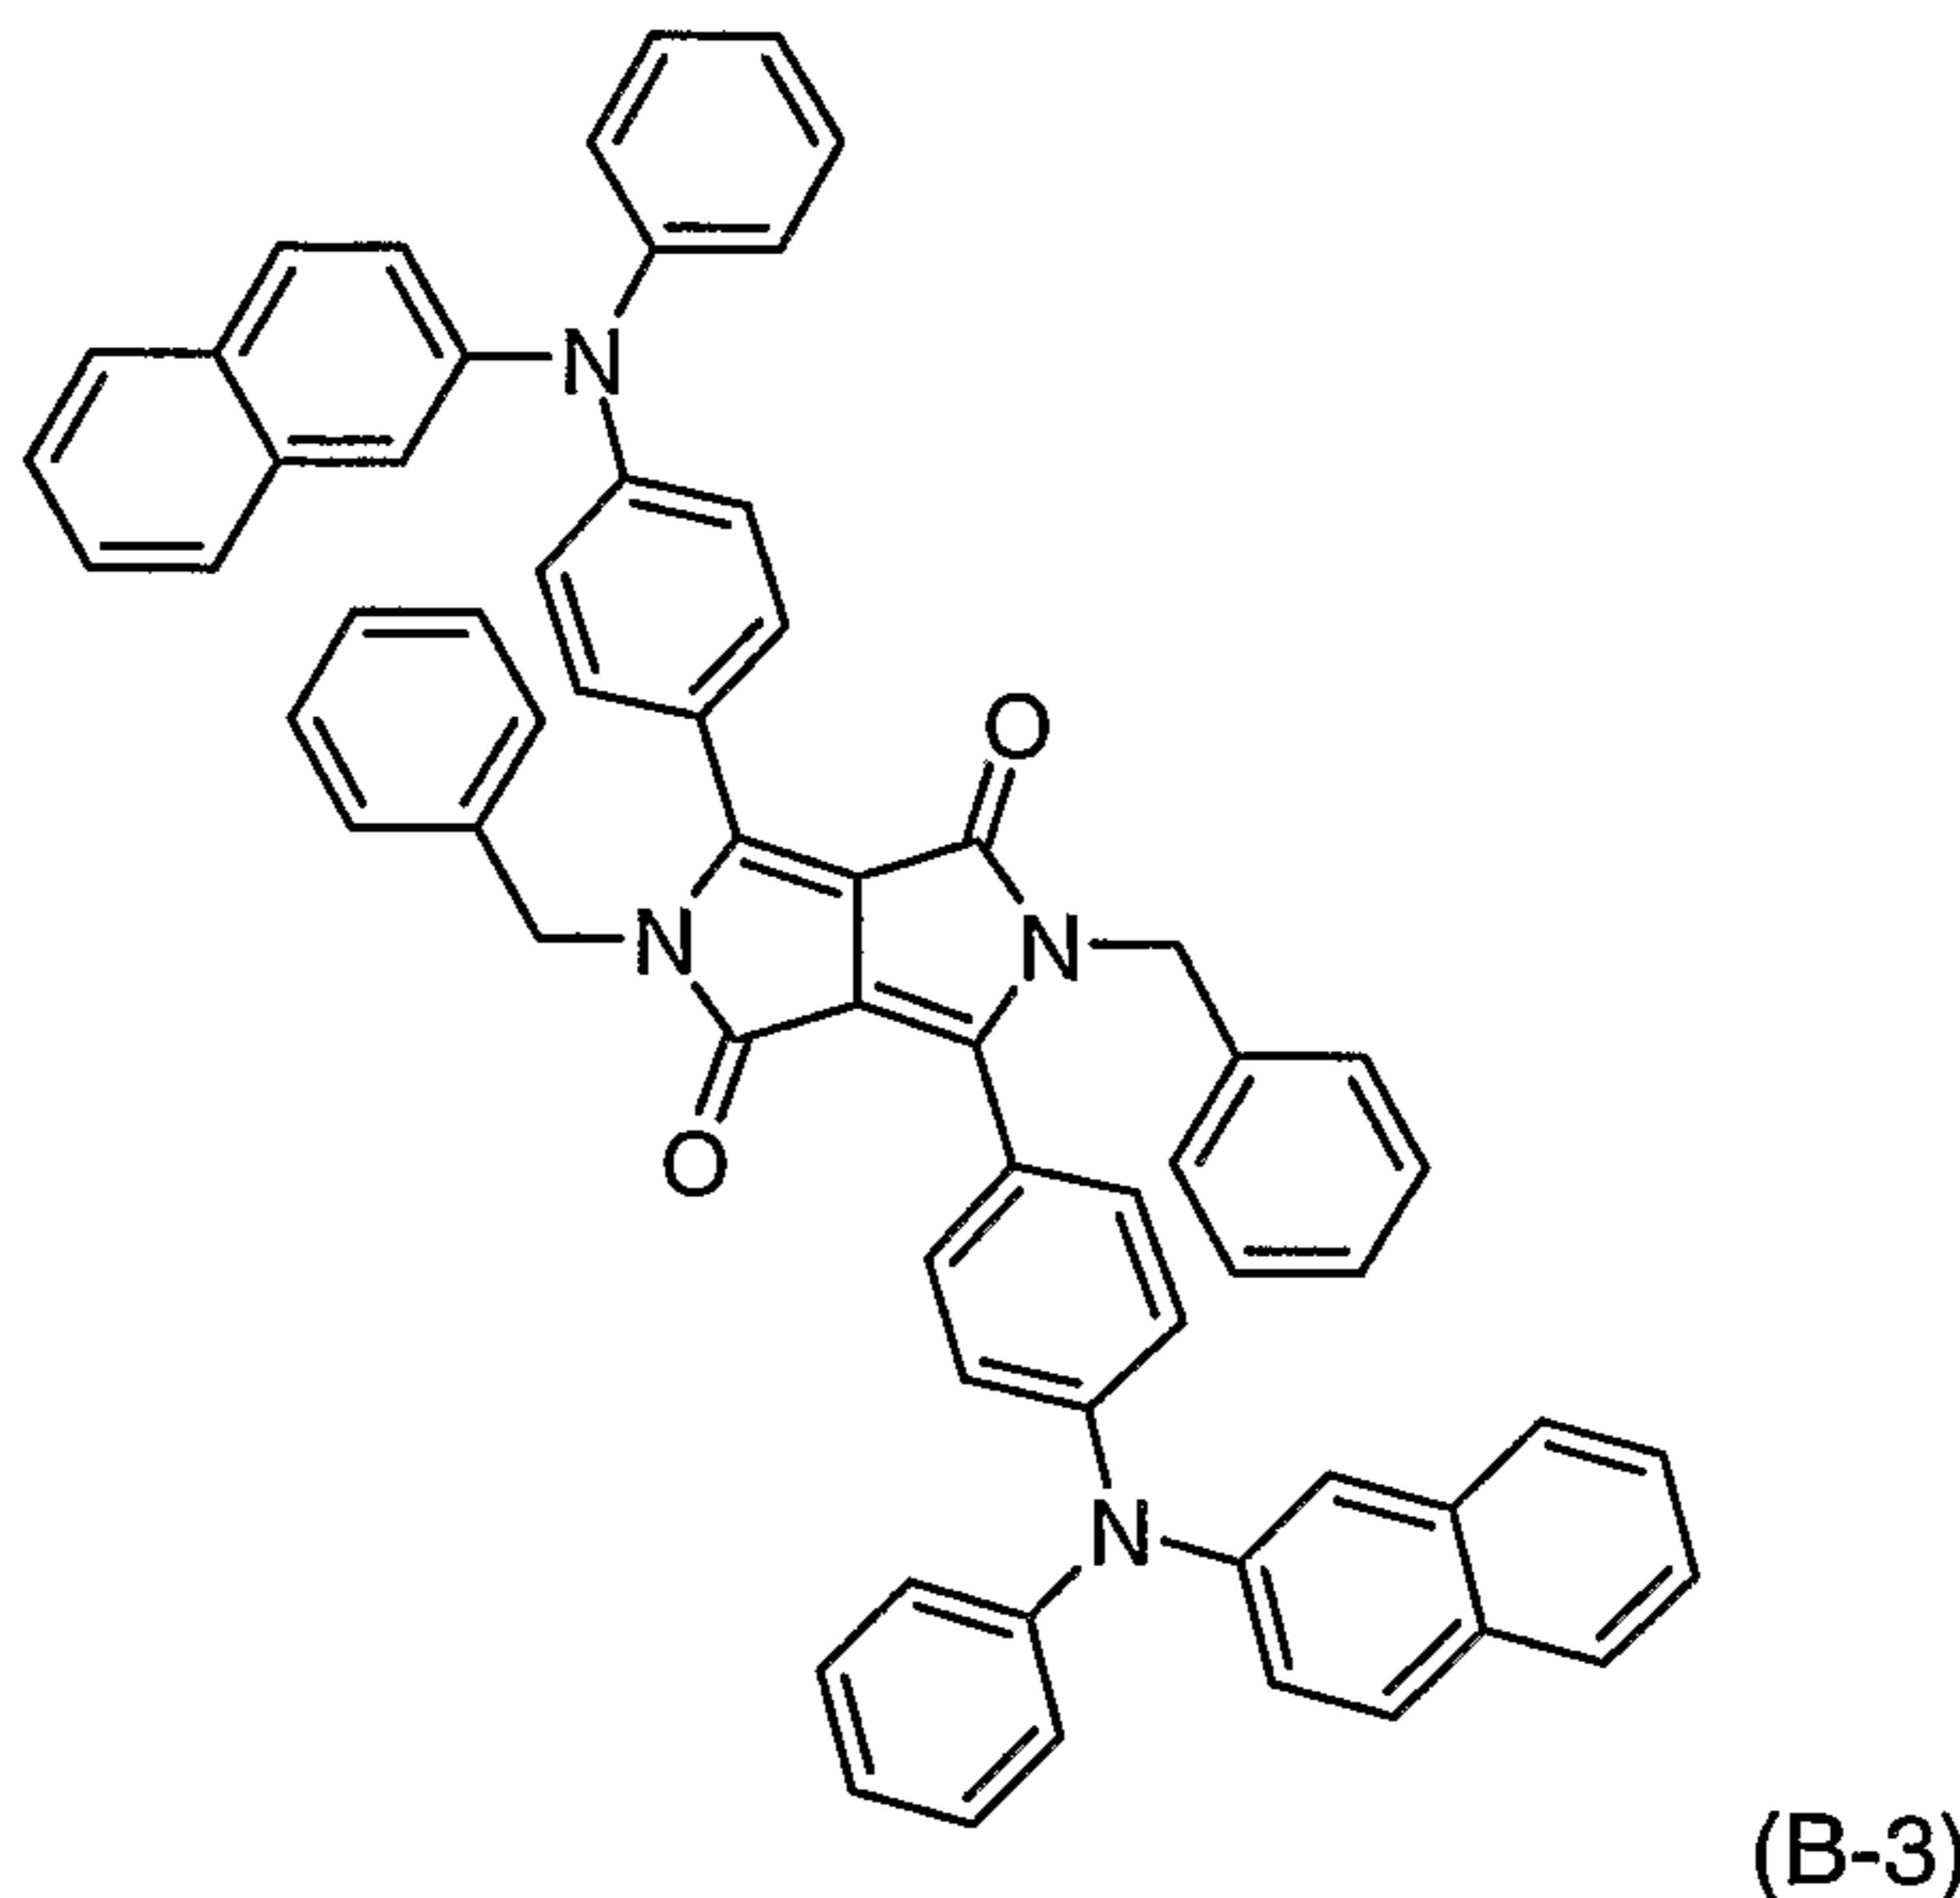Example 6

A glass substrate (manufactured by Asahi Glass Co., a product prepared by electron beam vapor deposition method) on which an ITO transparent electroconductive film had been deposited up to a thickness of ca. 210 nm is cut into a size of 30 x 40 mm, and etched. The substrate thus obtained is subjected to ultrasonic washing with acetone for 15 minutes and then to ultrasonic washing with Semikoklin 56 for 15 minutes, and then washing with ultra-pure water. Subsequently, the substrate is subjected to ultrasonic washing with isopropyl alcohol for 15 minutes, dipped in hot methanol for 15 minutes, and then dried. Just before forming the substrate into an element, the substrate thus obtained is subjected to an UV-ozone treatment for one hour and placed in a vacuum vapour deposition apparatus, and the apparatus is evacuated until the inner pressure reached  $1 \times 10^{-5}$  Pa or less. Then, according to the resistance heating method, N,N'-diphenyl-N,N'-(3-methylphenyl)-1,1'-diphenyl-4,4'-diamine (TPD) is vapor-deposited as a positive hole transporting material up to a thickness of 50 nm, to form a positive hole transporting layer. Subsequently, the DPP compounds obtained in example 1 (A-1) and example 6 (B-4) are co-deposited as a light emitting layer up to a thickness of 50 nm by controlling the ratio of deposition rate (A-1 : B-4 = 99 : ca. 1) to form an uniform light emitting layer. Subsequently, a Alq<sub>3</sub> layer is vapor-deposited to form an electron transporting layer having a thickness of 50 nm. On top of that, a Mg-Ag alloy (10:1) is vapor-deposited to form a cathode having a thickness of 150 nm, whereby an element having a size of 5 x 5 mm square is prepared.

The luminescent peak wavelength and emission intensity of the luminescent element thus obtained is summarized in Table 1.

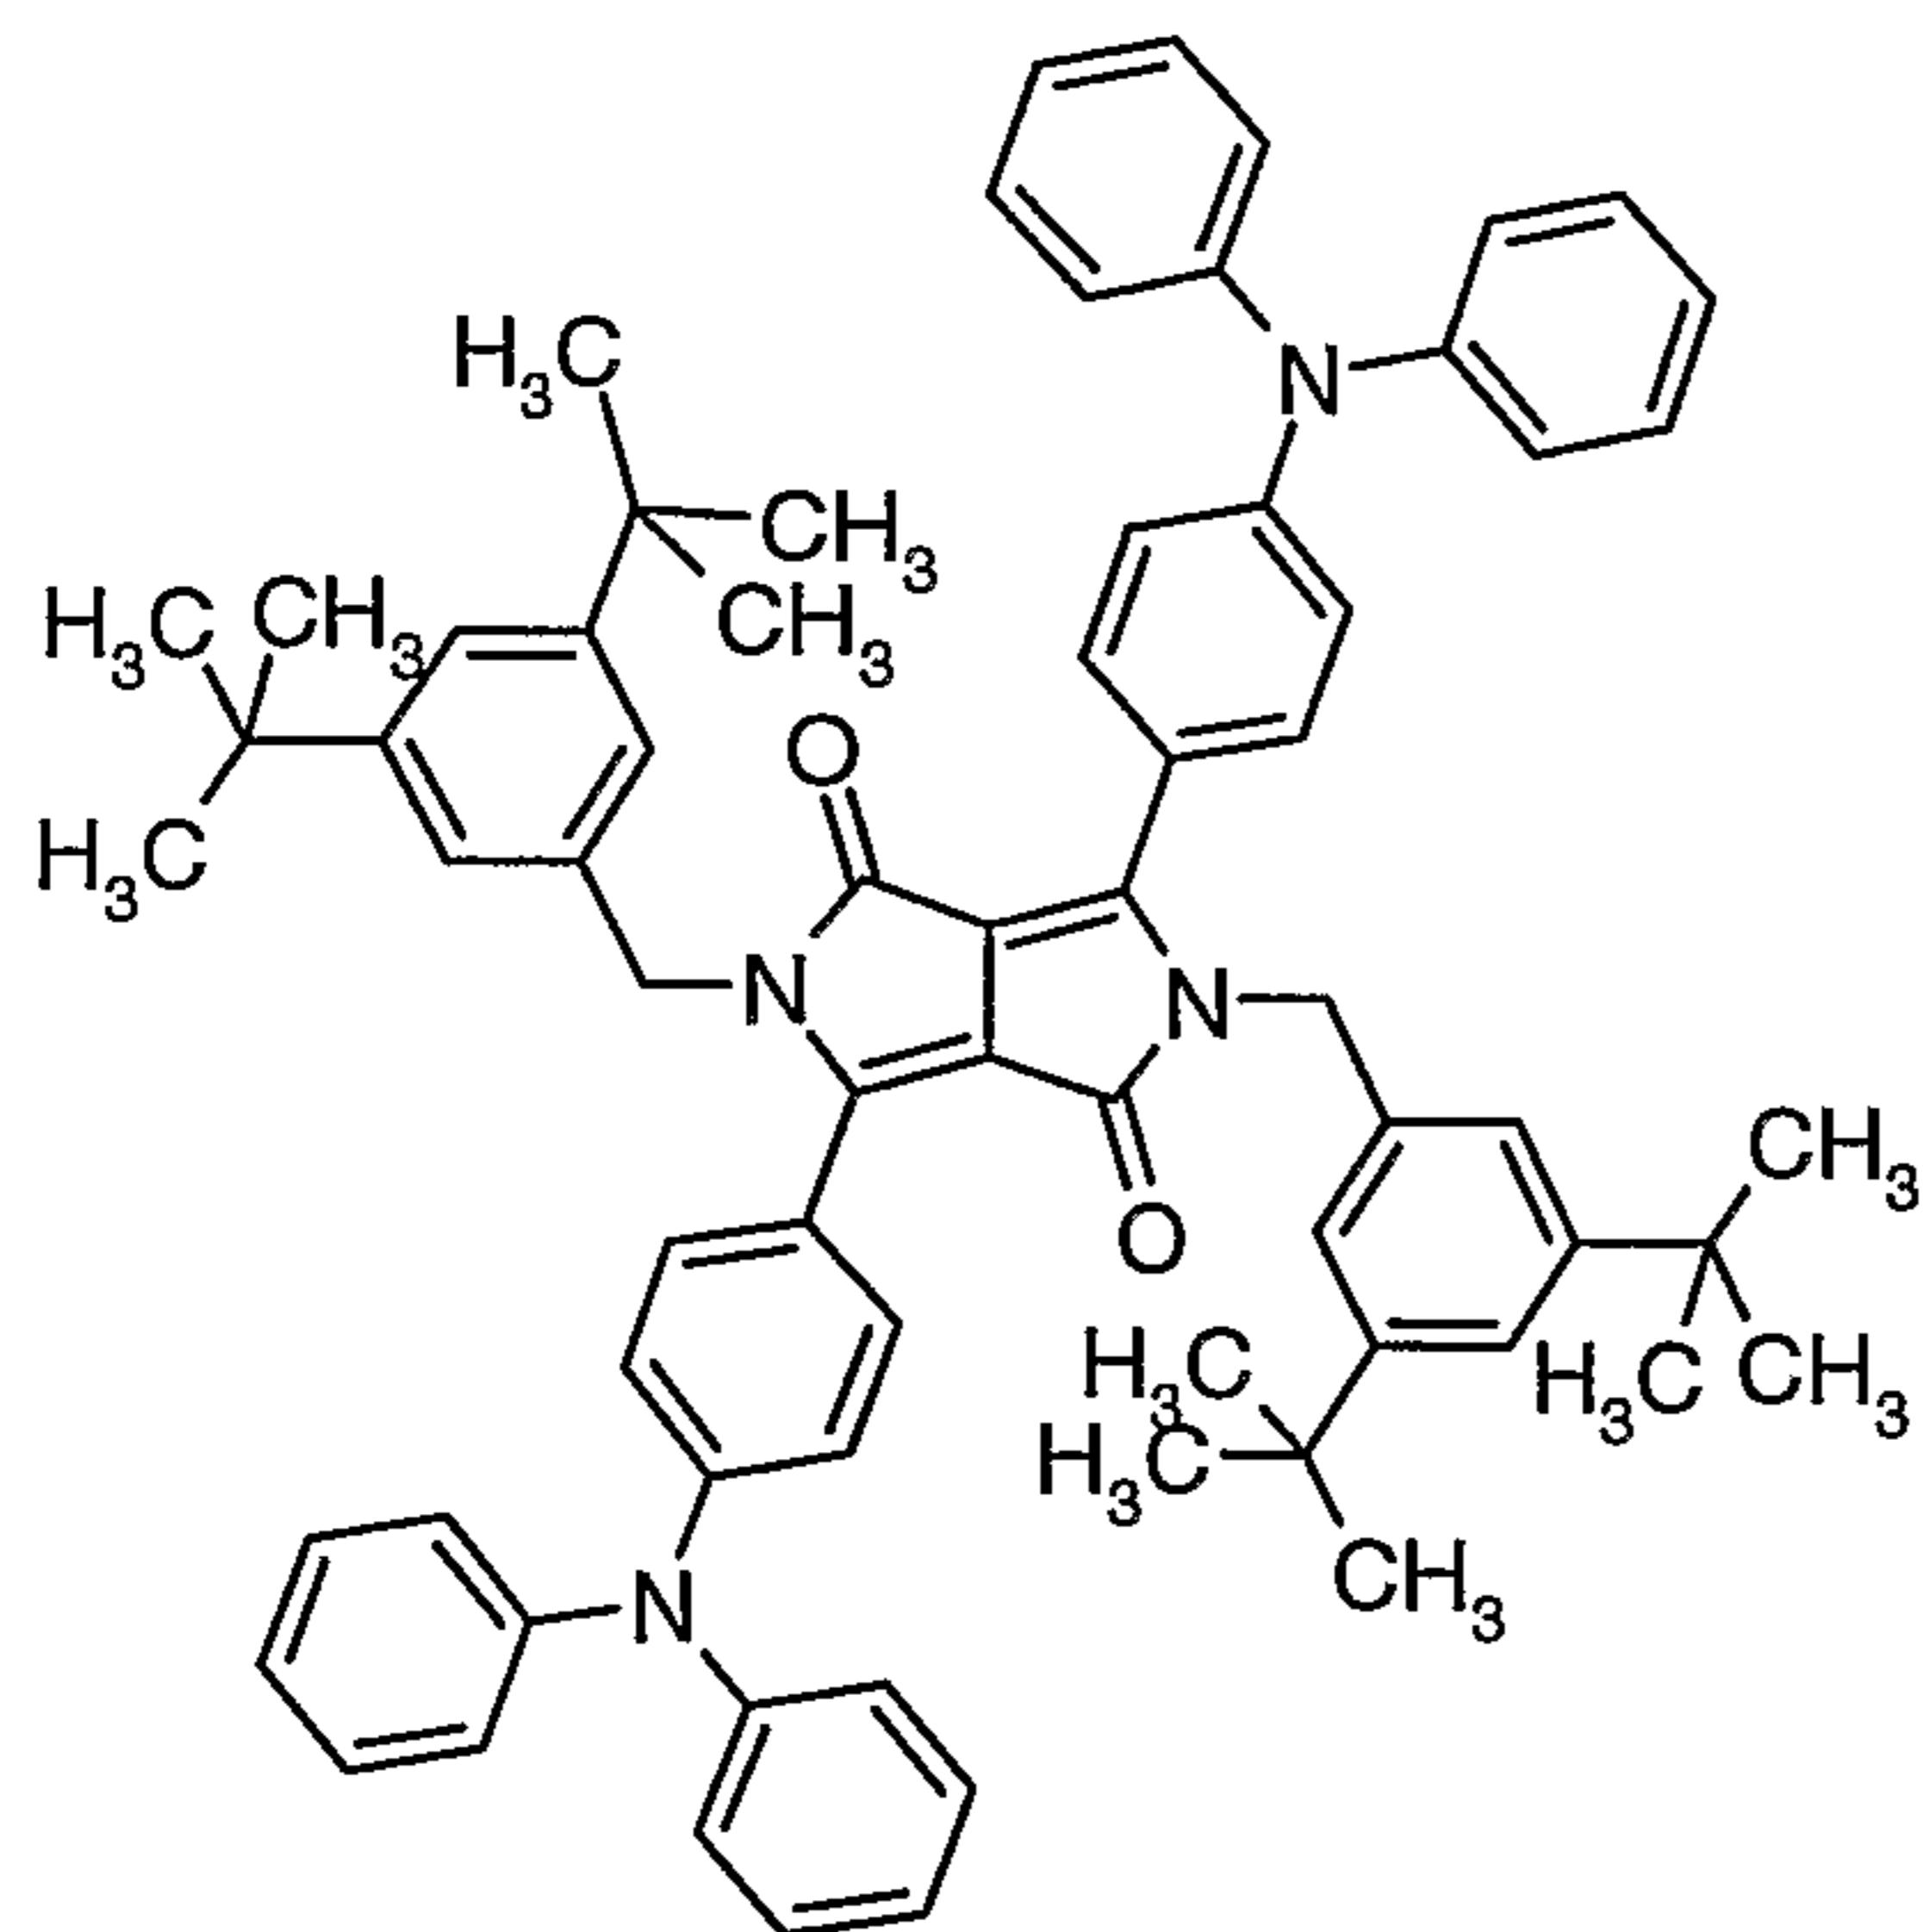

(B-4)

(Example 104 of EP-A-1087006)

Example 7, 8, 9 and 10


5 Example 6 is repeated, except that the emitting material of example 6 is replaced by the emitting materials as described in table 1.

Table 1

Device of Example	Emitting Material		EL properties	
	Compound of formula I [99 wt%]	Compound of formula II [ca. 1 wt%]	Peak (nm)	Intensity (cd/m <sup>2</sup> )
Ex. 6	A-1	B-4	590	10980
Ex. 7	A-1	B-1	608	9026
Ex. 8	A-2	B-1	610	9216
Ex. 9	A-2	B-2	594	6773
Ex. 10	A-2	B-3	600	12260
Reference Example 1	A-3 (100 %)	-	566	5260
Reference Example 2	A-1 (100 %)	-	534	2600

Example 11


10 Example 2 was repeated except that 3-(1-bromoethyl)-1-tert-butylbenzene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 307 °C, yield: 18 %).

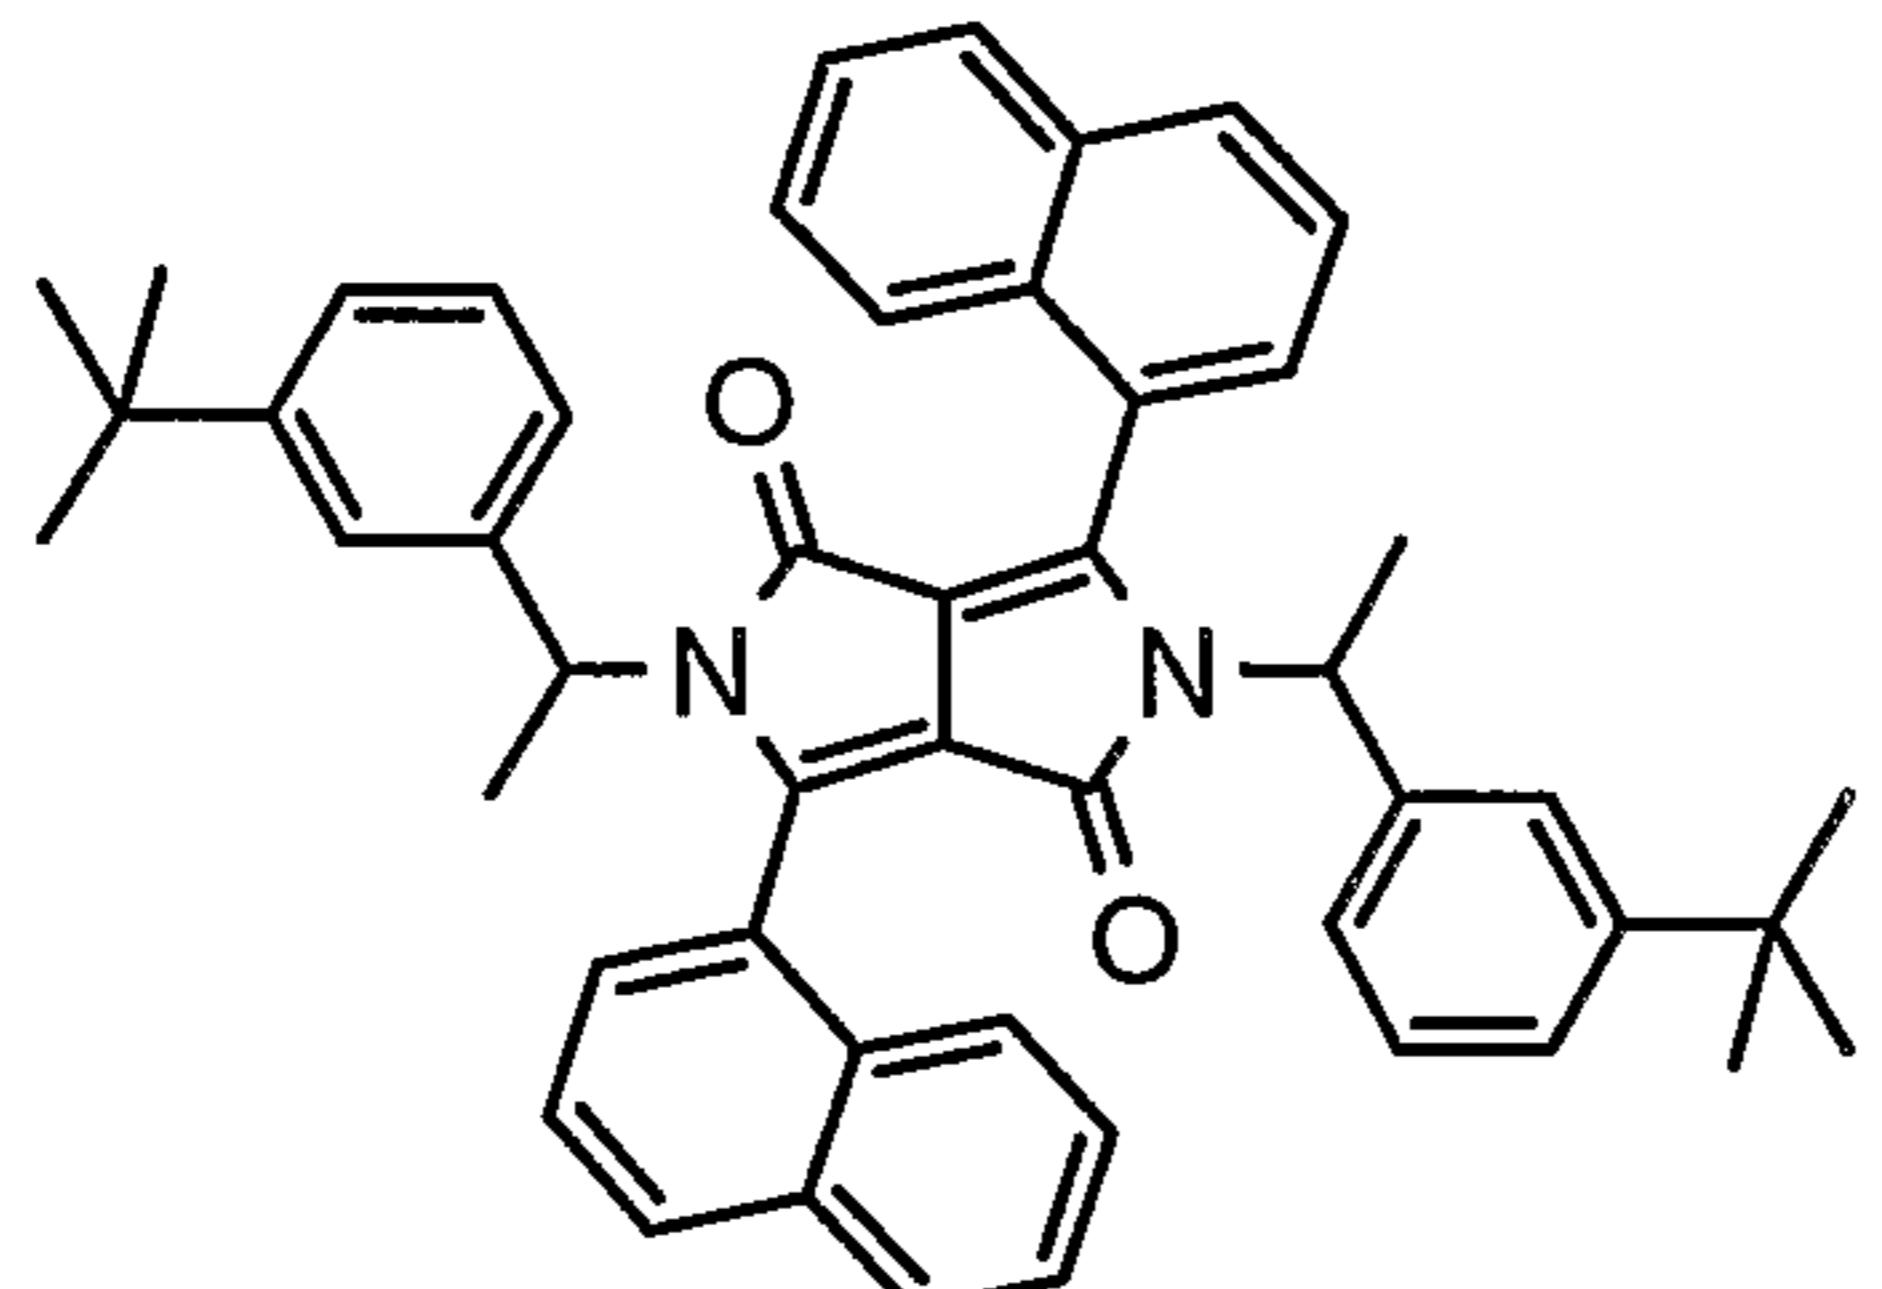

(A-11)

Example 12


Example 2 was repeated except that 3-(1-bromoethyl)toluene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 243 °C, yield: 14 %).

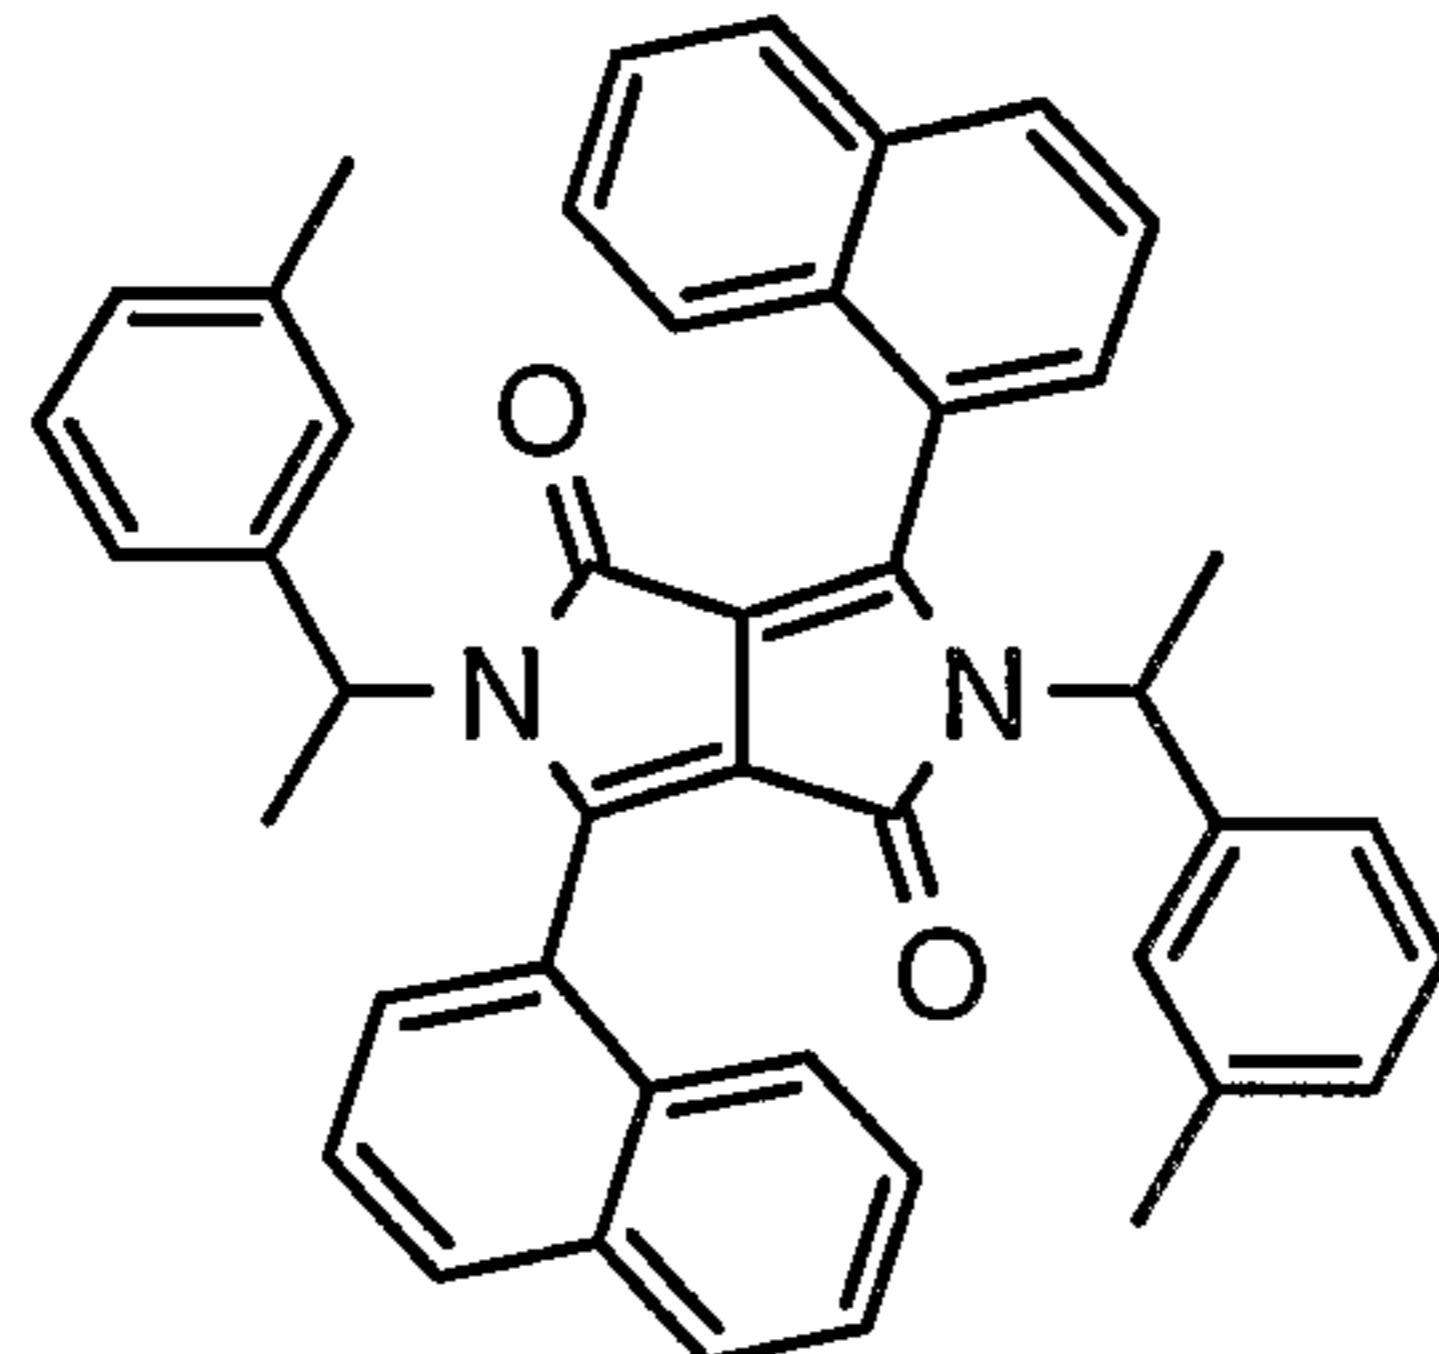

5 (A-12)

Example 13

Example 2 was repeated except that 2-(1-bromoethyl)naphthalene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 325-329 °C, yield: 10 %).

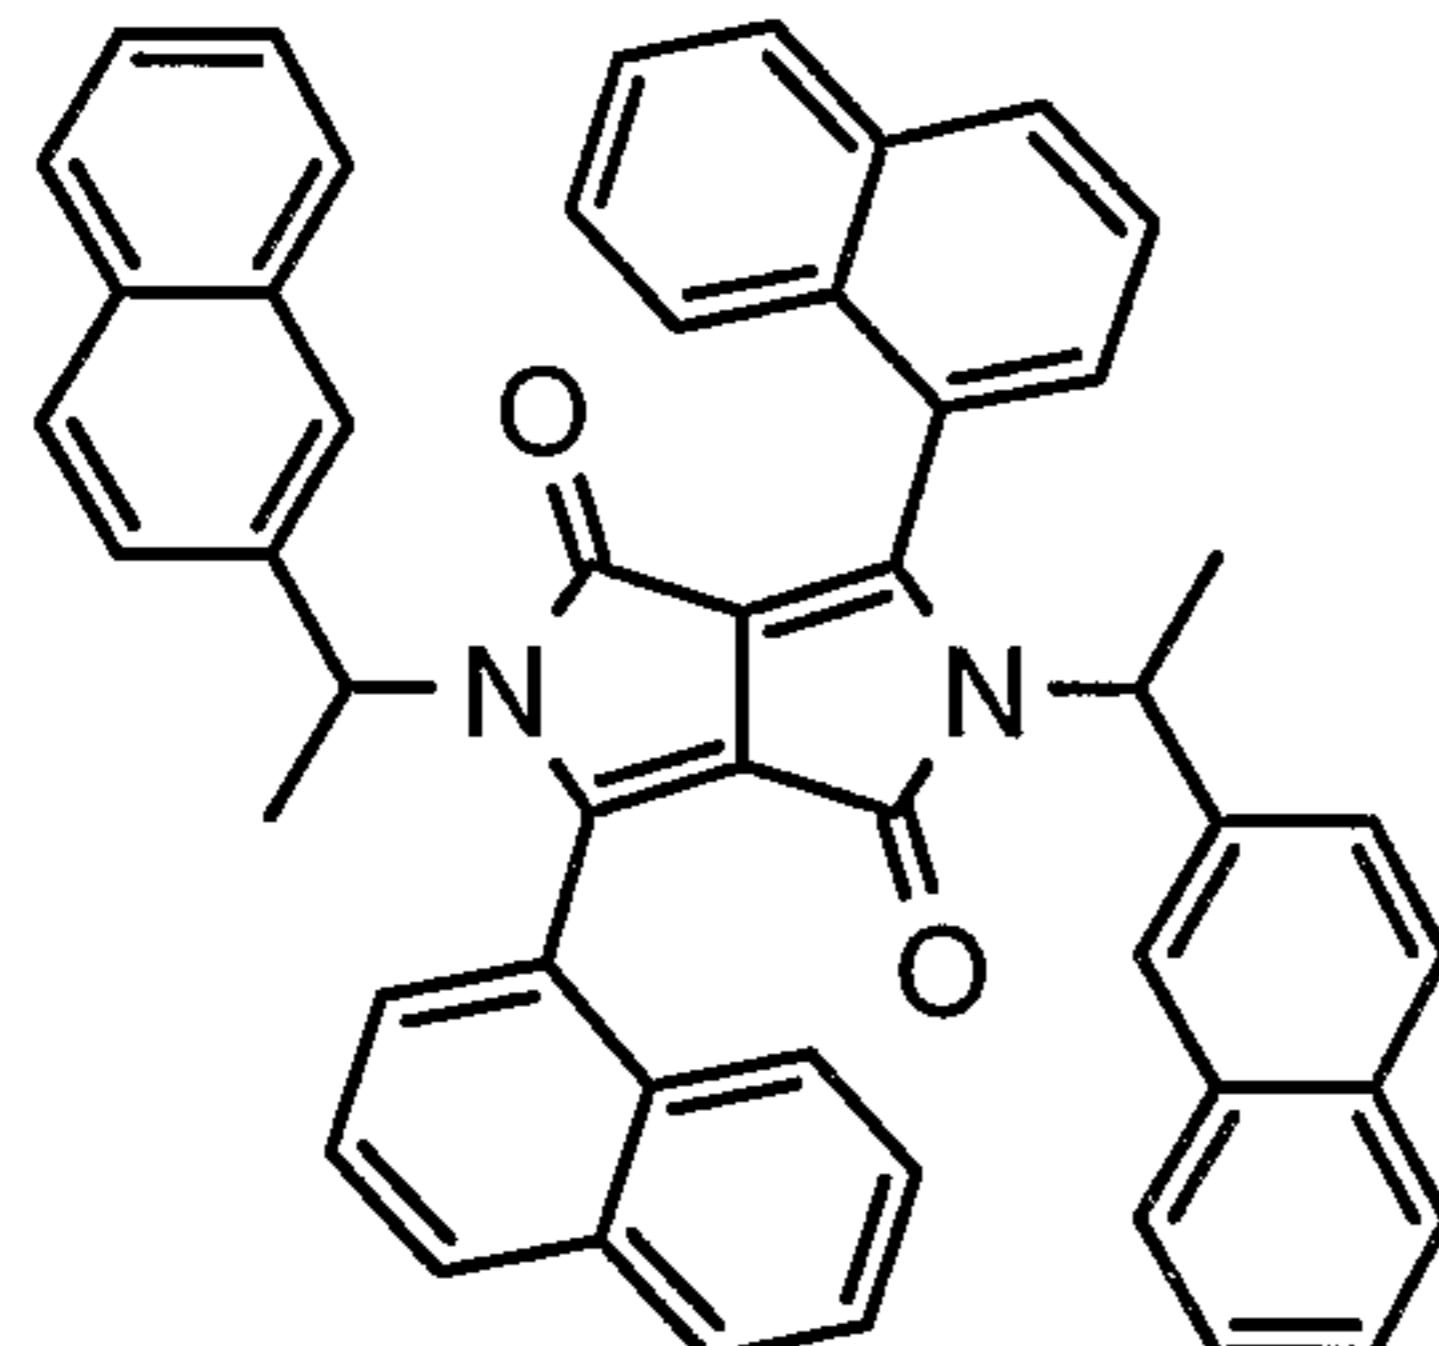


(A-13)

10

Example 14


Example 2 was repeated except that 1-(1-bromoethyl)naphthalene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 266 °C, yield: 17 %).

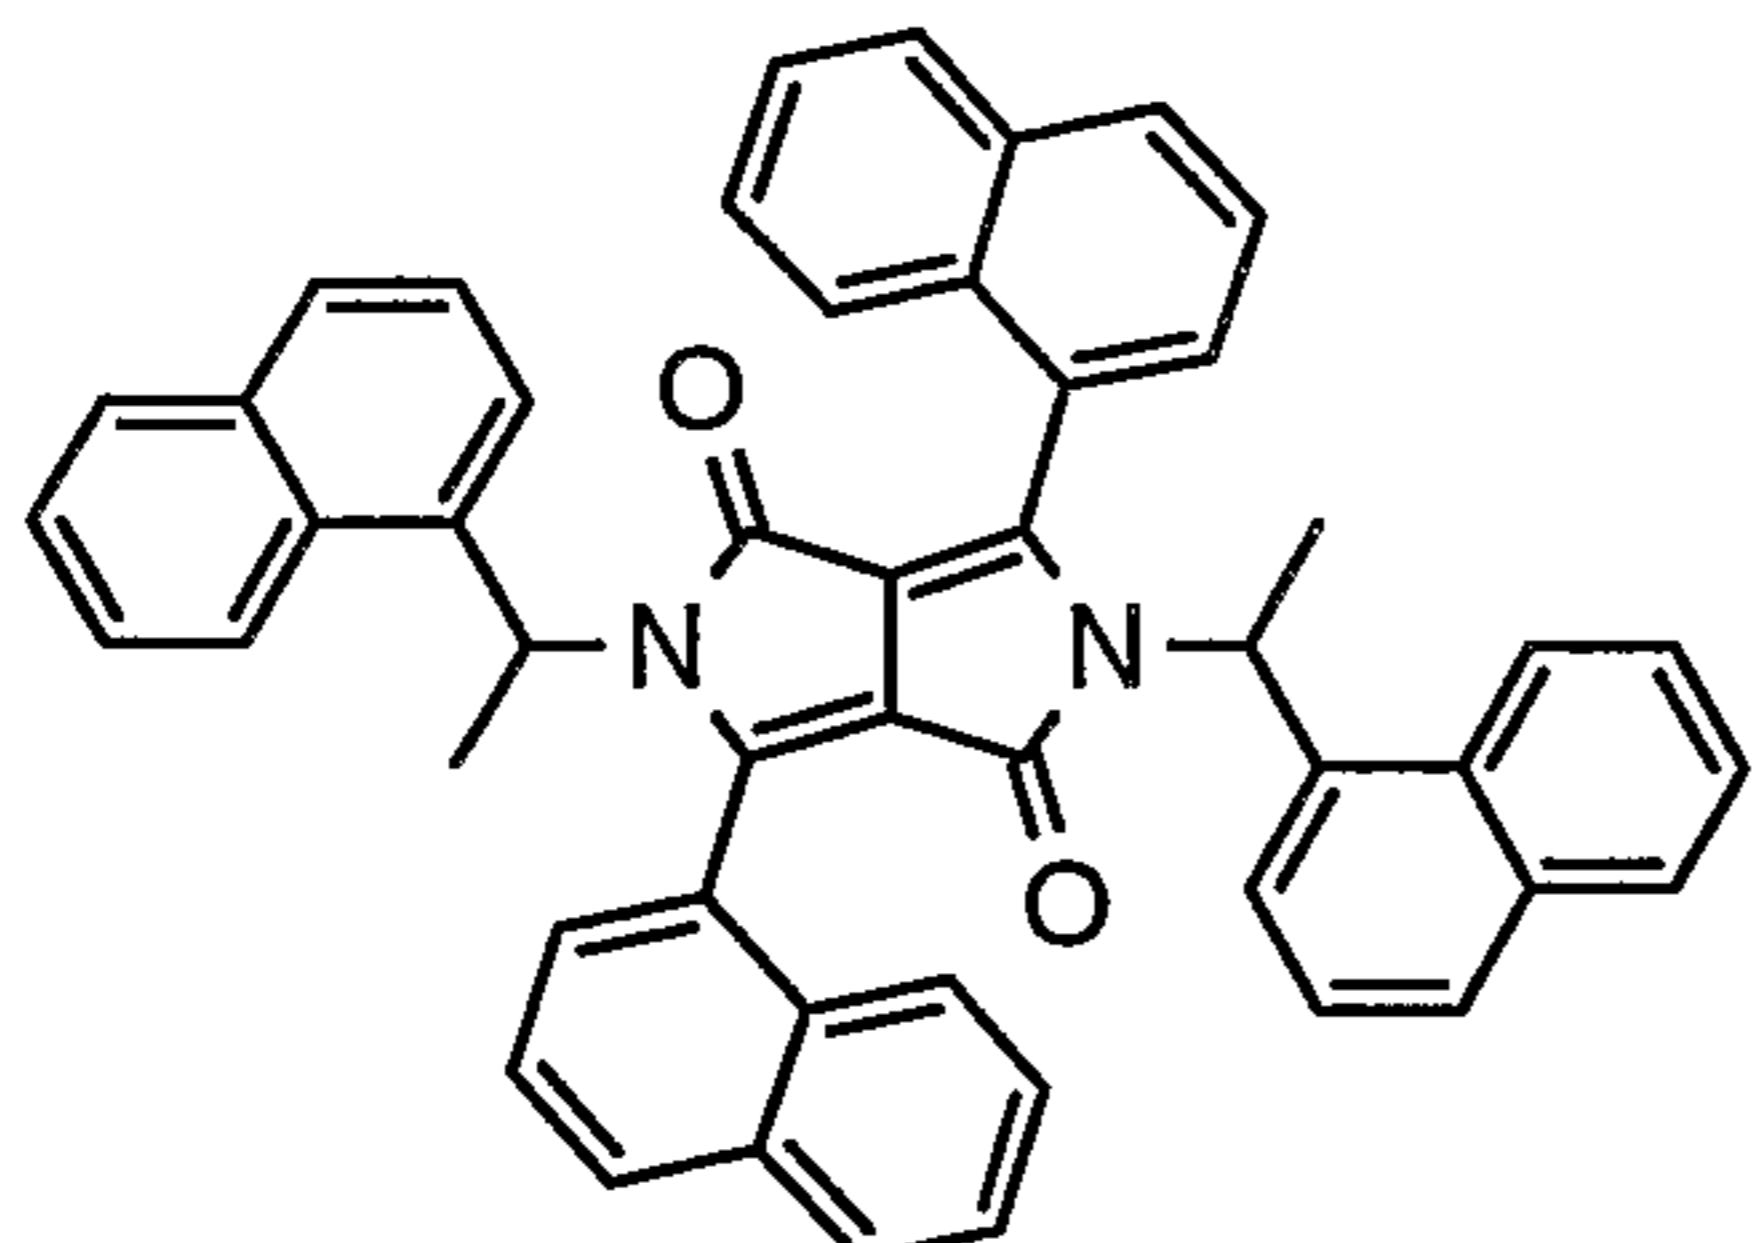

(A-14)

Example 15


Example 2 was repeated except that 4-bromo-1-(1-bromoethyl)benzene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 223-225 °C, yield: 32%).

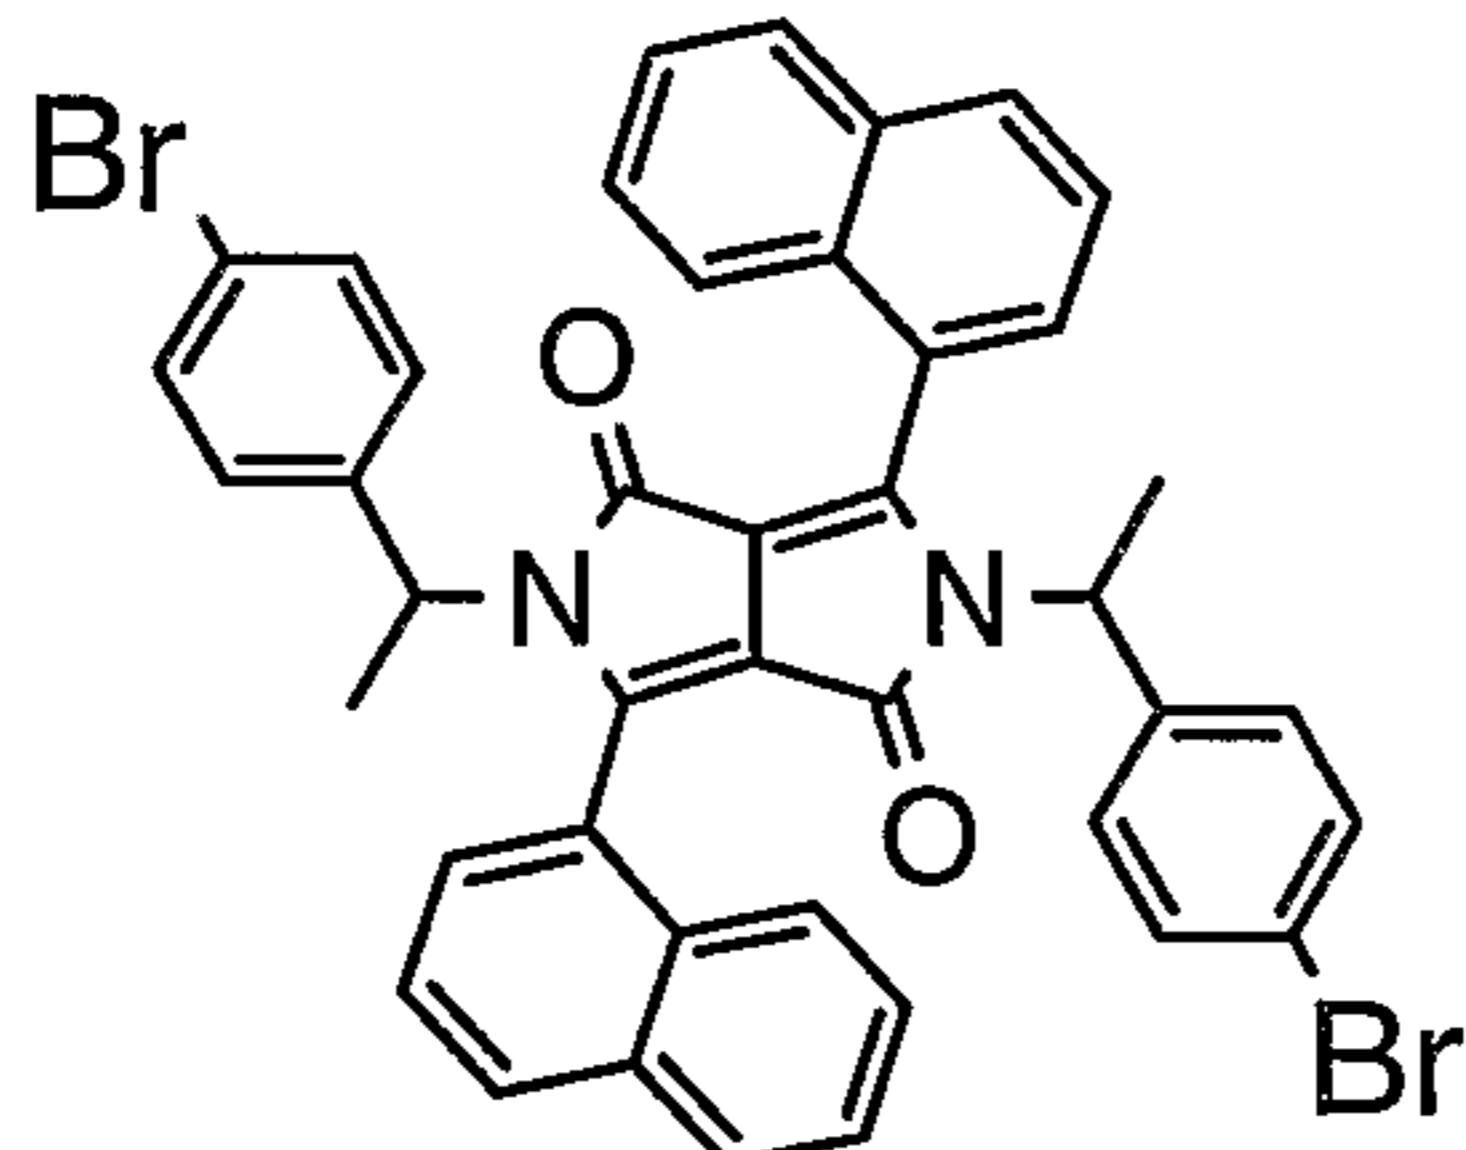

5 (A-15)

Example 16


Example 2 was repeated except that 4-phenyl-1-(1-bromoethyl)benzene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 293 °C, yield: 16 %).

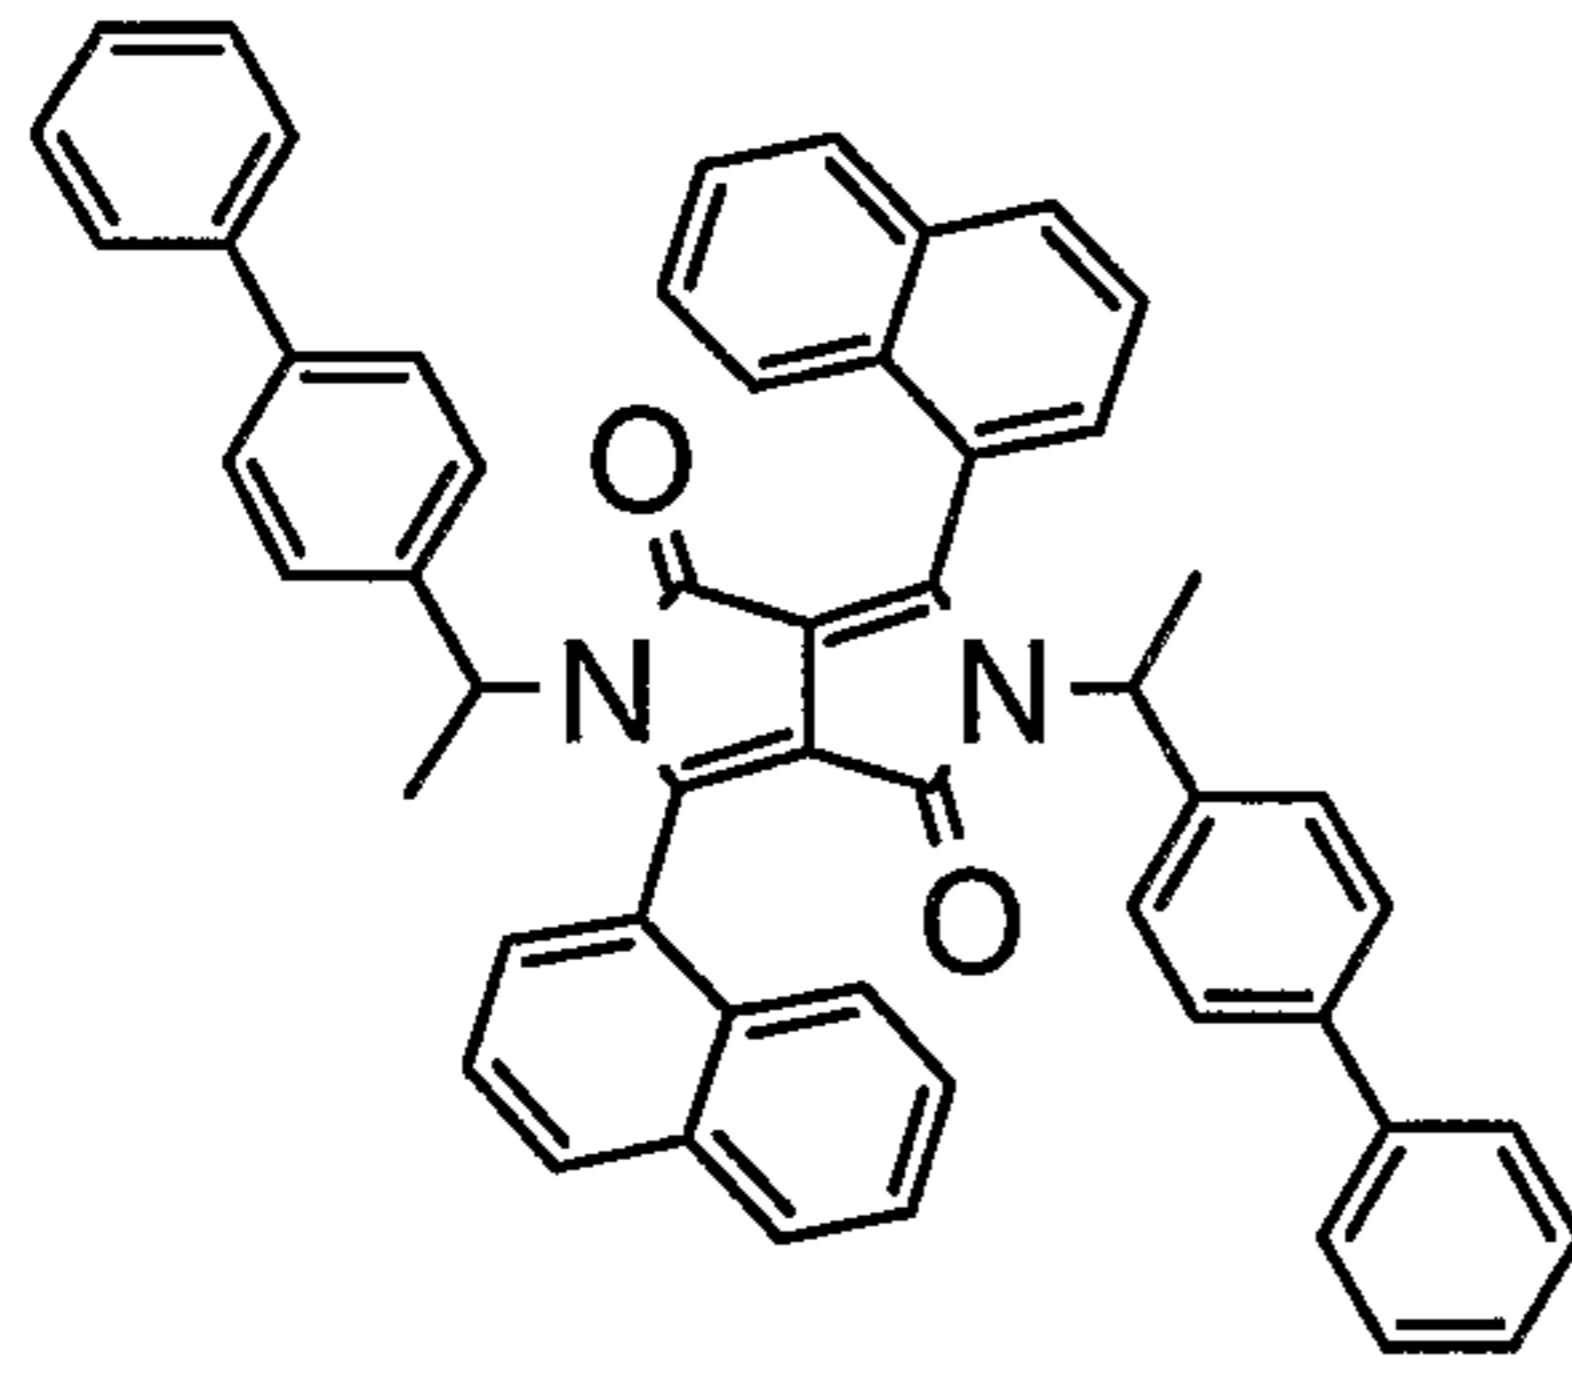

(A-16)

Example 17


Example 2 was repeated except that isopropyl iodide was used instead of 1-bromoethylbenzene. Orange solid (mp. = 294-295 °C, yield: 3 %).

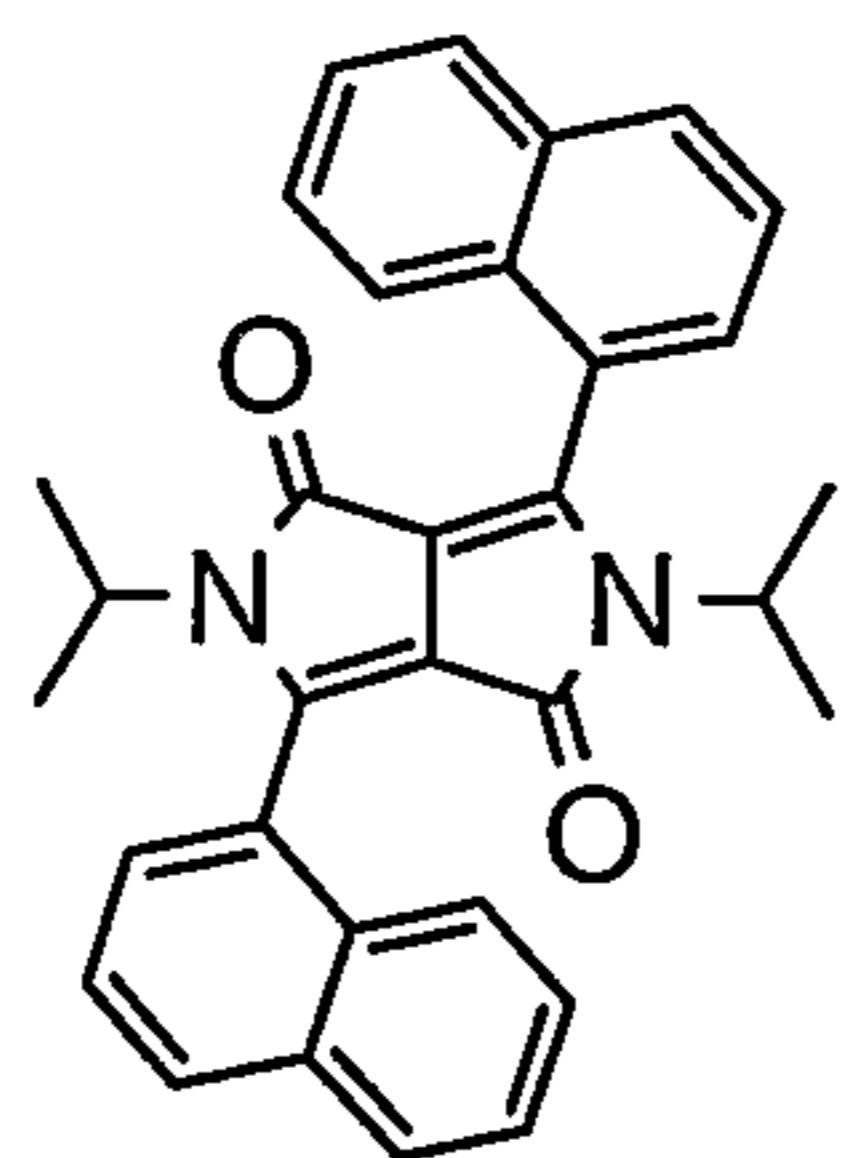

(A-17)

Example 18

Example 2 was repeated except that 1-bromo-1,2,3,4-tetrahydronaphthalene was used instead of 1-bromoethylbenzene. Orange solid (mp. = 360 °C, yield: 3%).

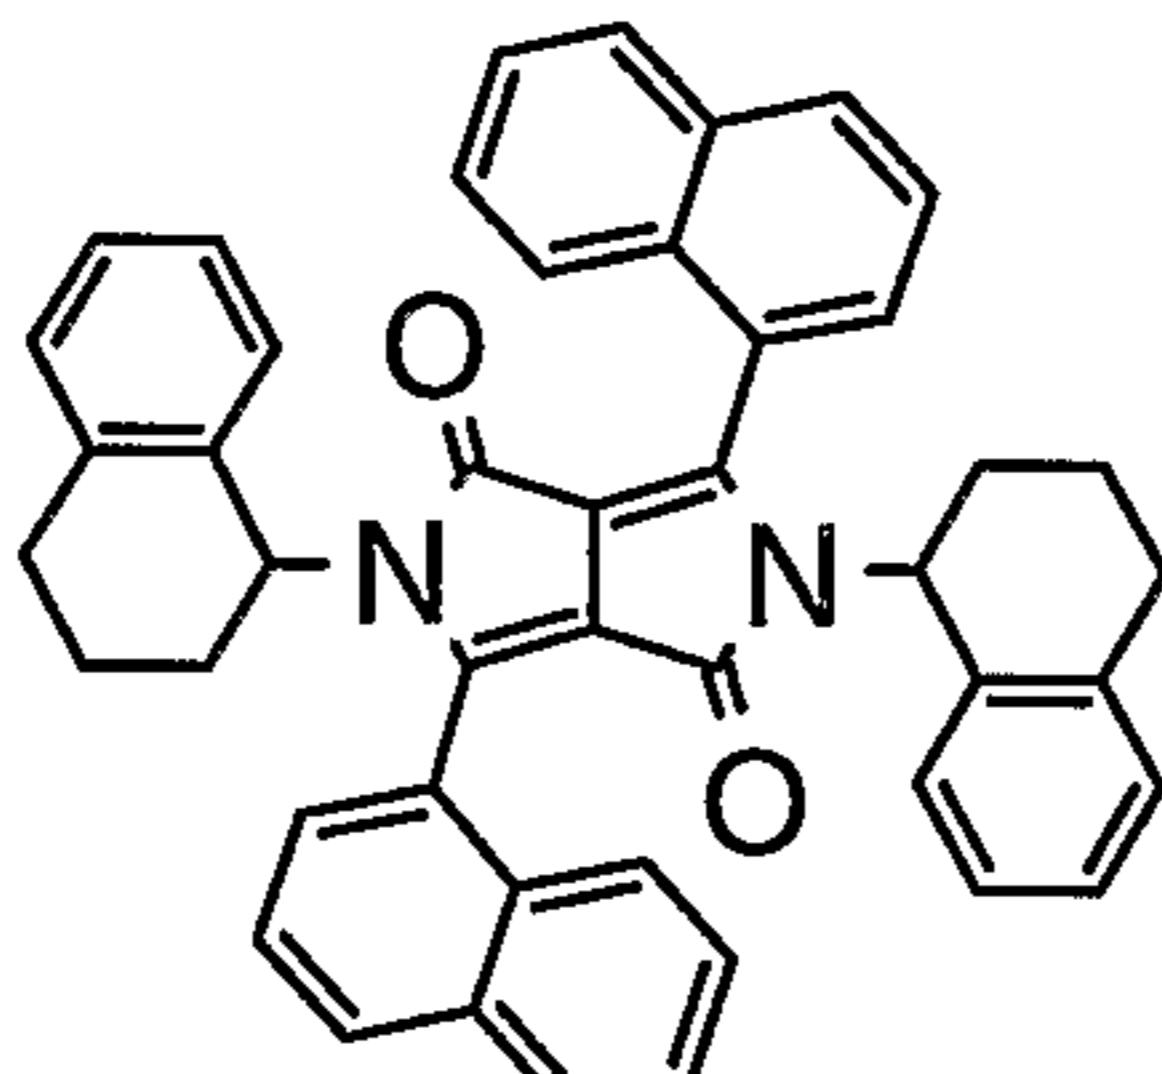


5

(A-18)

Example 19


Example 2 was repeated except that bromo d-phenyl methane was used instead of 1-bromoethylbenzene. Orange solid (mp. = 258-266 °C, yield: 11 %).

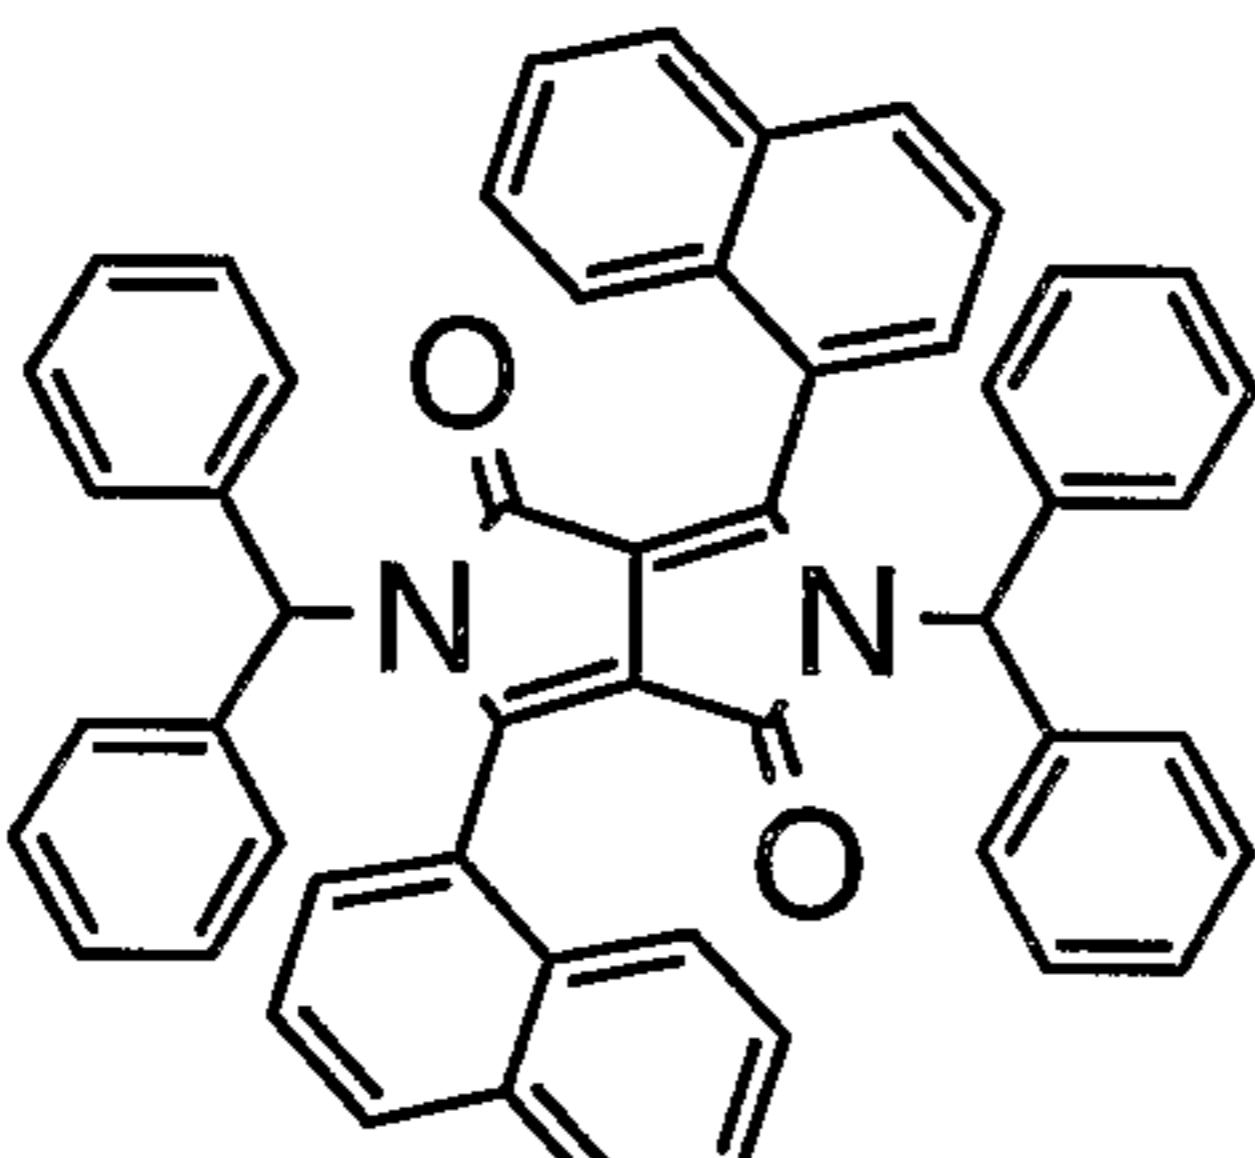

(A-19)


10 Example 20

Example 1 was repeated except that 1,4-diketo-3,6-bis(1-phenanthrenyl)-pyrrolo-(3,4-c)-pyrrole was used as starting material. Orange solid (mp. = 326 °C, yield: 4%).

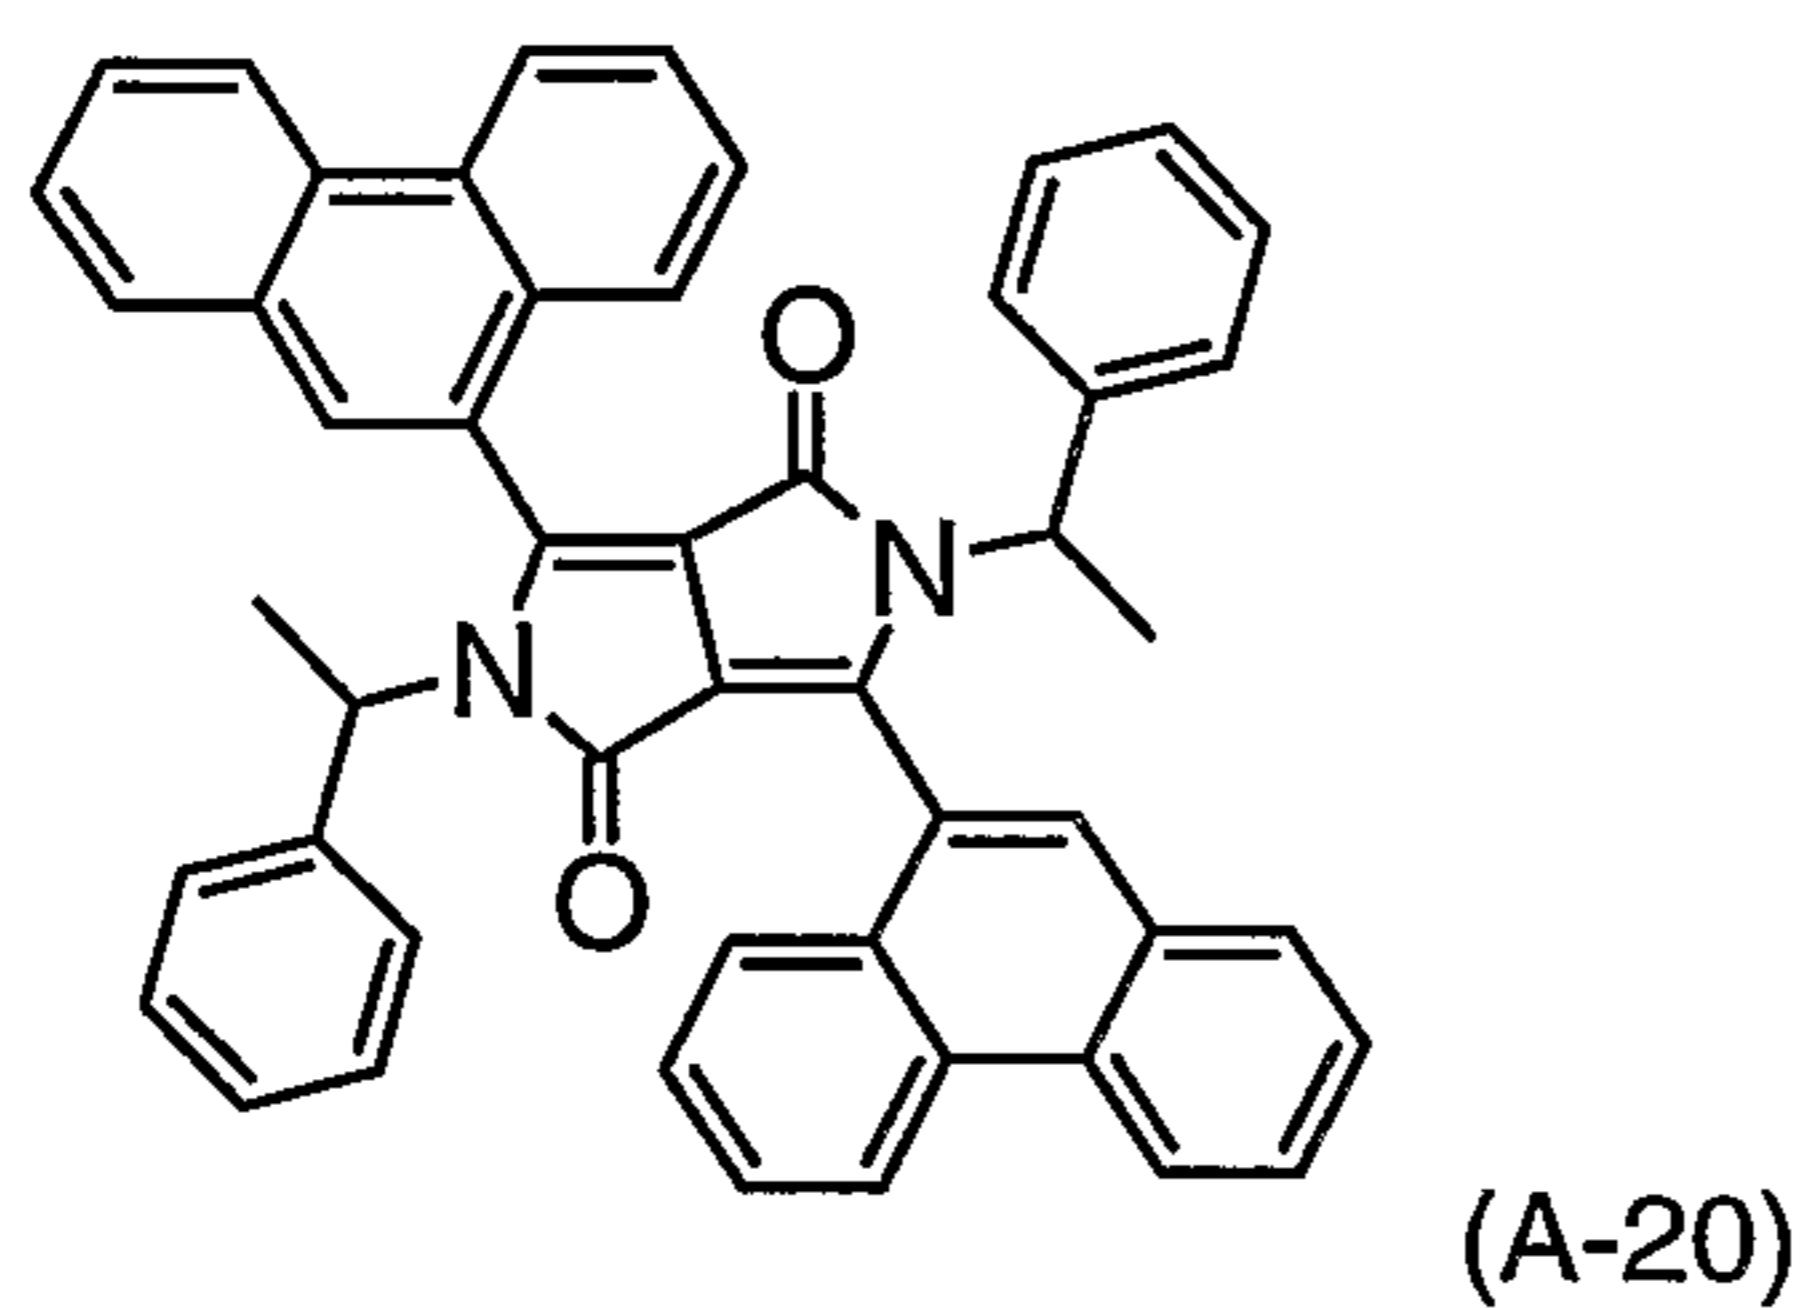Example 21


Example 3 was repeated except that 2,5-bis-(4-cyanobenzyl)-1,4-diketo-3,6-(4-bromophenyl)pyrrolo(3,4,-c)pyrrole and 1,1'-bis(diphenylphosphino)ferrocene were used as a starting material and Pd-ligand, respectively.

Red violet solid (mp. = 376 °C, yield: 45%).

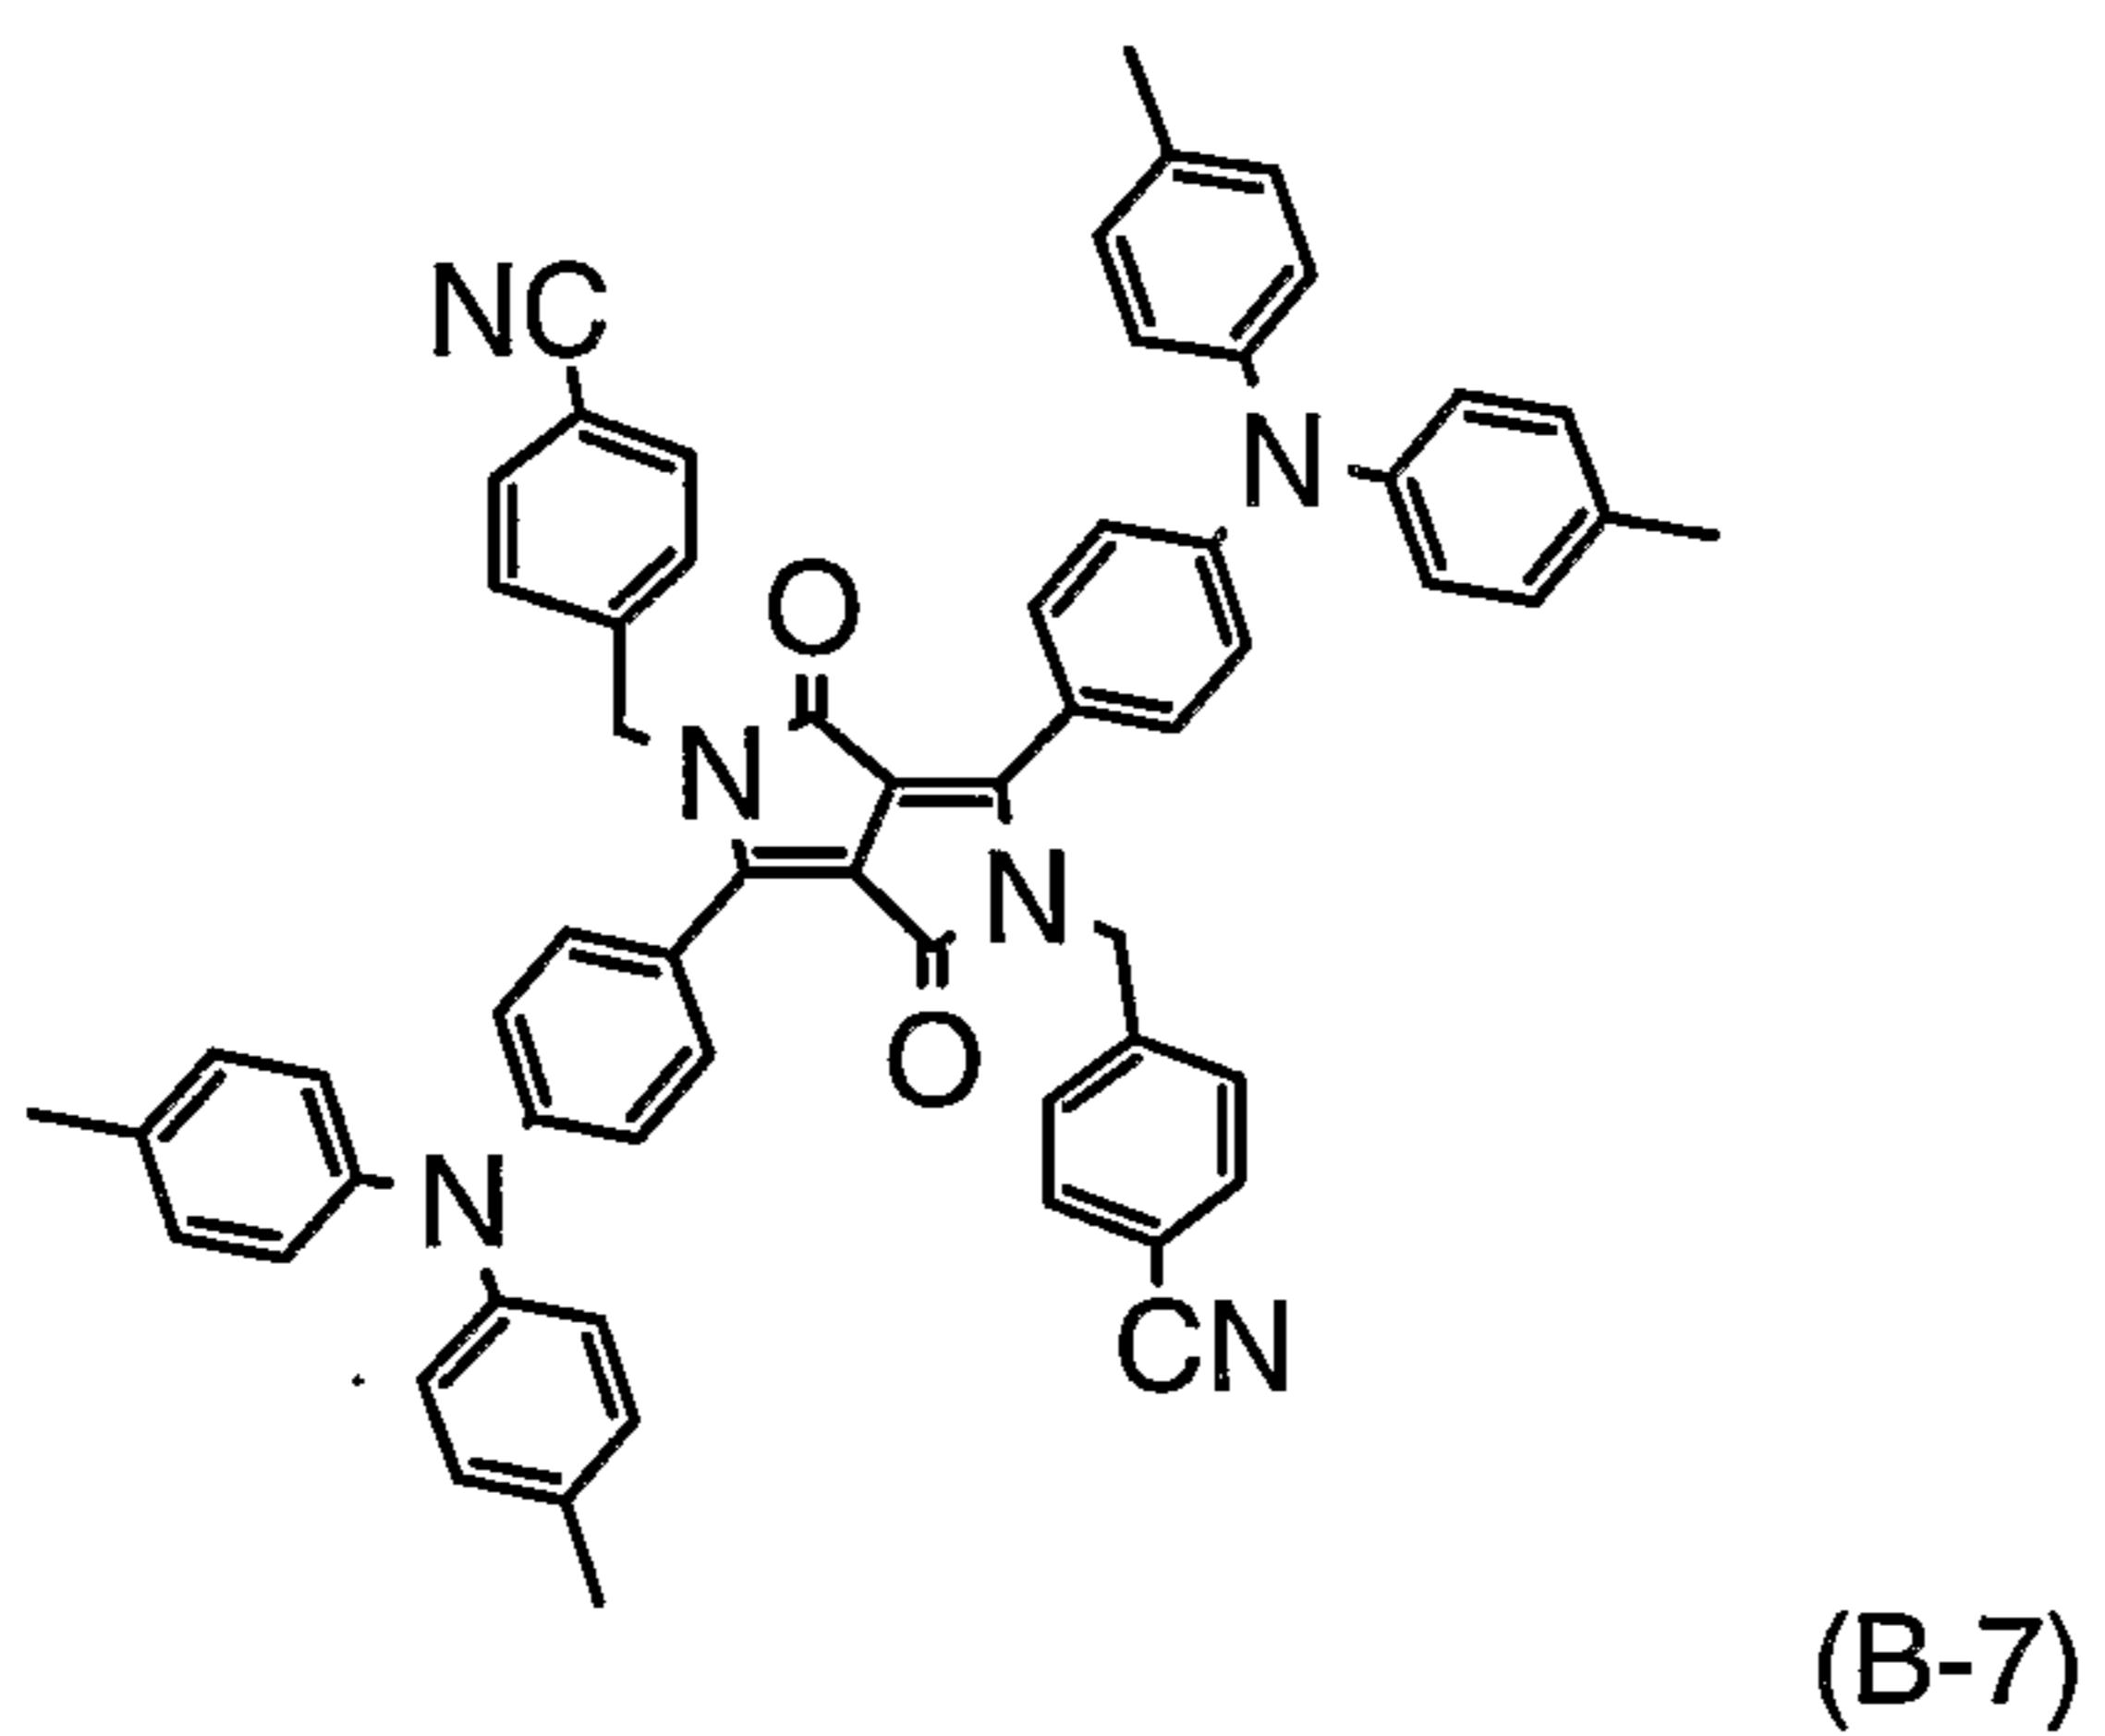Example 22

Example 16 was repeated except that 2,5-bis-(4,5-di-cyanobenzyl)-1,4-diketo-3,6-(4-bromophenyl)pyrrolo(3,4,-c)pyrrole was used as a starting material.

Red violet solid (mp. = 353-356 °C, yield: 17 %).

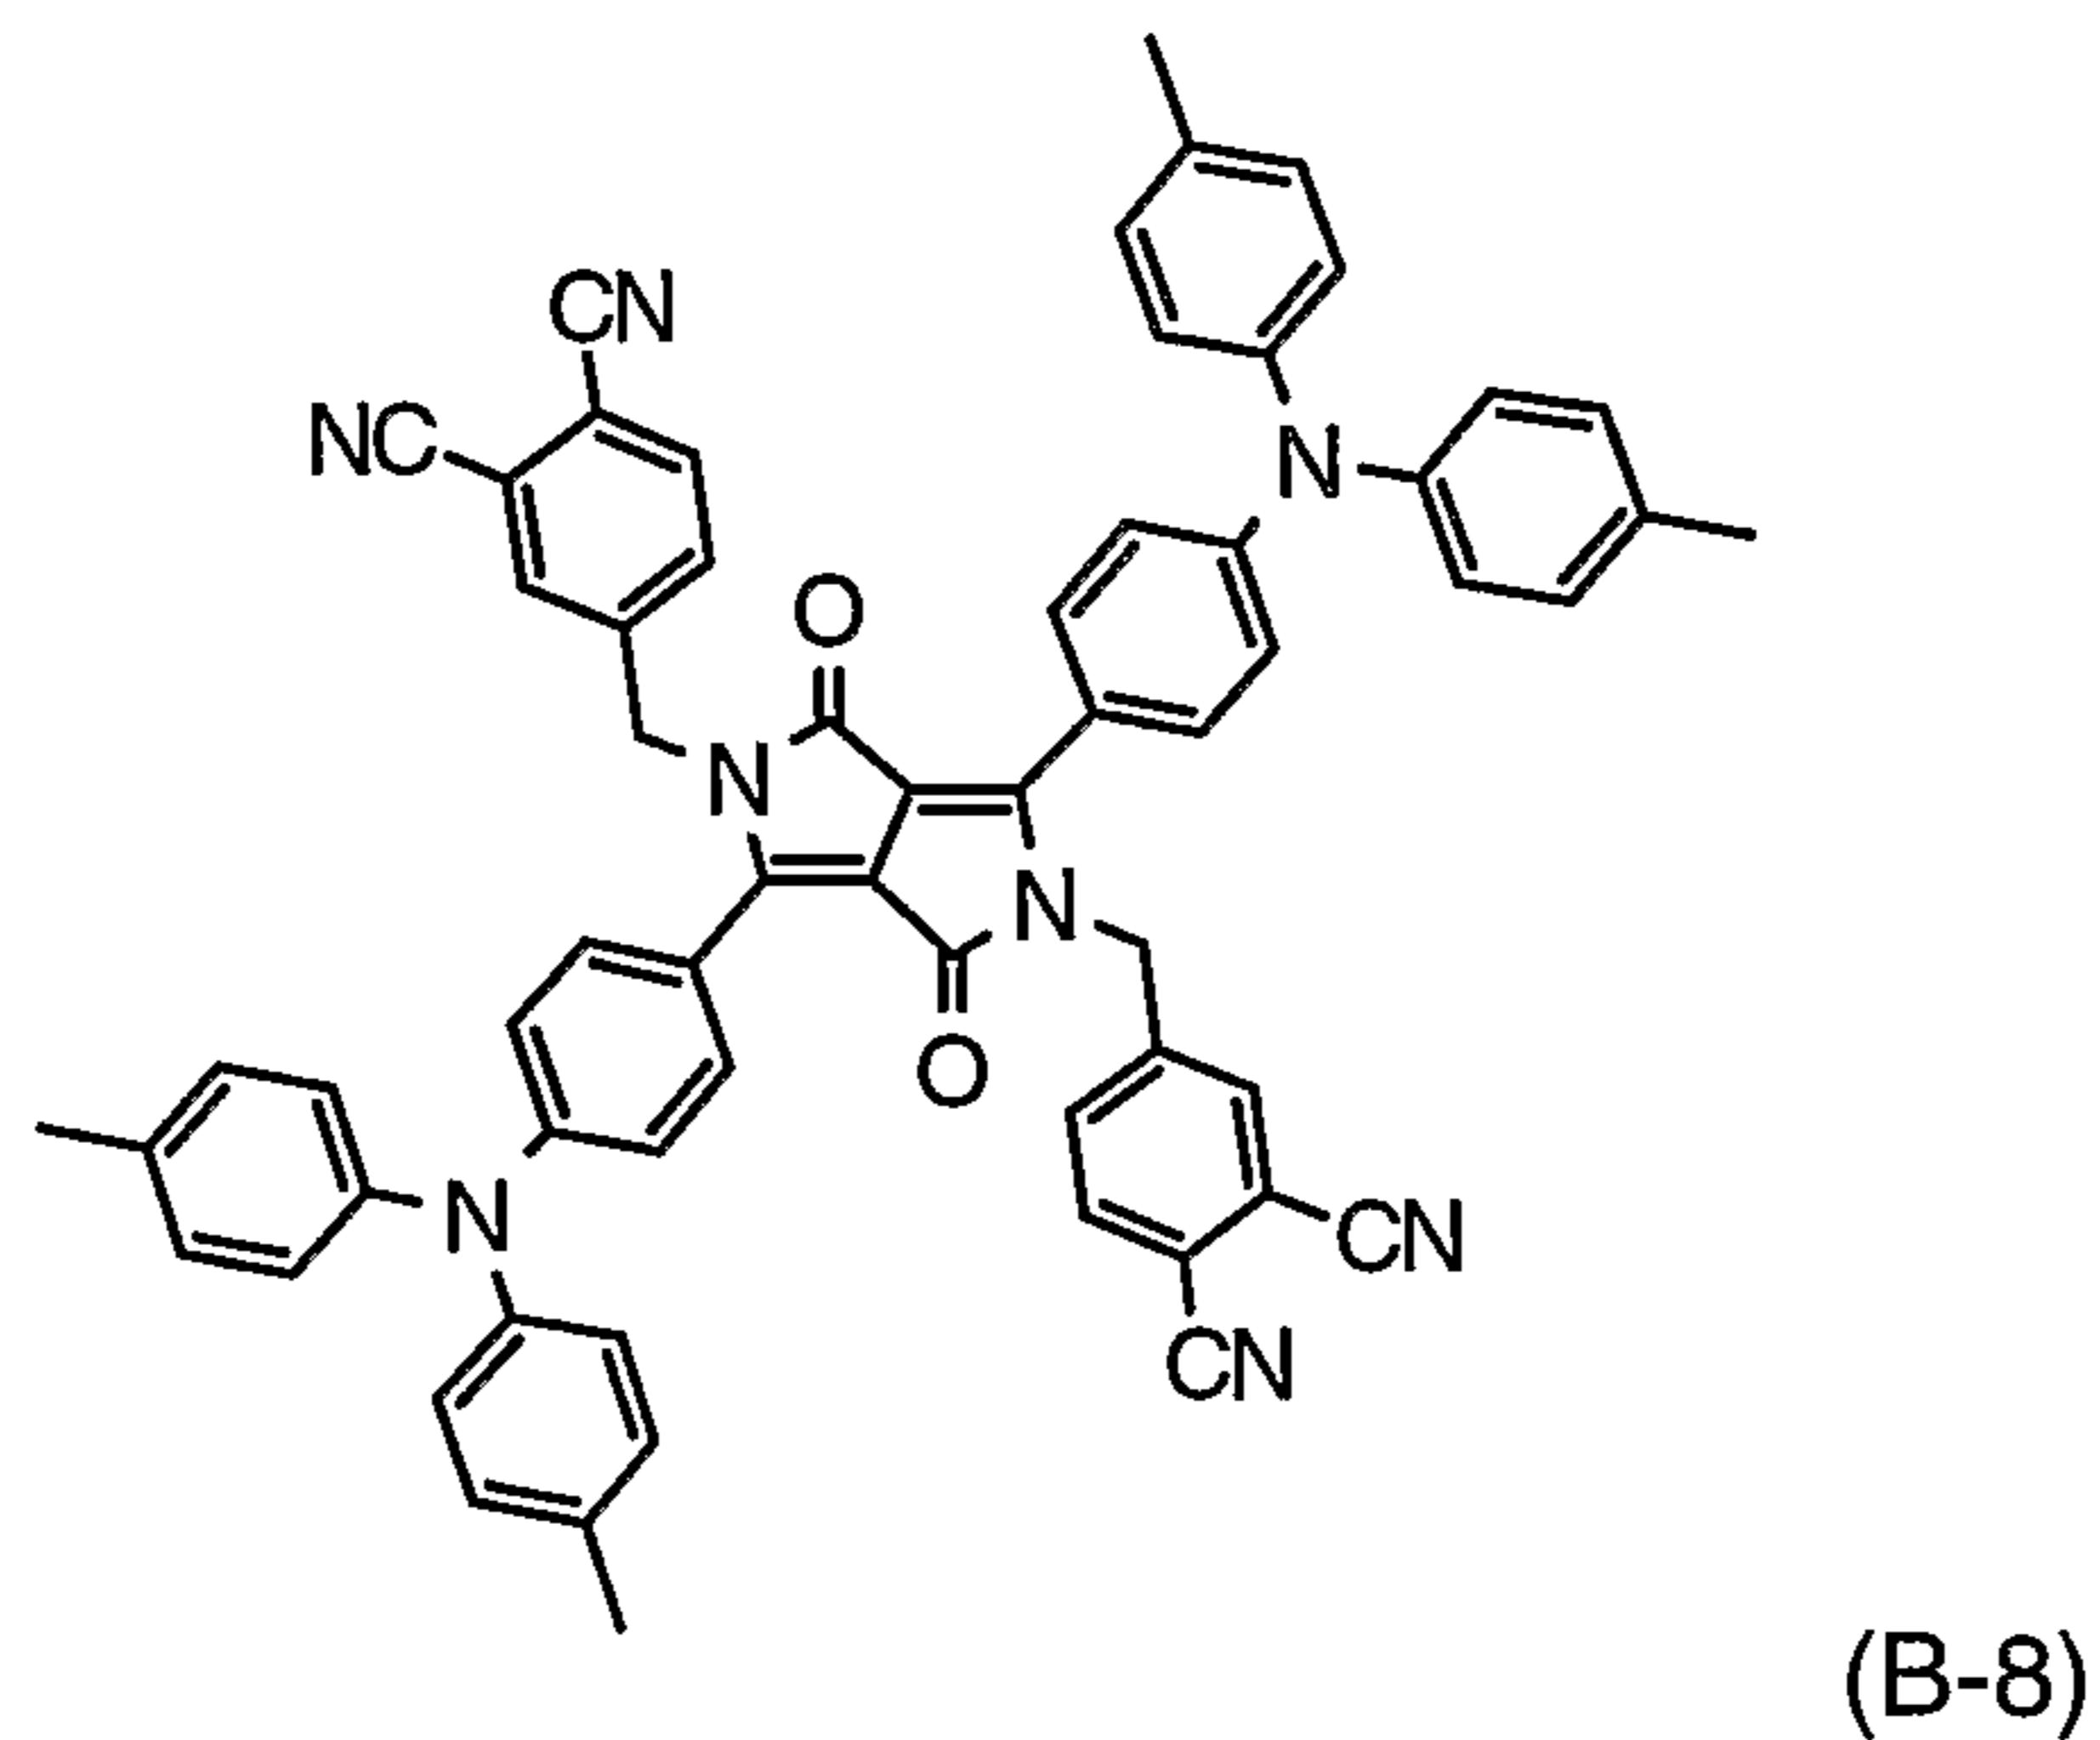


(B-8)

Example 23

Example 4 was repeated except that benzylbromide was used instead of iodobutane

5 Red violet solid (mp. = 359-361 °C, yield: 12%).

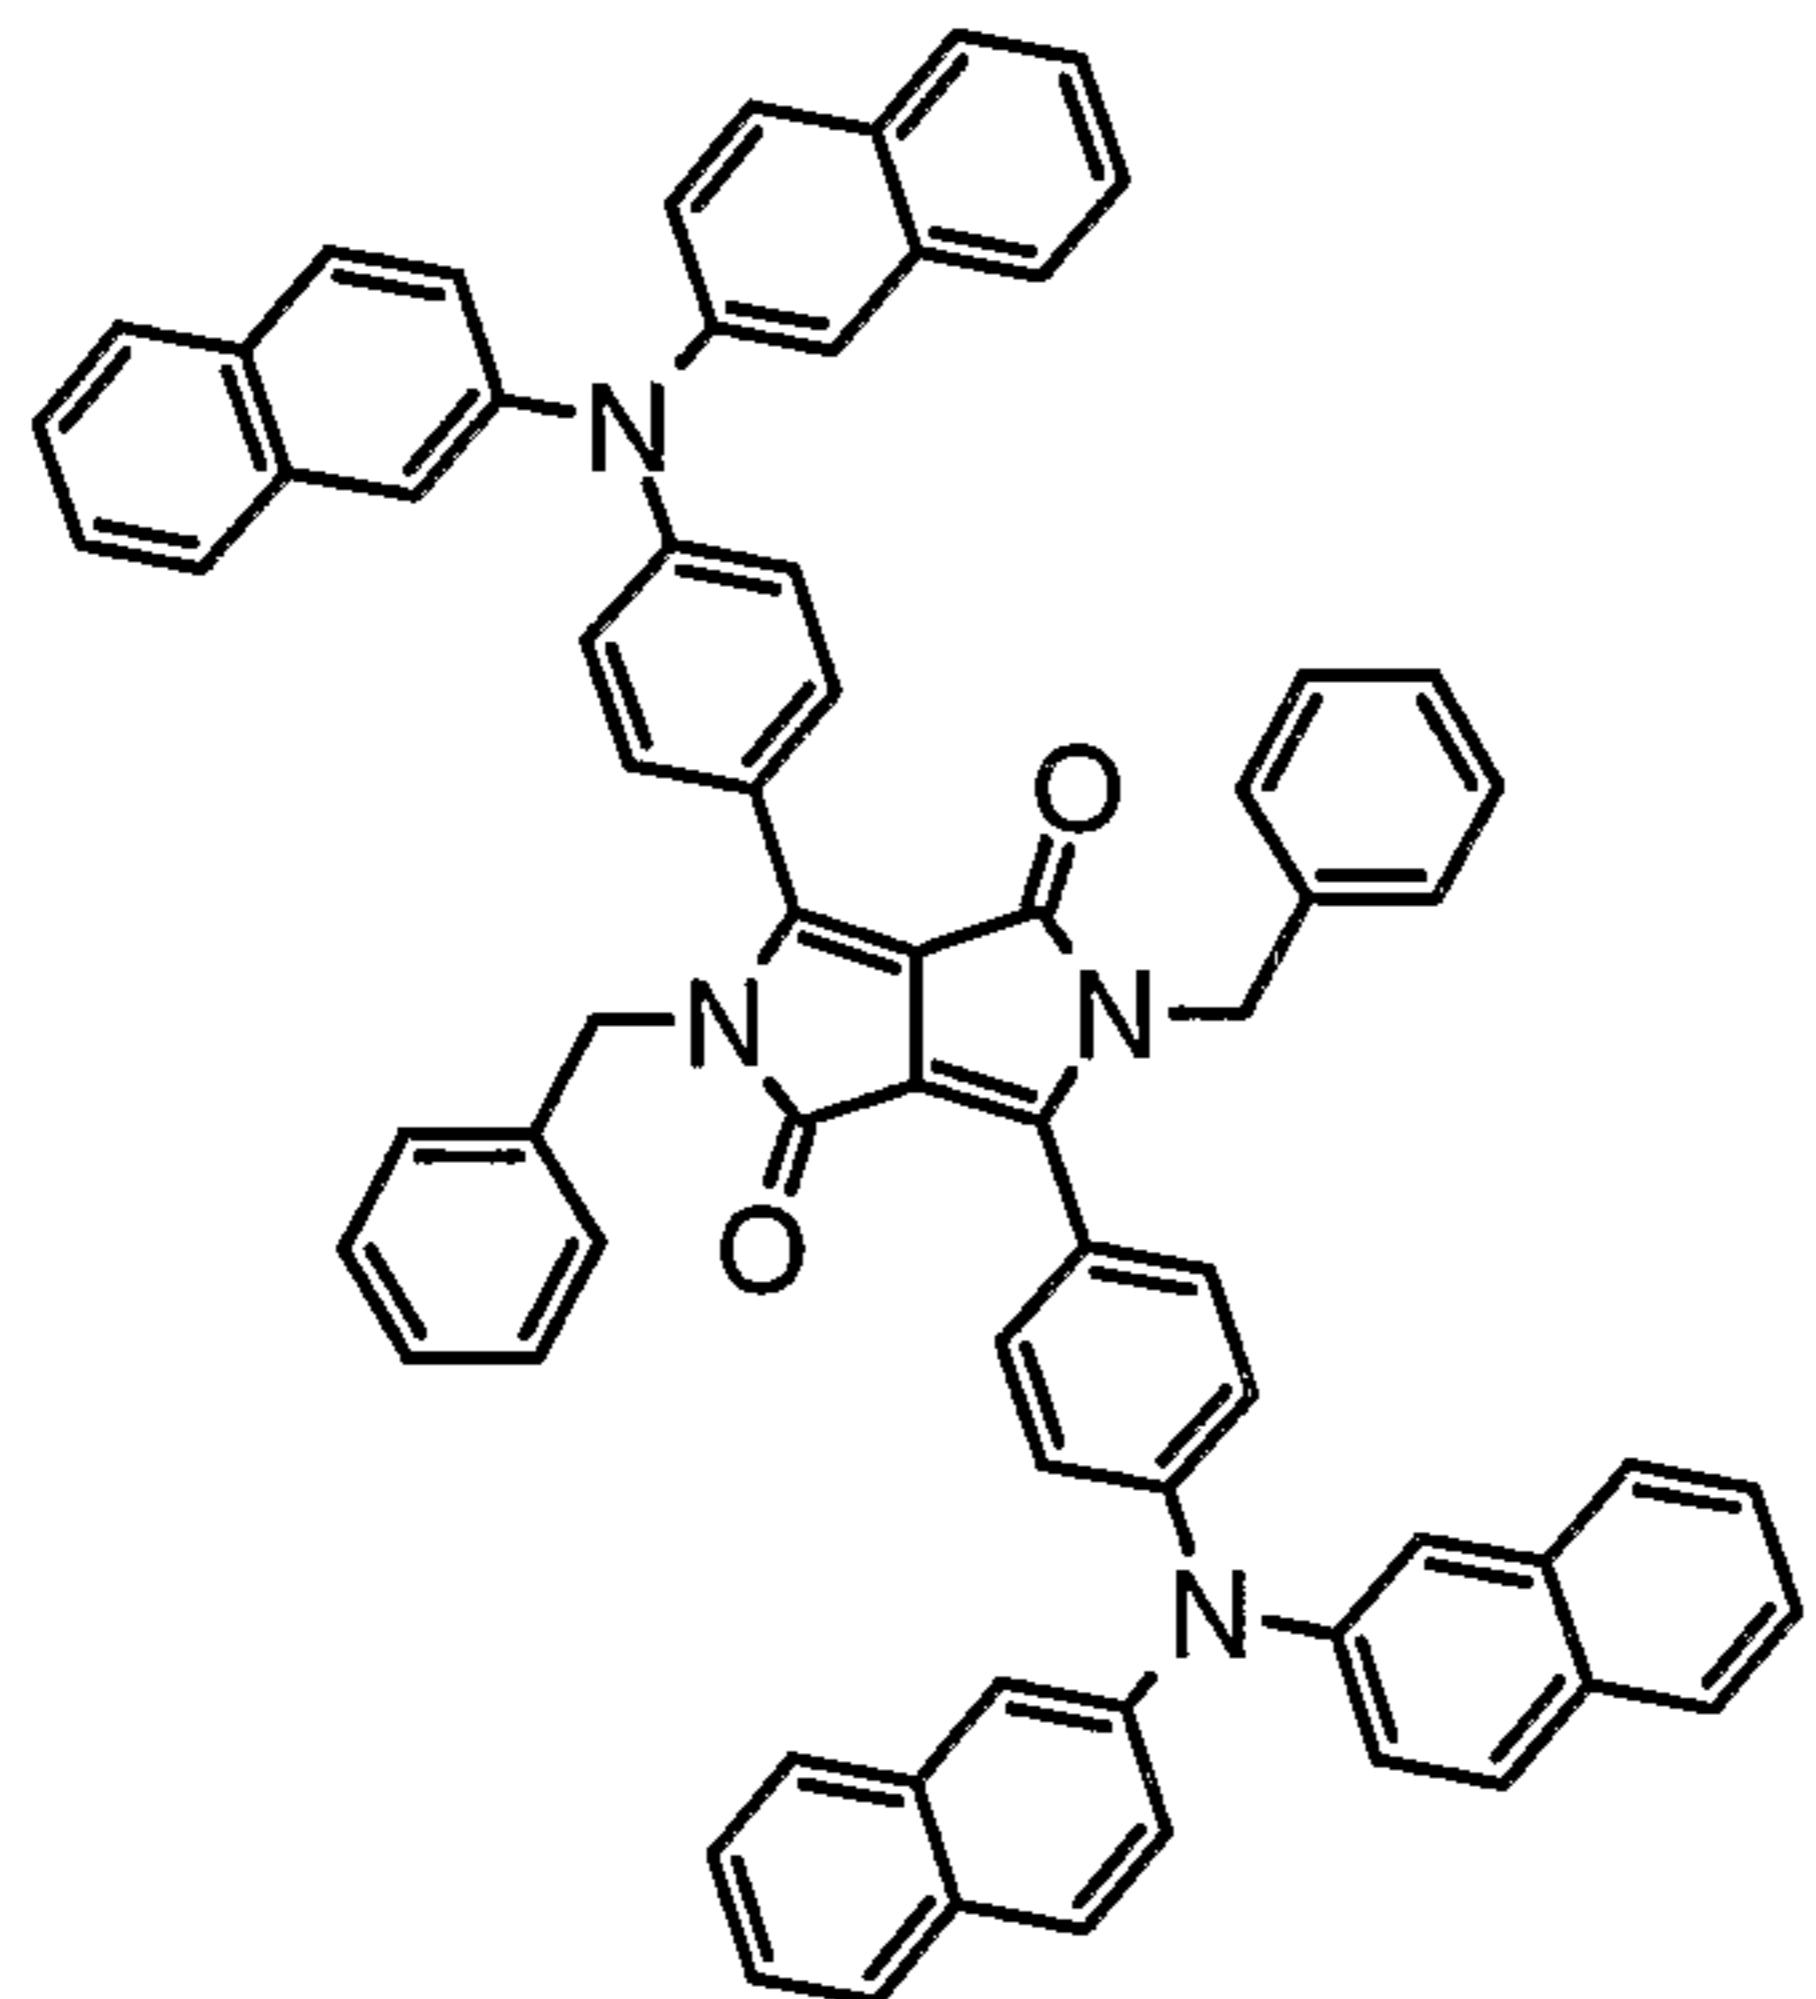

(B-9)

Example 24-26

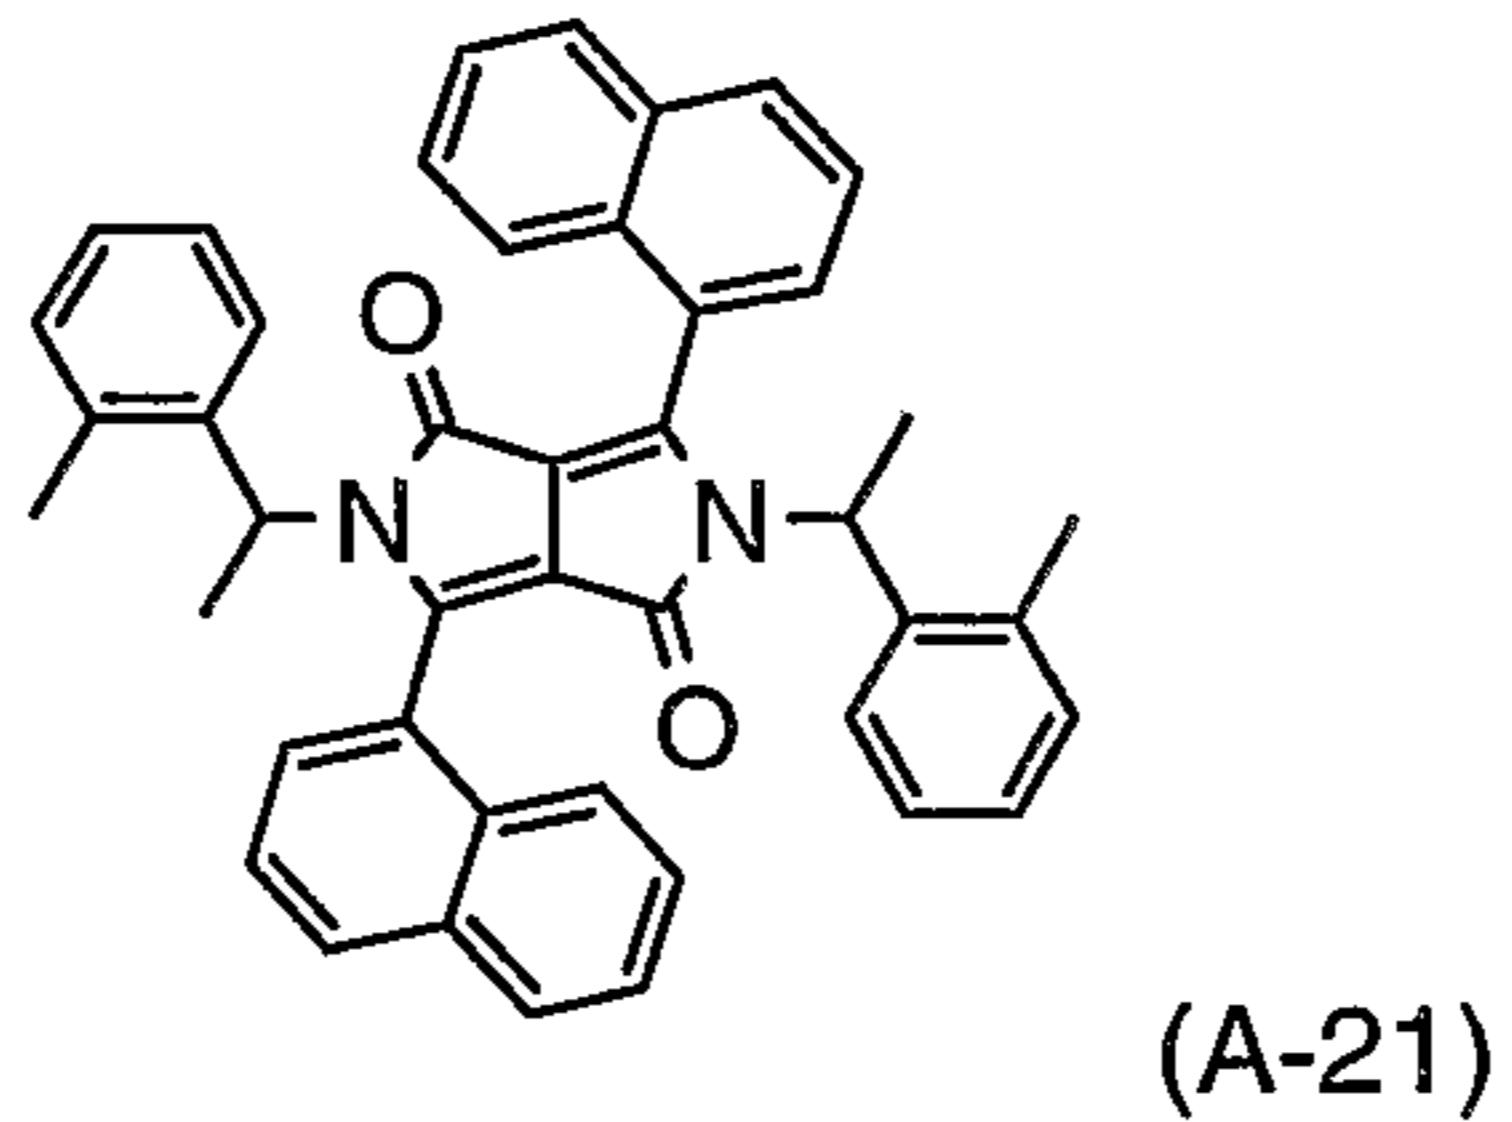
10 Example 6 is repeated, except that the emitting material of example 6 is replaced by the emitting materials as described in table 2.

Table 2


Device of Example	Emitting Material		EL properties	
	Compound of formula I (wt%)	Compound of formula II (wt%)	Peak (nm)	Intensity (cd/m <sup>2</sup> )
Ex. 24	A-2 (97.3)	B-7 (2.7)	624	2717
Ex. 25	A-11 (97.5)	B-1 (2.5)	610	3996
Ex. 26	A-11 (97.3)	B-7 (2.7)	614	5074

Example 27

Example 2 was repeated except that 2-(1-bromoethyl)toluene was used instead of 1-bromoethylbenzene. Yellow solid (mp. =276-278 °C, yield: 9 %).

Reference Example 1

Example 8 is repeated, except that the compound below (A-3; Example 81 of EP-A-1087006) is used as the light emitting material. The maximum luminance is 5260 Cd/m<sup>2</sup>.

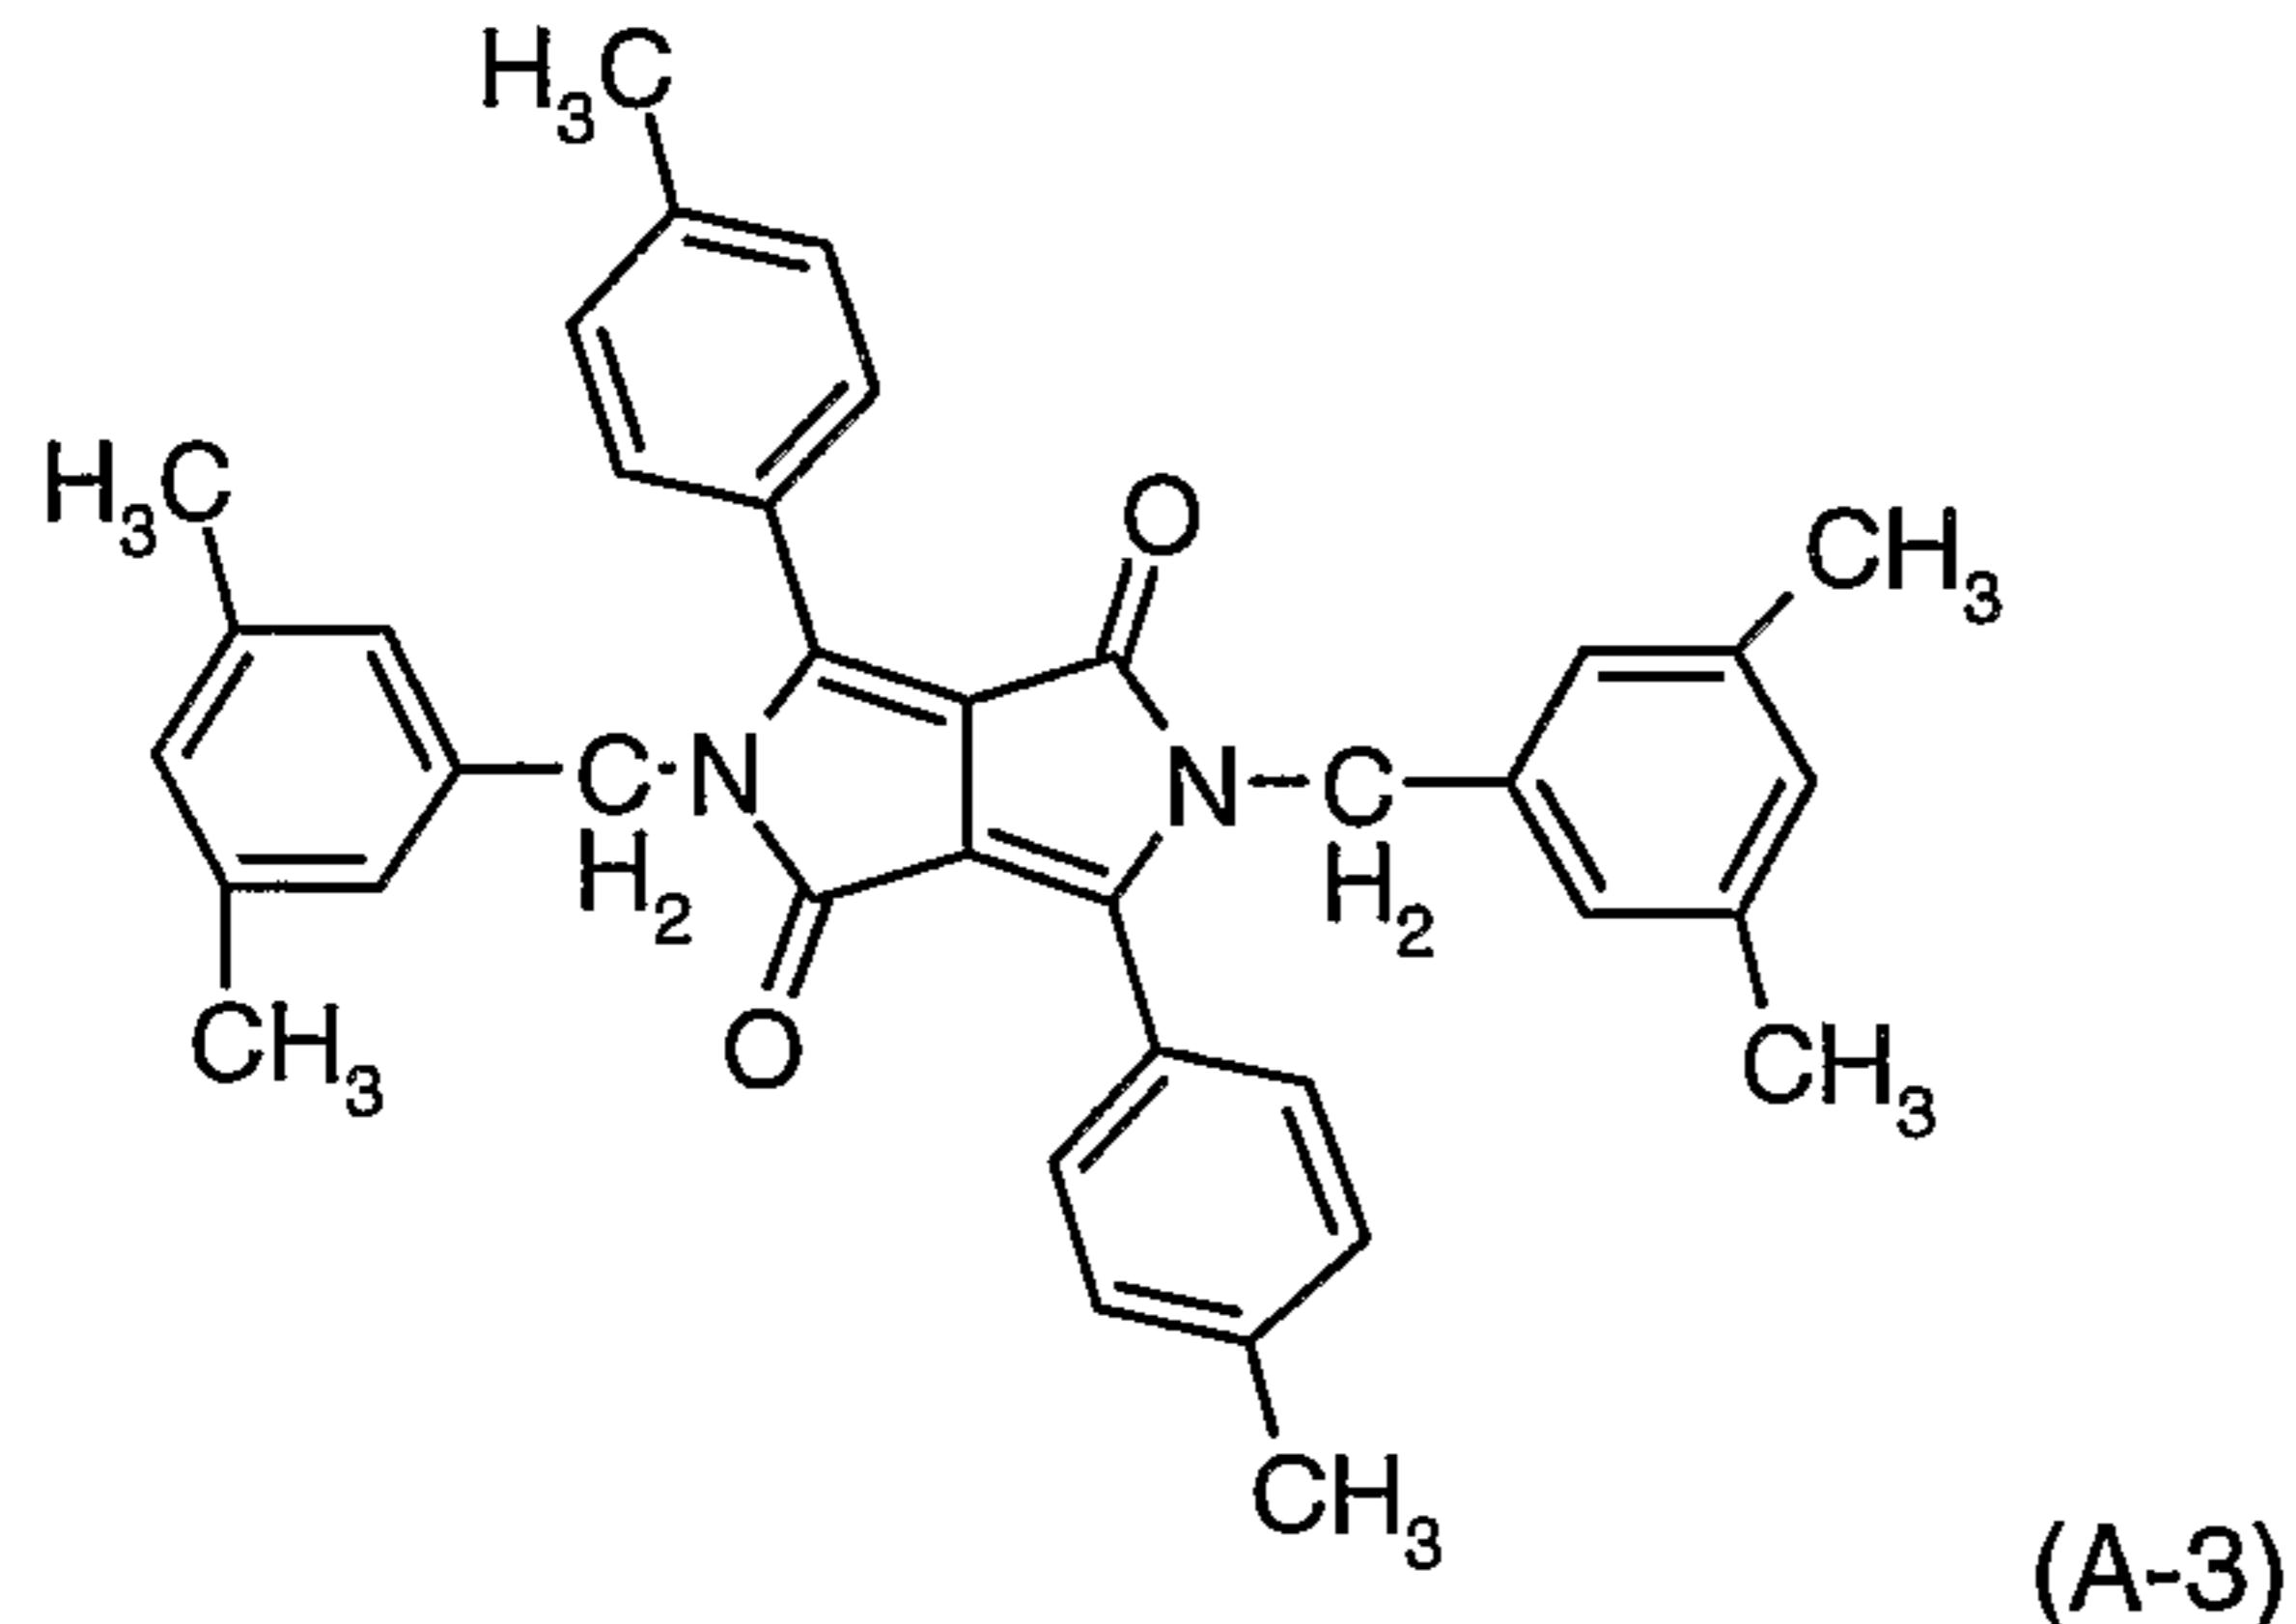Reference Example 2

Example 6 is repeated, except that A-1 (Example 93 of EP-A-1087006) is used as the light emitting material. The maximum luminance thereof is 2600 Cd/m<sup>2</sup>.

As evident from the examples the composition of the present invention, comprising a DPP of the formula I and a DPP of the formula II, can provide a luminescent element which is high in


the efficiency of electrical energy utilisation and is characterized by a much higher luminance than the individual DPP compounds of formula I and II.

Example 28 (Film preparation of Color Changing Media)


5 8 mg of A-2, 2 mg of B-7, 1 g of PMMA (Produced by Wako Pure Chemical Industries, Ltd.) are put in a bottle, and the mixture is dissolved in 5 g of toluene. The solution is dropped on a slid glass substrate, and coated on the glass by use of a spin coater with a rotating rate of 500 rpm for 30 seconds. The obtained film is dried over 80 °C and a CCM film is obtained. The film is evaluated by use of fluorescence spectrophotometer F-4500 (Hitachi, Ltd.). When 10 the film is irradiated by blue light with 470 nm, the film emits red light, the peak of which locates at 597 nm. Thus, the composition comprising the host and the guest is found to be applicable to CCM converting effectively blue light into red light.

## Claims

1. A composition comprising a guest chromophore and a host chromophore, wherein the absorption spectrum of the guest chromophore overlaps with the fluorescence emission spectrum of the host chromophore, wherein the host chromophore is a diketopyrrolopyrrole having a photoluminescence emission peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm and wherein the guest chromophore is a diketopyrrolopyrrole having an absorption peak at 500 to 720 nm, preferably 500 to 600 nm, most preferred 520 to 580 nm.
2. A composition according to claim 1, wherein the host chromophore is a diketopyrrolopyrrole (“DPP”) represented by formula I

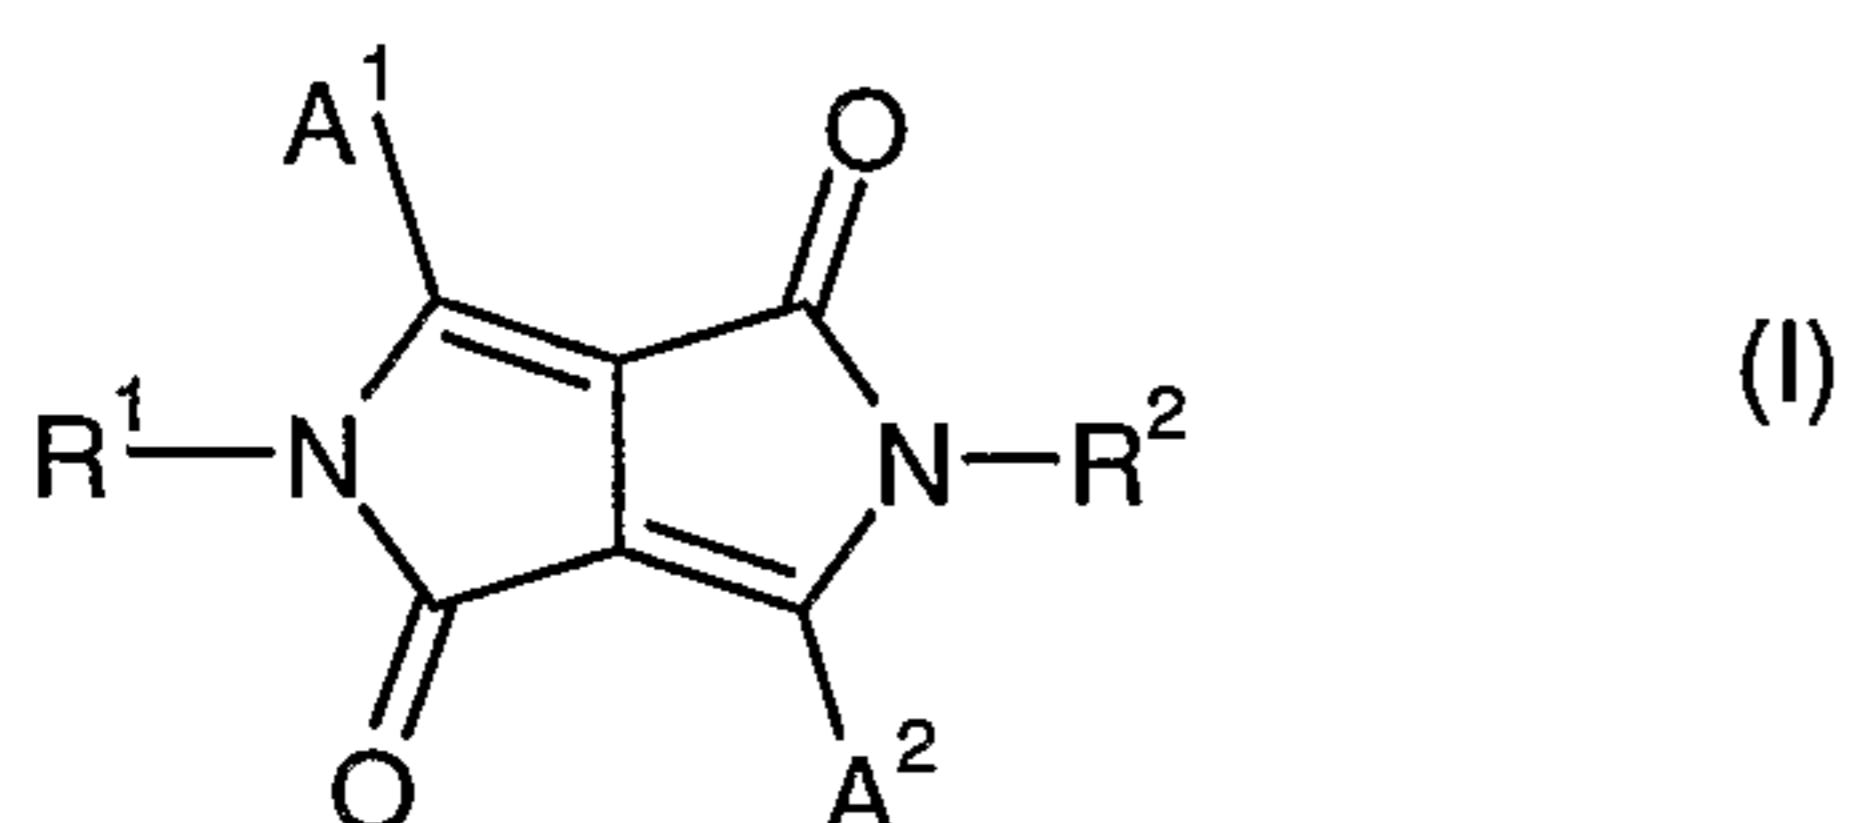


and the guest chromophore is a DPP represented by formula II

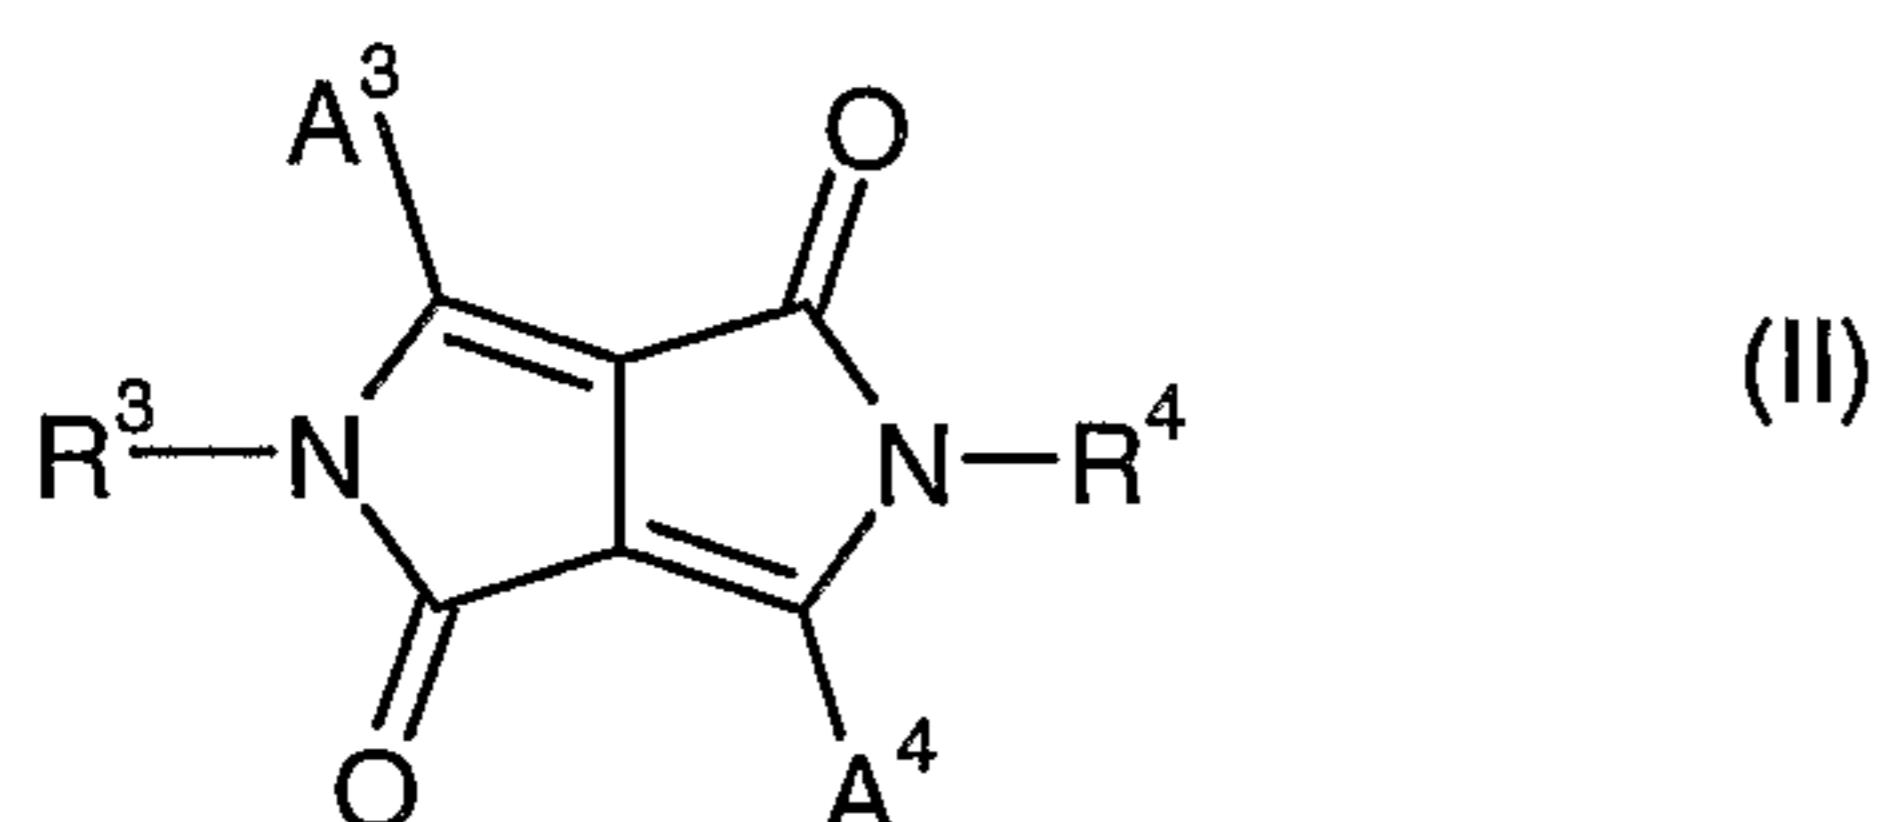

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> independently from each other stand for C<sub>1</sub>-C<sub>25</sub>-alkyl, which can be substituted by fluorine, chlorine or bromine, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>5</sub>-C<sub>12</sub>-cycloalkyl which can be condensed one or two times by phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>4</sub>-alkyl, halogen, nitro or cyano, silyl, A<sup>5</sup> or -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, wherein R<sup>11</sup> and R<sup>12</sup> independently from each other stand for hydrogen, fluorine, chlorine, bromine, cyano or C<sub>1</sub>-C<sub>4</sub>alkyl, which can be substituted by fluorine, chlorine or bromine, or phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>3</sub>alkyl, A<sup>5</sup> stands for phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen, nitro, cyano, phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, -NR<sup>13</sup>R<sup>14</sup> wherein R<sup>13</sup> and R<sup>14</sup> represent hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>6</sub>-C<sub>24</sub>-aryl, in particular phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl,


$C_1$ - $C_8$ alkoxy, halogen or cyano, or phenyl, which can be substituted with  $C_1$ - $C_8$ alkyl or  $C_1$ - $C_8$ alkoxy one to three times, and  $m$  stands for 0, 1, 2, 3 or 4,  $A^1$  and  $A^2$  independently from each other stand for

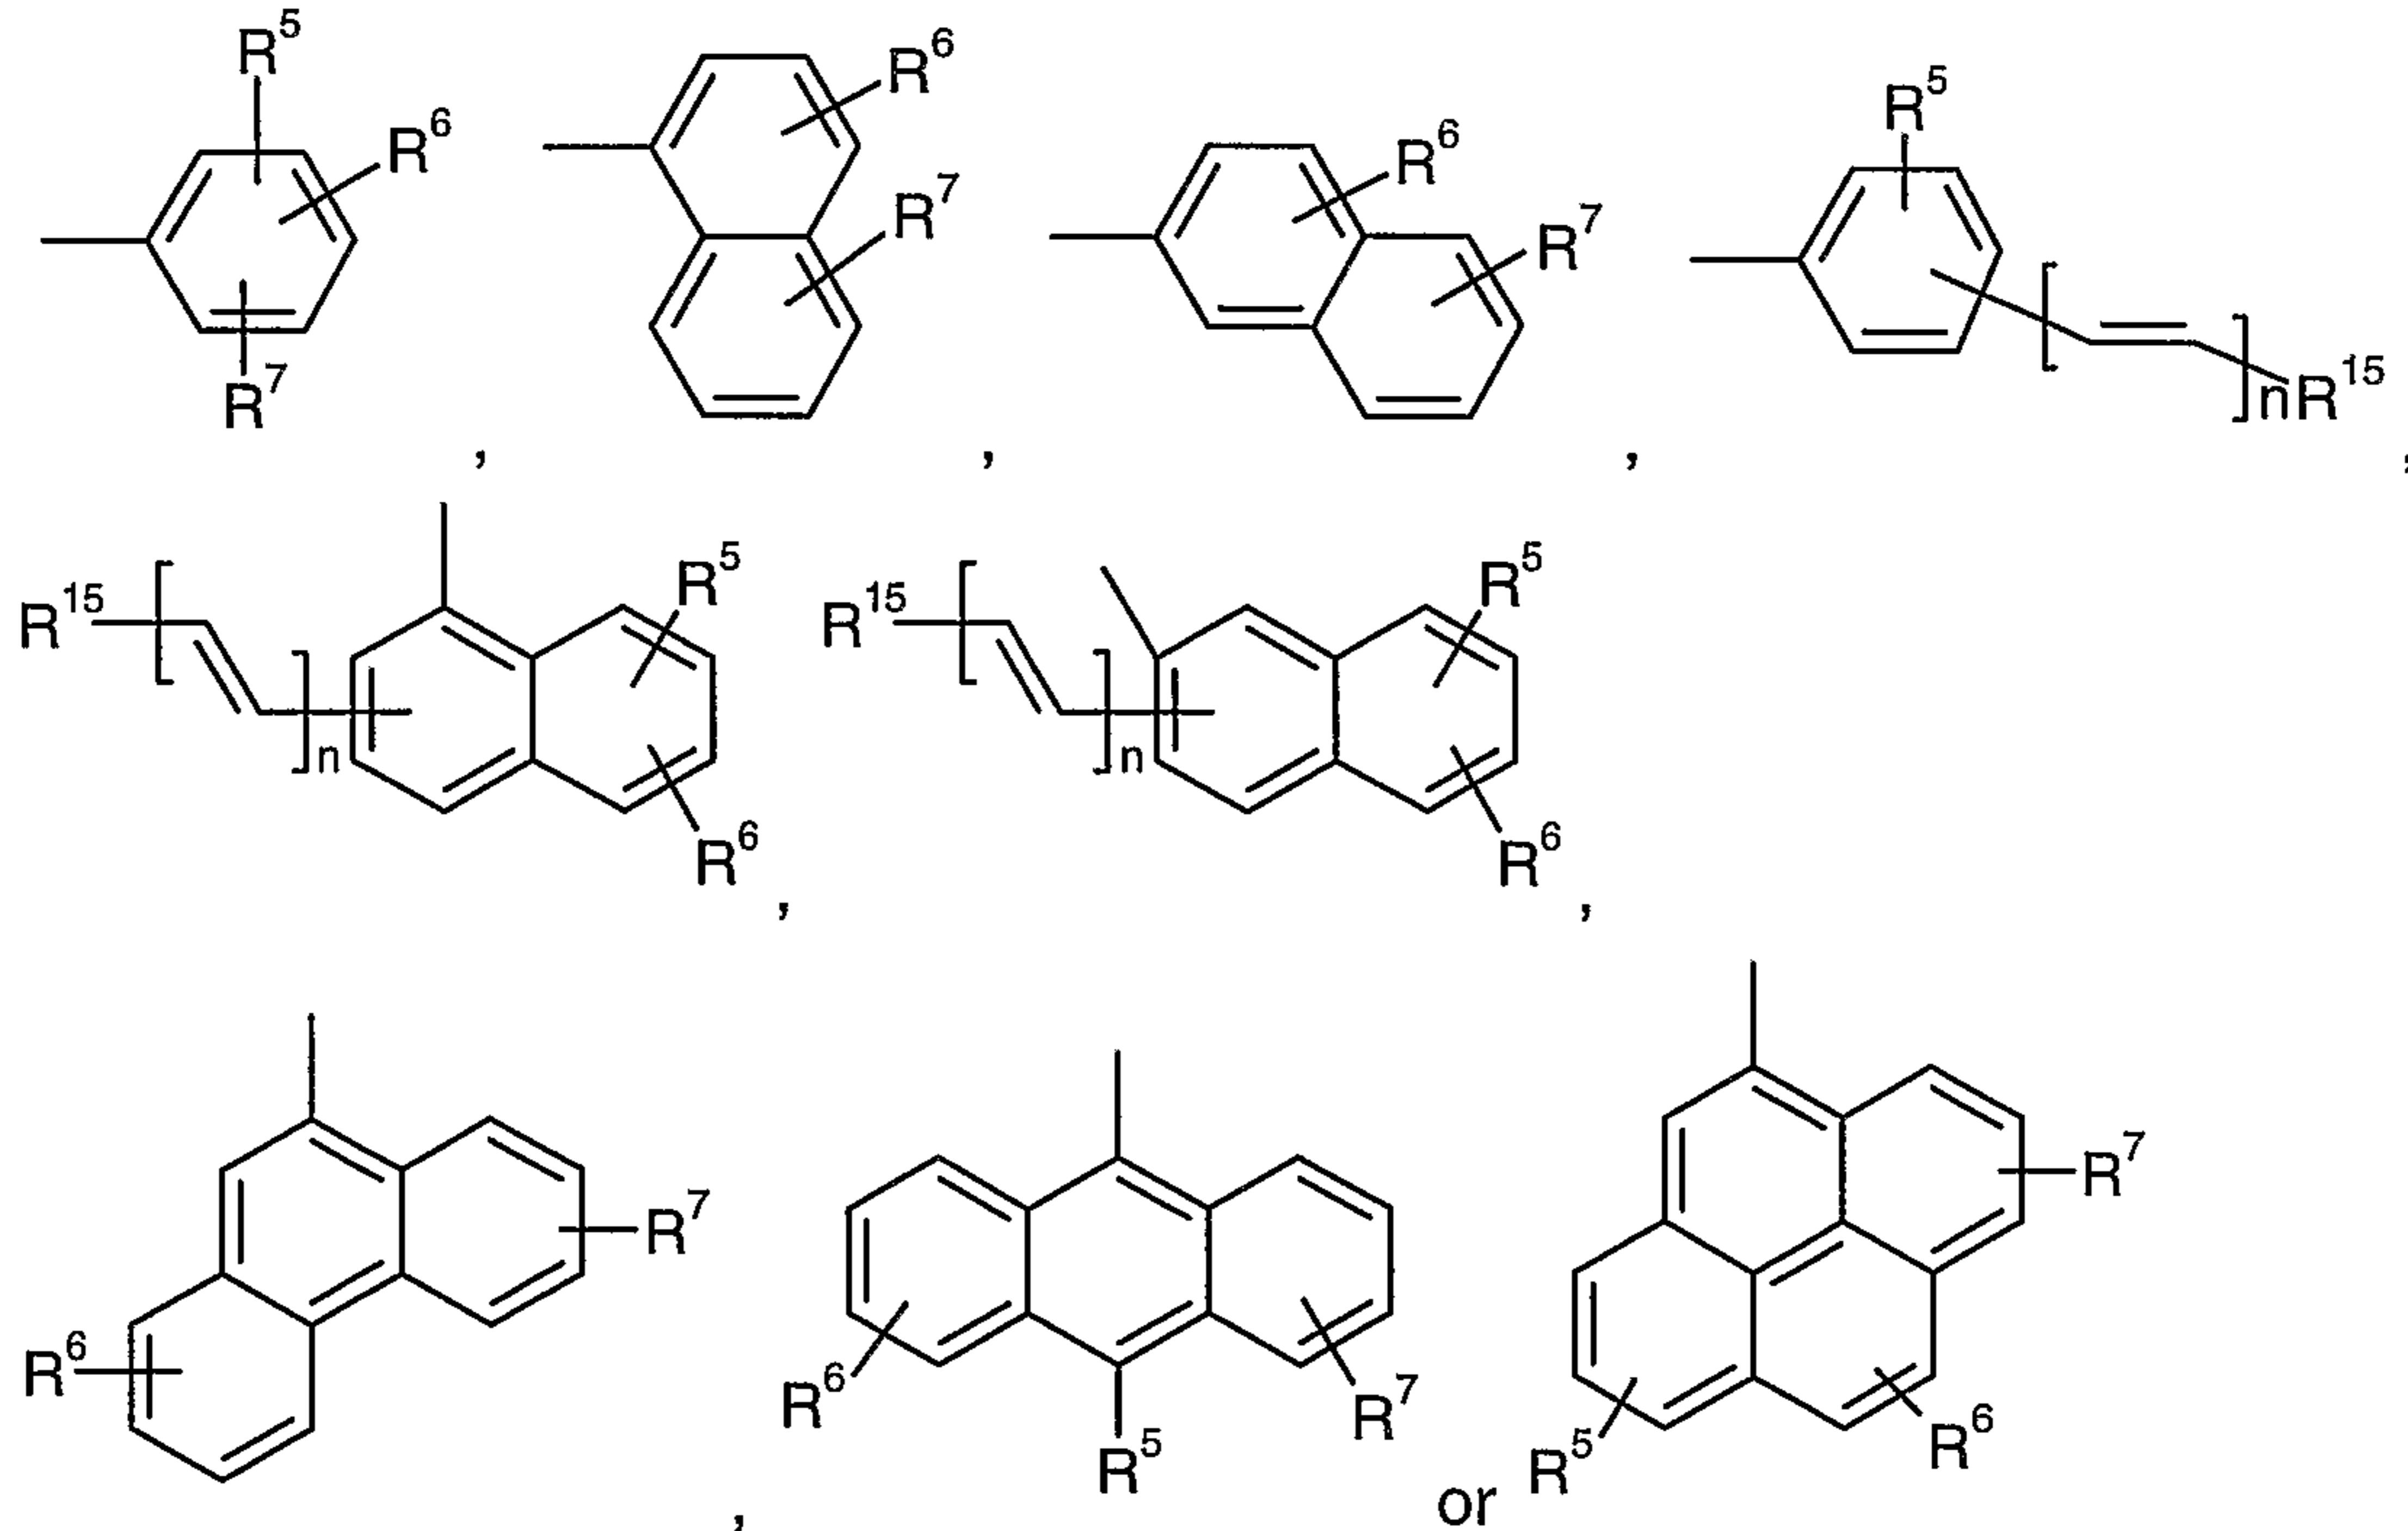


wherein

$R^5$ ,  $R^6$ ,  $R^7$  independently from each other stands for hydrogen,  $C_1$ - $C_{25}$ -alkyl,  $C_1$ - $C_{25}$ -alkoxy,  $-CR^{11}R^{12}-(CH_2)_m-A^5$ , cyano, halogen,  $-OR^{10}$ ,  $-S(O)_pR^{13}$ , or phenyl, which can be substituted one to three times with  $C_1$ - $C_8$ alkyl or  $C_1$ - $C_8$ alkoxy, wherein  $R^{10}$  stands for  $C_6$ - $C_{24}$ -aryl, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur,  $R^{13}$  stands for  $C_1$ - $C_{25}$ -alkyl,  $C_5$ - $C_{12}$ -cycloalkyl,  $-CR^{11}R^{12}-(CH_2)_m-Ph$ ,  $R^{15}$  stands for  $C_6$ - $C_{24}$ -aryl,  $p$  stands for 0, 1, 2 or 3 and  $n$  stands for 0, 1, 2, 3 or 4,


$A^3$  and  $A^4$  independently from each other stand for

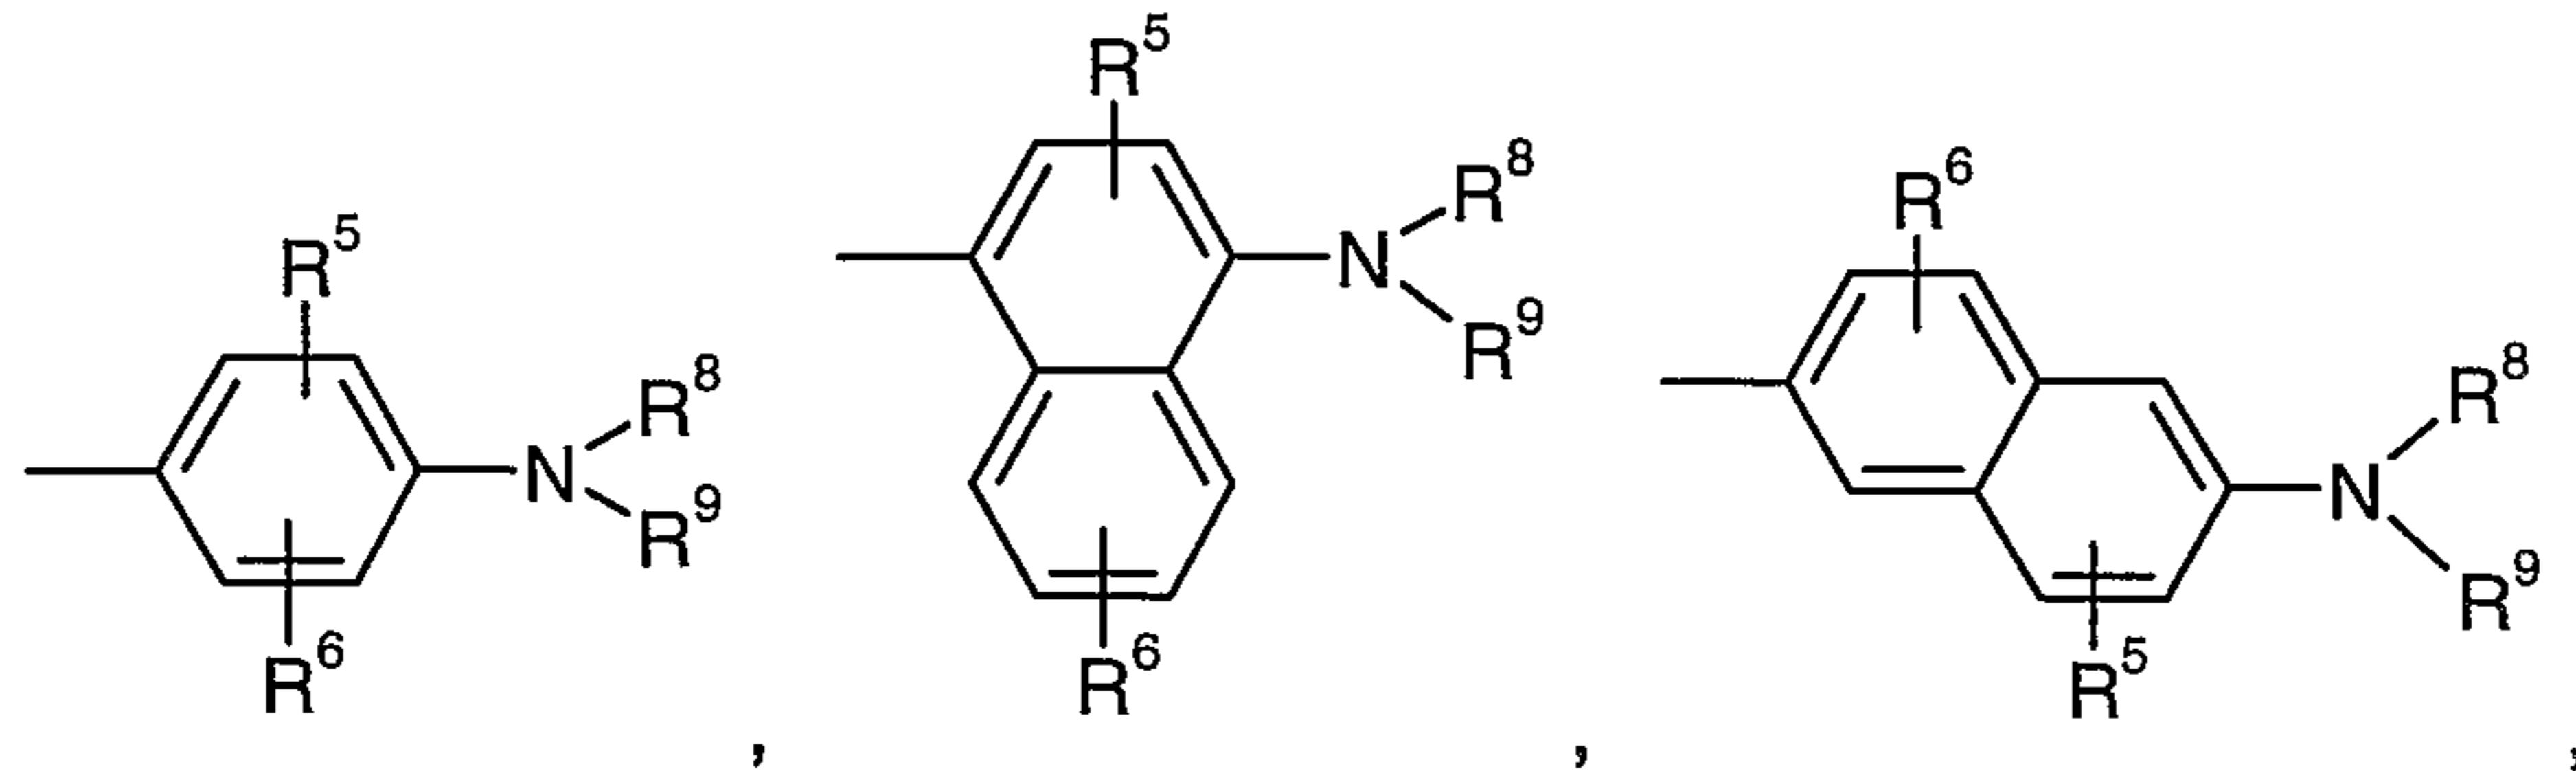

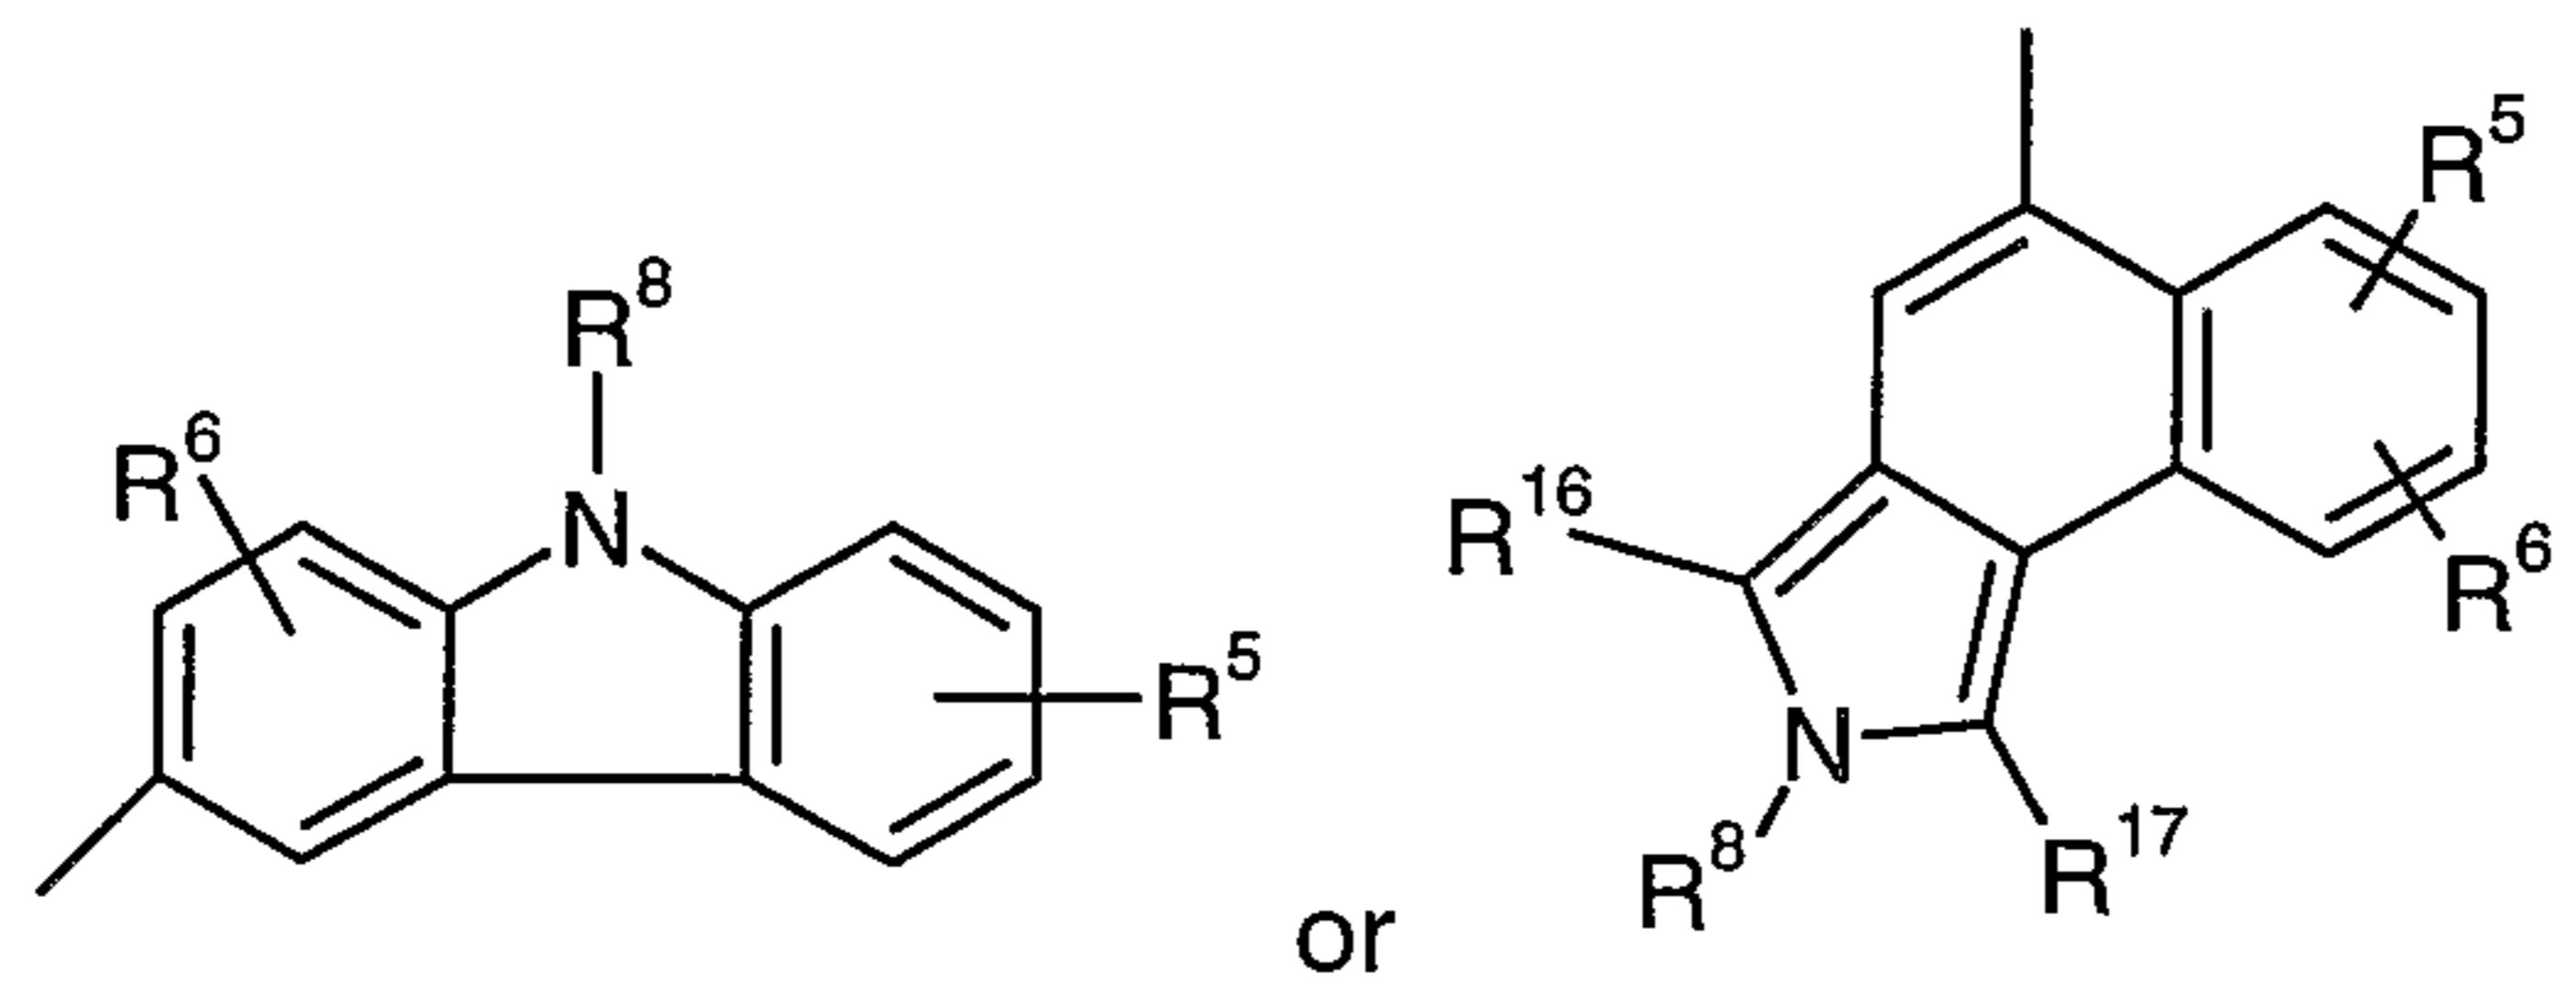



wherein R<sup>8</sup> and R<sup>9</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, C<sub>6</sub>-C<sub>24</sub>-aryl, in particular A<sup>1</sup>, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur, and R<sup>16</sup> and R<sup>17</sup> are independently of each other hydrogen or C<sub>6</sub>-C<sub>24</sub>aryl.

3. Composition according to claim 2, wherein A<sup>1</sup> and A<sup>2</sup> independently from each other stand for

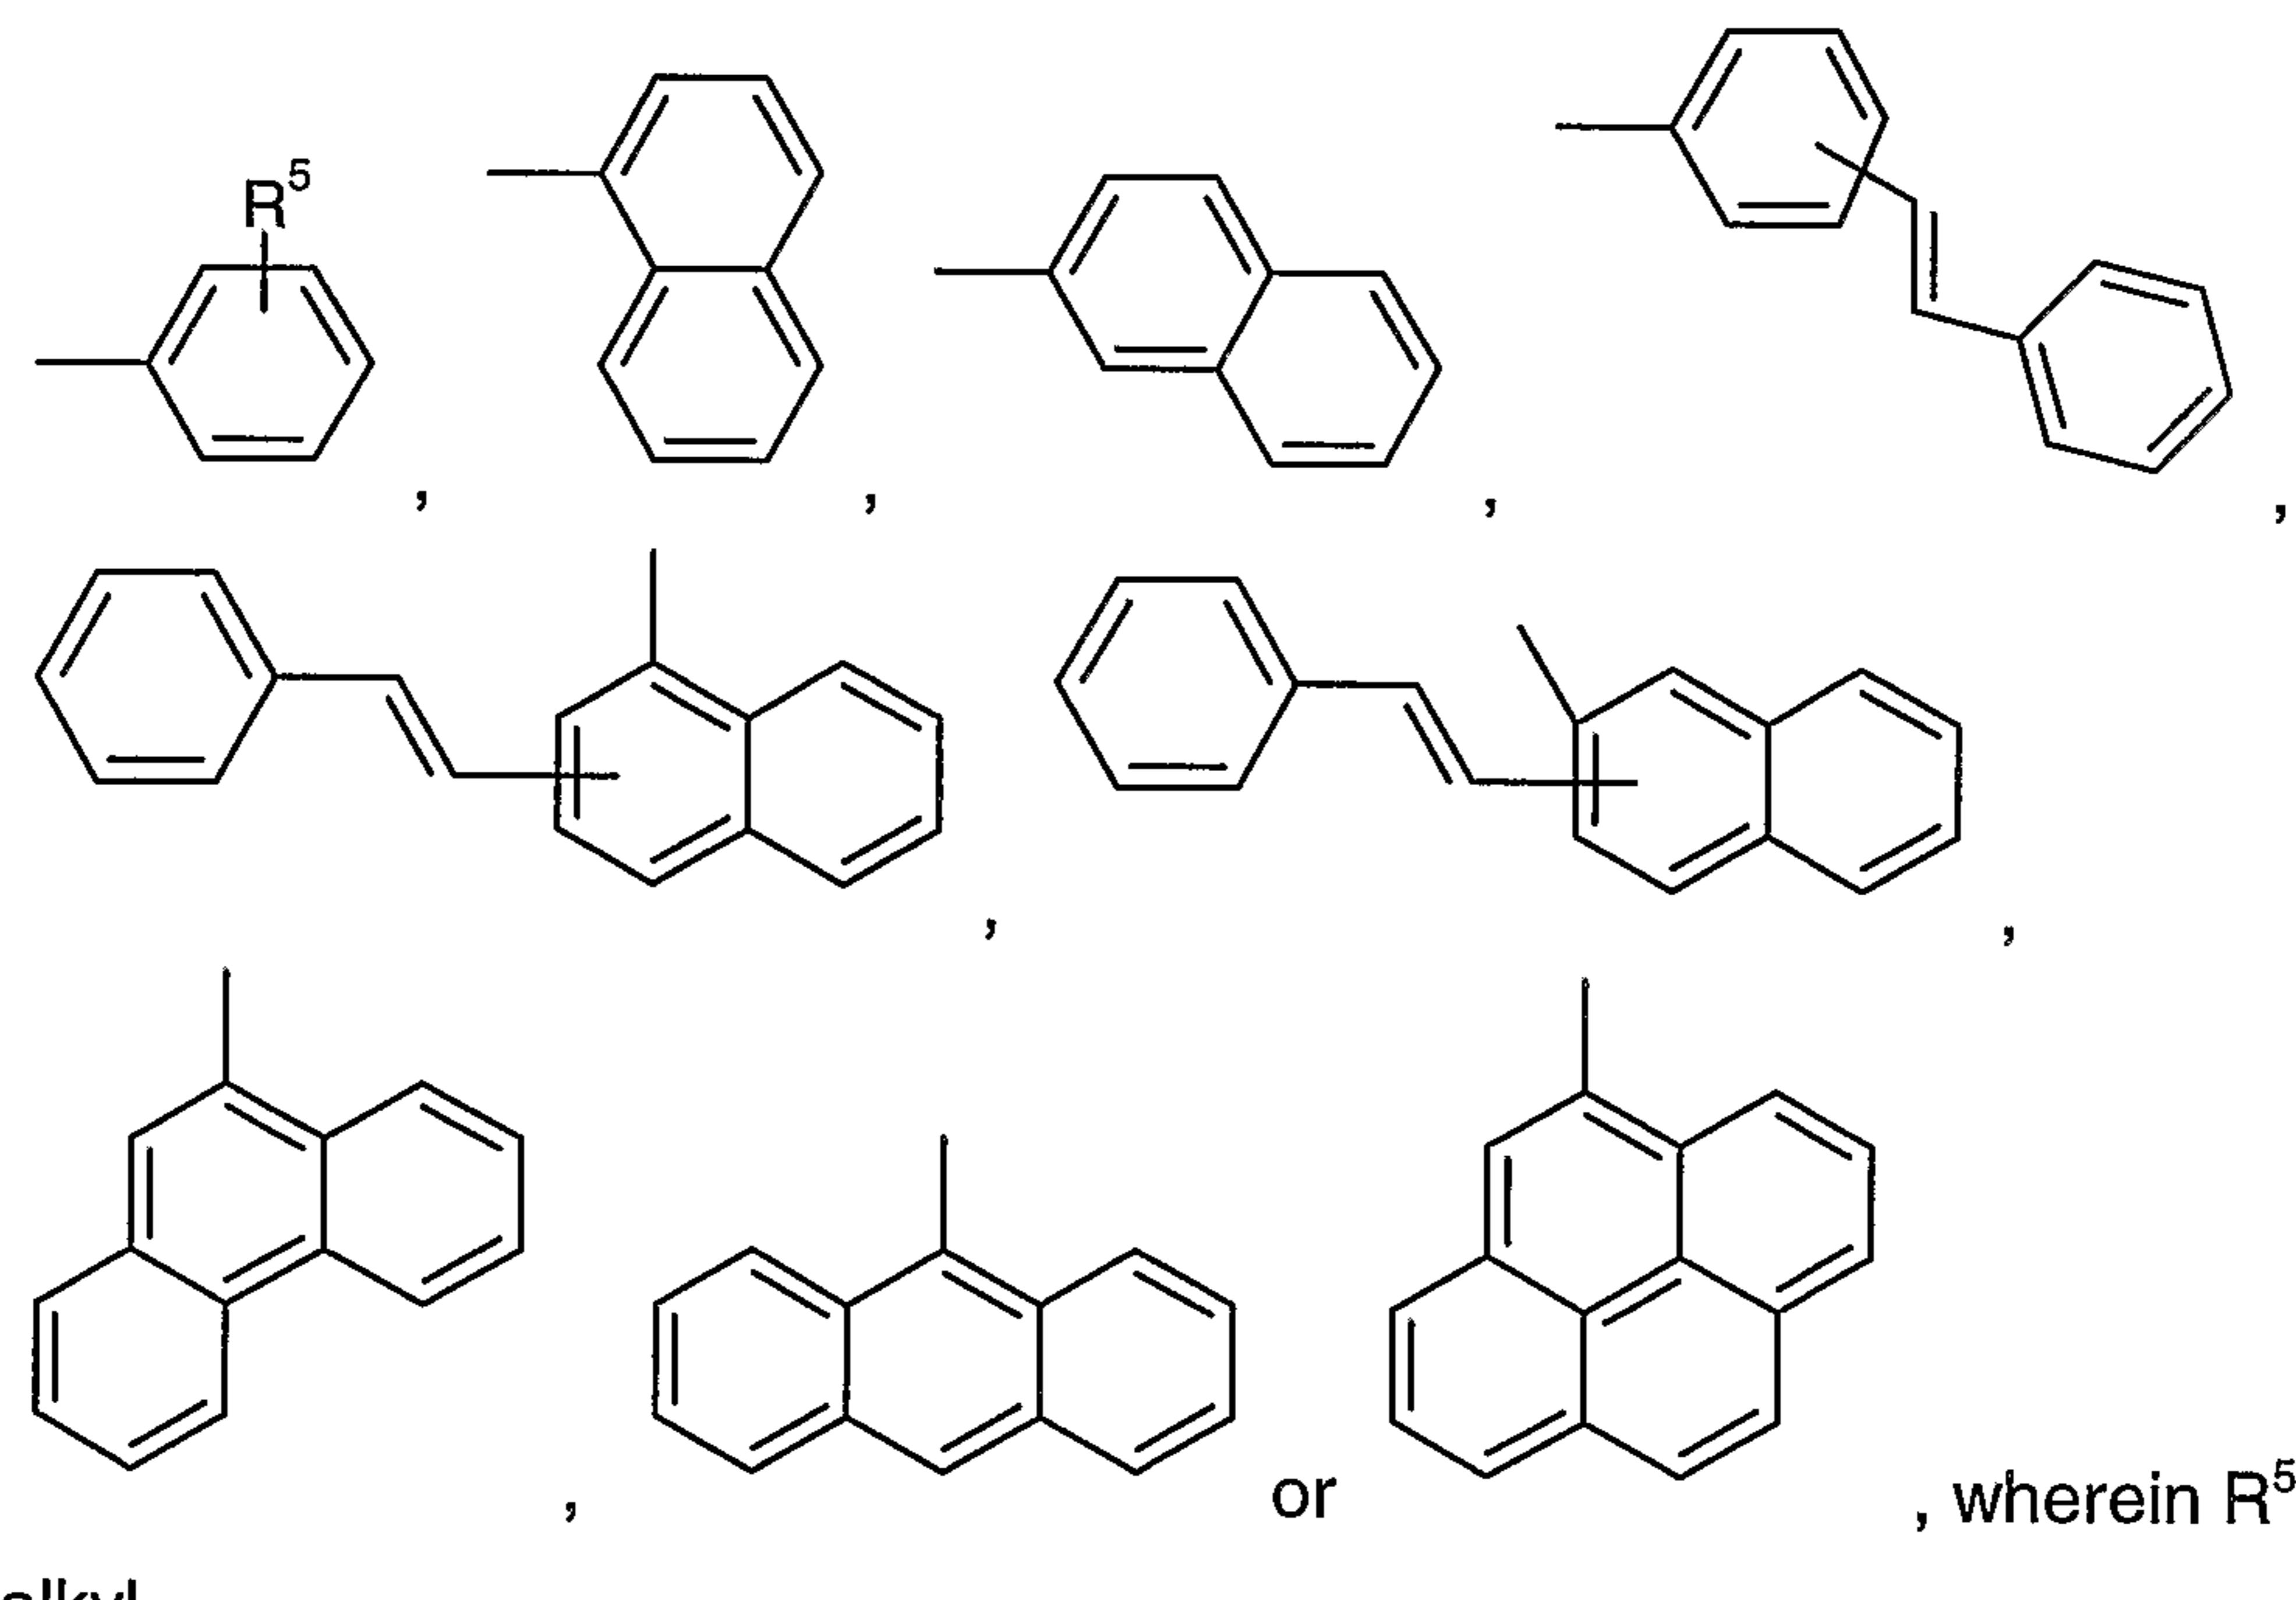


4. Composition according to claim 2 or 3, wherein A<sup>3</sup> and A<sup>4</sup> independently from each other stand for

48














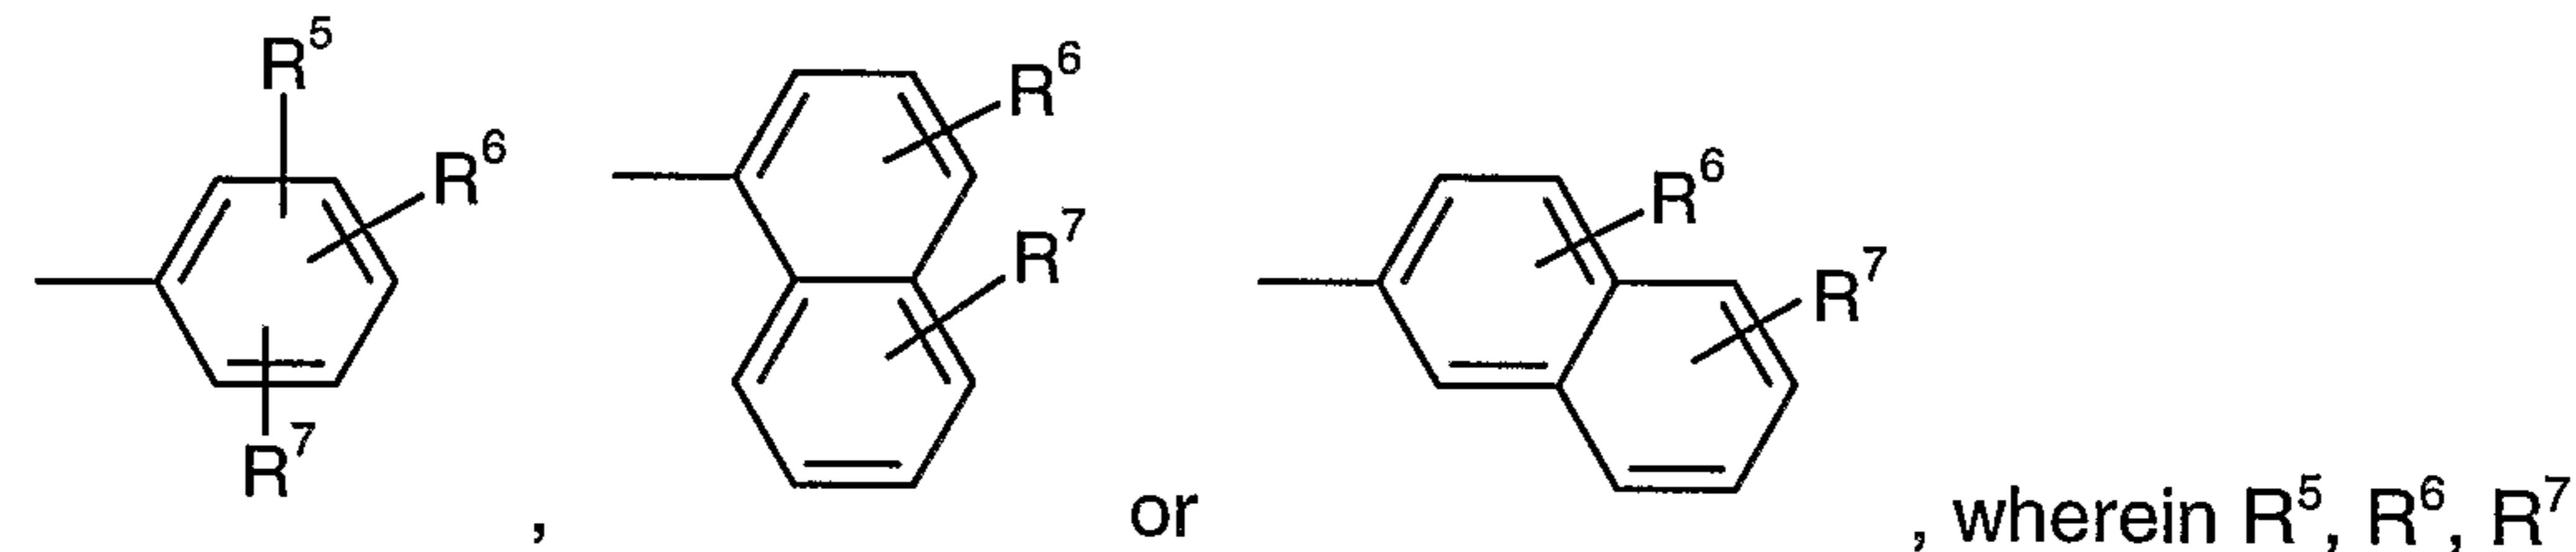
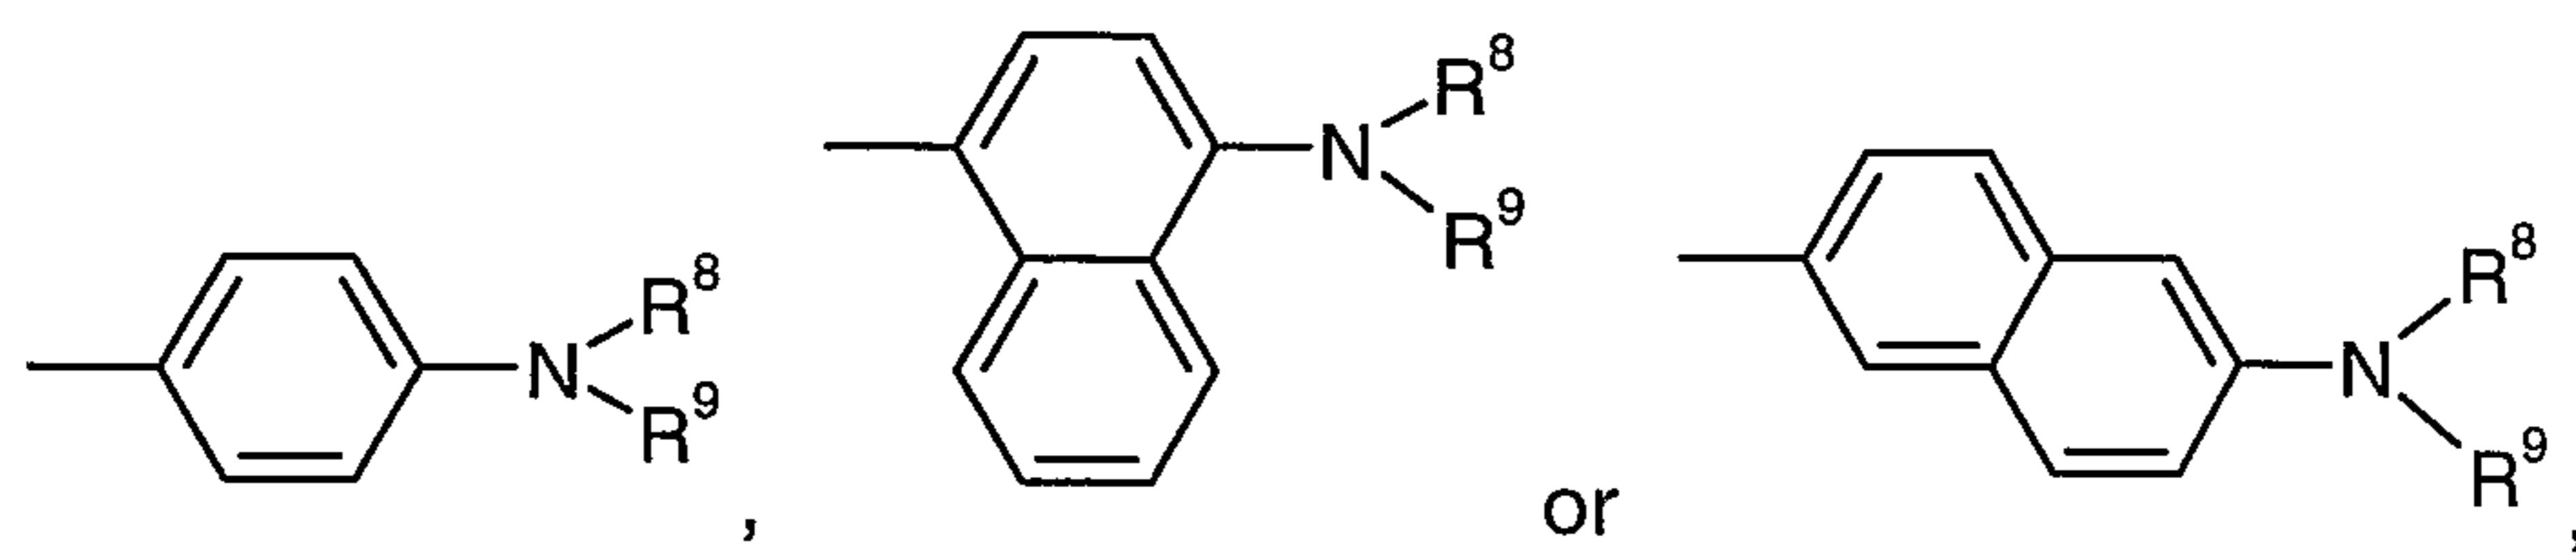


5. Composition according to any of claims 2 to 4, wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> independently from each other stand for C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl and/or C<sub>1</sub>-C<sub>8</sub>alkoxy, phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl and/or C<sub>1</sub>-C<sub>8</sub>alkoxy, or -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup> wherein R<sup>11</sup> and R<sup>12</sup> stand for hydrogen, A<sup>5</sup> stands for phenyl or 1- or 2-naphthyl, which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl and/or C<sub>1</sub>-C<sub>8</sub>alkoxy, and m stands for 0 or 1.
6. Composition according to any of claims 2, 3 or 5, wherein the compound of the formula I is selected from the following compounds A-1 to A-29:

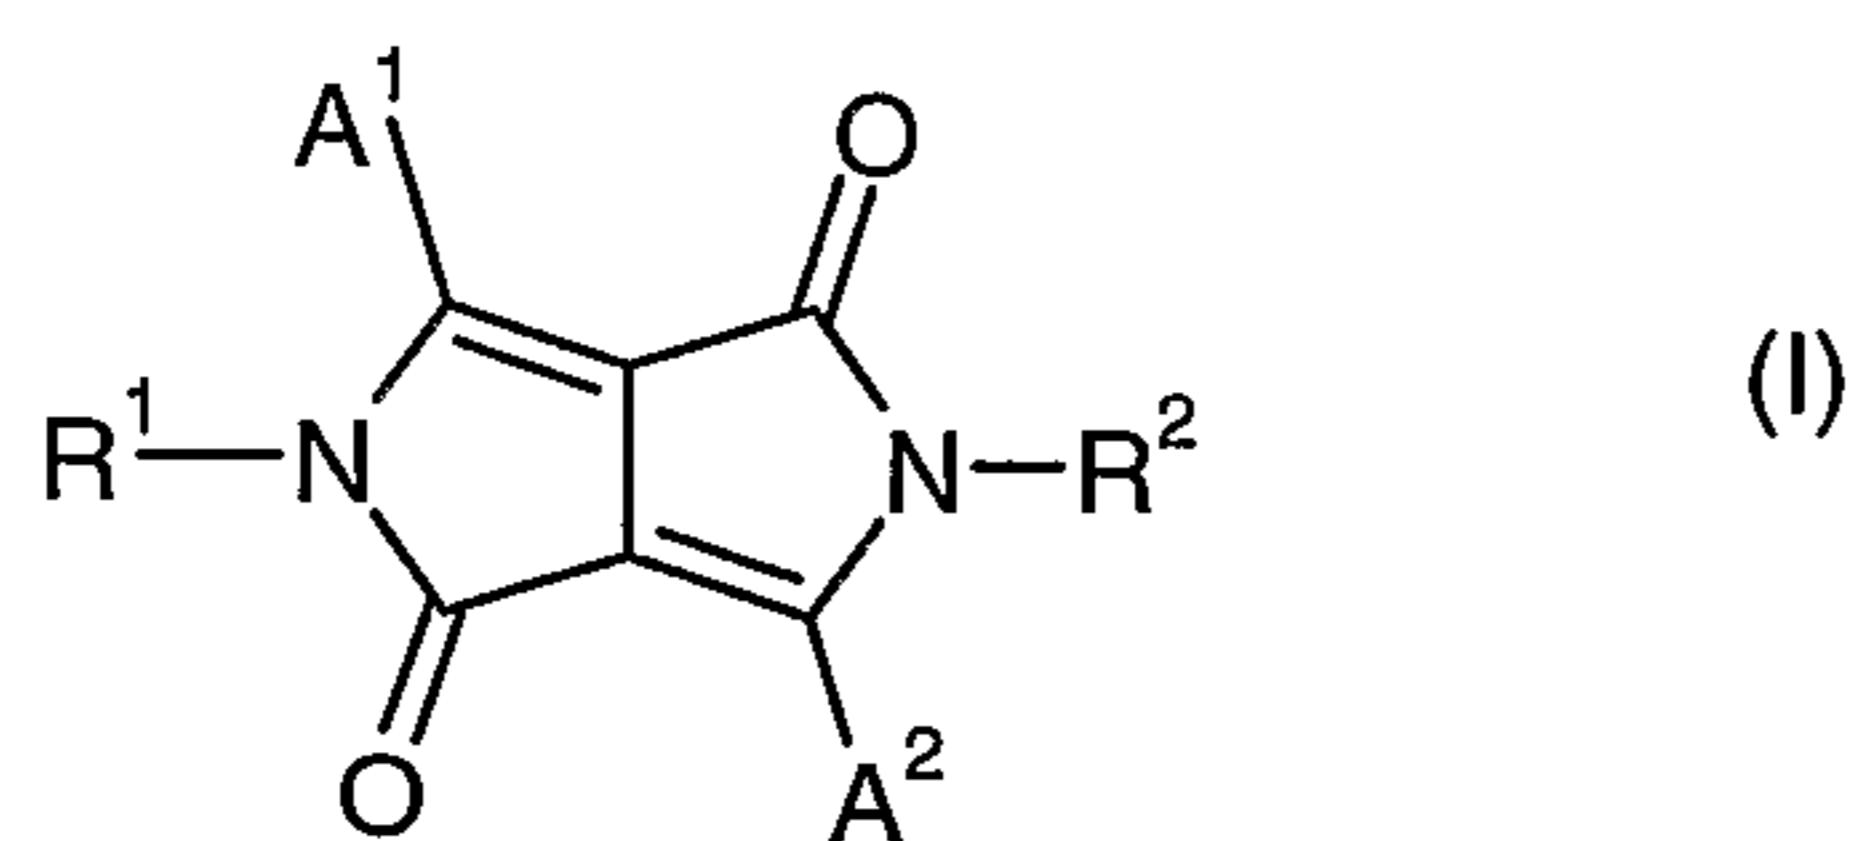


Compound	$A^1 = A^2$	$R^1 = R^2$
A-1		
A-2		
A-3		
A-4		
A-5	"	
A-6	"	$-(CH_2)_3CH_3$
A-7		

Compound	$A^1 = A^2$	$R^1 = R^2$
A-8		$-\text{Si}(\text{CH}_3)_3$
A-9		
A-10		
A-11		
A-12		
A-13		
A-14		
A-15		
A-16		

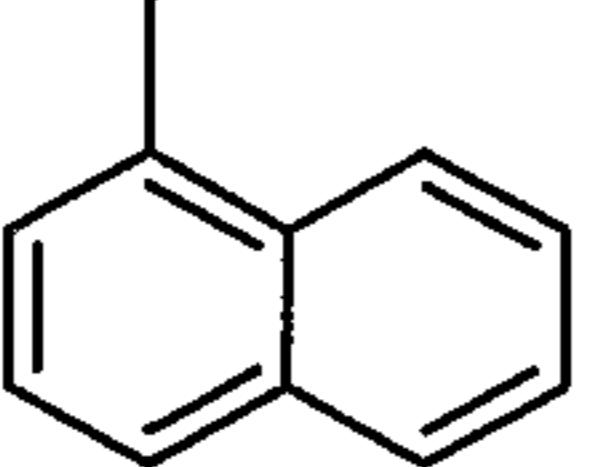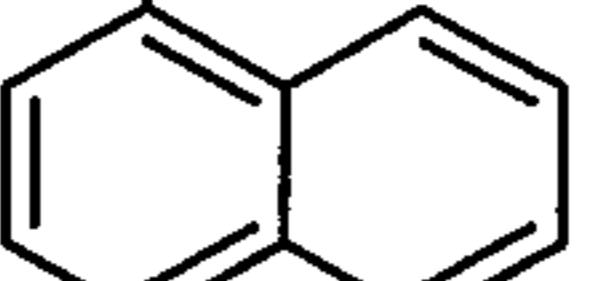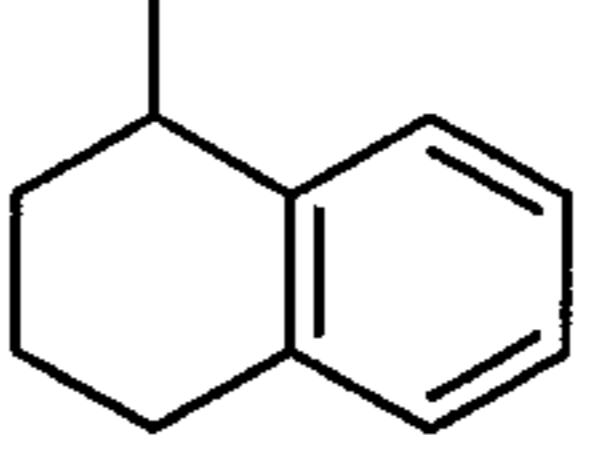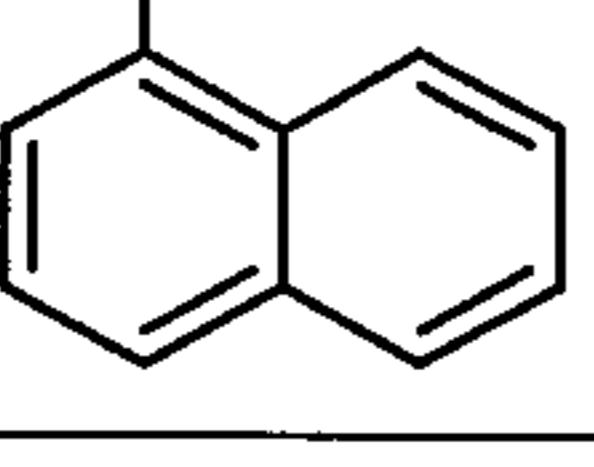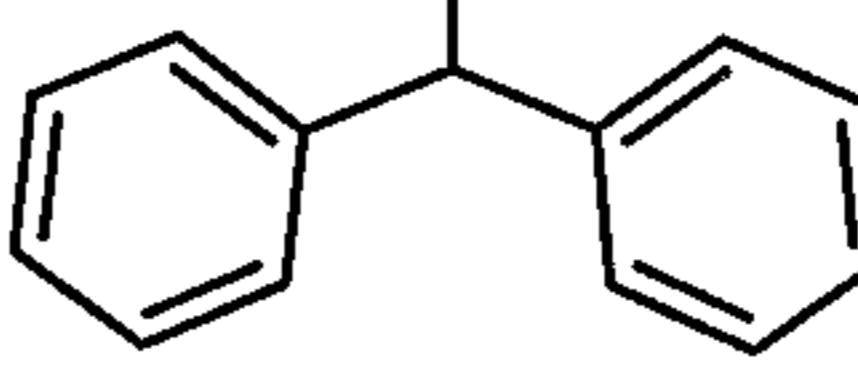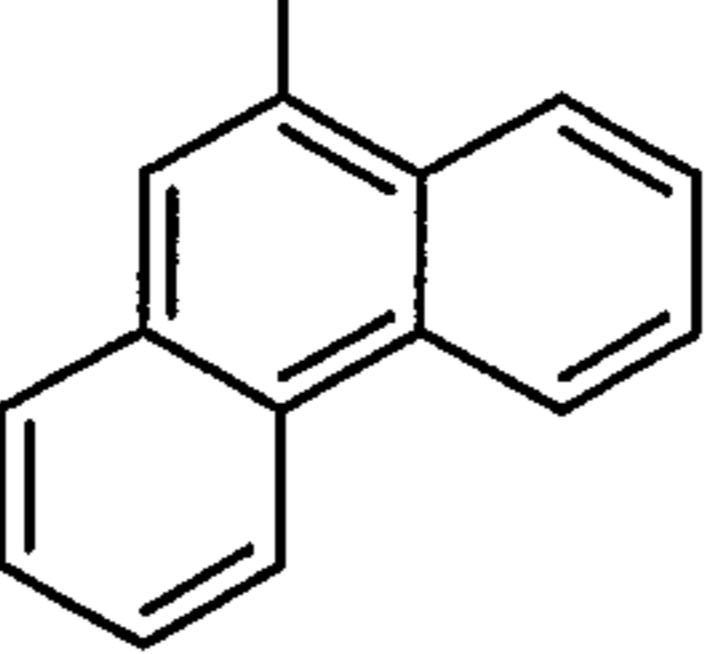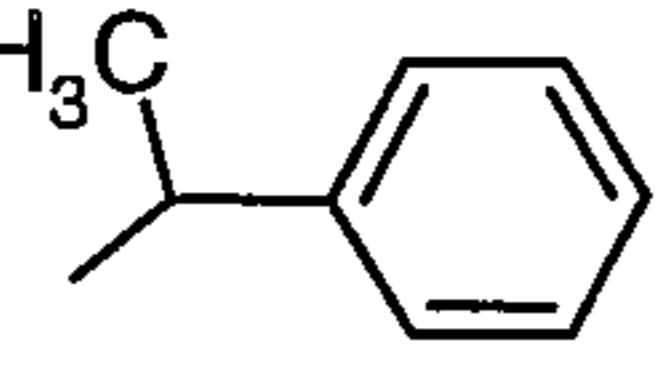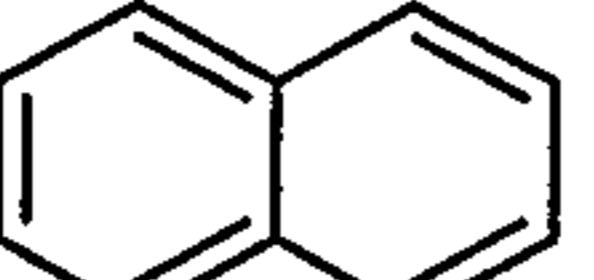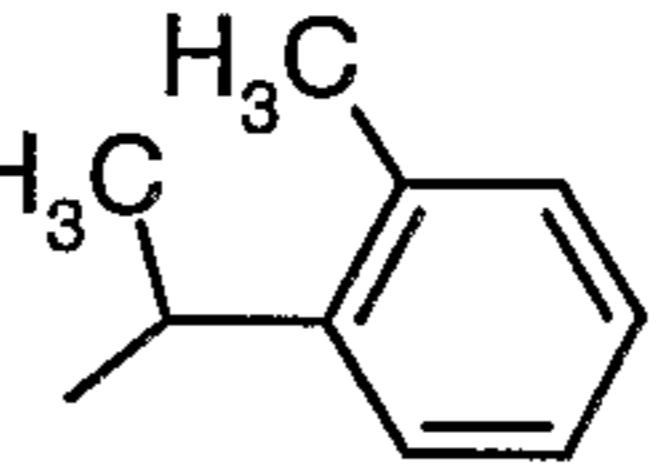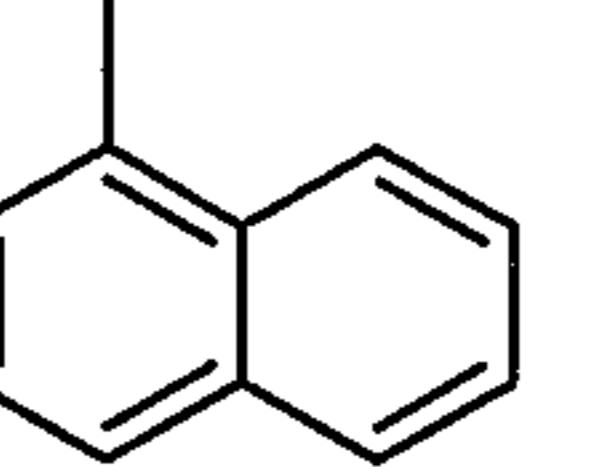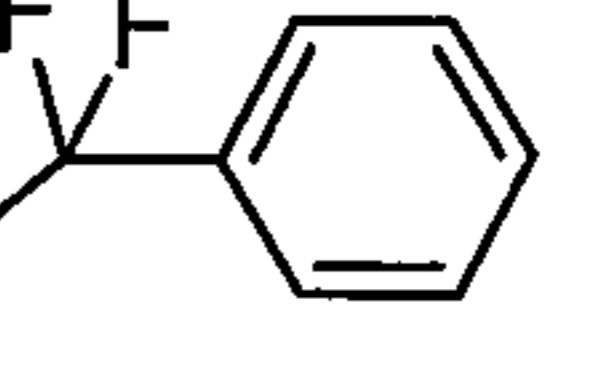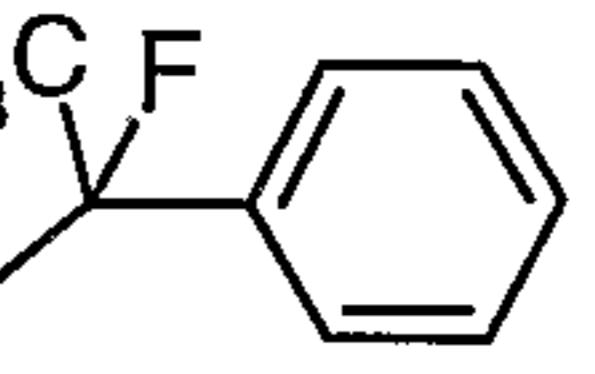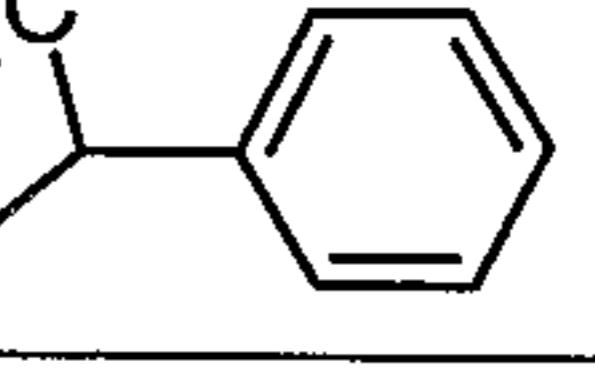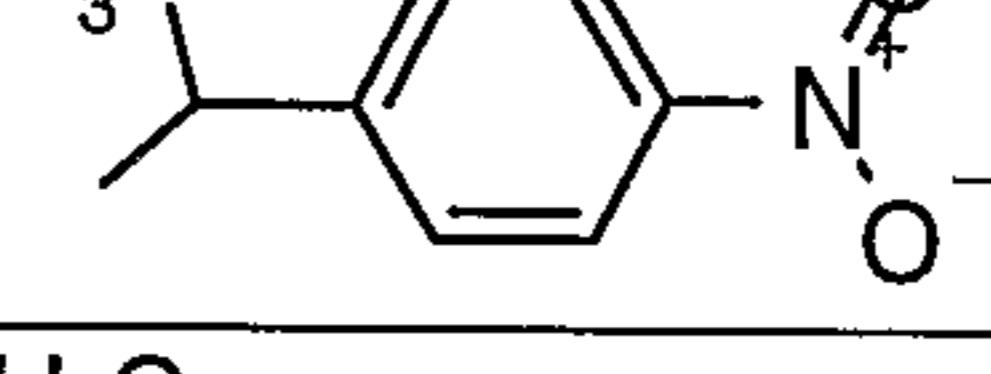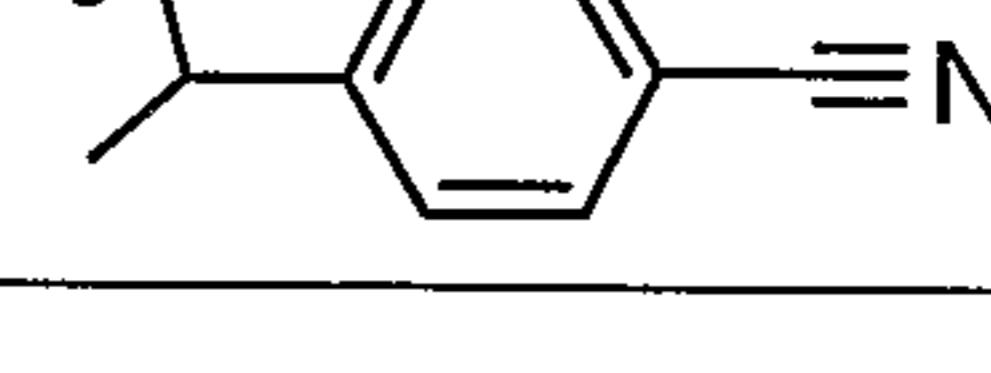Compound	$A^1 = A^2$	$R^1 = R^2$
A-17		$-\text{CH}(\text{CH}_3)_2$
A-18		
A-19		
A-20		
A-21		
A-22		
A-23	"	
A-24	"	$-\text{CF}_3$
A-25	"	$-\text{CHF}_2$
A-26	"	$-\text{CH}_2\text{F}$
A-27	"	
A-28	"	
A-29	"	



7. Composition according to any of claims 2, 4 or 5, wherein the compound of the formula II is selected from the following compounds B-1 to B-9:

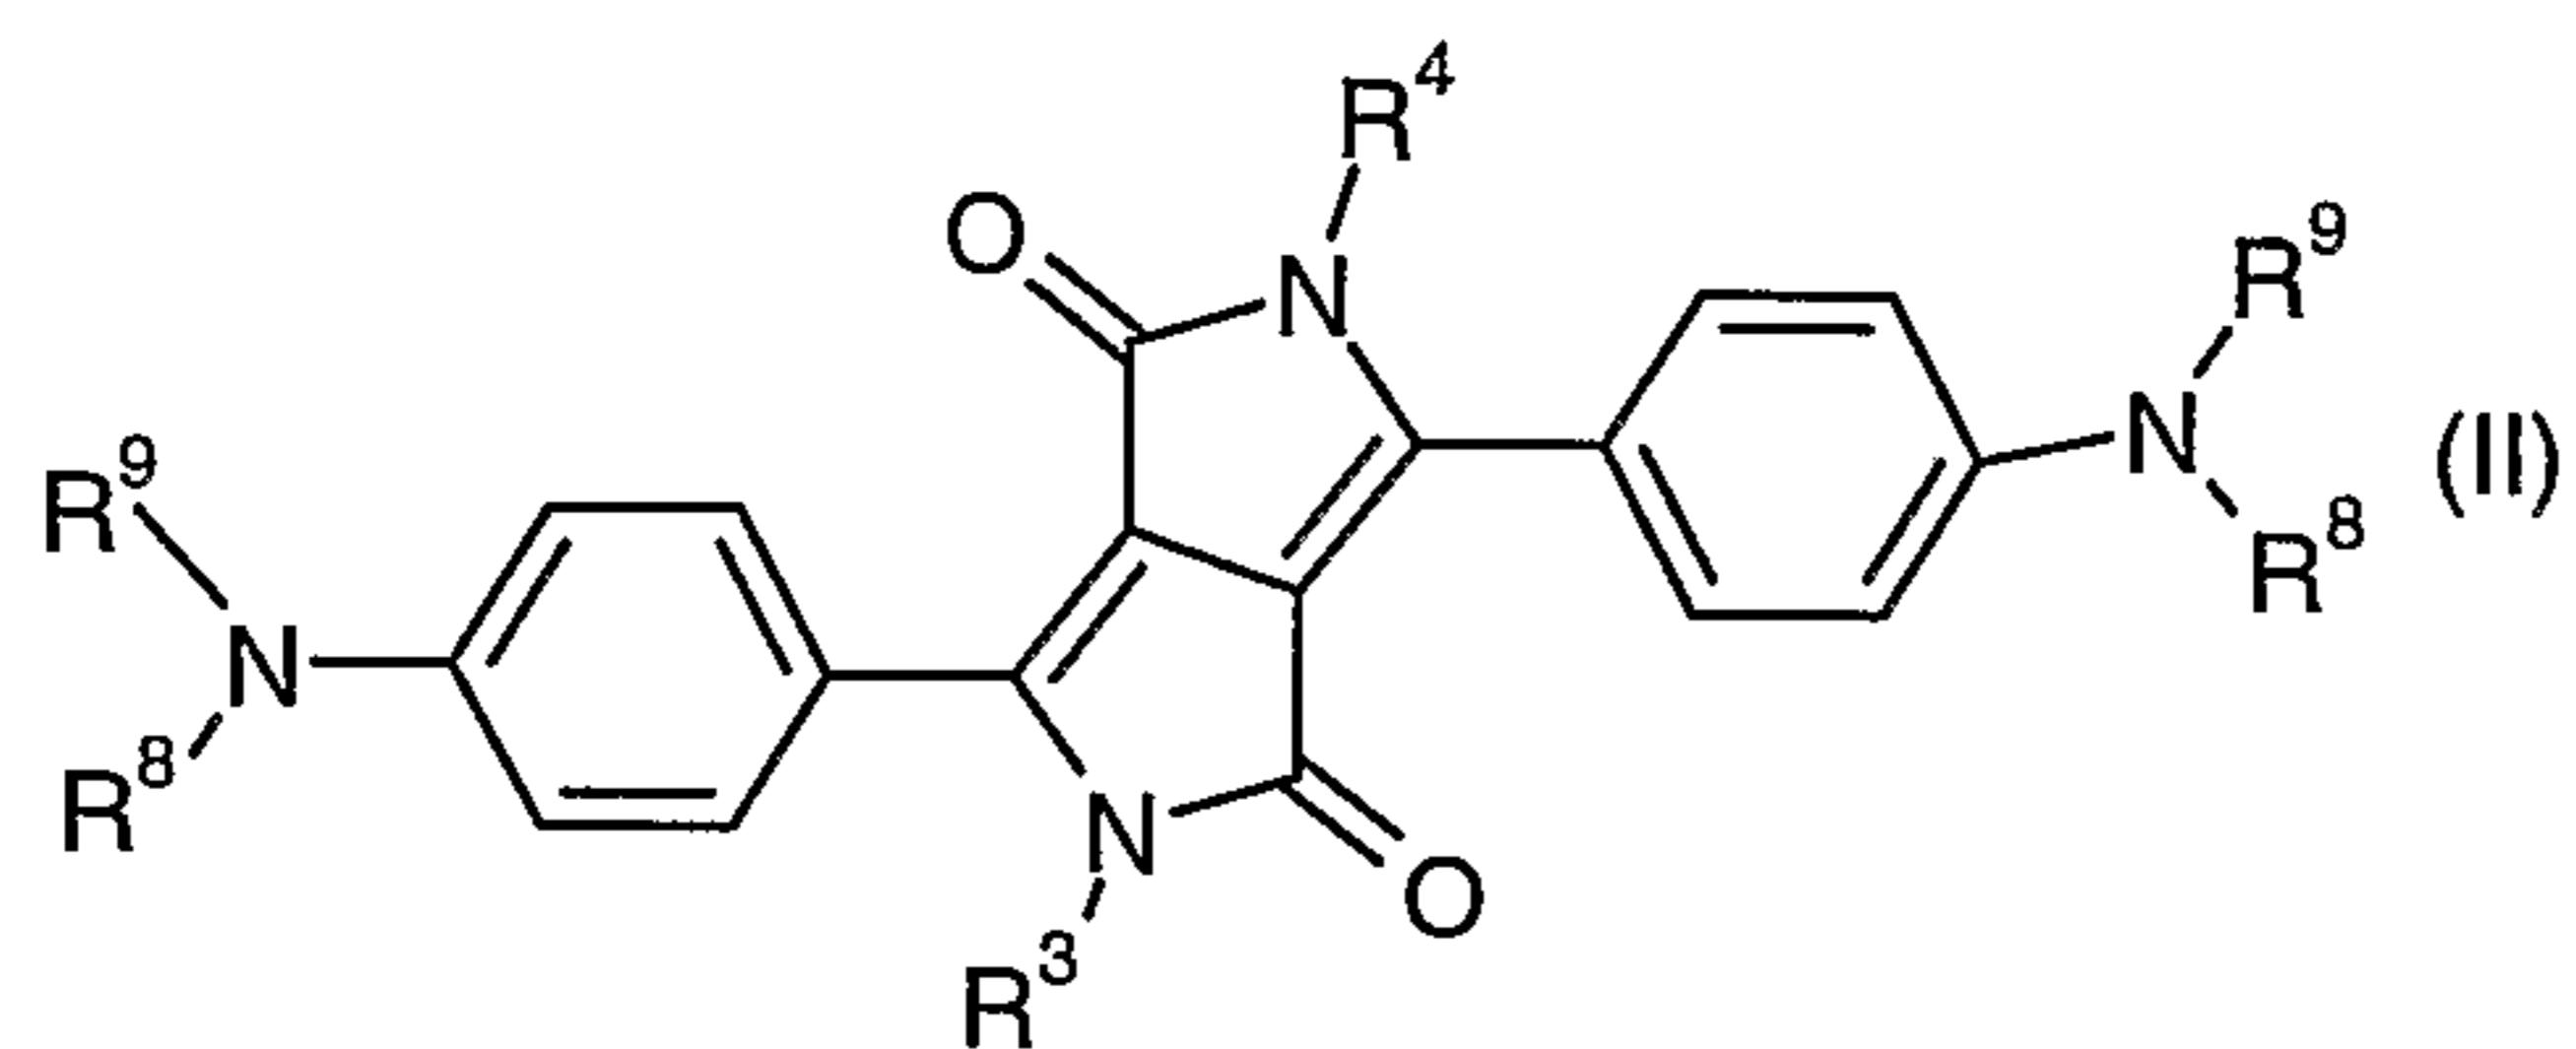

Compound	$R^3 = R^4$	$R^8$	$R^9$
B-1			
B-2	$-(CH_2)_3CH_3$		
B-3			
B-4			
B-5		"	"
B-6	"		
B-7			
B-8			
B-9			


8. An electroluminescent device comprising the composition according to any of claims 1 to 7.

9. An electroluminescent device according to claim 8, comprising in this order  
(a) an anode, (b) a hole transporting layer, (c) a light-emitting layer, (d) optionally an electron transporting layer and (e) a cathode.
10. A composition comprising  
(a) 0.01 to 50% by weight, based on the total weight of the colored high molecular weight organic material, of the composition according to any of claims 1 to 7, and  
(b) 99.99 to 50% by weight, based on the total weight of the colored high molecular weight organic material, of a high molecular organic material.
11. Use of the composition according to any of claims 1 to 6 for coloring a high molecular weight organic material and in color changing media.
12. A diketopyrrolopyrrole (“DPP”) represented by formula I or II

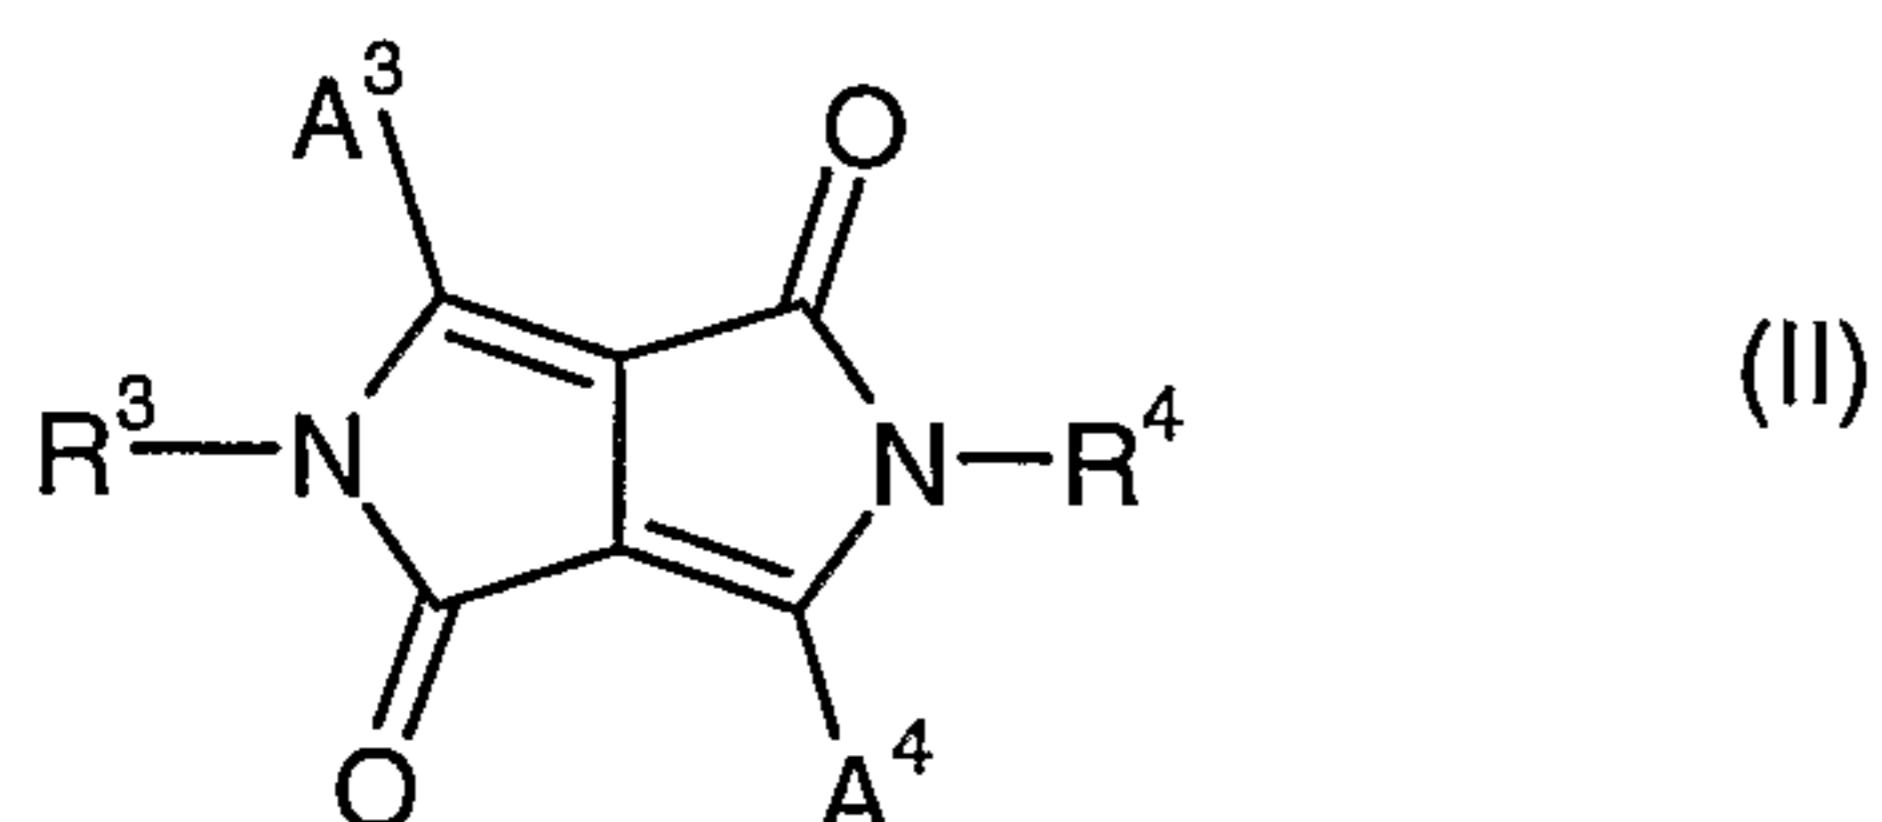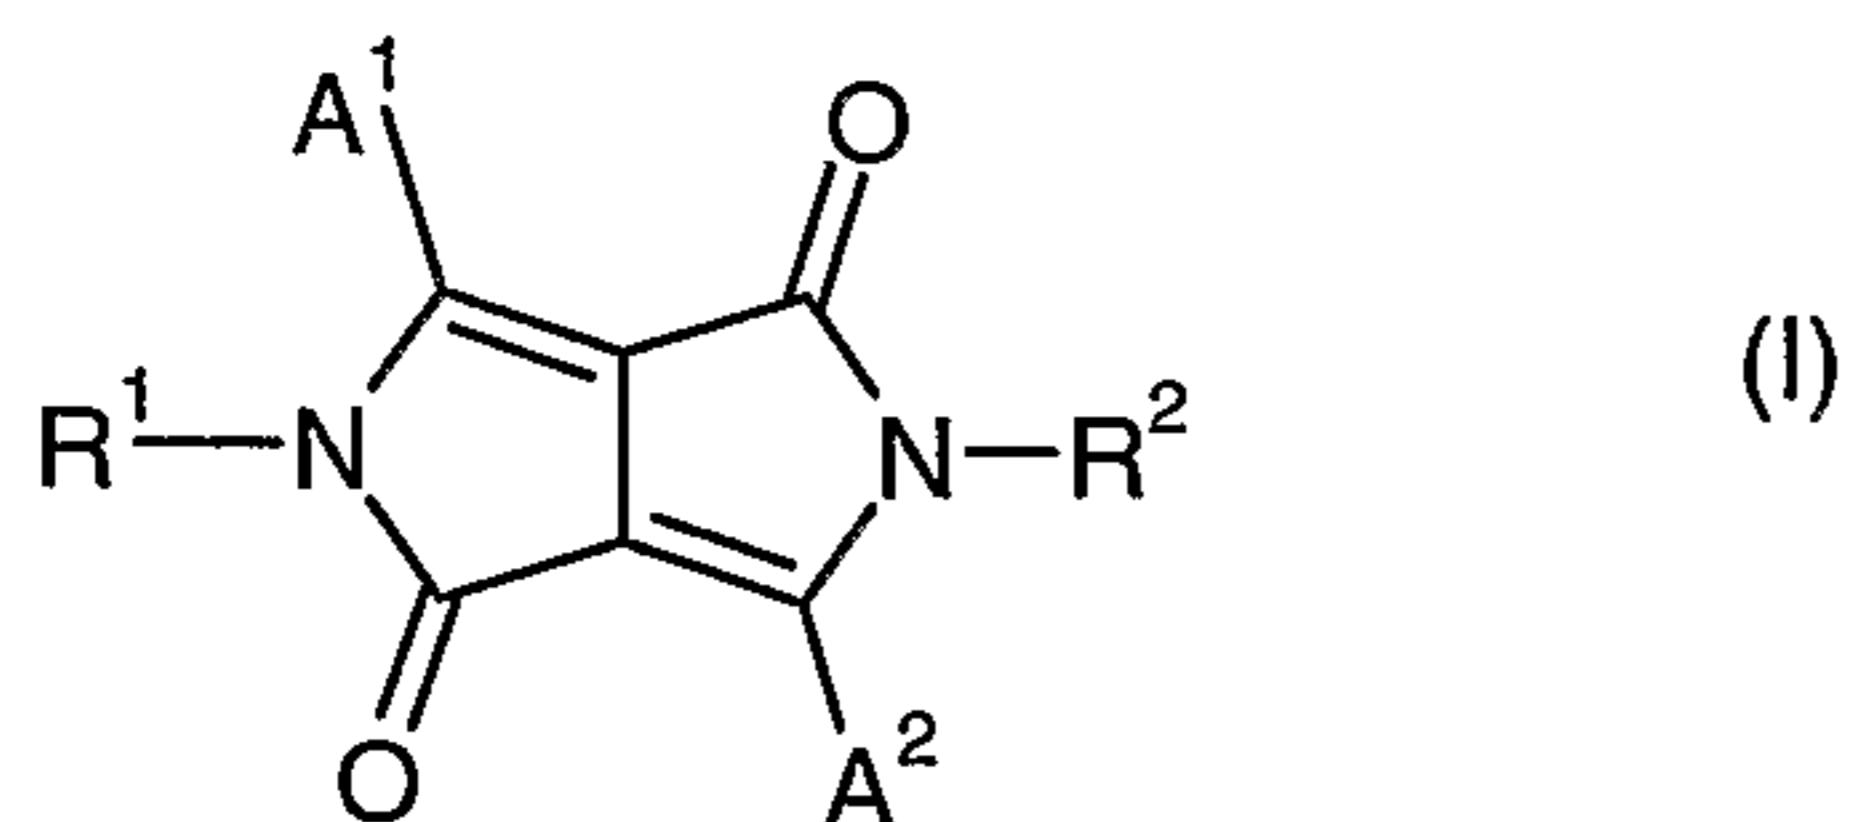


wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> independently from each other stand for C<sub>1</sub>-C<sub>25</sub>-alkyl, which can be substituted by fluorine, chlorine or bromine, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>5</sub>-C<sub>12</sub>-cycloalkyl which can be condensed one or two times by phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>4</sub>-alkyl, halogen, nitro or cyano, silyl, A<sup>5</sup> or -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, wherein R<sup>11</sup> and R<sup>12</sup> independently from each other stand for hydrogen, fluorine, chlorine, bromine, cyano or C<sub>1</sub>-C<sub>4</sub>alkyl, which can be substituted by fluorine, chlorine or bromine, or phenyl which can be substituted one to three times with C<sub>1</sub>-C<sub>3</sub>alkyl, A<sup>5</sup> stands for phenyl or 1- or 2-naphthyl which can be substituted one to three times with C<sub>1</sub>-C<sub>8</sub>alkyl, C<sub>1</sub>-C<sub>8</sub>alkoxy, halogen, nitro, cyano, phenyl, which can be substituted with C<sub>1</sub>-C<sub>8</sub>alkyl or C<sub>1</sub>-C<sub>8</sub>alkoxy one to three times, -NR<sup>13</sup>R<sup>14</sup> wherein R<sup>13</sup> and R<sup>14</sup> represent hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl or C<sub>6</sub>-C<sub>24</sub>-aryl, in particular

phenyl or 1- or 2-naphthyl which can be substituted one to three times with  $C_1$ - $C_8$ alkyl,  $C_1$ - $C_8$ alkoxy, halogen or cyano, or phenyl, which can be substituted with  $C_1$ - $C_8$ alkyl or  $C_1$ - $C_8$ alkoxy one to three times, and  $m$  stands for 0, 1, 2, 3 or 4,  $A^1$  and  $A^2$  independently from each other stand for

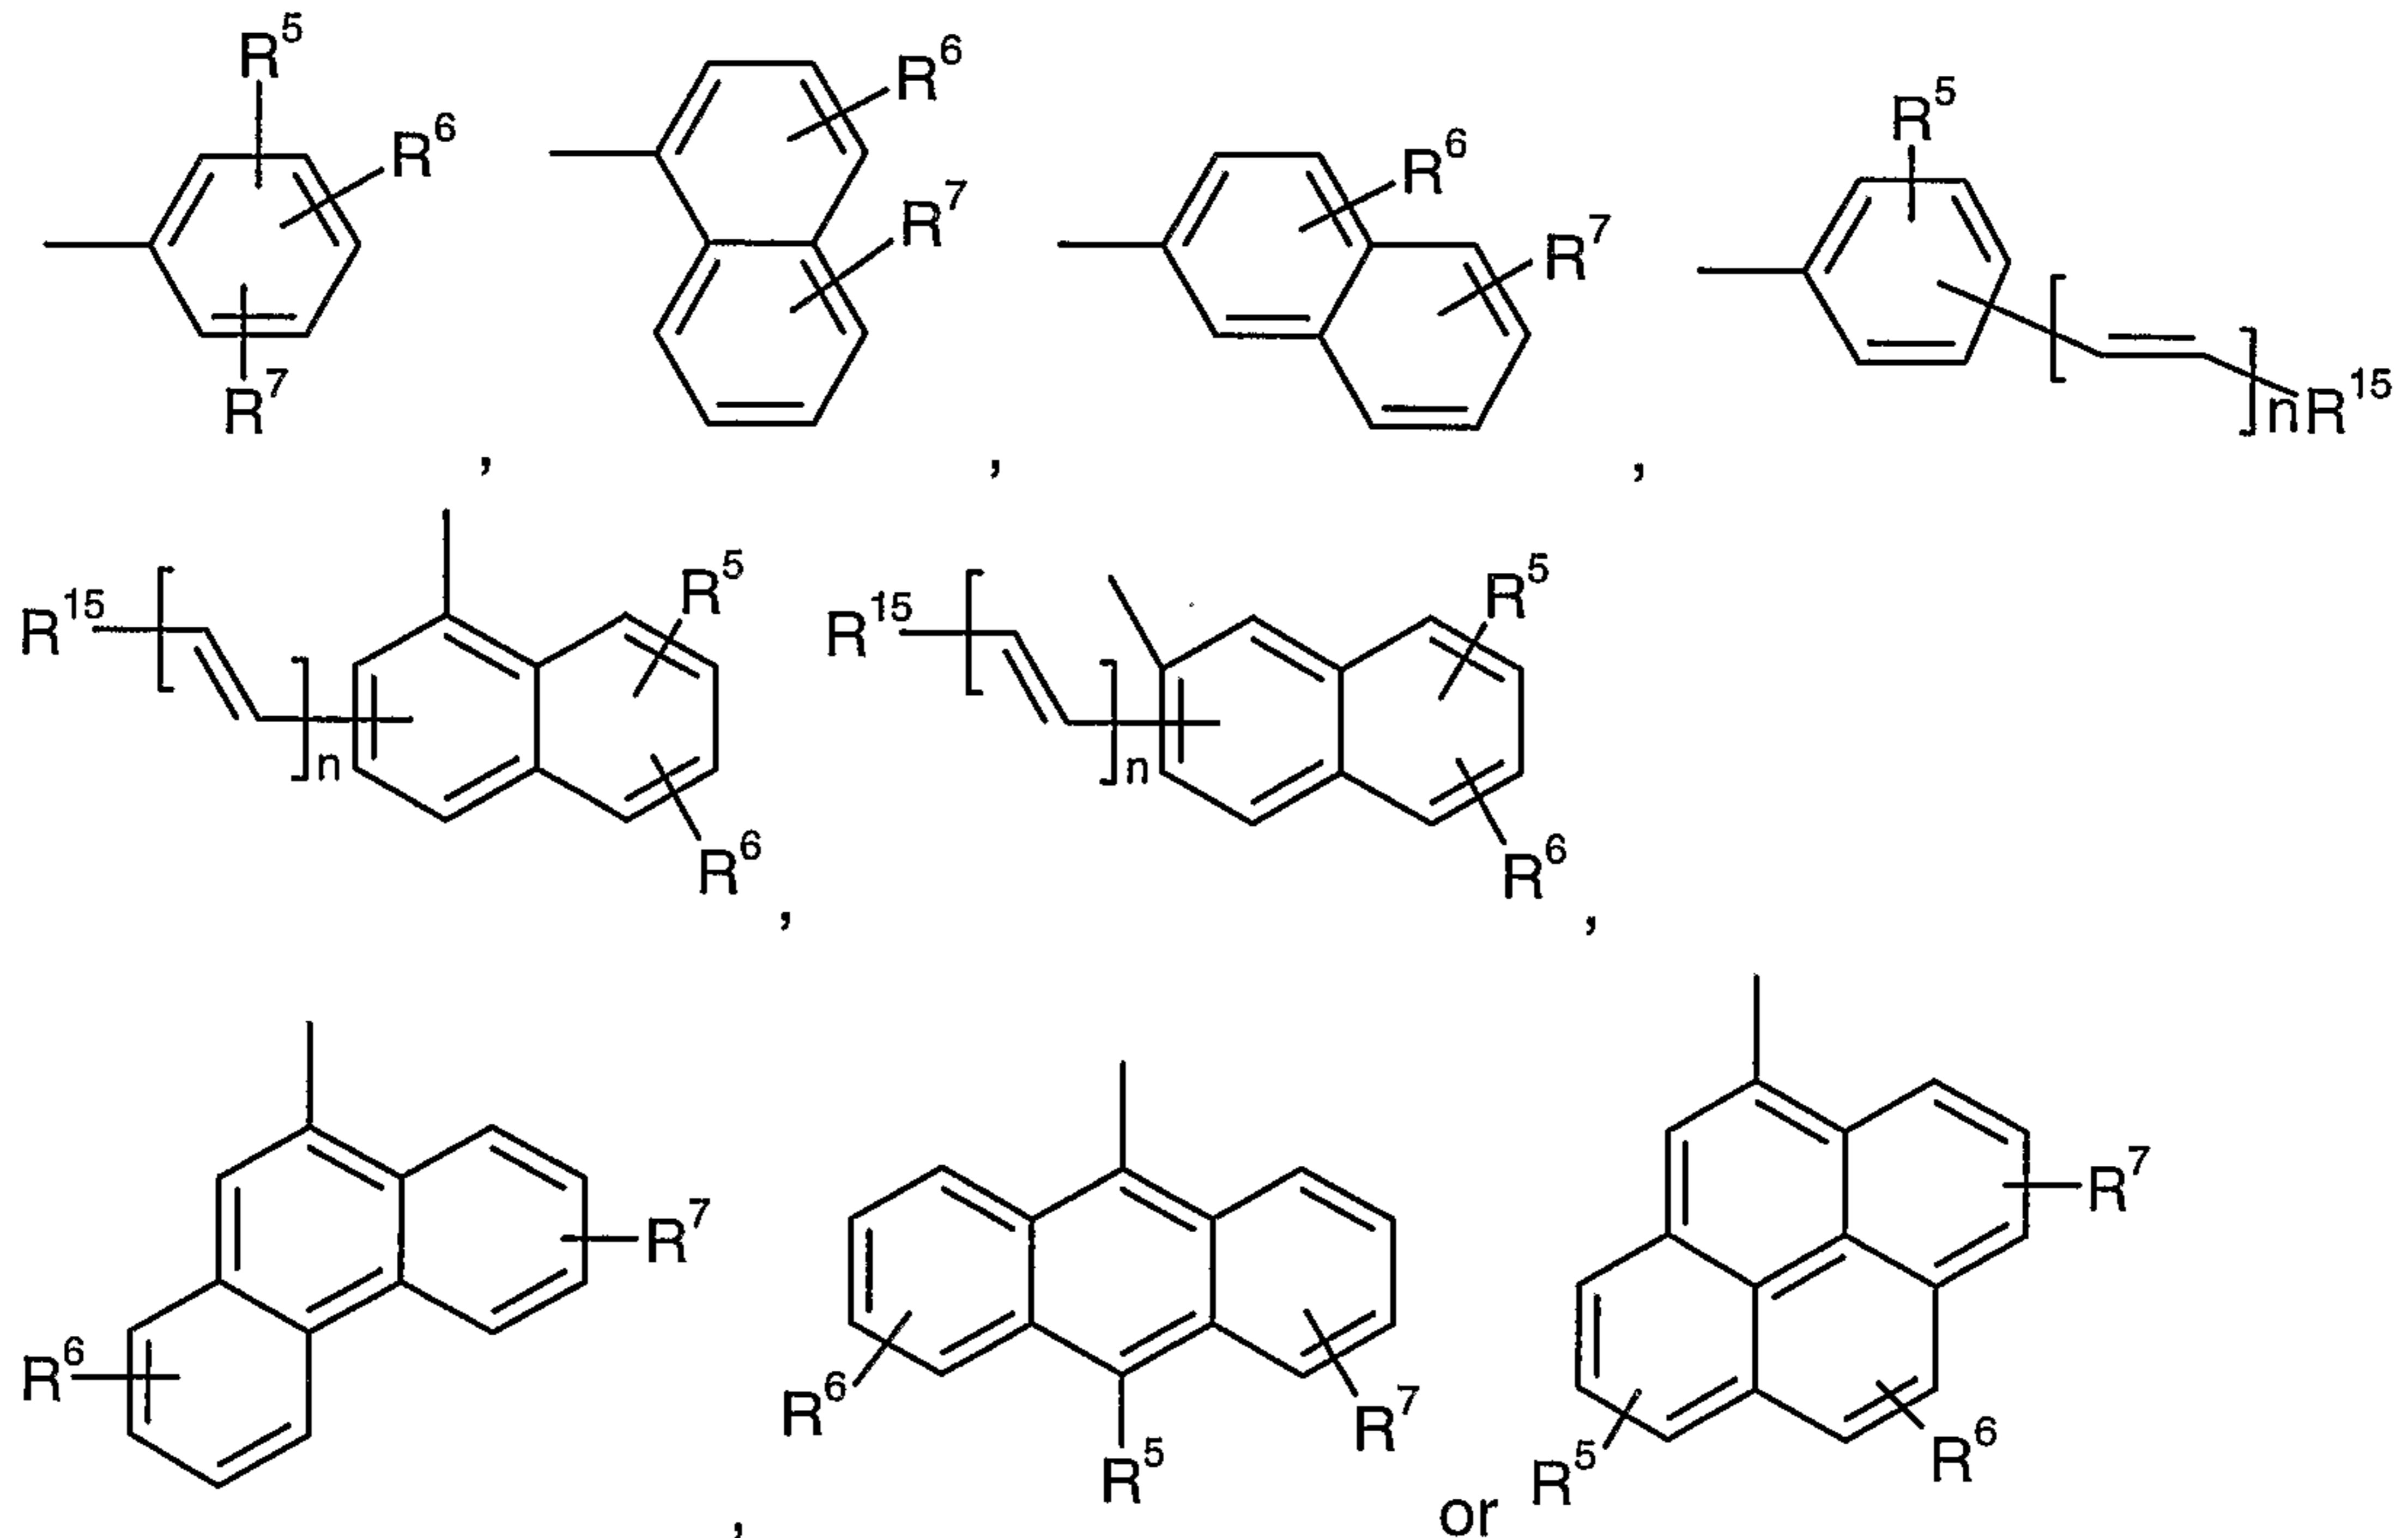


wherein

$R^5$ ,  $R^6$ ,  $R^7$  independently from each other stands for hydrogen,  $C_1$ - $C_{25}$ -alkyl,  $C_1$ - $C_{25}$ -alkoxy,  $-CR^{11}R^{12}-(CH_2)_m-A^5$ , cyano, halogen,  $-OR^{10}$ ,  $-S(O)_pR^{13}$ , or phenyl, which can be substituted one to three times with  $C_1$ - $C_8$ alkyl or  $C_1$ - $C_8$ alkoxy, wherein  $R^{10}$  stands for  $C_6$ - $C_{24}$ -aryl, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur,  $R^{13}$  stands for  $C_1$ - $C_{25}$ -alkyl,  $C_5$ - $C_{12}$ -cycloalkyl,  $-CR^{11}R^{12}-(CH_2)_m-Ph$ ,  $R^{15}$  stands for  $C_6$ - $C_{24}$ -aryl,  $p$  stands for 0, 1, 2 or 3 and  $n$  stands for 0, 1, 2, 3 or 4,  $A^3$  and  $A^4$  independently from each other stand for

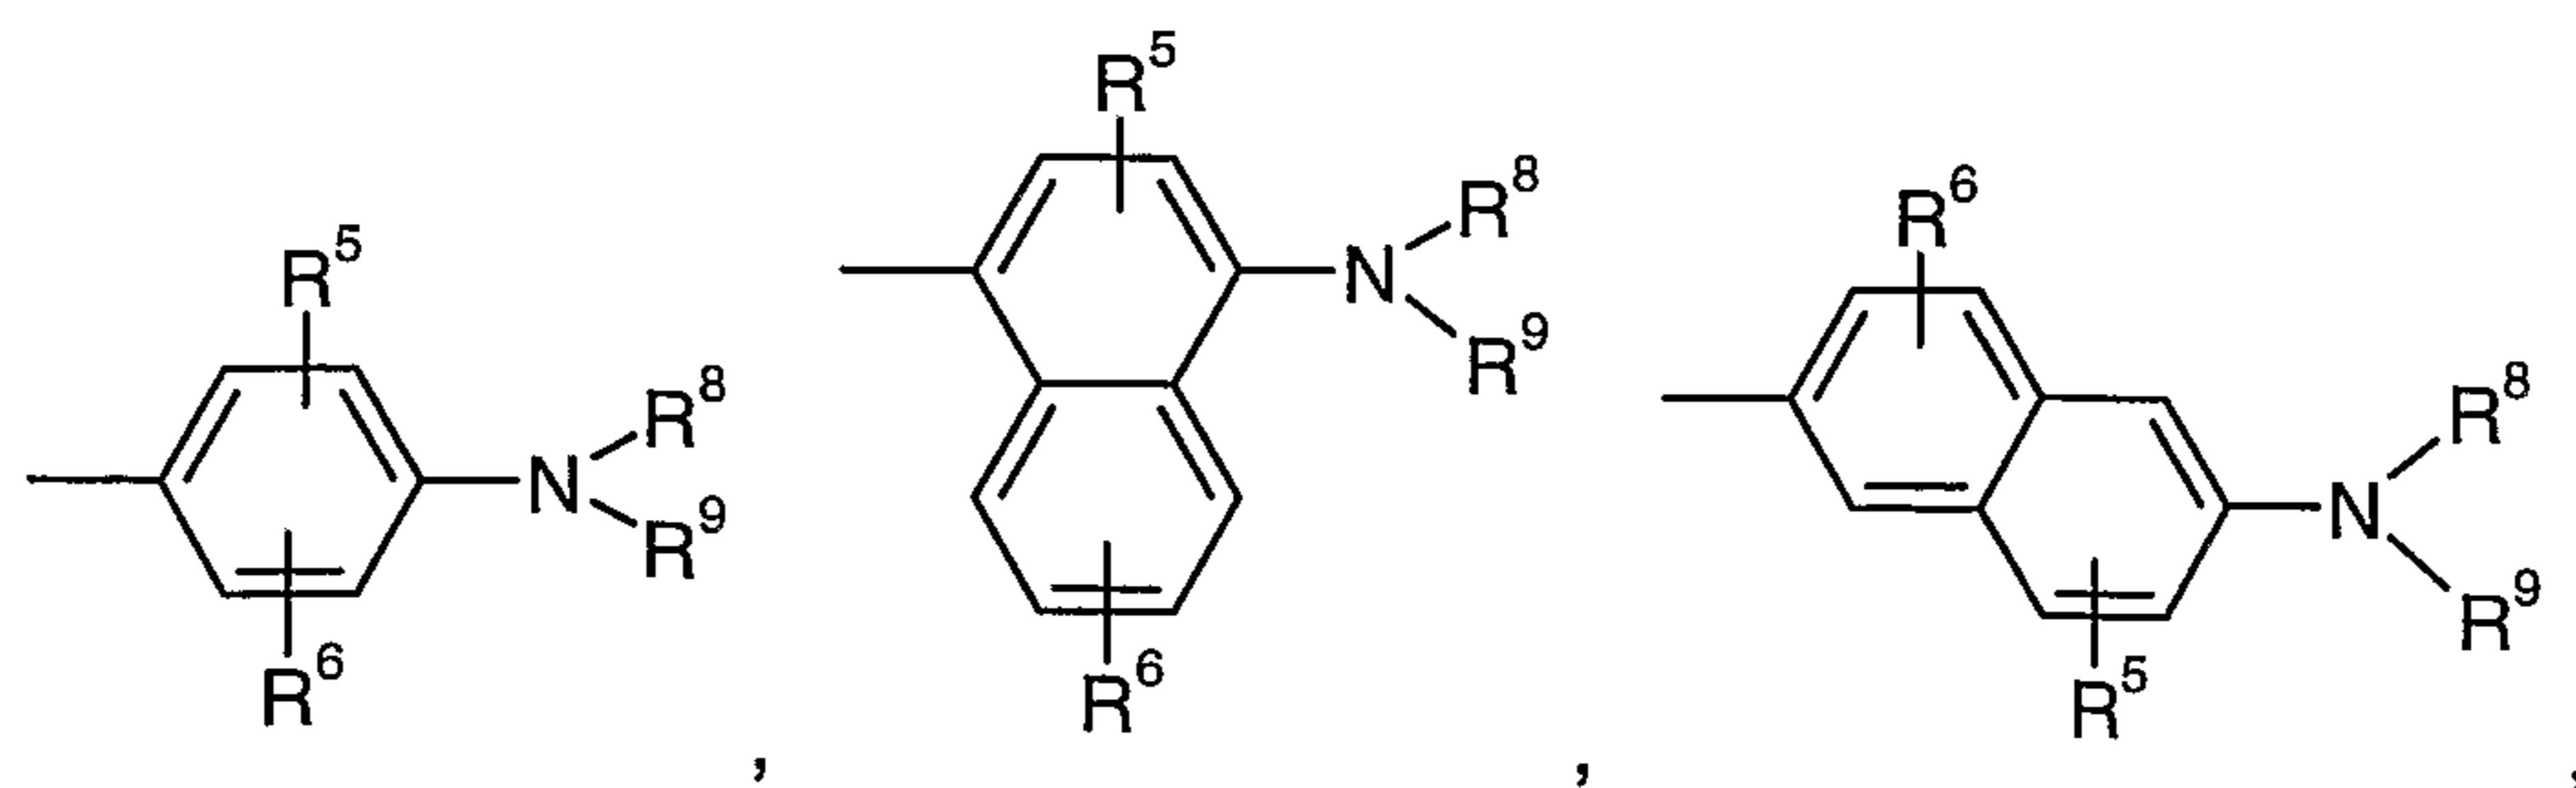

55

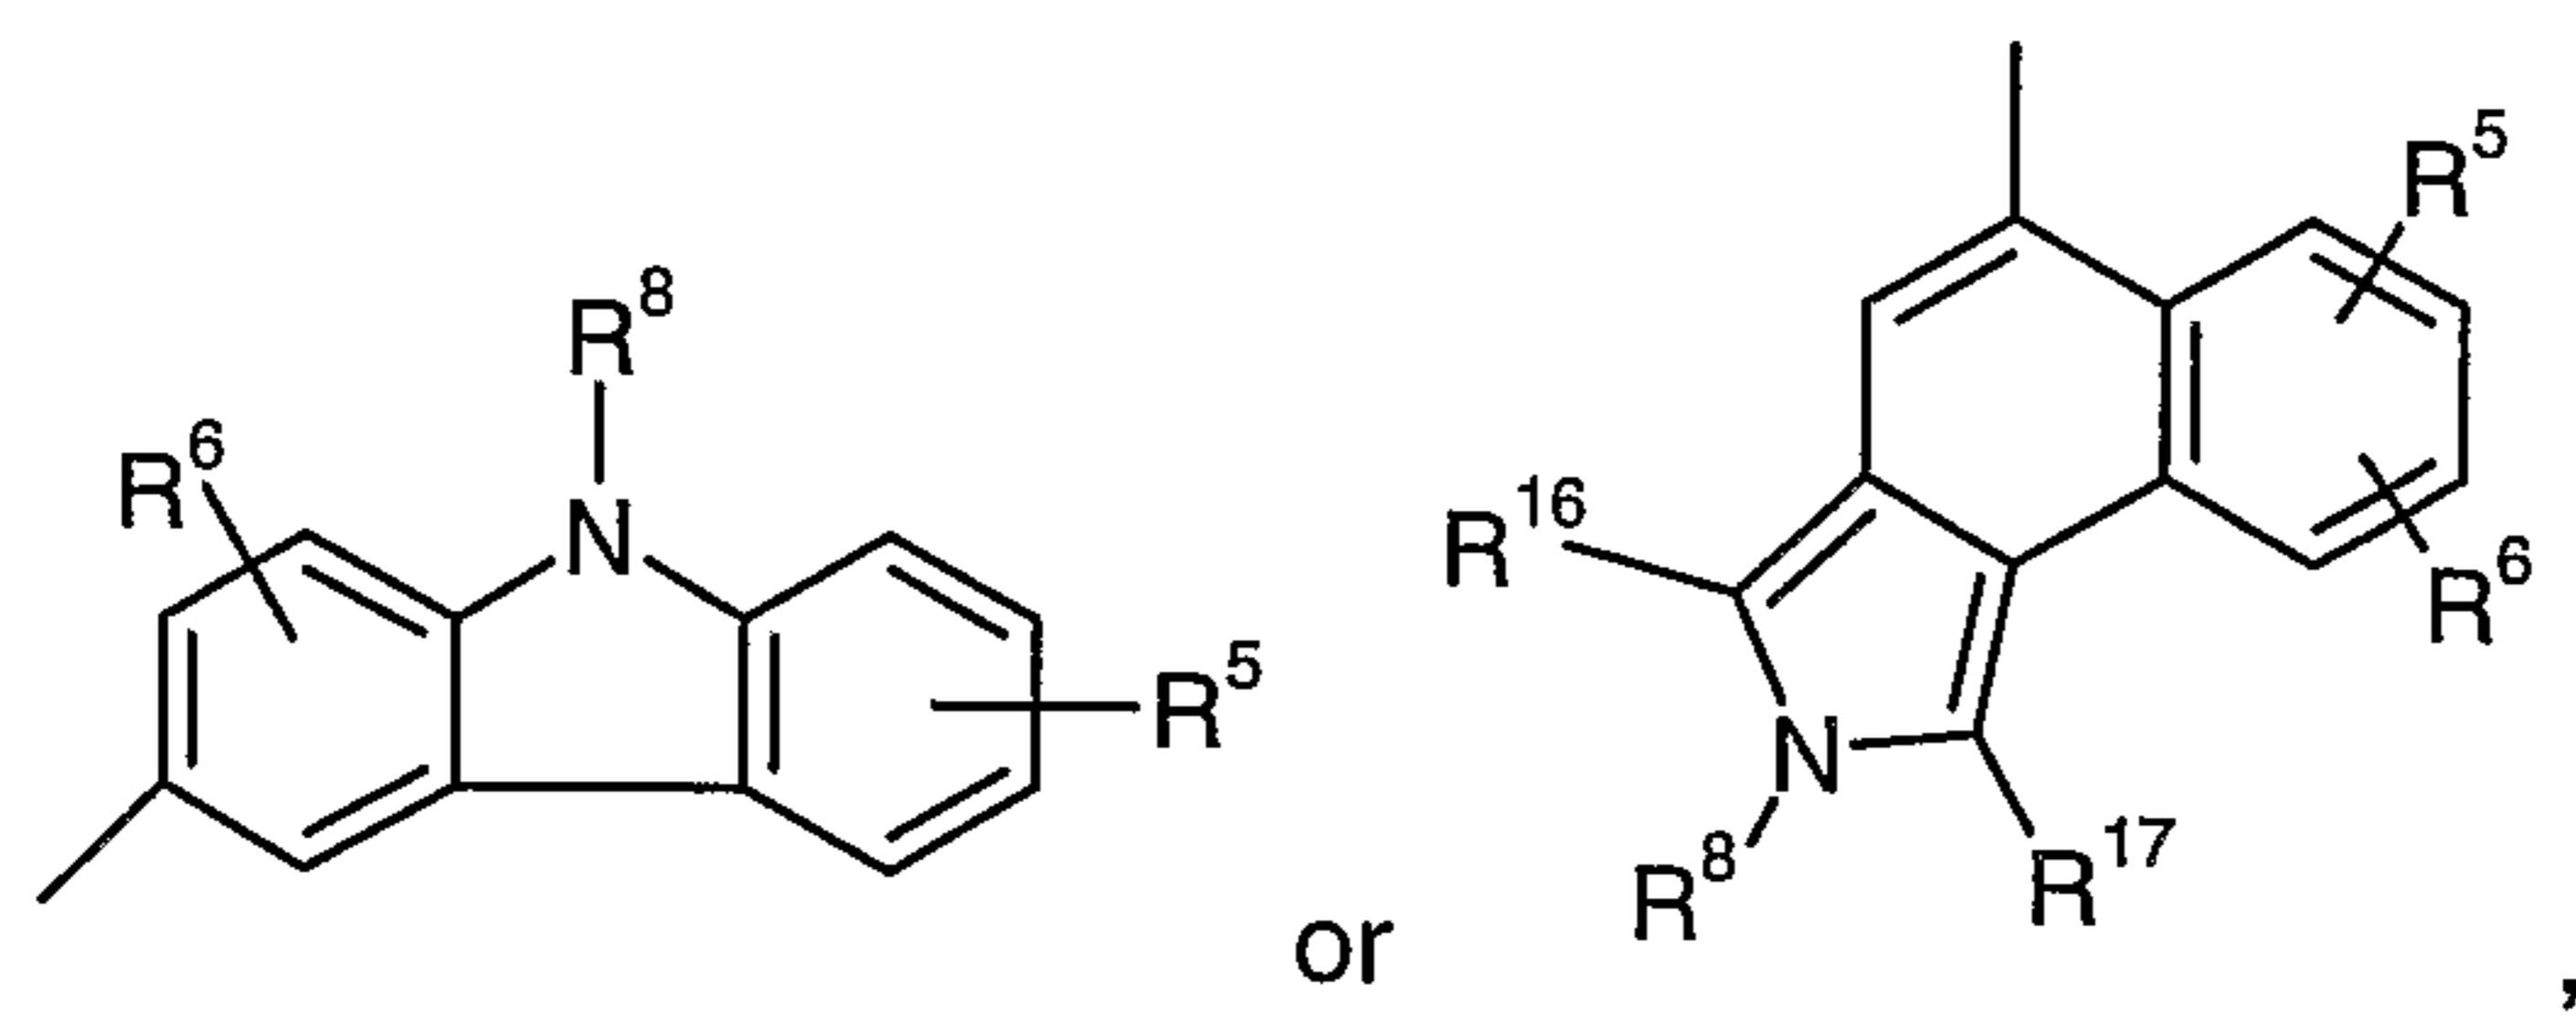

wherein R<sup>8</sup> and R<sup>9</sup> independently from each other stand for hydrogen, C<sub>1</sub>-C<sub>25</sub>-alkyl, C<sub>5</sub>-C<sub>12</sub>-cycloalkyl, -CR<sup>11</sup>R<sup>12</sup>-(CH<sub>2</sub>)<sub>m</sub>-A<sup>5</sup>, C<sub>6</sub>-C<sub>24</sub>-aryl, in particular A<sup>1</sup>, or a saturated or unsaturated heterocyclic radical comprising five to seven ring atoms, wherein the ring consists of carbon atoms and one to three hetero atoms selected from the group consisting of nitrogen, oxygen and sulfur, and R<sup>16</sup> and R<sup>17</sup> are independently of each other hydrogen or C<sub>6</sub>-C<sub>24</sub>aryl.