

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/082102 A2

(51) International Patent Classification⁷: **H02K**
(21) International Application Number:
PCT/KR2004/000506
(22) International Filing Date: 11 March 2004 (11.03.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
10-2003-0015221 11 March 2003 (11.03.2003) KR
(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20 Yoido-Dong, Yongsungpo-Gu, Seoul 150-010 (KR).

(72) Inventor; and
(75) Inventor/Applicant (for US only): **KU, Bon-Cheol** [KR/KR]; Dongbu Apt. 106-1203, Nae-Dong, Gimhae, Gyeongsangnam-Do621-751 (KR).
(74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STATOR OF RECIPROCATING MOTOR AND FABRICATION METHOD THEREOF

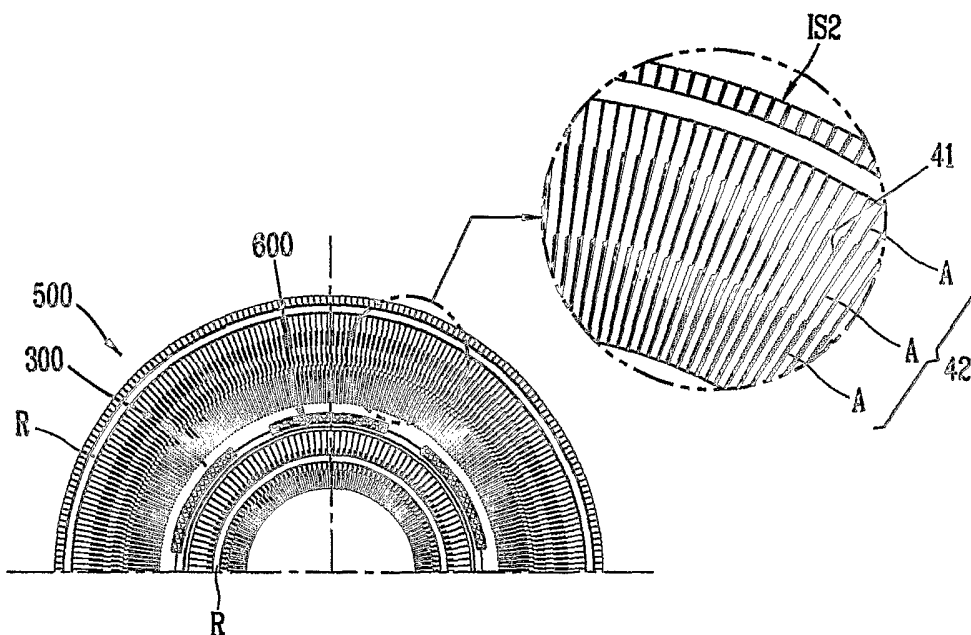

(57) Abstract: Disclosed is a stator of reciprocating motor comprising: a stator including two lamination assemblies formed accordingly as a plurality of lamination sheets are stacked as a cylindrical shape or a circular arc shape; and a mover inserted into an air gap between said two lamination assemblies and linearly reciprocating. In the stator, the lamination sheets constituting the lamination assembly are thicker at an outer circumference side of the lamination assembly than at an inner circumference said thereof. According to this, a path of a flux applied to the lamination assembly is maximized thus to minimize a resistance of the flux.

WO 2004/082102 A2

Description

STATOR OF RECIPROCATING MOTOR AND FABRICATION METHOD THEREOF

Technical Field

- [1] The present invention relates to a reciprocating motor, and more particularly, to a stator of a reciprocating motor capable of minimizing a resistance against a flux by maximizing a volume occupied by lamination sheets in a unit volume of a cylindrical lamination assembly when a plurality of lamination sheets are stacked as a cylindrical shape, and a fabrication method thereof.

Background Art

- [2] A motor converts an electric energy into a kinetic energy. The motor is divided into a rotary motor for converting an electric energy into a rotary movement force, a reciprocating motor for converting an electric energy into a linear reciprocation force, and etc.
- [3] Figure 1 shows one example of the reciprocating motor. As shown, the reciprocating motor comprises: a stator composed of an outer core 100 and an inner core 200 inserted into the outer core 100; and a mover 300 movably inserted between the outer core 100 and the inner core 200 of the stator.
- [4] The mover 300 includes: a magnet holder 310 formed as a cylindrical shape and inserted between the outer core 100 and the inner core 200; and a permanent magnet 320 coupled to the magnet holder 310.
- [5] A winding coil 400 and a bobbin 410 where the winding coil 400 is positioned are coupled to inside of the outer core 100. The bobbin 410 is formed as a ring shape, and the winding coil 400 is formed accordingly as a wire is wound on the bobbin 410 several times. The bobbin 410 and the winding coil 400 can be coupled to the inner core 200.
- [6] The outer core 100 is formed as a cylindrical shape having an inner diameter of a certain size, and has a certain width. A sectional surface of the outer core 100 in a circumferential direction thereof is composed of an opening groove 110 inwardly open so that the winding coil 400 and the bobbin 410 can be located; a pass portion 120 corresponding to an outer side of the opening groove 110 for passing a flux; and a pole portion 130 corresponding to both ends of inside of the pass portion 120 for forming a pole.
- [7] The inner core 200 is formed as a cylindrical shape having a certain width. A

sectional surface of the inner core 200 in a circumferential direction has a quadrangular shape having a certain width and length.

[8] The unexplained reference numeral R denotes a fixing ring.

[9] Operation of the reciprocating motor will be explained as follows.

[10] As a power is supplied to the reciprocating motor, a current is applied to the winding coil 400. By the current, a flux is formed around the winding coil 400. The flux forms a closed loop along the pass portion 120 of the outer core and the inner core 200.

[11] The flux formed at the pass portion 120 of the outer core and the inner core 200 interacts with a flux formed by the permanent magnet 310 of the mover, so that a force is applied to the permanent magnet 310 in an axial direction. By the force applied to the permanent 310, the mover moves in the axial direction. If a direction of the current applied to the winding coil 400 is alternated, the mover 300 linearly reciprocates.

[12] The outer core 100 and the inner core 200 constituting the stator S have various shapes and fabrication methods. The outer core 100 and the inner core 200 of the stator are fabricated by stacking a plurality of thin plates having a predetermined shape in order to minimize a flux loss. If the outer core 100 or the inner core 200 is one body not a lamination assembly, a flux loss is generated by a copper loss.

[13] Figure 2 is a disassembled perspective view showing one example of the inner core of reciprocating motor.

[14] As shown, the inner core 200 of the reciprocating motor is a cylindrical lamination assembly formed accordingly as quadrangular lamination sheets IS having a certain thickness are stacked as a cylindrical shape. The lamination sheets IS are stacked so that relatively long side edges 1 can be positioned at an inner circumferential side and at an outer circumferential side of the cylindrical lamination assembly. An opened groove 3 is formed at both short side edges 2 of each lamination sheet. By the grooves 3, a ring groove 210 is respectively formed at both side surfaces of the cylindrical lamination assembly. The fixing ring R of a ring shape is respectively coupled to the ring grooves 210, thereby fixing the lamination sheets IS.

[15] The outer core 100 of the reciprocating motor is constructed as the same shape as the inner core. That is, the outer core 100 is formed accordingly as lamination sheets of a predetermined shape are stacked as a cylindrical shape. The lamination sheets are radially positioned toward the center of the cylindrical lamination assembly.

[16] However, in the stator of the reciprocating motor, that is, in the outer core 100 and the inner core 200 constructed as a cylindrical lamination assembly, a volume

occupied by the lamination sheets is less in a unit volume of the cylindrical lamination assembly. According to this, a flux density is relatively high at the time of forming a flux thus to increase a flux resistance. More specifically, as shown in Figure 3, since the inner core 200 is constructed as a cylindrical lamination assembly that the lamination sheets IS having a certain thickness are stacked as a cylindrical shape, a dense state between adjacent lamination sheets IS is maintained at an inner circumferential surface side of the cylindrical lamination assembly. However, at an outer circumferential surface side of the cylindrical lamination assembly, an interval h between the lamination sheets IS is formed. The interval h between the lamination sheets IS is increased with a certain ratio towards the outer circumferential surface side from the inner circumferential surface side of the cylindrical lamination assembly. In case that the outer core 100 is constructed as a cylindrical lamination assembly, the above explanation is also applied.

- [17] According to this, much space is formed in the cylindrical lamination assembly, so that a volume occupied by the lamination sheets IS is less in the unit space of the cylindrical lamination assembly. Therefore, a flux path becomes narrow thus to increase a flux resistance and thereby to lower a motor efficiency.

Disclosure

- [18] Therefore, an object of the present invention is to provide a stator of a reciprocating motor capable of minimizing a resistance against a flux by maximizing a volume occupied by lamination sheets in a unit volume of a cylindrical lamination assembly when a plurality of lamination sheets are stacked as a cylindrical shape, and a fabrication method thereof.
- [19] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, there is provided a stator of a reciprocating motor comprising a stator including two lamination assemblies formed accordingly as a plurality of lamination sheets are stacked as a cylindrical shape or a circular arc shape; and a mover inserted into an air gap between said two lamination assemblies and linearly reciprocating, wherein the lamination sheets constituting the lamination assembly are thicker at an outer circumference side of the lamination assembly than at an inner circumference side thereof.
- [20] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, there is also provided a fabrication method of a stator of a reciprocating motor comprising: cutting a substrate having a certain thickness as a certain size; pressing the cut plane sheets so that a

thickness of one side can be different from a thickness of another side, and thereby fabricating lamination sheets; and stacking the lamination sheets as a cylindrical shape so that a relatively thin part of the lamination sheet can be inwardly positioned and a relatively thick part thereof can be outwardly positioned.

- [21] The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

Description of Drawings

- [22] Figure 1 is a sectional view showing a general reciprocating motor;
- [23] Figure 2 is a disassembled perspective view showing one example of an inner core of the reciprocating motor;
- [24] Figure 3 is a frontal view showing the inner core of the reciprocating motor;
- [25] Figures 4 and 5 are sectional and frontal views of a reciprocating motor provided with a reciprocating motor stator according to one embodiment of the present invention;
- [26] Figure 6 is a disassembled perspective view showing an inner core constituting the stator of the reciprocating motor;
- [27] Figure 7 is a frontal view of the inner core by a partial enlargement;
- [28] Figures 8 and 9 are perspective views showing other embodiments of the inner core by a partial enlargement;
- [29] Figure 10 is a flow chart showing a fabrication method of the stator of the reciprocating motor; and
- [30] Figures 11 and 12 are frontal views showing the fabrication method of the stator of the reciprocating motor.

Mode for Invention

- [31] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.
- [32] Hereinafter, a stator of a reciprocating motor according to the present invention and a fabrication method thereof will be explained in more detail with reference to the attached drawings.
- [33] Figures 4 and 5 are sectional and frontal views of a reciprocating motor provided with a reciprocating motor stator according to one embodiment of the present invention. The same reference numerals were given to the same parts as those of the conventional one.
- [34] As shown, the reciprocating motor according to the present invention comprises: a

stator composed of an outer core 500 and an inner core 600 inserted into the outer core 500; and a mover 300 movably inserted between the outer core 500 and the inner core 600 of the stator.

[35] A bobbin 410 and a winding coil 400 wound by a wire on the bobbin 410 are coupled to inside of the outer core 500. The bobbin 410, the winding coil 400, and the mover 300 have the same structure as those of the conventional one, thereby omitting the explanations.

[36] As shown in Figures 6 and 7, the inner core 600 is a cylindrical lamination assembly that a plurality of lamination sheets IS1 are stacked as a cylindrical shape. The thickness of the lamination sheet IS1 constituting the lamination assembly is thicker at an outer circumference side of the lamination assembly than at an inner circumference side thereof.

[37] The lamination sheet IS1 is composed of a plane portion 11 formed as a rectangular plane, and a step portion 12 formed at the opposite side of the plane portion 11 and having a plurality of consecutive step surfaces A of a stair shape. The step surfaces A are surfaces shown in Figure 3. The more the number of the step surfaces A is, the more effective. Two long side edges 13 have a different thickness, respectively. A groove 15 is respectively formed at two short side edges 14 which are relatively short. The groove 15 is formed as a rectangular shape of which one side is open.

[38] The lamination sheets IS1 constituting the cylindrical lamination assembly are stacked so that the plane portion of one lamination sheet and the step portion of another adjacent lamination sheet can be in contact with each other.

[39] By the grooves 15 of the lamination sheets IS1 constituting the cylindrical lamination assembly, a ring groove 610 of a ring shape is respectively formed at both side surfaces of the cylindrical lamination assembly. A fixing ring R of a ring shape is respectively forcibly-inserted into the ring grooves 610.

[40] The cylindrical lamination assembly constituted with the plurality of lamination sheets IS1 is fixed by welding both sides surfaces thereof.

[41] As a modification example of the lamination sheet, as shown in Figure 8, a lamination sheet IS2 includes: a first step portion 21 having a plurality of step surfaces A of a stair shape; and a second step portion 22 formed at the opposite side of the first step portion 21 and having a plurality of step surfaces A of a stair shape. That is, the lamination sheet IS2 is formed as a rectangular shape, and is provided with the first step portion 21 and the second step portion 22 at both side surfaces thereof.

[42] The step surfaces A are surfaces shown in Figure 3. The more the number of the

step surfaces A is, the more effective. Two long side edges 23 have a different thickness, respectively. A groove 25 is respectively formed at two short side edges which are relatively short. The groove 25 is formed as a rectangular shape of which one side is open.

[43] By the grooves 25 of the lamination sheets IS2 constituting the cylindrical lamination assembly, a ring groove 610 of a ring shape is respectively formed at both side surfaces of the cylindrical lamination assembly. A fixing ring R of a ring shape is respectively forcibly-inserted into the ring grooves 610.

[44] As another modification example of the lamination sheet, as shown in Figure 9, a lamination sheet IS3 includes an inclined plane portion 31 of a rectangular shape that both side surfaces thereof are inclined towards the center axis. Two long side edges 32 of the lamination sheet IS3 have a different thickness, respectively. A sectional shape of the lamination sheet IS3 in a horizontal direction is trapeziform. A groove 35 is formed at two short side edges of the lamination sheet IS3, respectively. The groove 35 is formed as a quadrangular shape of which one side is open.

[45] By the grooves 35 of the lamination sheets IS3 constituting the cylindrical lamination assembly, a ring groove 610 of a ring shape is respectively formed at both side surfaces of the cylindrical lamination assembly. A fixing ring R of a ring shape is respectively forcibly-inserted into the ring grooves 610.

[46] In the inner core 600 constituted with the cylindrical lamination assembly, the lamination sheet IS constituting the cylindrical lamination assembly has a thicker part at the outer circumferential side of the cylindrical lamination assembly than at the inner circumferential side thereof. According to this, not only the interval between lamination sheets of the outer circumferential side of the cylindrical lamination assembly but also the interval between lamination sheets become minimal. Therefore, a volume occupied by the lamination sheets in a unit volume of the cylindrical lamination assembly constituting the inner core 600 becomes maximum.

[47] The outer core 500 is a lamination assembly that a plurality of lamination sheets having a predetermined shape are stacked. The lamination sheet IS4 constituting the lamination assembly has a thicker thickness at the outer circumferential side of the lamination assembly than at the inner circumferential side thereof.

[48] The lamination sheet IS4 of the outer core is composed of a plane portion 41 formed as a rectangular plane, and a step portion 42 formed at the opposite side of the plane portion 41 and having a plurality of consecutive step surfaces A of a stair shape. The step surfaces A are surfaces shown in Figure 3. The more the number of the step

surfaces A is, the more effective. Two long side edges have a different thickness, respectively.

- [49] An opening groove 520 of a quadrangular shape is formed at one thin edge of the lamination sheet IS4. The opening groove 520 can be formed as various shapes. A groove 45 is formed at two short side edges of the lamination sheet IS4, respectively. The groove 45 is formed as a quadrangular shape of which one side is open.
- [50] The lamination sheets IS4 constituting the cylindrical lamination assembly are stacked so that the plane portion 41 of one lamination sheet and the step portions 42 of another adjacent lamination sheet can be in contact with each other.
- [51] By the grooves 45 of the lamination sheets IS4 constituting the cylindrical lamination assembly, a ring groove 510 of a ring shape is respectively formed at both side surfaces of the cylindrical lamination assembly. By the opening groove 520, a bobbin inserting groove of a ring shape for inserting a bobbin 410 is formed. A fixing ring R of a ring shape is respectively forcibly-inserted into the ring grooves 510.
- [52] The lamination sheets IS4 constituting the outer core 500 can be modified as various shapes like the lamination sheets constituting the inner core 600.
- [53] In the outer core 500 constituted with the cylindrical lamination assembly, like in the inner core 600, not only the interval between lamination sheets of the outer circumferential side of the cylindrical lamination assembly but also the interval between lamination sheets become minimal. Therefore, a volume occupied by the lamination sheets in a unit volume of the cylindrical lamination assembly constituting the outer core 500 becomes maximum.
- [54] According to the stator of the reciprocating motor of the present invention, both the outer core 500 and the inner core 600 inserted into the outer core can be constituted as a lamination assembly. It is also possible to constitute the outer core 500 as a lamination assembly and to constitute the inner core 600 inserted into the outer core 500 as a non-lamination assembly. It is also possible to constitute the outer core 500 as a non-lamination assembly and to constitute the inner core 600 as a lamination assembly.
- [55] A fabrication method of the stator of the reciprocating motor of the present invention will be explained. As shown in Figure 10, a substrate having a certain thickness is cut as a certain size. Then, the cut plane sheets are pressed so that a thickness of one side can be different from a thickness of another side, and thereby lamination sheets are fabricated. The cut plane sheets are plural as a rectangular shape. The cut plane sheet is pressed so that a thickness of one long side can be different from

a thickness of another long side.

[56] Then, the lamination sheets are stacked as a cylindrical shape so that a relatively thin part of the lamination sheet can be positioned at the inner circumferential side of the cylindrical assembly and a relatively thick part thereof can be positioned at the outer circumferential side of the cylindrical assembly.

[57] The lamination sheets constituting the cylindrical lamination assembly are fixed by a fixing ring R or by a welding.

[58] In the pressing step, as shown in Figure 11, only one side surface of the plane sheet is pressed step by step as a stair shape. That is, one side surface of the plane sheet is pressed step by step thus to form a plurality of step surfaces A such as stairs. The lamination sheets IS are stacked so that the plane of one lamination sheet and the step surfaces A of another adjacent lamination sheet can be in contact with each other.

[59] In the pressing step, as shown in Figure 12, both side surfaces of the plane sheet can be pressed as a stair shape step by step. That is, a plurality of step surfaces A of a stair shape are respectively formed at both side surfaces of the plane sheet.

[60] In order to form the step surfaces at both side surfaces of the plane sheet, one side surface of the plane sheet is pressed as a stair shape step by step, and then the plane sheet is overturned thus to press another side surface thereof as a stair shape step by step.

[61] It is also possible to simultaneously press both side surfaces of the plane sheet as a stair shape step by step.

[62] In the cylindrical lamination assembly, not only the interval between lamination sheets of the outer circumferential side thereof but also the interval between lamination sheets become minimal.

[63] Hereinafter, the stator of the reciprocating motor and the fabrication method thereof according to the present invention will be explained.

[64] In the reciprocating motor provided with the reciprocating motor stator of the present invention, like in the conventional reciprocating motor, as a power is supplied to the reciprocating motor, a current is applied to the winding coil 400. By the current, a flux is formed at the outer core 500 and the inner core 600 of the stator. The flux formed at the outer core 500 and the inner core 600 of the stator interacts with a flux formed by the permanent magnet 320 of the mover, so that a force is applied to the permanent magnet 320 and thus the mover 300 moves.

[65] In said process, since the stator of the present invention is provided with a cylindrical lamination assembly that a plurality of lamination sheets having different

thickness, a volume occupied by the lamination sheets in a unit volume of the cylindrical lamination assembly becomes maximum. According to this, a flux path formed at the cylindrical lamination assembly of the stator is maximized thus to minimize a flux resistance.

[66] Also, since contact parts between adjacent lamination sheets of the cylindrical lamination assembly are increased, a vibration of the lamination sheets or contact noise can be prevented at the time of a vibration generation while the reciprocating motor is operated.

[67] As aforementioned, in the stator of the reciprocating motor and the fabrication method thereof according to the present invention, the path of the flux generated by the current applied to the winding coil and the permanent magnet is maximized thus to minimize the flux resistance. According to this, not only an output of the motor but also the motor efficiency can be enhanced.

[68] Additionally, since a supported state between the lamination sheets is firm, the vibration and noise between the lamination sheets generated at the time of a vibration generation during the motor operation can be prevented thereby to enhance the motor reliability.

[69] As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiments are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the metes and bounds of the claims, or equivalence of such metes and bounds are therefore intended to be embraced by the appended claims.


Claims

- [1] A stator of a reciprocating motor comprising: a stator including two lamination assemblies formed accordingly as a plurality of lamination sheets are stacked as a cylindrical shape or a circular arc shape; and a mover inserted into an air gap between said two lamination assemblies and linearly reciprocating, wherein the lamination sheets constituting the lamination assembly are thicker at an outer circumference side of the lamination assembly than at an inner circumference side thereof.
- [2] The stator of the reciprocating motor of claim 1, wherein the lamination sheet is composed of a plane portion formed as a quadrangular plane, and a step portion formed at the opposite side of the plane portion and having a plurality of step surfaces of a stair shape.
- [3] The stator of the reciprocating motor of claim 1, wherein the lamination sheet is provided with a first step portion having a plurality of step surfaces of a stair shape, and a second step portion formed at the opposite side of the first step portion and having a plurality of step surfaces of a stair shape.
- [4] The stator of the reciprocating motor of claim 1, wherein the lamination sheet is an inclined plane portion that both side surfaces thereof are inclined towards a center axis thereof.
- [5] The stator of the reciprocating motor of claim 1, wherein a groove is respectively formed at both edges of the lamination sheet, and fixing rings of a ring shape are coupled to ring grooves formed at the lamination assembly by the grooves of the lamination sheet.
- [6] The stator of the reciprocating motor of claim 1, wherein the lamination sheets constituting the lamination assembly are fixed by a welding.
- [7] A stator of a reciprocating motor comprising: a stator constituted with an outer core having a winding coil and an inner core inserted into the outer core with a certain air gap; and a mover inserted into the air gap and linearly reciprocating, wherein the outer core or the inner core is a lamination assembly that a plurality of lamination sheets are stacked, and the lamination sheets constituting the lamination assembly are thicker at an outer circumference side of the lamination assembly than at an inner circumference side thereof.
- [8] A fabrication method of a stator of a reciprocating motor comprising: cutting a substrate having a certain thickness as a certain size;


pressing the cut plane sheets so that a thickness of one side can be different from a thickness of another side, and thereby fabricating lamination sheets; and stacking the lamination sheets as a cylindrical shape so that a relatively thin part of the lamination sheet can be inwardly positioned and a relatively thick part thereof can be outwardly positioned.

- [9] The method of claim 8, wherein in the pressing step, only one side surface of the plane sheet is pressed as a stair shape step by step.
- [10] The method of claim 8, wherein in the pressing step, both side surfaces of the plane sheet are pressed as a stair shape step by step.
- [11] The method of claim 10, wherein one side surface of the plane sheet is pressed as a stair shape step by step, and then the plane sheet is overturned thus to press another side surface thereof as a stair shape step by step.
- [12] The method of claim 10, wherein both side surfaces of the plane sheet are simultaneously pressed as a stair shape step by step.


[Fig. 1]

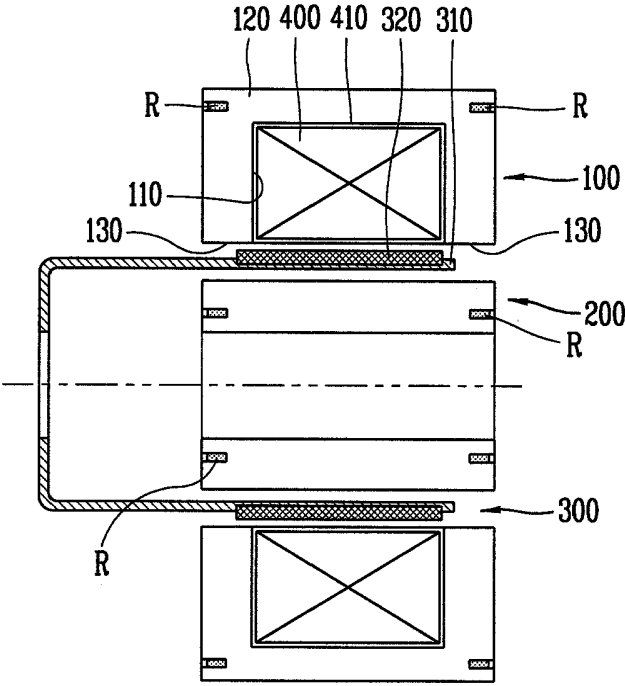


[Fig. 2]

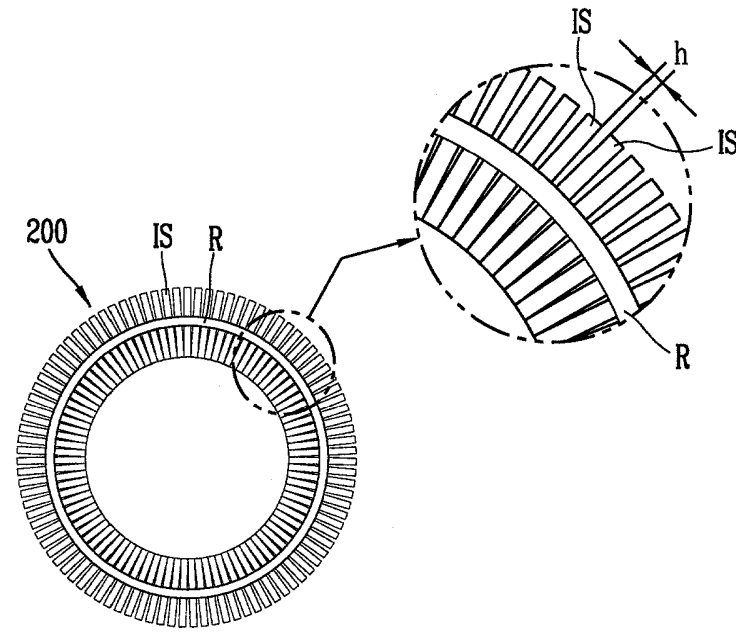


[Fig. 3]

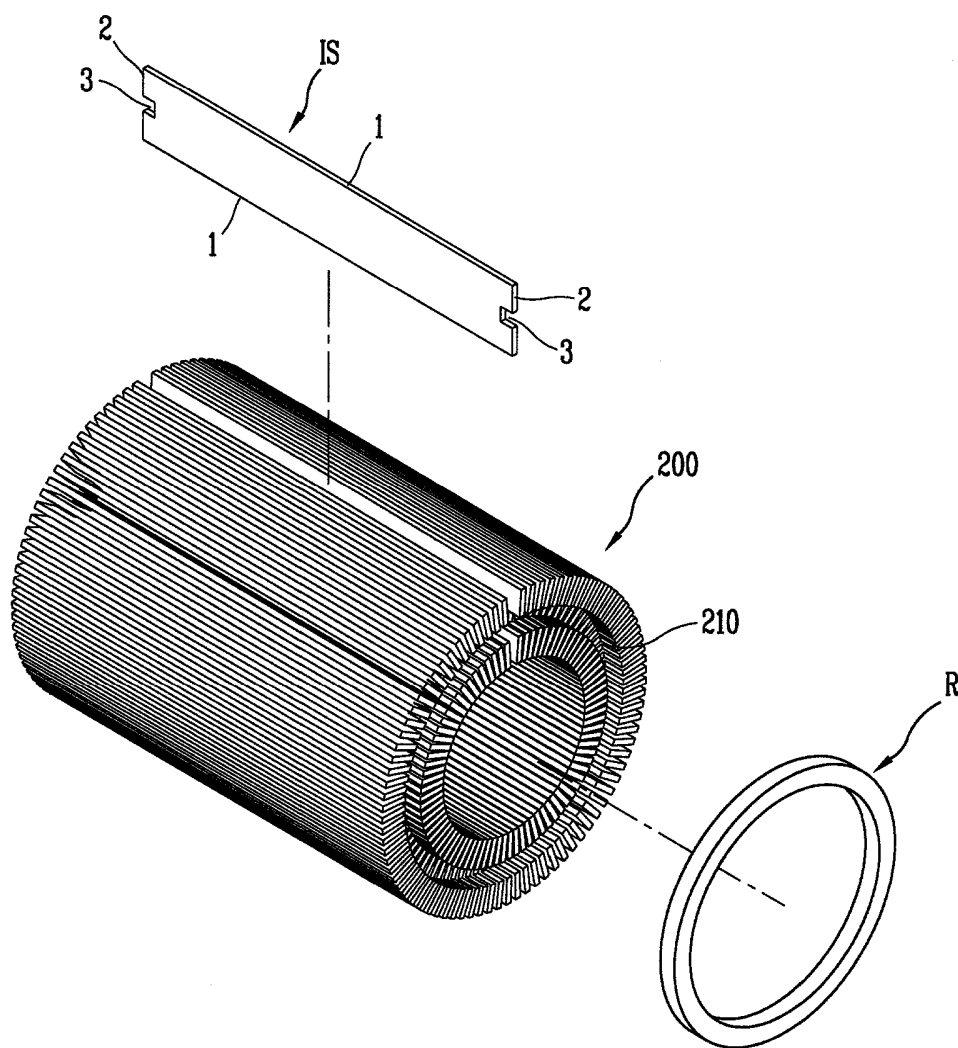


[Fig. 4]

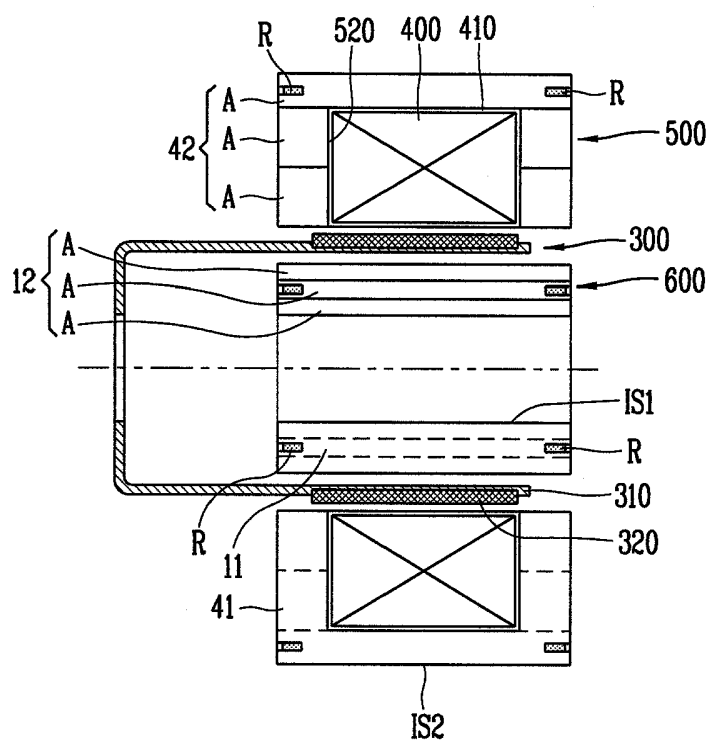


[Fig. 5]

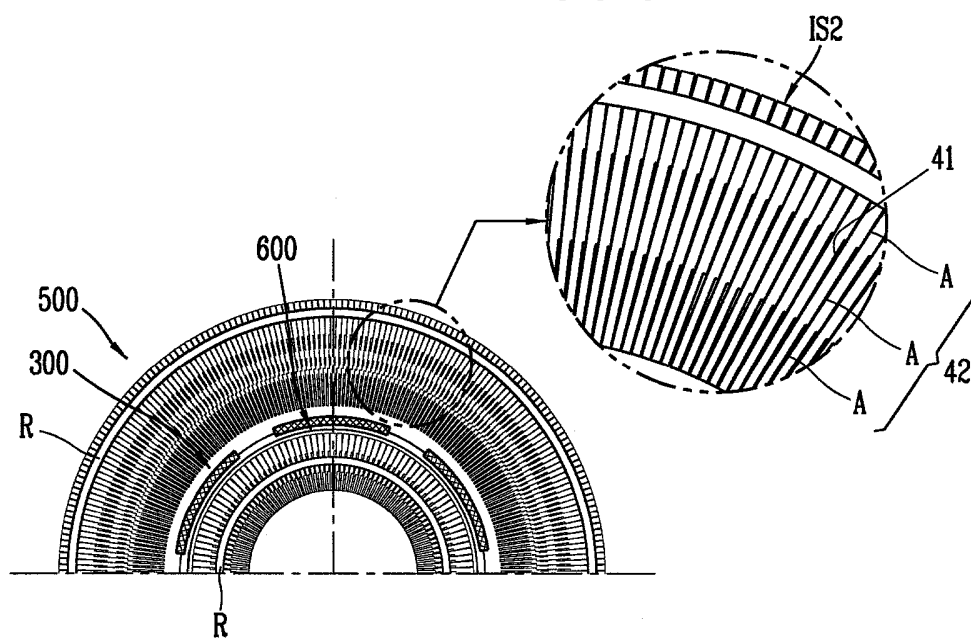


[Fig. 6]



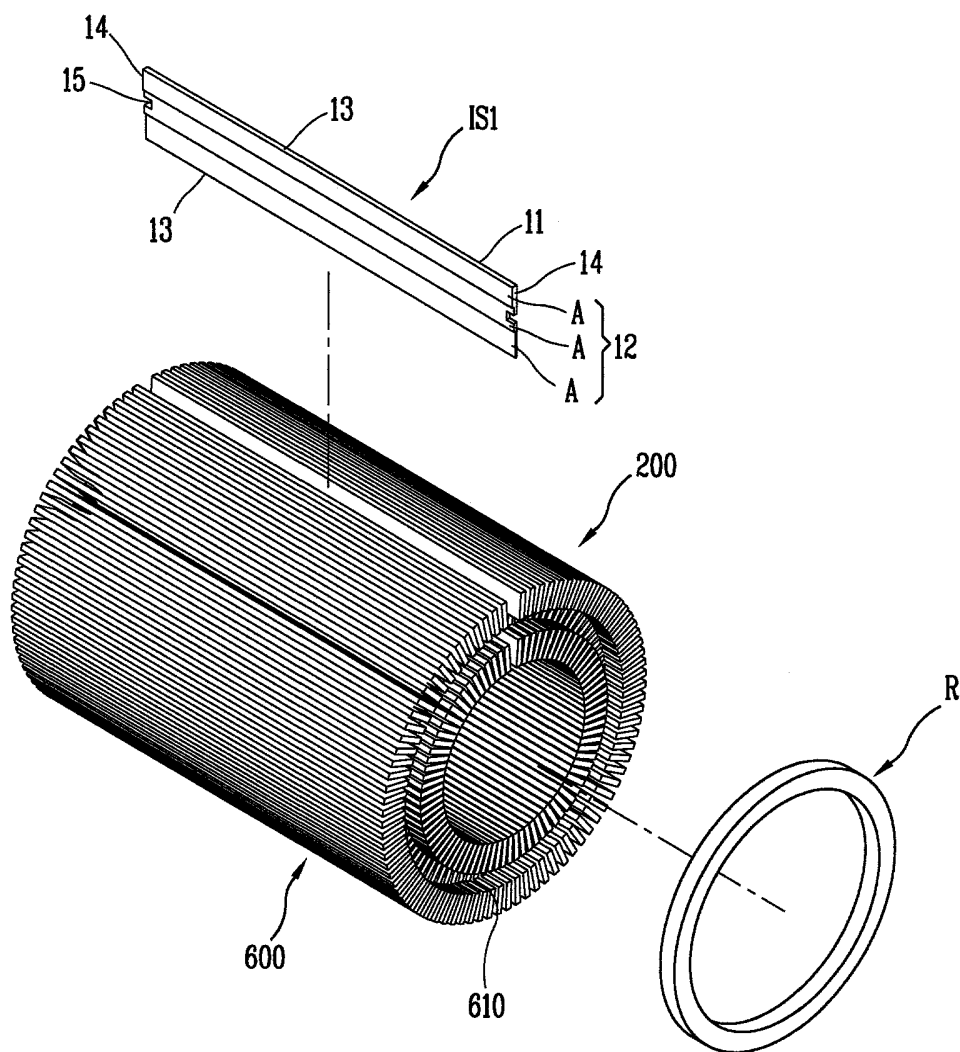


[Fig. 7]

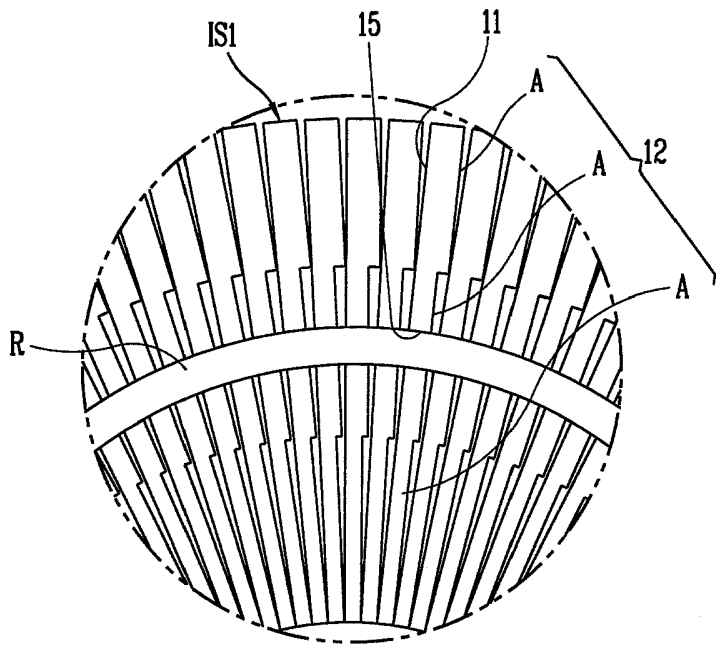

[Fig. 8]

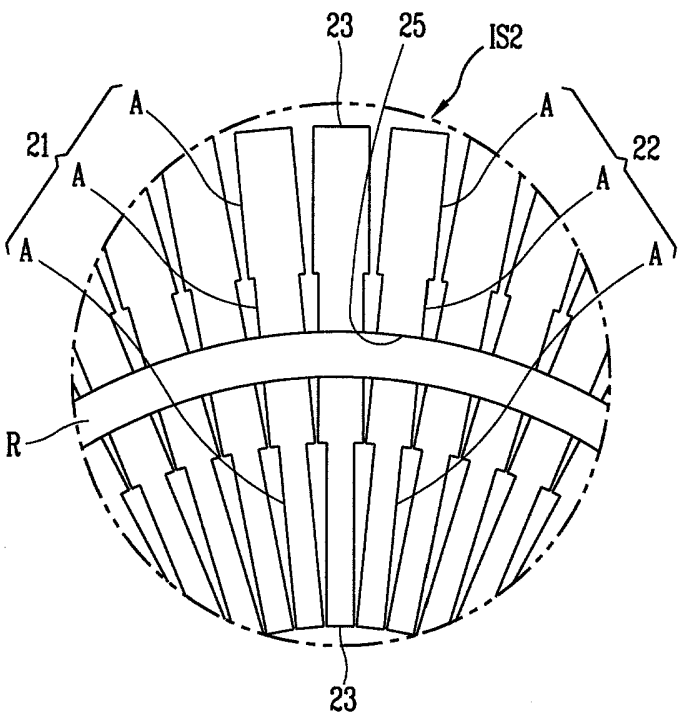

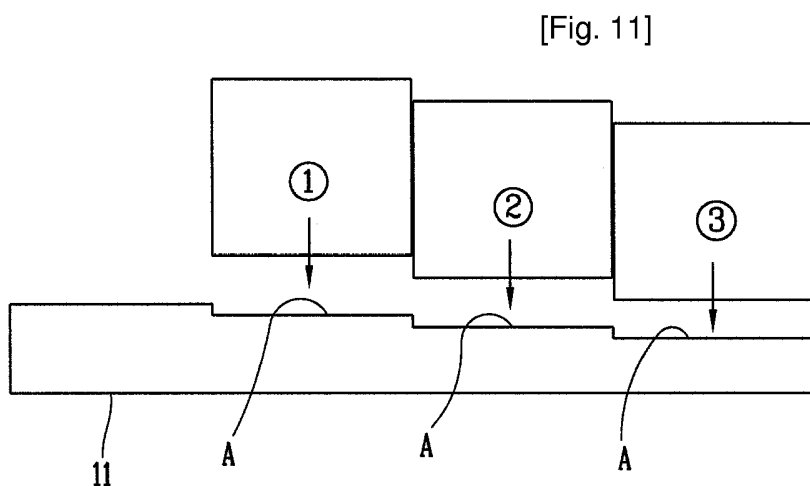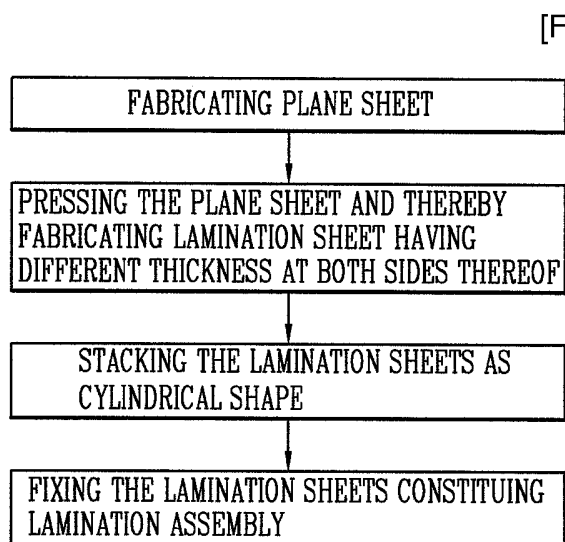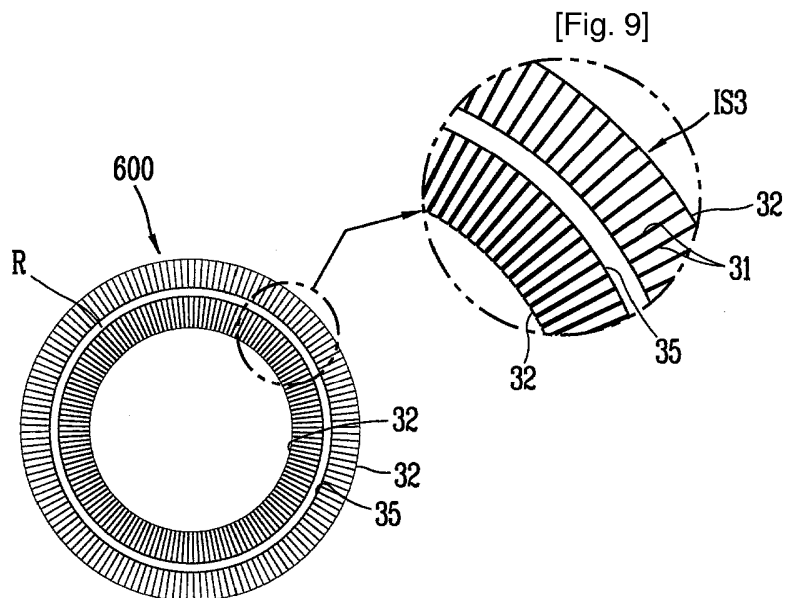

[Fig. 12]

