



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2467779 C 2011/07/05

(11)(21) **2 467 779**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2001/12/14
(87) Date publication PCT/PCT Publication Date: 2003/06/26
(45) Date de délivrance/Issue Date: 2011/07/05
(85) Entrée phase nationale/National Entry: 2004/05/07
(86) N° demande PCT/PCT Application No.: US 2001/048265
(87) N° publication PCT/PCT Publication No.: 2003/051568


(51) Cl.Int./Int.Cl. *B23K 3/00* (2006.01),
B23K 3/02 (2006.01), *B23K 3/03* (2006.01)

(72) Inventeurs/Inventors:
AXINTE, DRAGOS, US;
AXINTE, GRIGORE, US

(73) Propriétaire/Owner:
HYPERION INNOVATIONS, INC., US

(74) Agent: LAMBERT, ANTHONY R.

(54) Titre : FER A SOUDER AUTONOME
(54) Title: CORDLESS SOLDERING IRON

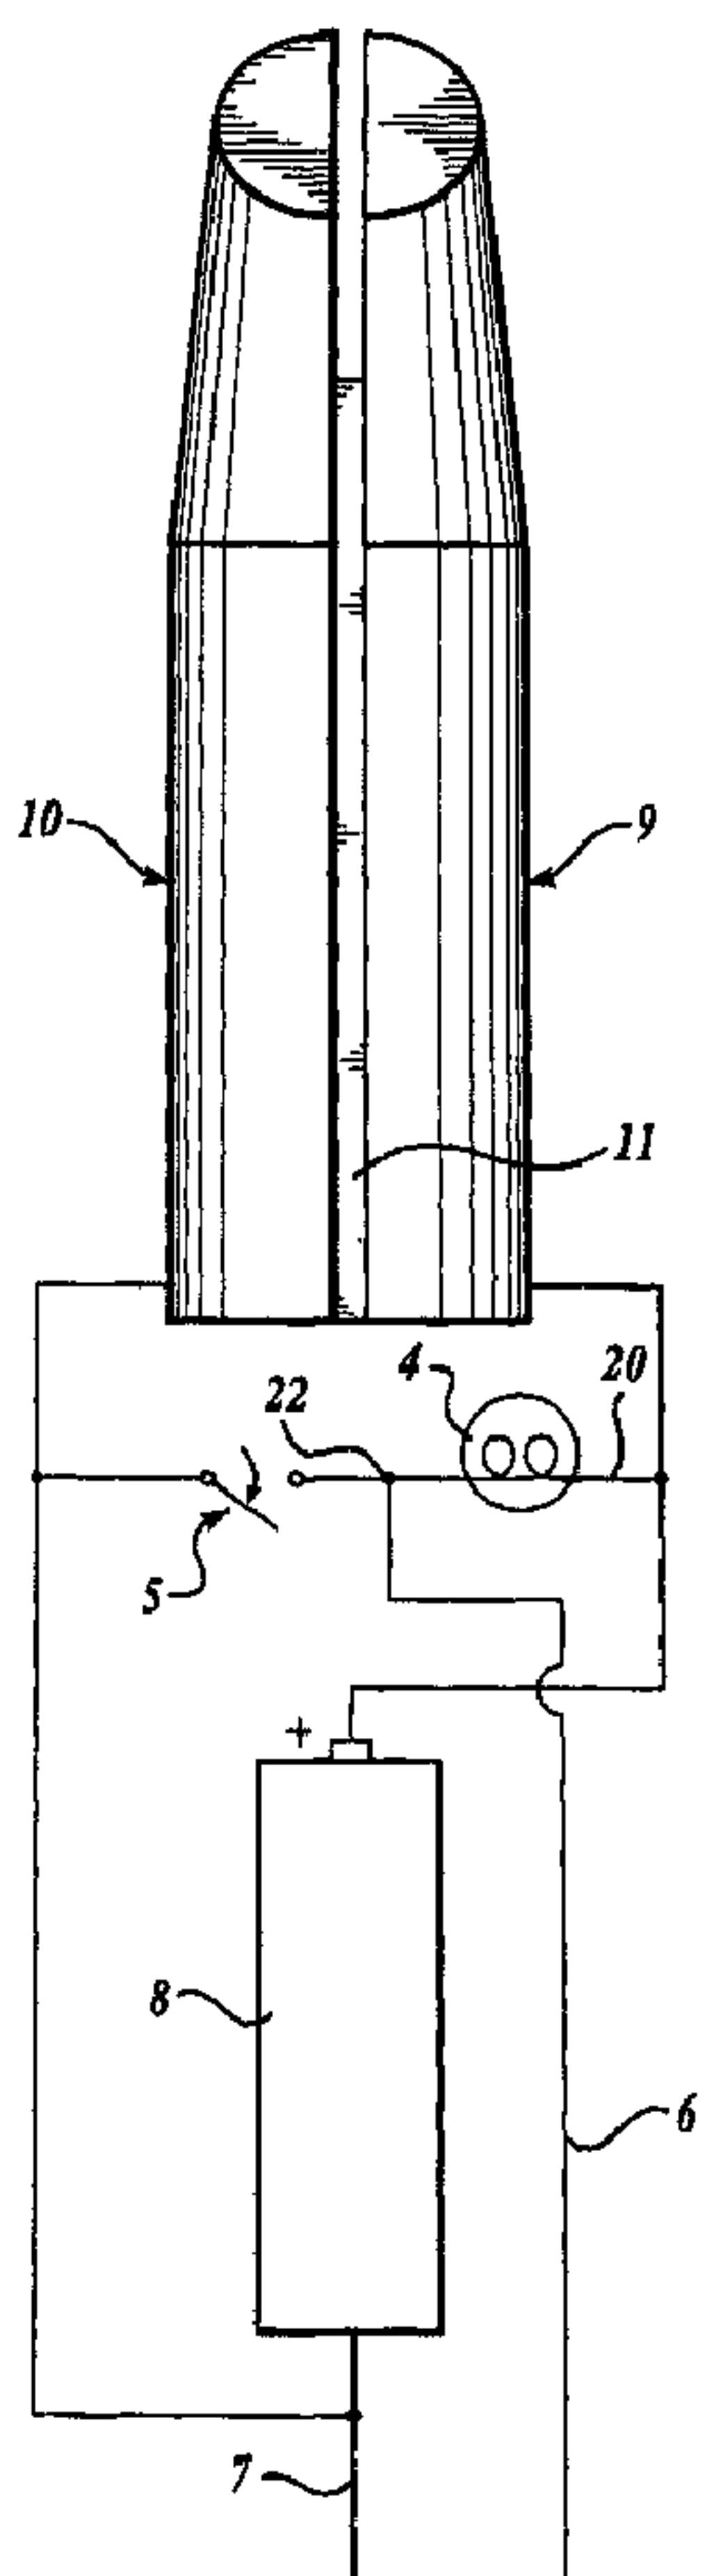

(57) Abrégé/Abstract:

A soldering iron comprises a graphite tip having two separate halves (9, 10) that are electrically isolated from each other. When both halves of the tip are applied to an electrically conductive material, such as the material to be soldered, an electrical circuit

(57) Abrégé(suite)/Abstract(continued):

between the tip halves (9, 10) and an electrical power source (8) is completed. Therefore, the tip can reach operating temperatures quickly. When the tip is removed from the joint, the electric circuit is broken and the tip material may quickly cool to a safe temperature. The tip material permits higher power outputs than other battery operated portable soldering irons.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
26 June 2003 (26.06.2003)

PCT

(10) International Publication Number
WO 03/051568 A1(51) International Patent Classification⁷:**B23K 3/00**

(74) Agent: DONAHUE, Thomas, M., Jr.; Christensen O'Connor Johnson & Kindness PLLC, 1420 Fifth Avenue, Suite 2800, Seattle, WA 98101 (US).

(21) International Application Number:

PCT/US01/48265

(22) International Filing Date:

14 December 2001 (14.12.2001)

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(71) Applicant: HYPERION INNOVATIONS, INC. [US/US]; 2815 Eastlake Avenue E, Suite 300, Seattle, WA 98102 (US).


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: AXINTE, Dragos; 18305 SE Newport Way #M301, Issaquah, WA 98027 (US). AXINTE, Grigore; 12562 SE 230th Street, Kent, WA 98301 (US).

[Continued on next page]

(54) Title: CORDLESS SOLDERING IRON

(57) Abstract: A soldering iron comprises a graphite tip having two separate halves (9, 10) that are electrically isolated from each other. When both halves of the tip are applied to an electrically conductive material, such as the material to be soldered, an electrical circuit between the tip halves (9, 10) and an electrical power source (8) is completed. Therefore, the tip can reach operating temperatures quickly. When the tip is removed from the joint, the electric circuit is broken and the tip material may quickly cool to a safe temperature. The tip material permits higher power outputs than other battery operated portable soldering irons.

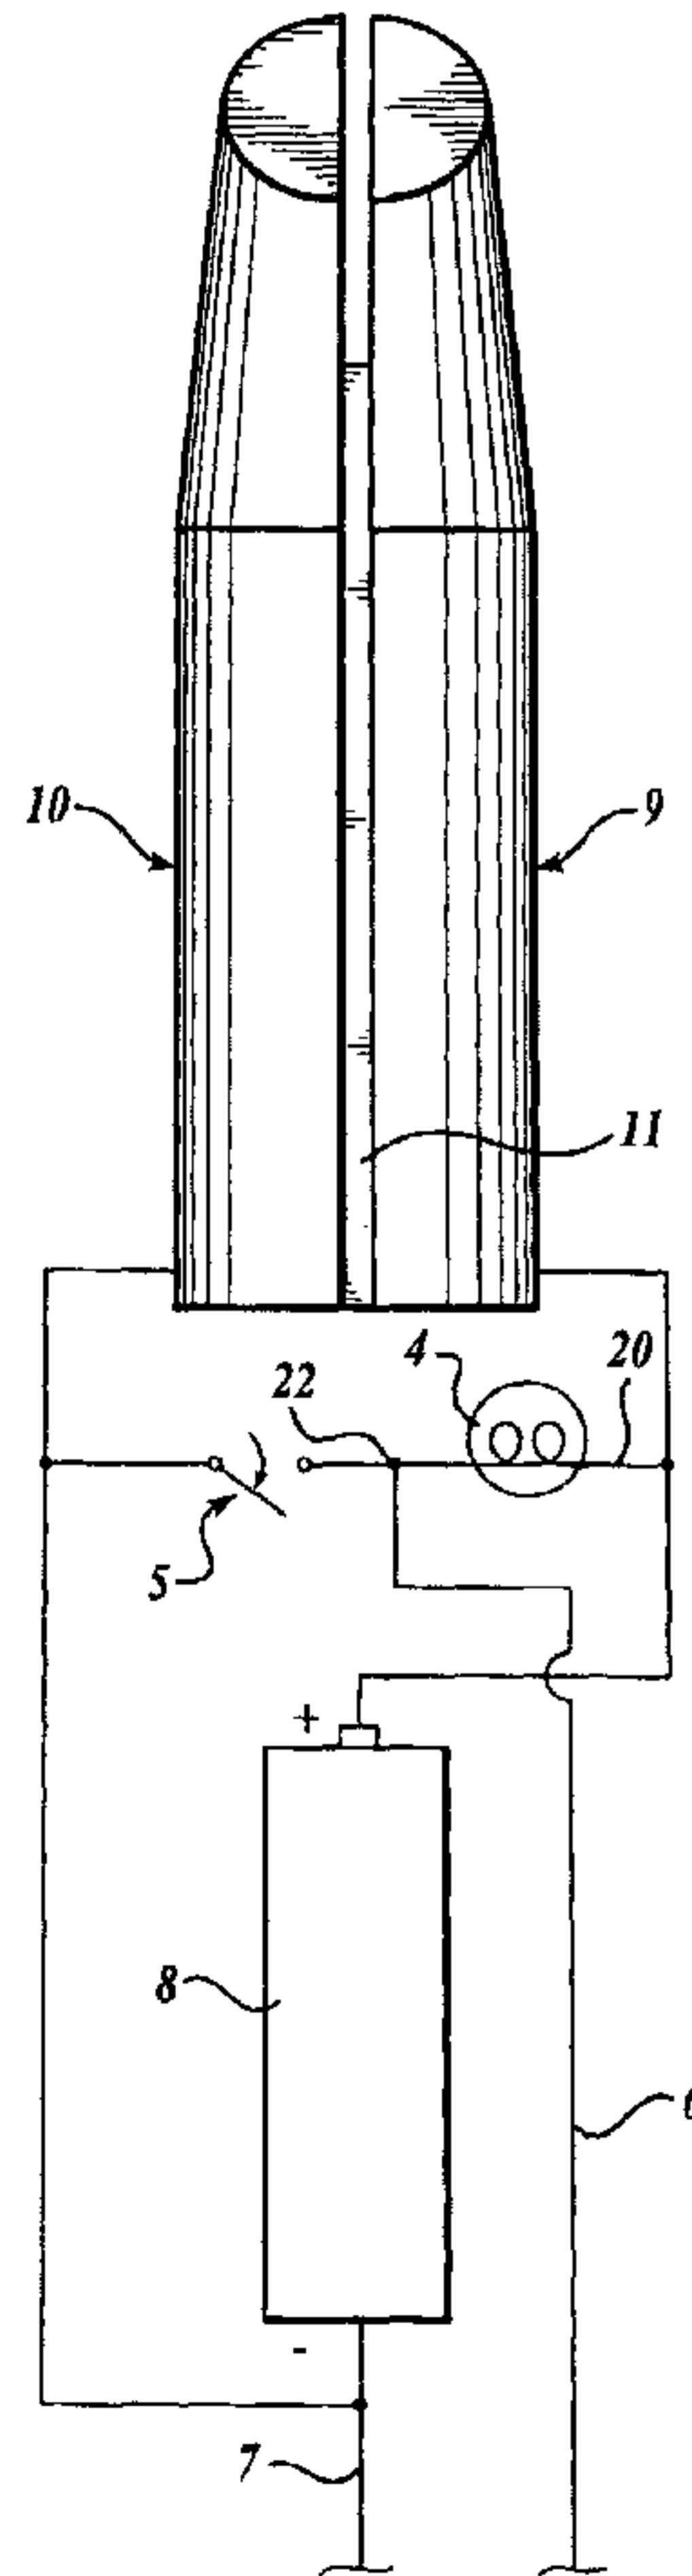**WO 03/051568 A1**

WO 03/051568 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CORDLESS SOLDERING IRON

This space intentionally left blank.

5

FIELD OF THE INVENTION

The present invention relates to cordless electrical devices, more specifically, to soldering irons and soldering iron tips.

10

BACKGROUND OF THE INVENTION

In many industries and for some hobbyists, it is necessary to manually make electrically conductive connections between various electrical components. In order to make such connections, a wide variety of soldering irons have been developed, for use in a variety of applications, ranging from repair of printed circuit boards, use in the 15 telecommunications industry, and use in the manufacture and repair of heavy industrial electrical and electromechanical equipment. Existing soldering irons vary by power source, application, performance, shape, size, temperature, tip type, heat source, price, and portability.

Regardless of the size or capability of the soldering iron, existing soldering iron 20 tips are generally categorized into two main types. The first consists of a heating element surrounded by a non-conductive film material, which is then covered by a thermally conductive metallic shell. The tip is heated by the application of electricity to the heating element. Depending on the application, the tip size can vary widely. The power source may also vary, ranging from 2.4 volt batteries through a 220 volt alternating current 25 conventional outlet. Regardless of the power source, the flow of electricity to the heating element is typically controlled by a switch in the electrical circuit leading to the heating element. The switch is often a manual switch located on the outer case of the soldering iron.

An alternate soldering iron tip includes a solid tip of a thermally conductive 30 material, usually a metal, which is heated by burning butane. Such soldering irons are typically portable, and the butane is supplied from a cartridge within the tool.

A number of problems exist with the current types of soldering irons. Soldering irons that must be plugged into a conventional electrical outlet lack mobility and are restrictive in use. Regardless of the tip type, the time generally required to reach soldering temperatures initially ranges from 10 to 60 seconds. If the soldering iron has 5 not completely cooled down between uses, subsequent uses may not require as much startup time, but are still not immediate. Similarly, the time required for desired cooling can be substantial, posing the danger of burns to the operator and his or her surroundings after the tool has been removed from the work surface and before the tool has cooled. Furthermore, metal tips may become soldered to the connection, damaging the 10 connection as the tip is removed and requiring further repair.

Existing cordless soldering irons resolve the mobility issues with soldering irons connected to conventional outlets, but at the cost of further problems. Butane irons require the operator to store and maintain a highly flammable gas and do not resolve the other deficiencies noted above. Existing battery-powered cordless soldering irons can 15 typically make only 125 connections per full charge and are only capable of equivalent power output in the range of about 15-25 watts.

In order to ensure that the operator is able to adequately view the joint to be soldered, existing electric soldering irons are sometimes provided with a small lamp disposed on the soldering iron to illuminate the tip and connection. In these devices, the 20 light is controlled by the same switch that controls the flow of electricity to the heating element. A disadvantage of this system is the inability to use the light without heating the tip of the soldering iron. This requires the operator to carry a separate flashlight if he or she wishes to illuminate the surroundings without soldering or heating.

As noted above, soldering irons are primarily used for making electrically 25 conductive connections in various forms of electrical and electronic equipment. A visual inspection of the soldered connection may not always accurately determine whether or not the connection has been formed correctly and is now electrically conductive. Therefore, those operators who wish to test their connection, or to test electrical 30 continuity between any two other points in the circuit, must carry a separate continuity tester.

Thus, a need exists for a soldering iron that can heat up and cool down quickly, minimizing the risk of burning the operator and/or his or her surroundings. Ideally, the

soldering iron would be portable and could be used to form a large number of connections at high power output without having to be recharged. There is a further need for a portable soldering iron which can also be used as a flashlight and/or a continuity tester, reducing the number of tools to be carried by the operator to the site of the work.

5

SUMMARY OF THE INVENTION

Generally described, the present invention provides a soldering iron, with a graphite tip having two separate halves that are electrically isolated from one another. The tip halves are each electrically connected to the opposite sides of an electrical power source. When both halves of the tip are applied to an electrically conductive material, such as the material to be soldered, an electrical circuit between the tip halves and electrical power source is completed. The halves of the tip are constructed from material having high electrical resistivity and low thermal conductivity. Therefore, the tip can reach operating temperatures quickly. When the tip is removed from the joint, the electrical circuit is broken and the tip material quickly cools.

15

Because electricity is only able to flow when the two pieces of the tip are electrically connected, no separate switch is required. Furthermore, the soldering iron may be used without waiting for the tip to heat. The tip also reduces the risk of burning the operator and/or his or her surroundings because it heats up and cools down quickly. Furthermore, the tip material eliminates the risk of the tip becoming stuck in the joint.

20

The tip material also permits higher power outputs than other known battery-operated portable soldering irons and permits over 300 joints for each full charge.

In accordance with further aspects of the present invention, in one embodiment, the soldering iron also includes a light disposed on the case to illuminate the tip and connection. The light is controlled by a separate switch and permits the tool to be used to illuminate the operator's surroundings without actually having to heat the tip. This aspect of the invention permits the operator to avoid the necessity of carrying a separate light source when working or intending to work in areas without sufficient lighting.

In accordance with other aspects of the invention, another embodiment is provided in which the tool also includes an electrical lead connected in series with the lamp, the power source, and a continuity testing probe. This aspect of the invention permits the soldering iron to test circuit continuity by applying the lead and the probe directly to a newly soldered connection, or to another part of the circuit to be tested. This

aspect of the invention permits the operator to avoid the necessity of carrying a separate continuity tester to perform this function.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will 5 become more readily appreciated as the same become better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is an elevation view of one embodiment of a soldering iron formed in accordance with the present invention;

10 FIGURE 2 is a front elevation view of one embodiment of a soldering tip formed in accordance with the present invention;

FIGURE 3 is a side elevation of the soldering tip illustrated in FIGURE 2;

FIGURE 4 is an end view of the soldering tip shown in FIGURE 2; and

FIGURE 5 is a circuit diagram for use with the embodiment of FIGURE 1.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIGURE 1, one embodiment of a cordless soldering iron formed in accordance with the present invention is shown. The soldering iron 1 includes a tip 2 attached to a body 3, an electric light 4 disposed on the body 3 to illuminate the tip 2 and surrounding work surfaces (not shown), a switch 5 disposed on the body 3 to control the 20 electric light 4, a continuity testing lead 6 and a continuity testing probe 7 disposed on body 3, and an electrical power means 8 (see FIGURE 5).

In more detail, the body 3 includes an elongate substantially tubular member of rigid heat resistant material, such as plastic or other materials known to those skilled in the art. The body is a unitary structure, assembled in parts, and configured to hold the 25 sub-components described below. Those skilled in the art will recognize that the configuration of the body can vary widely for use in different applications.

Referring to FIGURES 2, 3 and 4, the tip 2 includes two electrodes 9 and 10, electrically isolated from one another by an insulator 11 disposed therebetween. In the case of the embodiment illustrated in FIGURES 2, 3, and 4, the electrodes 9 and 10 are 30 cross-sectionally shaped as half cylinders. In the longitudinal direction, each electrode is conically tapered along its distal third at an angle A and is further truncated at the distal tip by an angle B, thereby forming a flat, angled surface for application to the joint to be

soldered. Those skilled in the art will recognize that the size and shape of the tip can also vary widely for use in different soldering applications.

The electrodes 9 and 10 are preferably formed of graphite, or a material containing graphite. For example, battery electrodes containing graphite, such as battery electrodes obtained from Eveready® Super Heavy Duty Lantern Battery Model No. 1209, manufactured by Eveready Battery Company, Inc., Cleveland, Ohio, have provided acceptable results. The electrodes may alternatively be formed from other materials that are semi-conductive electrically, and which have low thermal conductivity, for example germanium or silicon. The electrical resistivity of the tip materials should be at least 1,500 micro-Ohm cm. and is preferably over 3,000 micro-Ohm cm., while the thermal conductivity should be less than 10 BTU/hr-ft-°F and is preferably in the range of 1 to 10 BTU/hr-ft-°F. Upon the application of electricity, the electrode material reaches a temperature of approximately 600°F within a few seconds, and remains a solid at temperatures in excess of about 1,000°F. Furthermore, the electrode material preferably has sufficient compressive and tensile strength to permit the electrodes to be manufactured to tolerances of less than about 1 mm, rigidly held in place by the body 3 and applied to the connection to be soldered without mechanical failure. The tip should have a density in the range of 1.5 to 1.75 g/cc and a minimum flexural strength of 1,500 psi.

In one embodiment, the insulator 11 is formed of mica. The insulator 11 may alternatively be formed of a solid dielectric material that is able to withstand temperatures in excess of about 1,000°F without changing state.

The tip 2 is attached in any conventional manner, preferably in detachable manner, to the body 3. Those skilled in the art will recognize that the means of attaching and detaching the tip to the body can vary widely for use in different soldering applications. Making the tip detachable also permits the use of different tips for different applications with the same tool. When secured, the electrodes 9 and 10 are separately electrically connected to the positive and negative terminals of an electrical power means 8 in a conventional manner. A variety of electrical power means 8 can be used, including rechargeable or non-rechargeable batteries, or low voltage provided from line voltage through a transformer. Electrical power means in FIGURE 1 are a pair of nickel cadmium batteries encased within the body 3 to provide a nominal voltage of 2.4 volts

and 700-750 milliamp hours. Electrodes 9 and 10 can optionally be electrically isolated from the electrical power means 8 by a switch or other means for interrupting the flow of electricity in an electrical circuit.

When both electrodes 9 and 10 are applied to an electrically conductive or semi-conductive material, such as solder, an electrical circuit is completed from the positive terminal of electrical power means 8, through electrode 9, through the electrically conductive or semi-conductive material to which the tip has been applied, through electrode 10 and back to the negative terminal of electrical power means 8. The flow of electricity causes electrodes 9 and 10 to heat to a temperature of about 600°F or greater within a few seconds, allowing the tool to thereafter be used in the same manner as a conventional soldering iron. As configured, the apparatus provides an alternating current equivalent of about 25 – 50 watts of heat to the joint to be soldered. An additional property of the preferred material for the electrodes is that it cannot become soldered to the joint while being used. When the operator of the apparatus wants to cease the application of heat, the apparatus can be removed from the electrically conductive or semi-conductive material, interrupting the flow of electricity. When the electricity is interrupted, the electrodes cool to a temperature safe for contact with human skin or clothing within a few seconds.

The apparatus optionally includes a conventional electric light 4, for example, an incandescent light bulb or light emitting diode. As shown on FIGURE 1, the light 4 is positioned on the body 3 so that the light emitted will illuminate the tip 2 and the surrounding work area during use. As shown on FIGURE 5, the light 4 is conventionally electrically connected to the electrical power means 8 and controlled by the switch 5. When switch 5 is closed, the circuit is completed from one terminal of the electrical power means 8, through the switch 5, through the electric light 4, and back to the opposite terminal of electrical power means 8, illuminating the electric light 4 without applying electricity to the tip 2. Because electric light 4 may be switched on without heating the tip 2, the light may be used to illuminate the surroundings of the operator without risk of accidentally burning the operator or nearby combustible materials.

As shown in FIGURE 1, the apparatus may further optionally be provided with a continuity testing assembly having a continuity testing lead 6 and a continuity testing probe 7. The lead 6 further includes a wire 12, for example, a 26 gauge wire, extending

from the body 3 at one end and with an alligator clip 13 attached at the distal end of the wire 12. The continuity testing probe 7 is a probe similar to those used in conventional electrical test equipment, for example, a short, rigid, electrically conductive needle-shaped probe. It will be readily apparent to those skilled in the art that the continuity testing lead and continuity testing probe can be formed of any electrically conductive material without departing from the spirit and intention of the invention. As shown in FIGURE 5, the continuity testing lead 6 is electrically connected to the electrical power means 8 via a path extending through the electric light 4. The probe 7 is connected to the opposite terminal of the power means 8. Referring to FIGURE 5, the tip is connected in series to the power means 8. A path 20 is provided in parallel with the tip. The light 4 and the switch 5 are placed in series along the path 20. The lead 6 is connected to the path 20 at connection 22 located between the light 4 and switch 5. The assembly is used to test circuit by affixing alligator clip 13 to one side of the circuit to be tested and touching the probe 7 to the opposite side of the circuit. If the circuit being tested is electrically continuous, current will flow from the electrical power means 8, through the electric light 4, through the continuity testing lead 6, through the circuit being tested, through the continuity testing probe 7, and back to electrical power means 8, thus completing the circuit and illuminating electric light 4. The illumination of the light 4 quickly demonstrates the continuity of the tested circuit. This embodiment is particularly useful for cordless soldering irons, since the operator can test the soldered joint without having to obtain or carry a separate tool.

As shown in FIGURE 1, end caps 14 and 15 are available to protect the tip 2 and continuity testing lead 6 from damage. The end caps are removably fixed to the body 2 by conventional means, for example, a friction fit, a clamp, threaded surfaces, etc.

While the preferred embodiment of the invention has been illustrated and described, it will be appreciated that various changes can be made therein without departing from the spirit and scope of the invention.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A soldering iron, comprising:
 - an electric power source having positive and negative terminals;
 - a soldering contact comprising a first electrode and a second electrode electrically isolated from the first electrode, the first and second electrodes being electrically connected to said electric power source;
 - a continuity indicator; and
 - a first electrically conductive continuity testing lead having a free end discrete from said soldering contact, said first testing lead electrically connected in series to said continuity indicator and to one of said terminals of said electrical power source; and
 - a second electrically conductive continuity testing lead having a free end discrete from said soldering contact, said second testing lead electrically connected to said opposite terminal of said electrical power source.

2. The soldering iron of claim 1, wherein the continuity indicator is a light bulb or light emitting diode.

3. The soldering iron of claim 1, wherein the soldering contact further includes an insulator coupled between the first and second electrodes.

4. The soldering iron of claim 1, further including a switch having a closed state and an open state.

5. The soldering iron of claim 4, wherein the continuity indicator illuminates when the switch is in the closed state.

6. The soldering iron of claim 4, wherein the soldering contact has an energized and non-energized state.

Deleted:

3. The soldering iron of claim 1, wherein the soldering contact includes first and second electrodes.

4. The soldering iron of claim 3, wherein the first and second electrodes are electrically isolated from one another.

Deleted: 5

Deleted: 4

Deleted: 6

Deleted: 7

Deleted: 6

Deleted: 8

Deleted: 6

7. The soldering iron of claim 6, wherein the continuity indicator illuminates when the switch is in the closed state regardless of the state of the soldering contact.

Deleted: 9
Deleted: 8

8. The soldering iron of claim 4, wherein the continuity indicator and the switch are connected in series.

Deleted: 10
Deleted: 6

9. The soldering iron of claim 1, wherein the soldering contact is connected in parallel with the continuity indicator.

Deleted: 11

10. A soldering iron, comprising:

Deleted: 12

an electric power source having positive and negative terminals;

a continuity indicator;

a first electrode electrically connected to one of said terminals of said electric power source;

a second electrode electrically connected to the opposite terminal of said electric power

source, wherein the first and second electrodes are electrically isolated from one another;

a first electrically conductive continuity testing lead disposed a spaced distance from said first and second electrodes, said first testing lead having a free end adapted to contact one side of a circuit to be tested, wherein said opposite end of said testing lead is electrically connected in series to said continuity indicator and to one of said terminals of said electric power source; and

a second electrically conductive continuity testing lead disposed a spaced apart distance from said first and second electrodes, said second testing lead having a free end adapted to contact the opposite side of the circuit to be tested, wherein said opposite end of said second testing lead is electrically connected to the opposite of said terminals of said electric power source.

Deleted:

Deleted: 13. The soldering iron of claim 12, wherein the first and second electrodes are electrically isolated from one another.

Deleted: 14

Deleted: 13

11. The soldering iron of claim 10, further including an insulator coupled between the first and second electrodes.

12. The soldering iron of claim 10, further including a switch having a closed state and an open state.

Deleted: 15
Deleted: 12

13. The soldering iron of claim 12, wherein the continuity indicator illuminates when the switch is in the closed state.

Deleted: 16
Deleted: 15

14. The soldering iron of claim 12, wherein the first and second electrodes have energized and non-energized states.

Deleted: 17
Deleted: 15

15. The soldering iron of claim 14, wherein the continuity indicator illuminates when the switch is in the closed state regardless of the states of the first and second electrodes.

Deleted: 18
Deleted: 17

16. The soldering iron of claim 12, wherein the continuity indicator and the switch are connected in series.

Deleted: 19
Deleted: 15

17. The soldering iron of claim 10, wherein the first and second electrodes are connected in parallel with the continuity indicator.

Deleted: 20
Deleted: 12

1/3

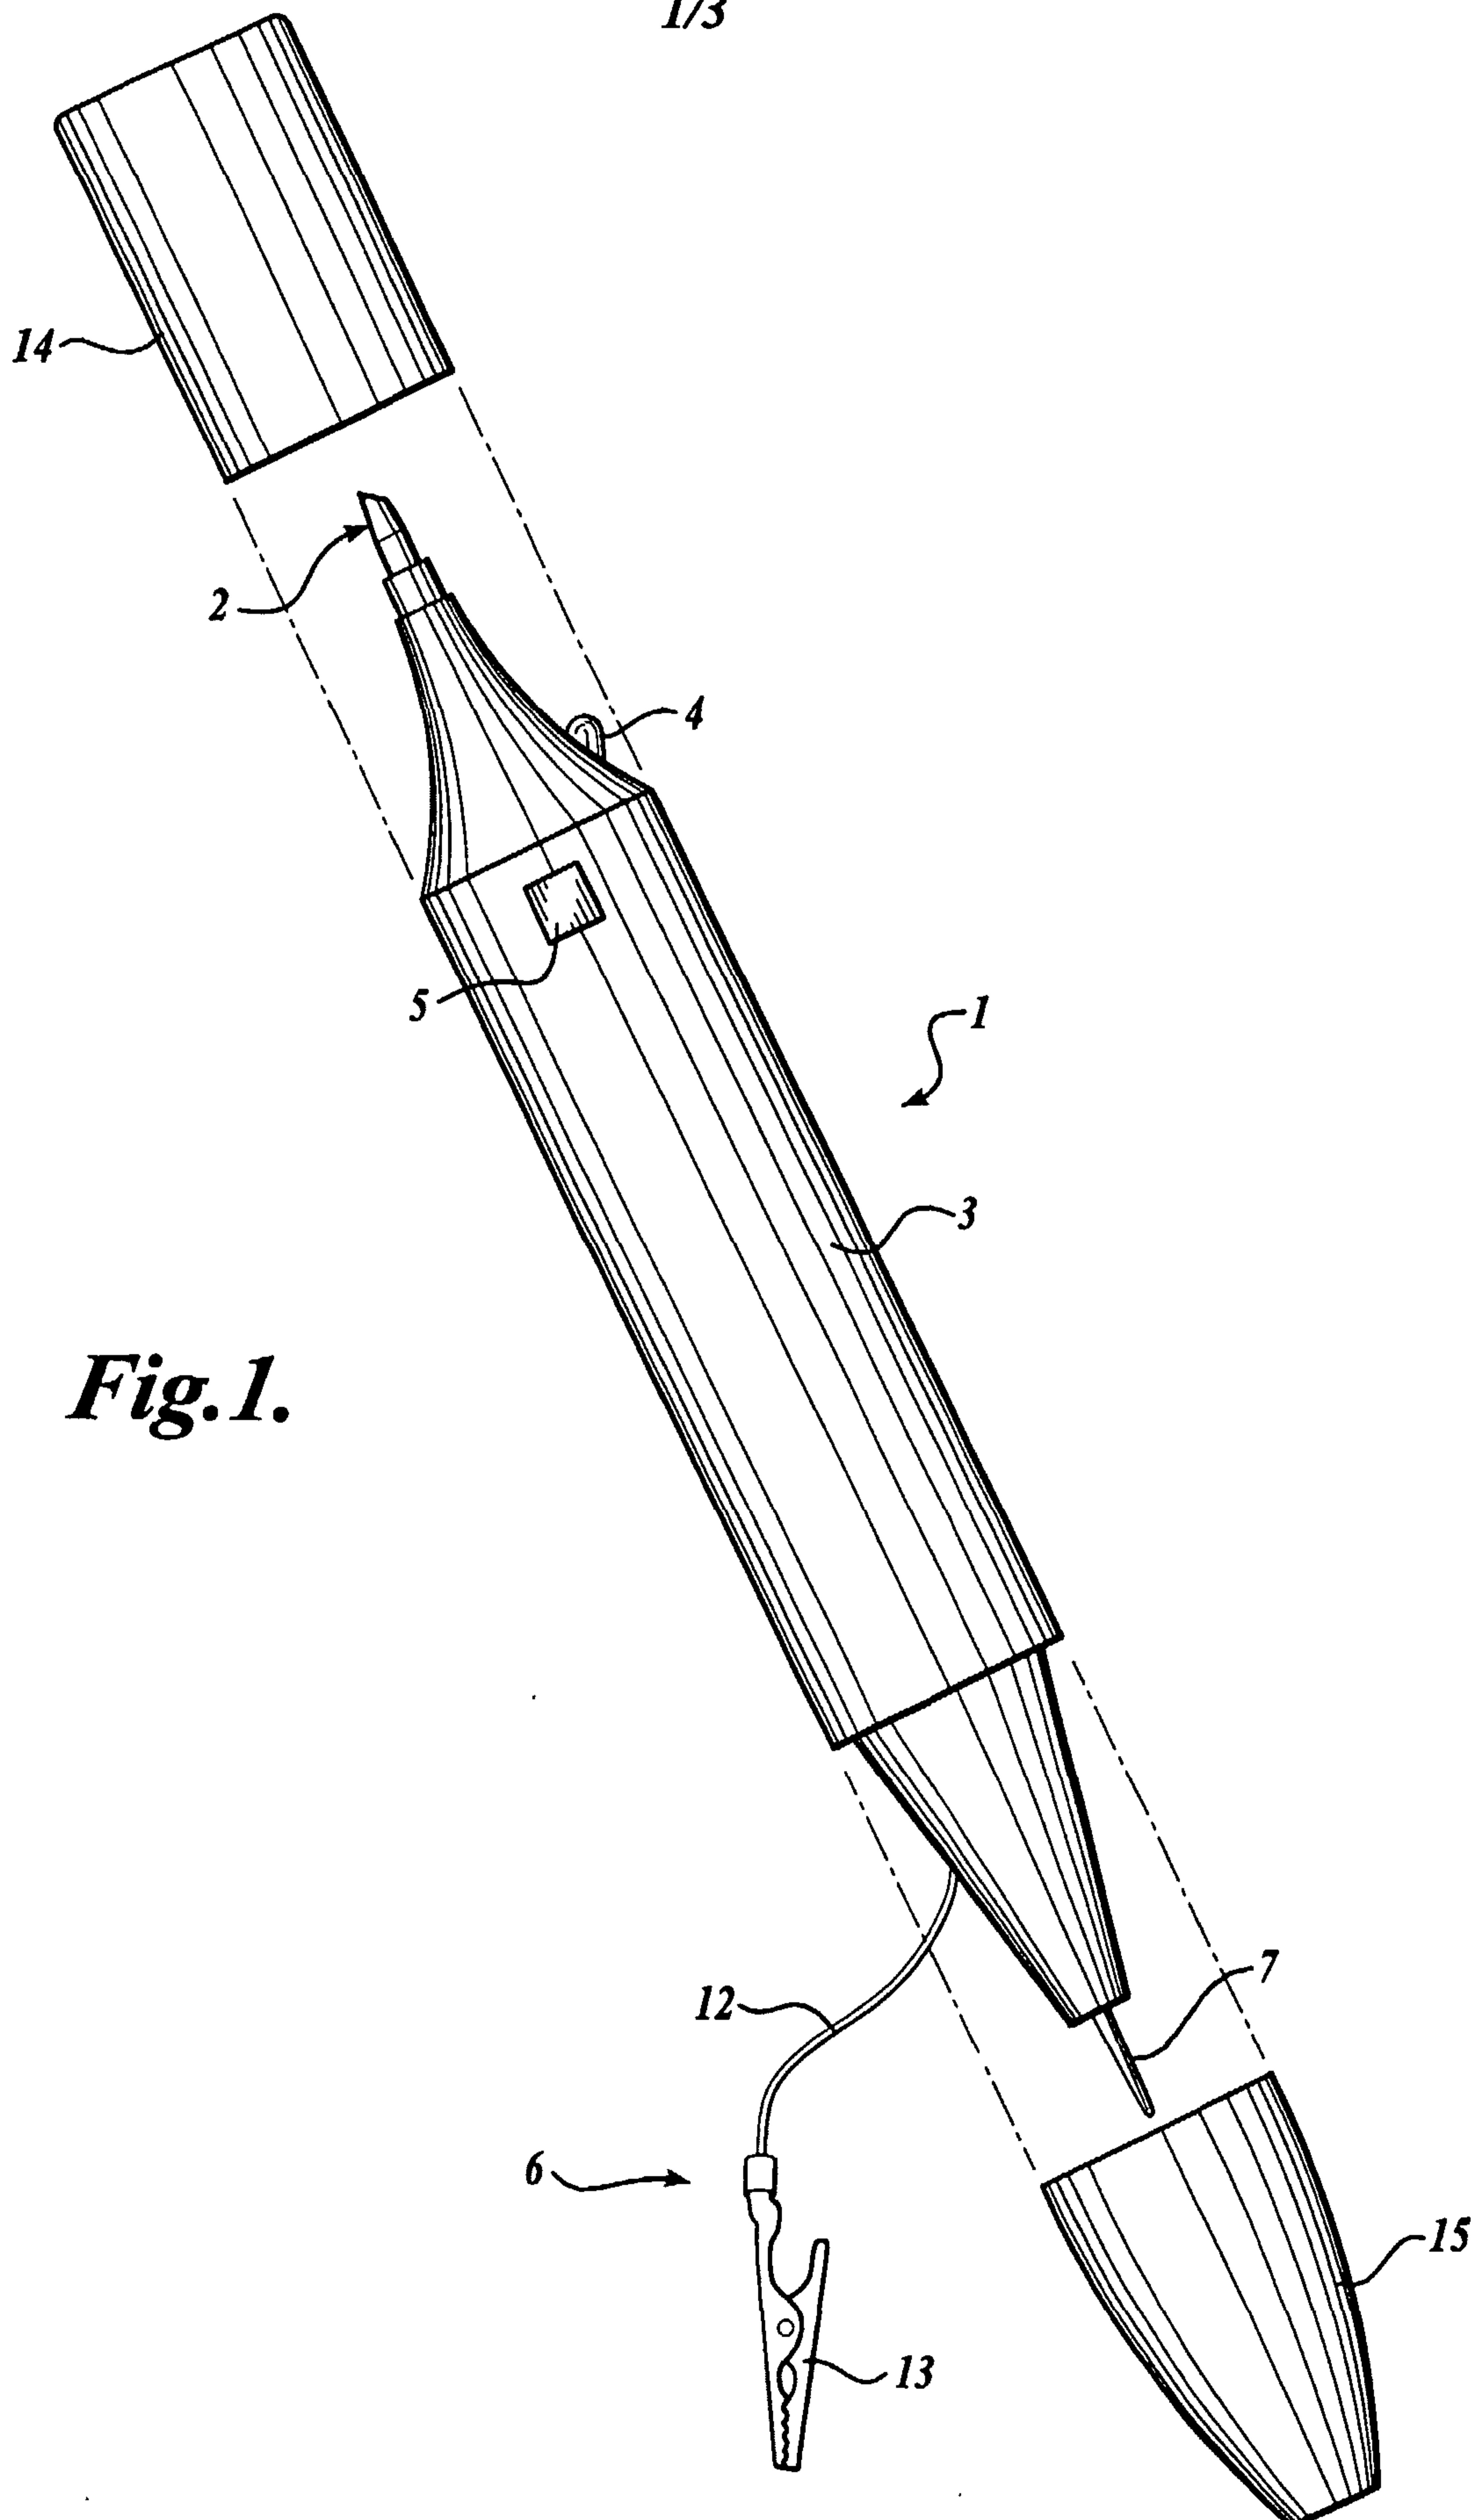


Fig.1.

2/3

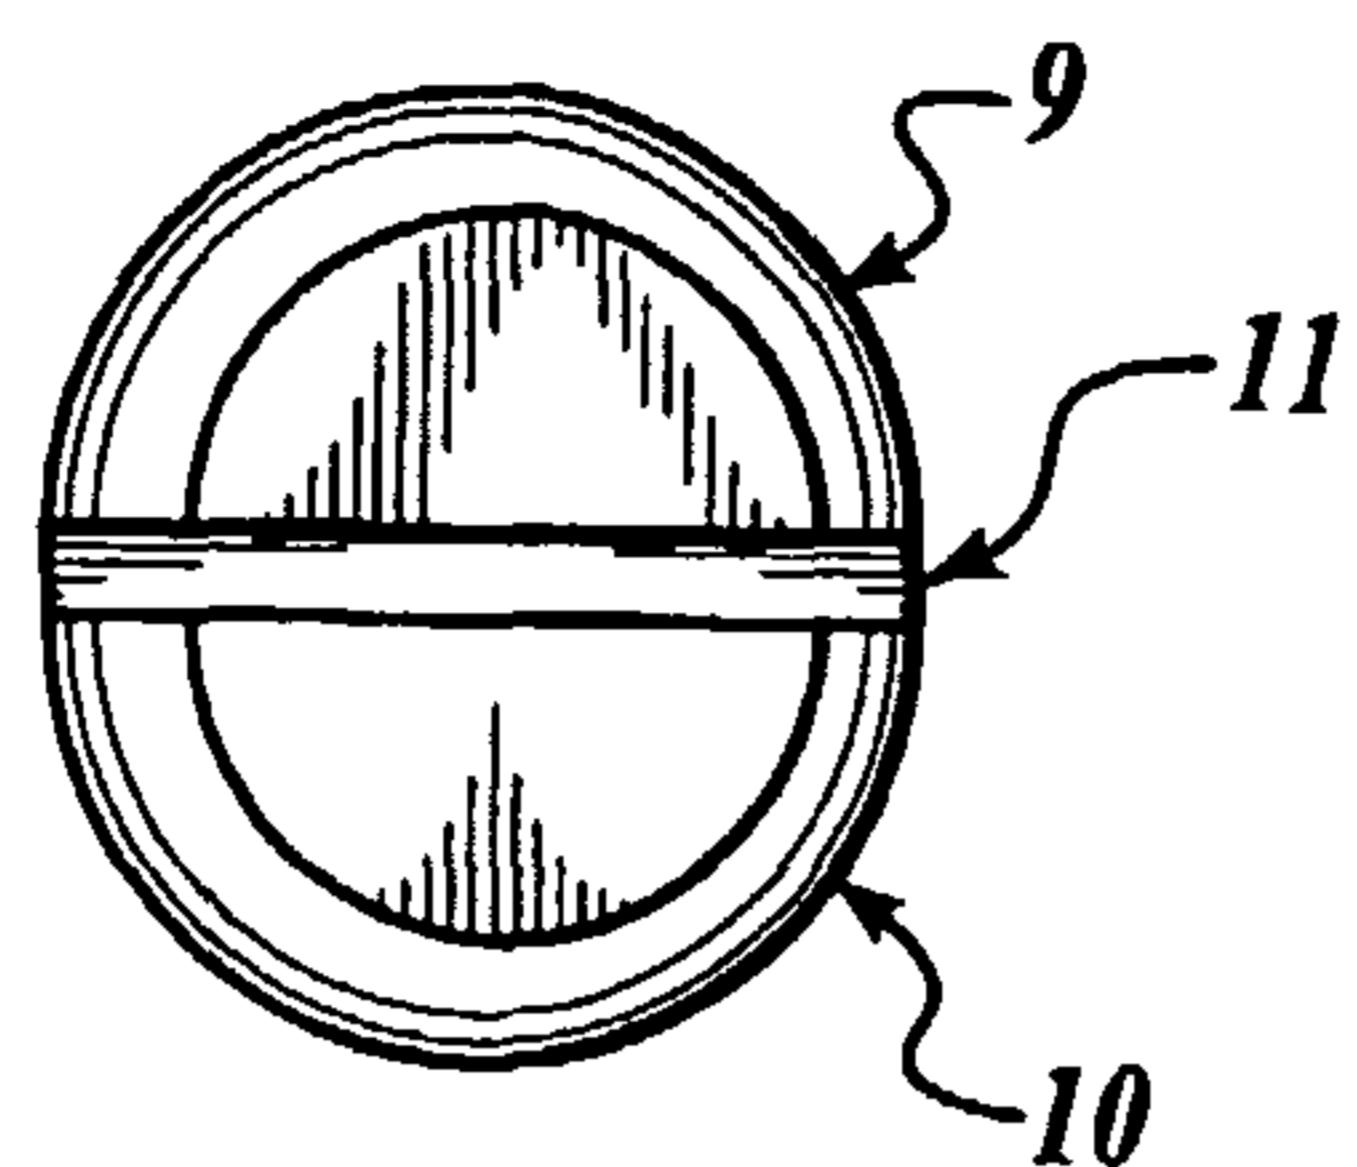


Fig.4.

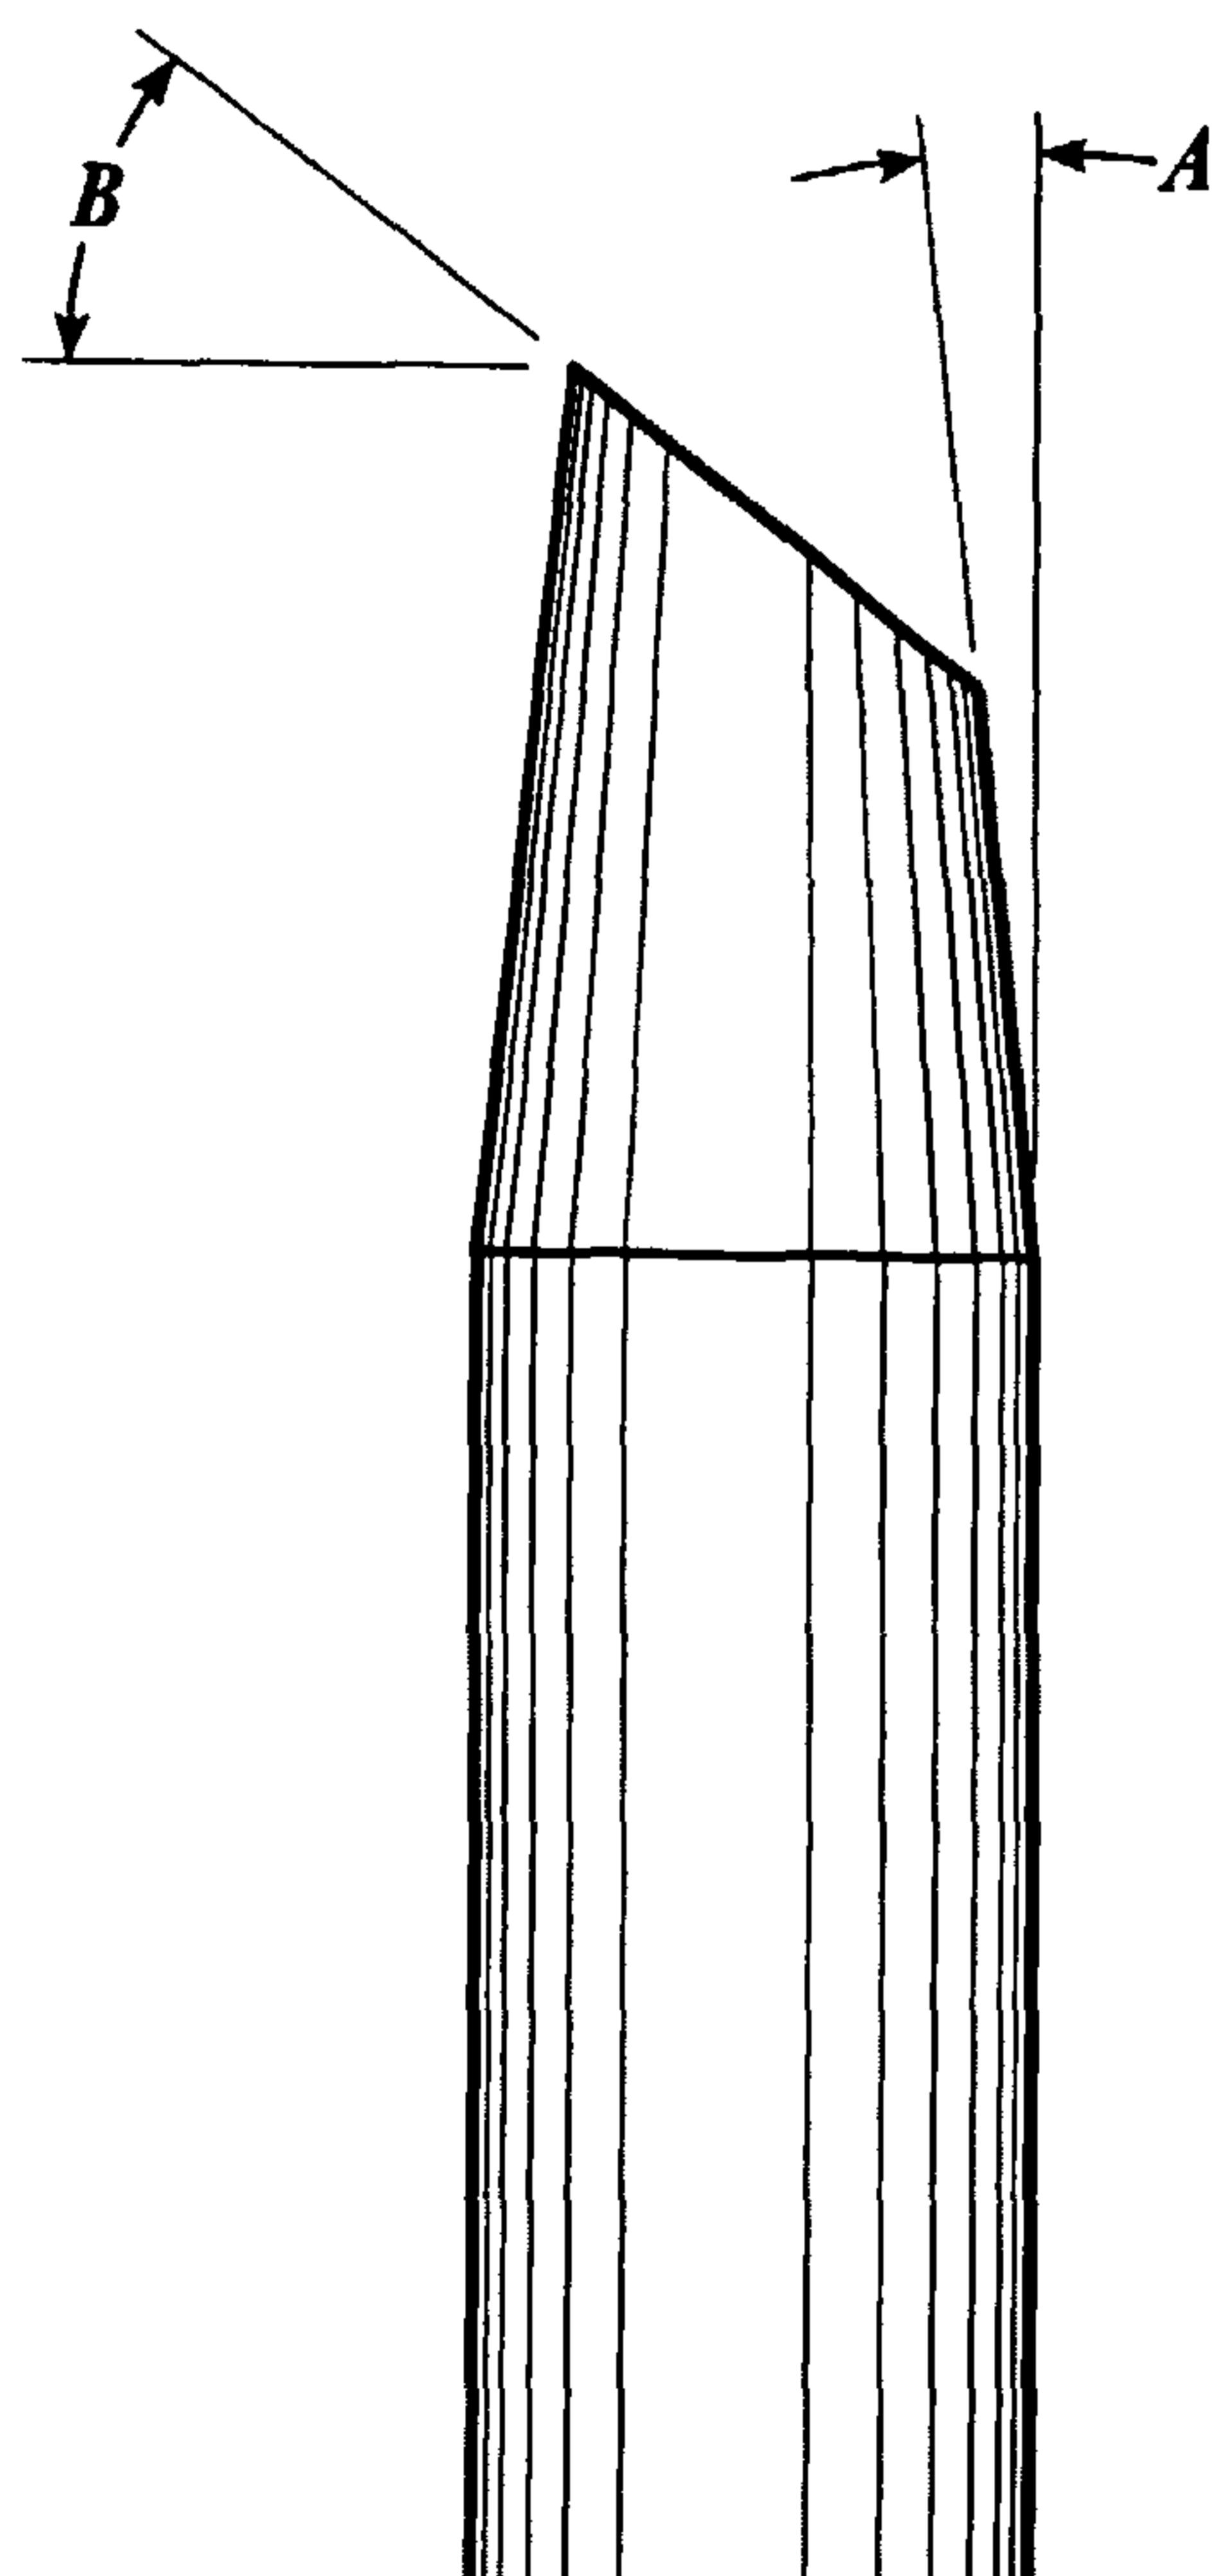


Fig.3.

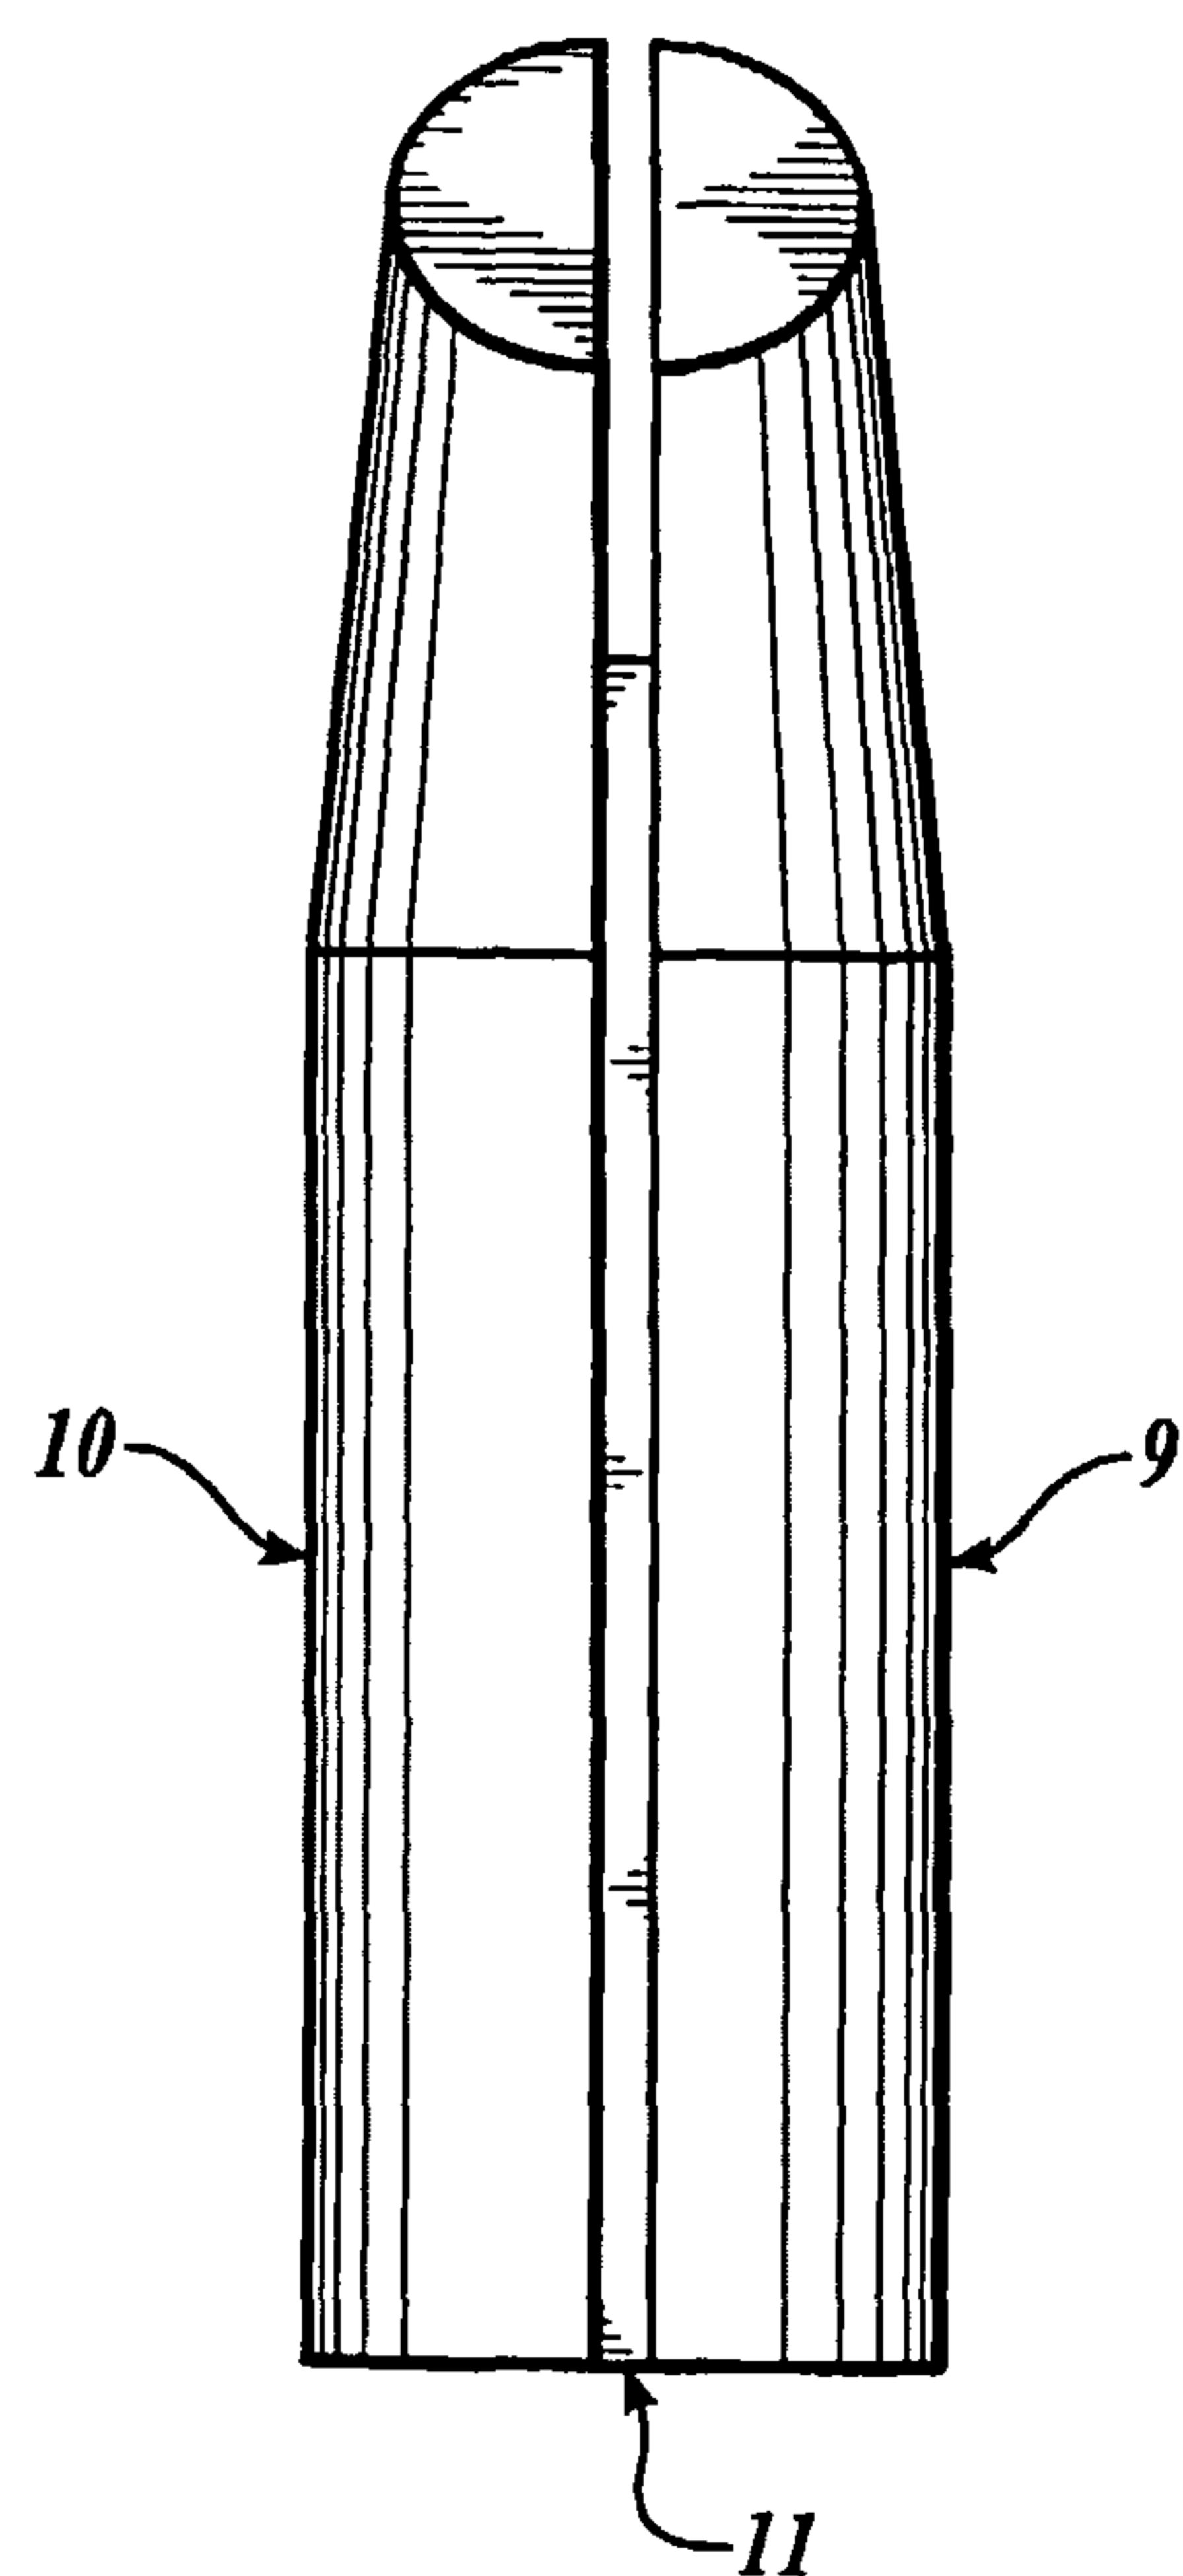


Fig.2.

3/3

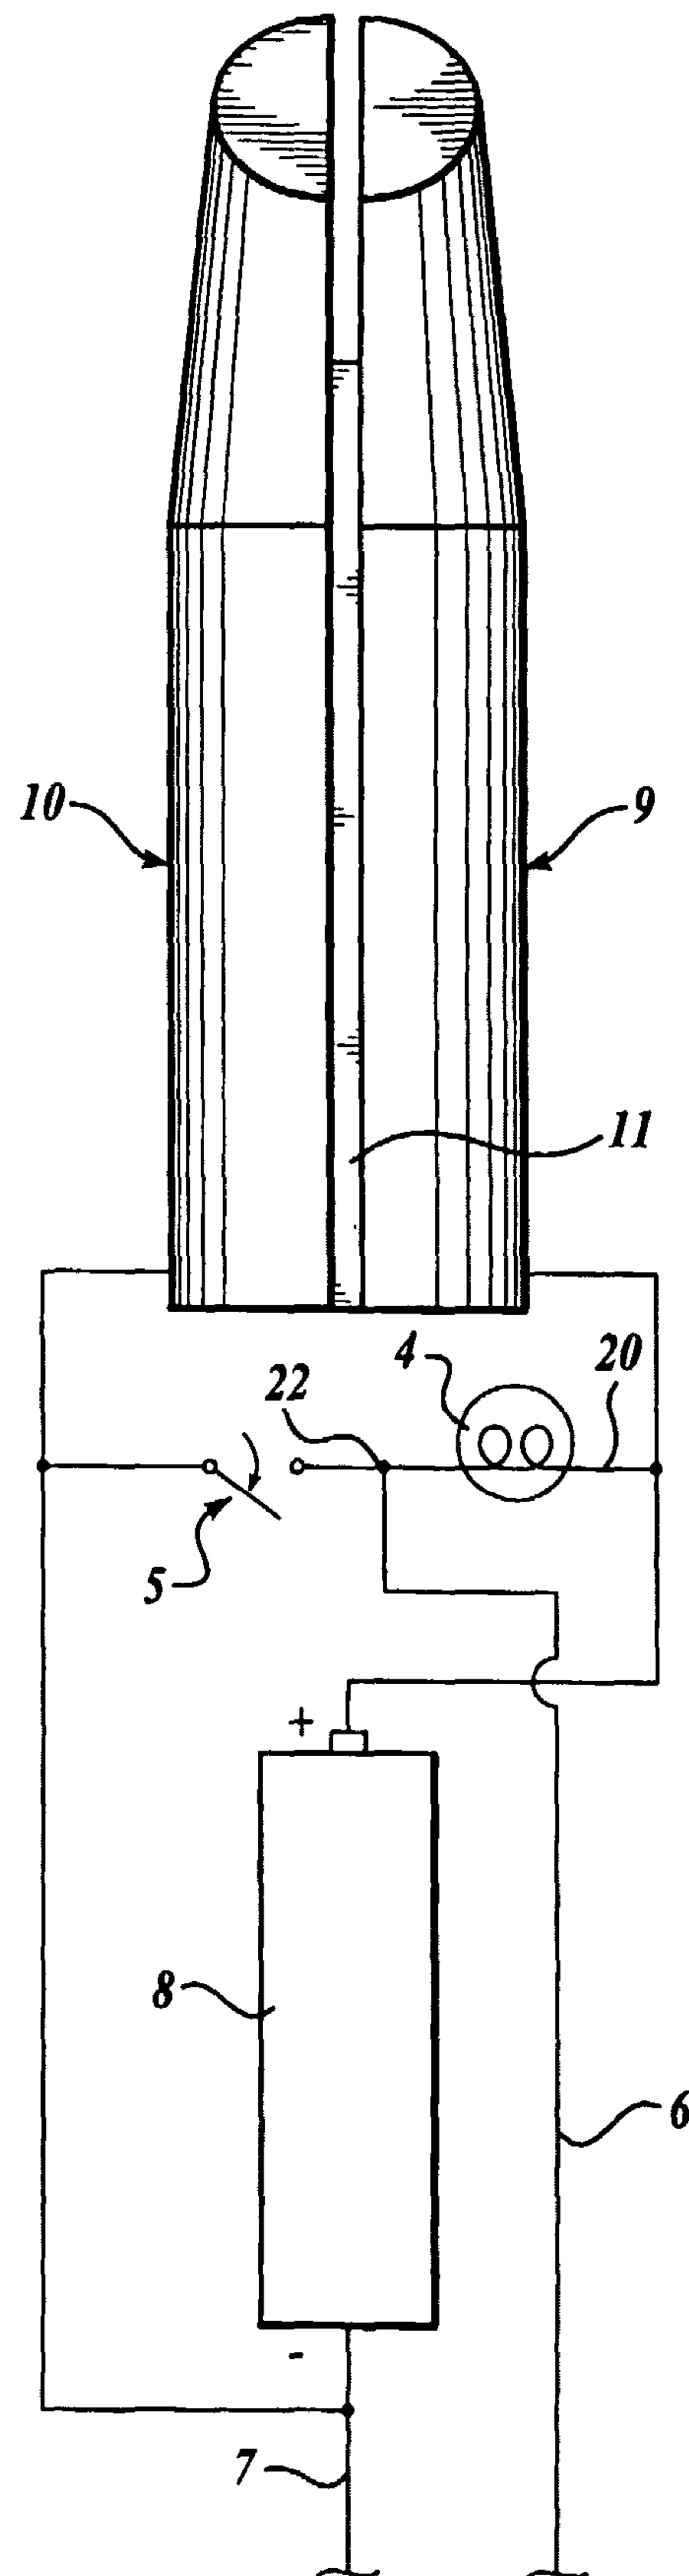


Fig. 5.

