




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B05B 3/04, B08B 9/093	A1	(11) International Publication Number: WO 00/47331 (43) International Publication Date: 17 August 2000 (17.08.00)
(21) International Application Number: PCT/GB00/00458 (22) International Filing Date: 11 February 2000 (11.02.00) (30) Priority Data: 9903102.3 11 February 1999 (11.02.99) GB (71) Applicant (for all designated States except US): ONYX UK LIMITED [GB/GB]; Onyx House, 401 Mile End Road, London E3 4PB (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): BARKER, Dennis [GB/GB]; Progressive Technical Services, Factory Road, Sandycroft, Deeside, Flintshire CH5 2QJ (GB). FURNESS, John [GB/GB]; Progressive Technical Services, Factory Road, Sandycroft, Deeside, Flintshire CH5 2QJ (GB). HOWARD, Philip, John [GB/GB]; Progressive Technical Services, Factory Road, Sandycroft, Deeside, Flintshire CH5 2QJ (GB). JONES, John [GB/GB]; Progressive Technical Services, Factory Road, Sandycroft, Deeside, Flintshire CH5 2QJ (GB). (74) Agents: CRUMP, Julian, Richard, John et al.; fJ Cleveland, 40-43 Chancery Lane, London WC2A 1JQ (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: FLUID SPRAYING APPARATUS

(57) Abstract

A fluid spraying apparatus (10) comprising a generally cylindrical body defining a longitudinal axis, which body comprises: a first fixed part (12) comprising inlet means (16) adapted for connection to a pumped supply of fluid, and turbine means (40, 42, 44) arranged to be driven by said fluid; and a second rotatable part (14) comprising gear means (46-60), and one or more nozzles (82) in fluid communication with the turbine means for outletting the fluid as one or more jets, which nozzles extend radially of the longitudinal axis, which rotatable part is drivable by the turbine means through said gear means such that said nozzles are caused to rotate about said longitudinal axis; characterised in that none of the nozzles extends radially of the longitudinal axis further than the body. The apparatus is adapted to operate at a working pressure of 4-8 bar to provide a flow-rate of 400-700 m³/hr, and is thus suitable for use with low pressure pumps of the kind often found at oil refineries.

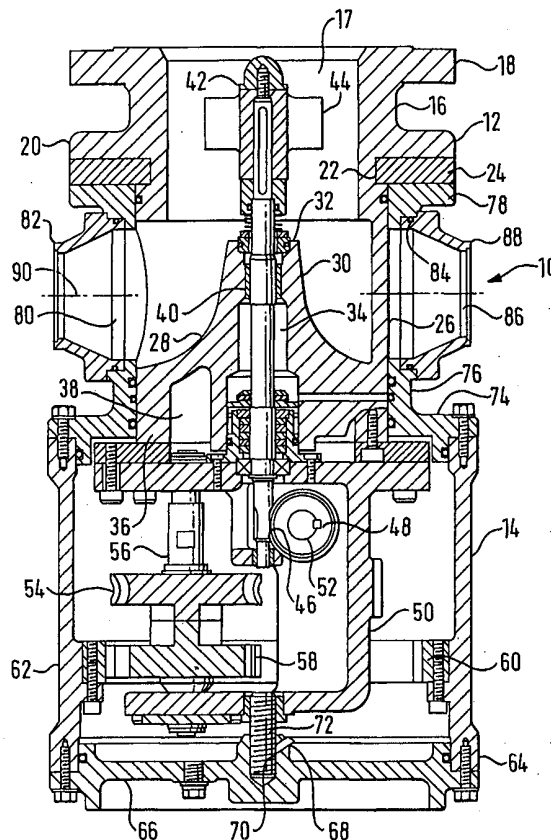

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

FLUID SPRAYING APPARATUS

The present invention relates to a fluid spraying
5 apparatus, and has particular reference to fluid spraying
apparatus of the kind suitable for use in dislodging or
resuspending sludge accumulated on the bottom of a crude
oil storage tank.

10 Fluid spraying apparatus of this kind is disclosed by EP-
A-0048091. The apparatus of EP-A-0048091 comprises a
generally cylindrical body and two diametrically opposing
nozzles that are arranged for rotation about the
longitudinal axis of the body. The body comprises a
15 fixed part and a rotatable part. The fixed part
comprises an annular inlet portion defining an inlet
passageway that accommodates a turbine, a mounting disk
for mounting the turbine and an open-sided intermediate
connecting portion between the inlet portion and the
20 mounting disk. Said rotatable part includes generally
cylindrical gear box portion that accommodates a gear
train, that is connected between the rotatable part and
the turbine, and a nozzle body portion that surrounds the
open-sided intermediate connecting portion of the fixed
25 part. Said nozzles are mounted on the nozzle body

portion, each nozzle having the form of a truncated cone, the longitudinal axis of each cone being oriented substantially orthogonally to the longitudinal axis of the body.

5

In use, the apparatus is placed within a crude oil storage tank, and the inlet portion is connected to a pipe carrying a pumped supply of fluid, typically recirculating crude oil from the tank. The passage of
10 the fluid over the turbine causes rotation of the rotatable part with respect to the fixed part, and thus rotation of the nozzles about the longitudinal axis of the body around the open-sided intermediate connecting portion of the fixed part. The fluid thus issues from
15 the apparatus via the nozzles, and the length and taper of each nozzle are carefully selected so that the jet of liquid emerging has a comparatively small angle of spread.

20 A disadvantage of the fluid spraying apparatus of EP-A-0048091 is that owing to the back pressure generated within the nozzles, a high pressure pump is required.

A further disadvantage is that as the nozzles project to
25 a substantial extent beyond the body of the apparatus,

a large opening is required in a wall of the tank in order to insert the apparatus into the tank.

There is a requirement for a more compact fluid spraying
5 apparatus which can be inserted through smaller openings
in a crude oil storage tank as compared with those that
are required for entry of the apparatus disclosed by EP-
A-0048091. There is also a requirement for a fluid
spraying apparatus which can be used with a low pressure
10 pump of the kind that are readily available on site at
oil refineries.

According to the present invention therefore there is
provided a fluid spraying apparatus of the kind described
15 comprising one or more of nozzles, characterised in that
none of the nozzles extends radially of the longitudinal
axis further than the body.

The fluid spraying apparatus of the present invention is
20 thus extremely compact, and can be inserted through any
aperture having a diameter greater than the maximum
diameter of the body of the apparatus across the
longitudinal axis thereof. Said apparatus may have a
maximum diameter of no more than 46 cm (18 inches), and
25 in one embodiment, the maximum diameter of the machine

is 31 cm (12 inches).

Preferably the or each nozzle is generally frustoconical, and the longitudinal axis of each nozzle extends
5 substantially orthogonally to the longitudinal axis of the body. The outer extremity of each nozzle preferably coincides with the outer extent of the rest of the machine. In some embodiments, the taper of each nozzle is in the range 10 to 40°, so as to minimise the back
10 pressure arising as a result of the constriction presented by the or each nozzle. Preferably, the taper of each nozzle is in the range 15 to 35°. The diameter of the opening in each nozzle will vary according to the specific application of the machine, but will generally
15 be in the range 4-9 cm (1.5-3.5 inches). In some embodiments nozzle diameters of 5 cm (2 inches), 6.5 cm (2.5 inches) or 7.5 cm (3 inches) may be provided.

The body may comprise a first fixed part that is adapted
20 to be connected to a pipe carrying a pumped supply of fluid and second rotatable part that is arranged for rotation about said longitudinal axis. Said nozzle(s) may be mounted on the rotatable part.

25 Said fixed part may comprise an annular inlet portion

defining a passageway that accommodates a turbine arranged to be driven by fluid entering therein; a disk portion for mounting said turbine; and an open-sided connecting portion between the mounting disk portion and
5 the inlet portion.

Said rotatable part may comprise a generally cylindrical gear box portion that accommodates a gear train connected between the turbine and the rotatable part; and a
10 generally cylindrical nozzle body portion that surrounds the fixed part. Said nozzle(s) may be mounted on the nozzle body portion.

Preferably, two nozzles are provided, and these are
15 ideally positioned diametrically opposite one another on the nozzle body portion around the open-sided intermediate portion of the fixed part. Thus, fluid entering the fixed part via the inlet portion debouches the apparatus through the open-sided connection portion
20 of the fixed part and through the nozzle(s).

In some embodiments, the open-sided intermediate connecting portion of the fixed part may comprise a semi-cylindrical baffle wall that is connected between the
25 annular inlet portion and the disk portion. It will be

appreciated by those skilled in the art that as the nozzles rotate about the fixed part, the semi-cylindrical baffle wall thus serves to obturate each nozzle in succession. This arrangement is suitable where the
5 fluid spraying apparatus is to be positioned within a tank adjacent a wall of the tank, so that fluid is prevented from being sprayed directly at the said wall in order to avoid damaging the wall.

10 Alternatively, the intermediate connecting portion may comprise a plurality of circumferentially spaced fingers which are dimensioned so as not to prevent any significant obstacle to the passage of fluid through the nozzle. In this case, the apparatus is suitable for use
15 at or towards the centre of a crude oil storage tank, for example, away from the way, so that the jets of sprayed fluid emerging from the apparatus can be directed in all directions radially outwards of the longitudinal axis of the body.

20

The apparatus of the present invention is suitable for connection to a supply of fluid at a pressure of 4-8bar, and is adapted to provide a flow rate of 400-700m³/hr.

25 Following is a description by way of example only with

reference to the accompanying drawings of embodiments of the present invention.

In the drawings:-

5

Figure 1 is a cross sectional side view of a fluid spraying apparatus in accordance with a first embodiment of the present invention.

10 Figure 2 is a plan view of the first embodiment.

Figure 3 is a cross sectional side view through a nozzle of the first embodiment.

15 Figure 4 is a cross sectional side view of a fluid spraying apparatus in accordance with a second embodiment of the present invention.

With reference to figure 1, a fluid spraying apparatus
20 (10) in accordance with the present invention comprises a first fixed part (12) and a second rotatable part (14). Said first fixed part (12) comprises annular inlet portion (16) that is provided with a first flange (18) at one end, which first flange (18) is drilled at
25 circumferentially spaced locations for attachment of the

inlet portion (16) to a end of a pipe carrying a pumped supply of fluid.

Towards its other end, the inlet portion (16) is equipped
5 with a second flange (20). Said inlet portion (16) is rebated juxtaposed the second flange (20) at (22) to accommodate a low friction ring (24) which forms a rotatory bearing.

10 Said inlet portion (16) is formed integrally with a coaxial, semi-cylindrical portion (26), which semi-cylindrical portion (26) is connected at its lower end to a central body portion (28). Said central body portion (28) is circular in cross section and has a bell-
15 shaped upper portion (30) that extends juxtaposed the semi-cylindrical portion (26) towards the inlet portion (16). Said bell-shaped portion (28) is disposed substantially coaxially with the inlet portion (16), and the upper extremity of the bell-shaped portion (28) has
20 a flat, circular surface (32) that is drilled centrally to provide an open bore (34) that extends axially through the central body portion (28). Said central body portion (28) has a flat, circular lower surface (36) that is scalloped at four circumferentially spaced locations to
25 provide cut-outs (38).

Said open bore (34) accommodates a shaft (40) which carries at one end, within the central passageway (17) through the inlet portion (16), a propeller (42) comprising four turbine blades (44). The other end of the shaft (40) protrudes from the lower surface (36) of the central body portion (28) is formed with an external worm (46) which engages a worm wheel (48). Said worm wheel (48) is mounted on a bracket (50) that is fixedly secured to the lower surface of the central body portion (28).

Said worm wheel (48) is mounted on a shaft (52) that is provided with a second worm (not shown). Said second worm engages a second worm wheel (also not shown) which is mounted on a further shaft (also not shown). Said further shaft is provided with a third worm (also not shown) which engages a worm wheel (54). Said worm wheel (54) is mounted on a shaft (56). A spur wheel (58) is keyed to the shaft (56), which spur wheel (58) engages a ring gear (60) which is mounted on an inner surface of a cylindrical gear casing (62) of the rotatable part (14).

Said gear casing (62) surrounds the above described gear train and is closed at its lower end (64) by a circular

bottom plate (66). The inner surface of the bottom plate (66) is provided with a central lug (68) that is drilled to provide a blind bore (70), which blind bore (70), accommodates an end of a stub shaft (72), the other end
5 of which is journalled on the bracket (50) so as to locate the lower end of the bracket (50) within the gear casing (62).

The upper end of the gear casing (62) is bolted to an
10 annular flange (74) formed on a generally cylindrical nozzle body (76). Said nozzle body (76) forms a snug fit around the semi-cylindrical portion (26) and is provided at its upper end with a second flange (78) that engages the low friction ring (24).

15

Said nozzle body (76) is provided with two diametrically opposed circular apertures (80), and the nozzle body (76) is rebated around the circumference of each aperture (80). A nozzle (82) is fixedly secured to the nozzle
20 body (76) at each aperture (80). Each nozzle (82) is generally frustoconical in shape and, at the wider end, is equipped with a rebated portion (84) that is accommodated within the rebate formed around the aperture (80). Each nozzle is hollow and is formed with a
25 circular opening (86) at its narrower end (88).

As can be seen from figure 1, each nozzle is positioned such that its longitudinal axis (90) is oriented substantially orthogonally to the longitudinal axis
5 defined by the shaft (40).

As can be seen from figure 2, the length of each nozzle (82) radially of the shaft (40) is such that the outer extremity of the nozzle coincides with and does not
10 protrude radially of the outer extent of the rest of the apparatus. In the embodiment shown, the widest part of the apparatus is the flange (74) on the nozzle body (76) that is secured to the cylindrical gear casing (62). As can be seen from figure 2, the nozzles (82) are disposed
15 wholly within the outline of the flange (74). This represents an advantageous arrangement as it allows a compact fluid spraying apparatus which can be inserted in narrow manways which are only slightly larger than the outer diameter of the flange (74). Whilst the actual size
20 of the apparatus in accordance with the present invention may vary depending upon the intended application of the apparatus, in the present embodiment, said flange (74) has an outer diameter of 305mm (12").

25 Said nozzles (82) are designed to provide minimum back

pressure to fluid passing therethrough. With reference to figure 3, the angle α subtended by the internal surface (83) of each nozzle (82) to the longitudinal axis (90) of the nozzle is an important factor in ensuring
5 that the fluid issues from the nozzles as a convergent jet, whilst at the same time providing minimum back pressure and thus allowing the use of a low pressure pump. In the first embodiment, angle α is 25° , although more generally an angle in the range 15 to 35° may be
10 adopted, with particularly preferred angles being 16.5° and 33° . Again, the actual size of the nozzles may vary according to the proposed use of the apparatus but in the embodiment shown, the diameter of the opening (86) in each nozzle (82) is 6.5 mm (2.5 inches).

15

In use, the fluid spraying apparatus (10) is inserted through a manway into a crude oil storage tank and is positioned juxtaposed a wall of the tank at a pressure of 4-8 bar. Conveniently a low pressure pump of the kind
20 often found at oil refineries may be used for pumping the oil. The inlet portion (60) is connected to an end of pipe carrying a pumped supply of recirculating crude oil from the tank. As the oil flows through the inlet passage (17), it interacts with the propeller (42)
25 causing the shaft (40) to rotate. In turn, the shaft

(40) acts through the gear train described above causing the rotatable part (14) of the assembly, comprising said gear casing (62) and nozzle body (76), to rotate. Typically, the step-down ratio of the gear train is such as to provide one complete rotation of rotatable part (14) of the apparatus every two to four hours.

From the inlet passageway (17), the oil passes into the space around the bell-shaped portion of the central body portion (30) and exits the apparatus through the apertures (80) and nozzles (82) at a flow rate of 400-700m³/hr, depending on the actual nozzle size and configuration, and the pressure of the oil supplied to the apparatus. It will be appreciated that as each nozzle rotates passed the semi-cylindrical portion (26), the nozzle is obturated, thus preventing fluid from entering that nozzle. This means that in the apparatus of the first embodiment, oil is only able to issue from one nozzle at a time. Preferably the arc length of the semi-cylindrical portion (26) is greater than 180°. The apparatus (10) is thus positioned in the tank, so that the semi-cylindrical wall (26) is positioned adjacent the wall of the tank, so that the jet of oil emerging from the apparatus (10) is directed away from the wall, so as to avoid damaging the wall.

Figure 4 shows a second embodiment of the invention which is suitable for use at or towards the centre of the crude oil storage tank. In the second embodiment, the majority of components are the same or substantially similar to the components of the first embodiment, and for these the same reference numerals are used.

The apparatus (100) of the second embodiment differs from the first embodiment however in that the semi-cylindrical portion (26) of the first embodiment is replaced by a plurality of circumferentially spaced fingers (126) that extend between the central body portion (28) and the inlet portion (16). In the second embodiment illustrated in figure 4, four such fingers (126) are provided, with three being visible in the drawings. In the second embodiment, the fingers (126) provide the required connection between the inlet portion (16) and the central body portion (28) of the fixed part (12) of the apparatus, but are dimensioned so as not to provide any significant obstruction to the passage of oil. Oil is therefore able to issue through both nozzles (82) at the same time, and thus the jets are directed across the whole 360° of rotation of the rotatable part (14) of the apparatus.

Whilst the invention has been described by reference to apparatus incorporating two nozzles (82), those skilled in the art will appreciate that the apparatus hereinbefore described can readily be adapted to
5 incorporate three or more nozzles as required.

Claims

1. A fluid spraying apparatus (10) comprising a generally cylindrical body defining a longitudinal axis,
5 which body comprises:

a first fixed part (12) comprising inlet means (16) adapted for connection to a pumped supply of fluid, and turbine means (40,42,44) arranged to be driven by said fluid; and

10 a second rotatable part (14) comprising gear means (46-60), and one or more nozzles (82) in fluid communication with the turbine means for outletting the fluid as one or more jets, which nozzles extend radially of the longitudinal axis, which rotatable part is
15 drivable by the turbine means through said gear means such that said nozzles are caused to rotate about said longitudinal axis;

characterised in that none of the nozzles extends radially of the longitudinal axis further than the body.

20

2 A fluid spraying apparatus as claimed in claim 1, wherein the or each nozzle has an outer extremity that coincides with the outer extent of the rest of the apparatus.

25

3 A fluid spraying apparatus as claimed in claim 1 or claim 2, wherein the or each nozzle is generally

17

frustoconical, and the longitudinal axis (90) of each nozzle extends substantially orthogonally to the longitudinal axis of the body.

5 4 A fluid spraying apparatus as claimed in claim 3, wherein the taper of each nozzle is in the range 10 to 40°, so as to minimise the back pressure arising as a result of the constriction presented by the or each nozzle.

10

5 5 A fluid spraying apparatus as claimed in claim 2 or 3, wherein the taper of each nozzle is in the range 15 to 35°.

15 6 A fluid spraying apparatus as claimed in claim 3, claim 4 or claim 5, wherein each nozzle has an opening having a diameter in the range 4-9 cm.

7 7 A fluid spraying apparatus as claimed in any
20 preceding claim, wherein said fixed part comprises an annular inlet portion (16) defining a passageway that accommodates a turbine (42,44) arranged to be driven by fluid entering therein; a coaxial disk portion (28) for mounting said turbine; and an open-sided, longitudinal
25 connecting portion (26) between the mounting disk portion and the inlet portion.

8 A fluid spraying apparatus as claimed in any
preceding claim, wherein said rotatable part (14)
comprises a generally cylindrical gear box portion (62)
that accommodates a gear train connected between the
5 turbine and the rotatable part; and a generally
cylindrical nozzle body portion (76) that surrounds the
fixed part.

9 A fluid spraying apparatus as claimed in claim 6,
10 wherein said nozzle(s) (82) are mounted on the nozzle
body portion.

10 A fluid spraying apparatus as claimed in claim 6 or
7, wherein two nozzles are provided which are positioned
15 diametrically opposite one another on the nozzle body
portion around the open-sided intermediate portion of the
fixed part.

11 A fluid spraying apparatus as claimed in claim 5,
20 wherein the open-sided intermediate connecting portion
of the fixed part comprises a semi-cylindrical baffle
wall (26) that is connected between the annular inlet
portion and the disk portion.

25 12 A fluid spraying apparatus as claimed in claim 5,
wherein the intermediate connecting portion comprises
a plurality of circumferentially spaced fingers (126)

which are dimensioned so as not to prevent any significant obstacle to the passage of fluid through the nozzle.

5 13 A fluid spraying apparatus as claimed in any preceding claim, wherein the maximum outer diameter of the apparatus is not greater than 31cm (12").

10 14 A fluid spraying apparatus as claimed in any preceding claim, which is adapted to operate at a working pressure of 4-8 bar to provide a flow-rate of 400-700 m³/hr

1/3

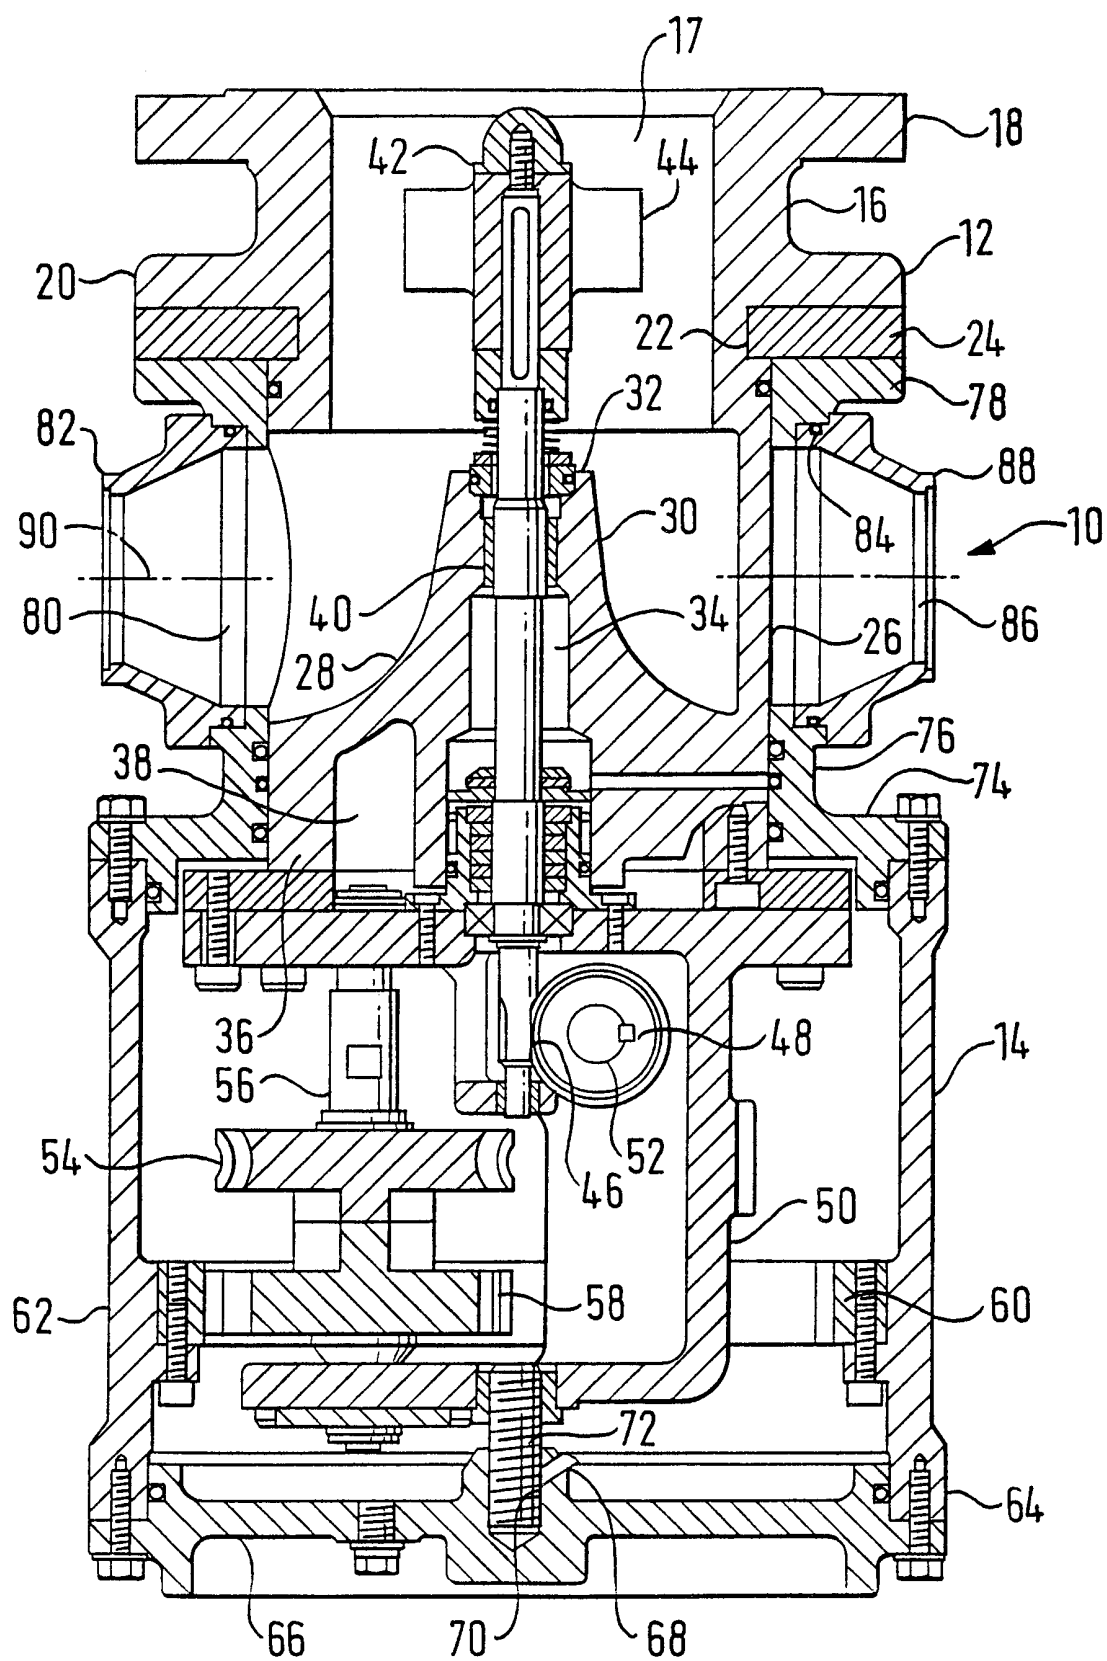


FIG. 1

2/3

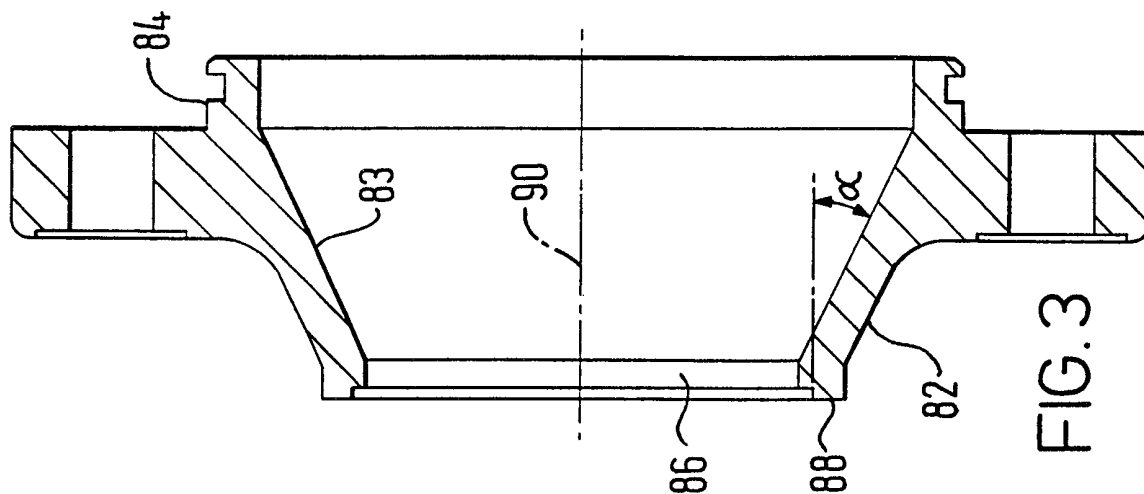


FIG. 3

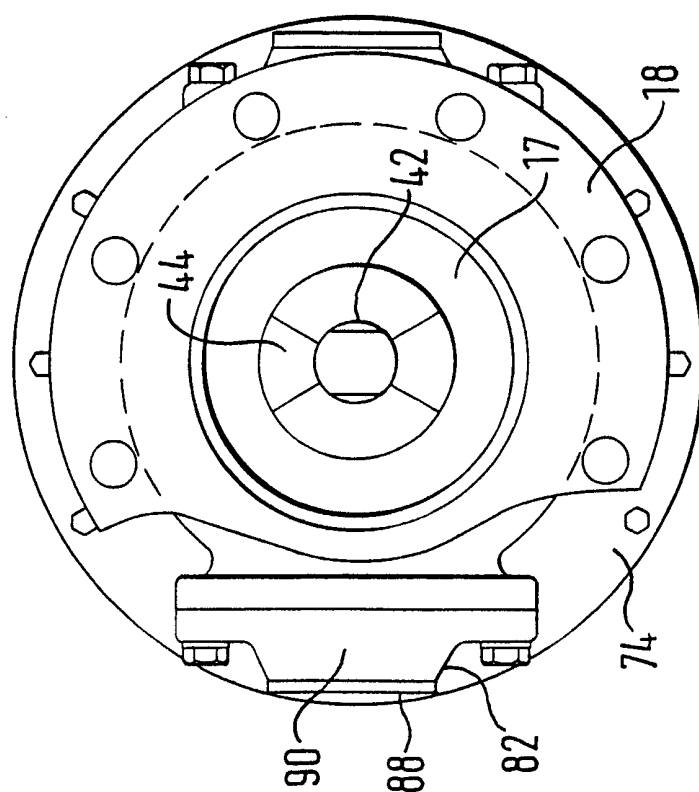


FIG. 2

3 / 3

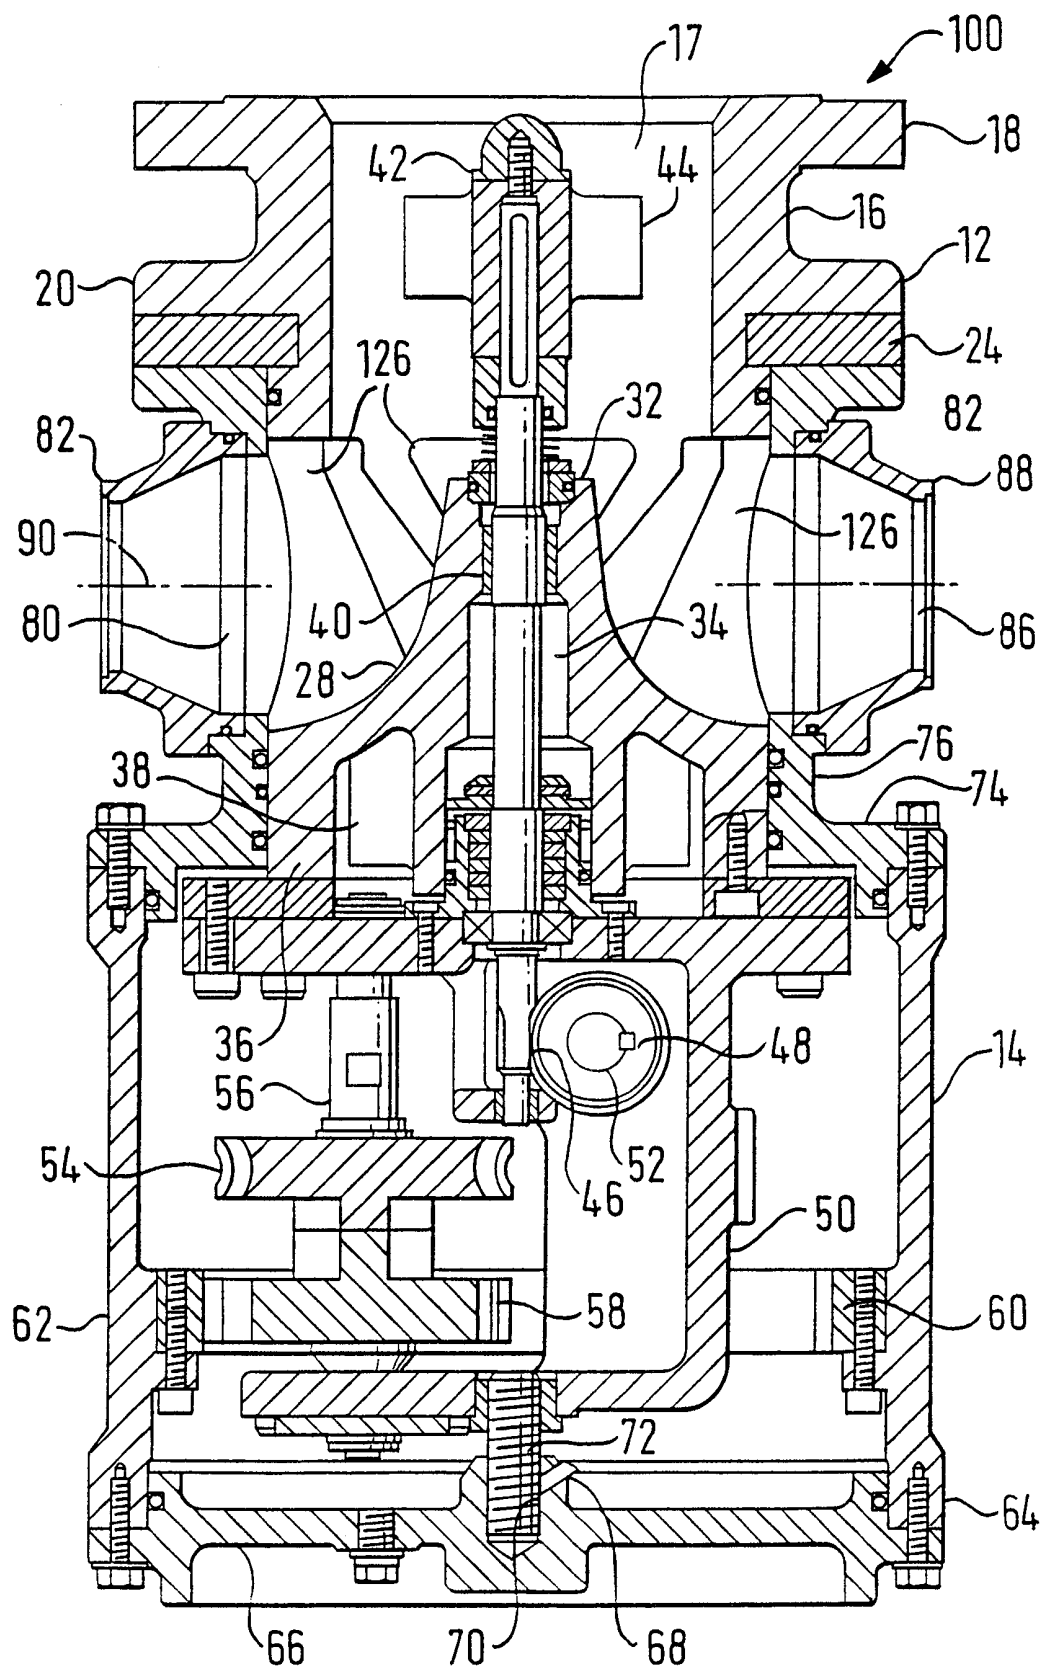


FIG. 4

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/GB 00/00458

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B05B3/04 B08B9/093

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B05B B08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	DE 195 07 051 A (STEINICKE EMILIA) 5 September 1996 (1996-09-05) column 2, line 40 -column 3, line 8; figure ---	1,2,8 9,10
X	EP 0 712 668 A (PLASTRO GVAT) 22 May 1996 (1996-05-22) column 3, line 40 -column 4, line 8; figures ---	1
X	GB 1 245 422 A (INTERNATIONAL PATENT RESEARCH CORP.) 8 September 1971 (1971-09-08) claims; figures --- -/--	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 May 2000

Date of mailing of the international search report

17/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brévier, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00458

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 134 414 A (EXXON RESEARCH ENGINEERING CO) 15 August 1984 (1984-08-15) the whole document ----	1-12
A	EP 0 048 091 A (BUTTERWORTH SYSTEM INC) 24 March 1982 (1982-03-24) cited in the application the whole document ----	1-11
A	US 5 033 680 A (SCHULTZ DIETER) 23 July 1991 (1991-07-23) figures ----	4,5
A	US 5 460 331 A (KRAJICEK RICHARD W ET AL) 24 October 1995 (1995-10-24) -----	

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter: nal Application No

PCT/GB 00/00458

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19507051 A	05-09-1996	NONE	
EP 0712668 A	22-05-1996	IL 111651 A AU 690345 B AU 3665195 A BR 9504948 A TR 960477 A US 5695122 A ZA 9509709 A	12-03-1999 23-04-1998 23-05-1996 21-10-1997 21-07-1996 09-12-1997 29-06-1996
GB 1245422 A	08-09-1971	DE 1782094 A FR 1603610 A GB 1245423 A US 3464628 A	13-01-1972 10-05-1971 08-09-1971 02-09-1969
GB 2134414 A	15-08-1984	NONE	
EP 0048091 A	24-03-1982	GB 2083764 A CA 1162705 A DE 3169048 D DK 406681 A,B, IE 52593 B JP 1558766 C JP 57071681 A JP 63025828 B JP 60137483 A NO 812989 A,B, US 4407678 A US 4685974 A	31-03-1982 28-02-1984 28-03-1985 13-03-1982 23-12-1987 16-05-1990 04-05-1982 26-05-1988 22-07-1985 15-03-1982 04-10-1983 11-08-1987
US 5033680 A	23-07-1991	DE 3922619 C BR 9003264 A CA 2019203 A,C SE 505360 C SE 9002055 A	04-10-1990 27-08-1991 10-01-1991 11-08-1997 11-01-1991
US 5460331 A	24-10-1995	US 5542984 A	06-08-1996