



(22) Date de dépôt/Filing Date: 1999/09/17

(41) Mise à la disp. pub./Open to Public Insp.: 2000/03/18

(45) Date de délivrance/Issue Date: 2002/10/08

(30) Priorité/Priority: 1998/09/18 (283533/98) JP

(51) Cl.Int.⁶/Int.Cl.⁶ A01G 9/02, A47G 7/02


(72) Inventeur/Inventor:
ITO, SHOKO, JP

(73) Propriétaire/Owner:
ITO, SHOKO, JP

(74) Agent: RIDOUT & MAYBEE LLP


(54) Titre : JARDINIERE POUR PLANTATION PAR GROUPES

(54) Title: FLOWER POT FOR GROUP PLANTING

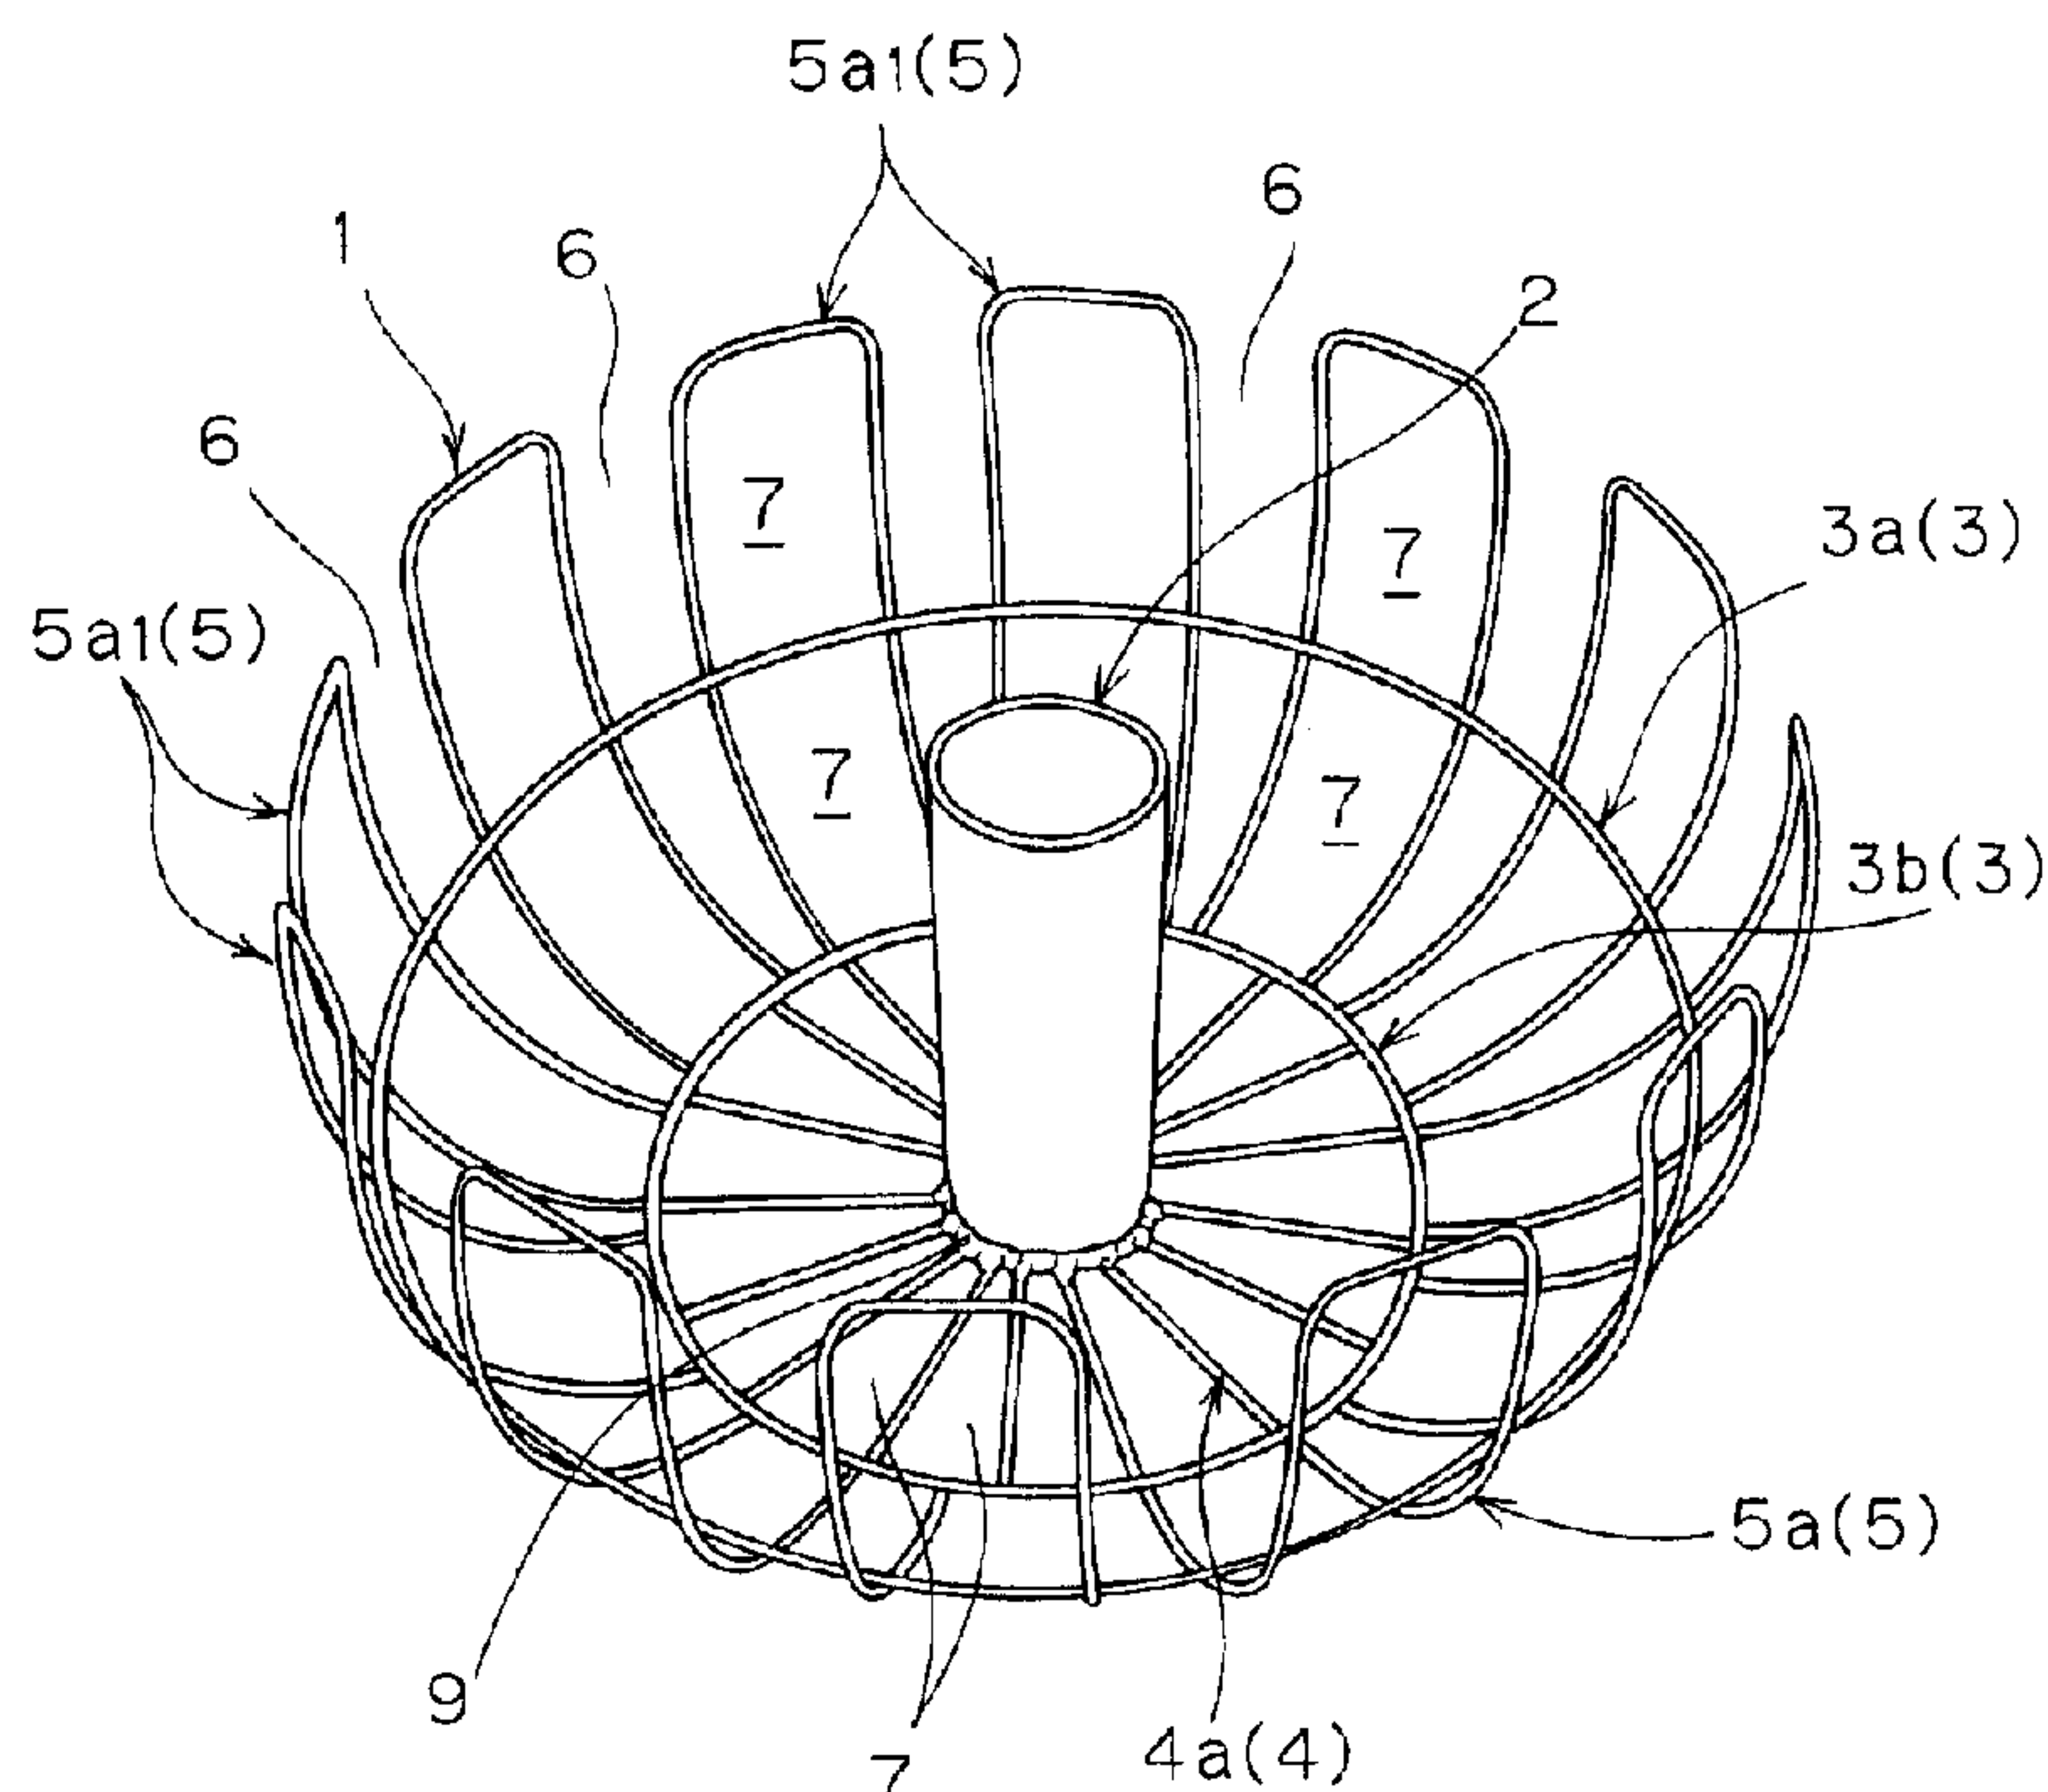

(57) **Abrégé/Abstract:**

A flower pot mounted on a pole for group planting of flower plants or the like. The flower pot includes a flower pot body (1) having planting openings (6), of which have open upper parts and are provided in a plurality of locations in the periphery of the body (1). A hole (8) is provided in the bottom of the body for inserting the pole, and a cylindrical mounting member (2) is provided for receiving the upper part of the pole, and at least the bottom of the mounting member is open and the mounting member is fixedly or removably mounted in a vertical position around the hole (8). The outer face of the flower pot is covered by the group of planted flower plants, and thus, is not exposed when the flower pot, in which flower plants have been group planted, is mounted on the pole. Accordingly, the beauty of the flowers planted in the flower pot is kept well and the decorative effect is increased, and the flower pot is securely mounted on the pole.

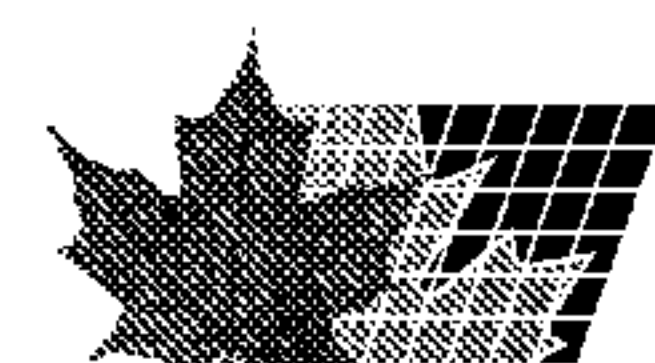

ABSTRACT OF THE DISCLOSURE

A flower pot mounted on a pole for group planting of flower plants or the like. The flower pot includes a flower pot body (1) having planting openings (6), of which have open upper parts and are provided in a plurality of locations in the periphery of the body (1). A hole (8) is provided in the bottom of the body for inserting the pole, and a cylindrical mounting member (2) is provided for receiving the upper part of the pole, and at least the bottom of the mounting member is open and the mounting member is fixedly or removably mounted in a vertical position around the hole (8). The outer face of the flower pot is covered by the group of planted flower plants, and thus, is not exposed when the flower pot, in which flower plants have been group planted, is mounted on the pole. Accordingly, the beauty of the flowers planted in the flower pot is kept well and the decorative effect is increased, and the flower pot is securely mounted on the pole.

FLOWER POT FOR GROUP PLANTING

BACKGROUND OF THE INVENTION

1. Technical Field

The present invention relates to a flower pot for group planting of flower plants or the like which is mounted on a pole, and more particularly to a flower pot for group planting of flower plants or the like in which the flower plants or the like have been beautifully group planted may be safely and securely mounted on the upper part of a pole having a height nearly equal to the level of human eye and normally installed outdoors at suitable places on the streets, in the parks or the like and which is useful for not only beautifying the streets, the parks or the like but also delighting eyes and hearts of pedestrians.

2. Description of Related Art

It has been a conventional practice to place on the streets, in the parks or the like flower pots in which flowers are planted at a level which is a little lower than the level of human eyes to not only beautify the streets, parks or the like but also to delight the eyes of pedestrians.

For this purpose, it has been known to plant flowers in flower pots with long legs or to place on the streets or in the parks a legged body comprising a lower seat and an upper

tray having legs and to place on the tray flower pots in which flowers have been planted.

However, in either case, the flowers are planted simply in an ordinary flower pot so that there is a problem that the beauty of the flowers planted in the flower pot is spoiled considerably and hence the decorative effect is decreased because the exposed outer face of the flower pot directly faces the pedestrians when the flower pot is placed at a level nearly equal to the level of human eyes, and in the latter case, there is a problem that the flower pot can fall from the tray by strong winds, etc. and is broken.

SUMMARY OF THE INVENTION

This invention has been made to eliminate the problems in the prior art, and it is an object of this invention to provide a flower pot for group planting of flower plants or the like which is mounted on a pole and brings about the advantages that the outer face of the flower pot is not exposed when the flower pot in which flowers have been planted is mounted on the upper part of a pole having a height nearly equal to the level of human eyes. Therefore, the beauty of the flowers planted in the flower pot is maintained and the decorative effect is increased, and the flower pot is mounted

securely on the pole and accordingly will not fall even when subjected to strong winds.

In order to eliminate said problems and to accomplish said object, this invention provides a flower pot for group planting of flower plants or the like which is mounted on a pole, comprising a flower pot body having planting openings of which upper part is opened and provided in a plurality of locations in the periphery of said body, and having a hole provided in the bottom of said body for inserting said pole; and a cylindrical mounting member for inserting the upper part of said pole, at least lower part of the bottom of said mounting member being opened and said mounting member being fixedly mounted vertically around said hole, and a flower pot for group planting of flower plants or the like which is mounted on a pole, comprising a flower pot body having planting openings of which upper part is opened and provided in a plurality of locations in the periphery of said body, and having a hole provided in the bottom of said body for inserting said pole; and a cylindrical mounting member for inserting the upper part of said pole, at least the bottom of said mounting member being opened and said mounting member being removably mounted vertically around said hole.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view showing a first embodiment of this invention.

Figure 2 is a developed perspective view of the embodiment shown in Figure 1.

Figure 3 is an axial sectional view of Figure 1.

Figure 4 is an illustration showing a flower plant as planted in the flower pot.

Figure 5 is an illustration showing the state wherein the flower pot is being mounted on the upper part of a pole.

Figure 6 is a front view showing the state wherein the flower pot has been mounted on the upper part of a pole.

Figure 7 is a front view showing a pole-supported flower.

Figure 8 is an axial sectional view showing only main part of the second embodiment of this invention.

DETAILED DESCRIPTION OF THE INVENTION

An embodiment of this invention will now be described with reference to the drawings in which Figures 1 to 3 show the first embodiment of the invention. In this embodiment, the flower pot for group planting of flower plants

or the like which is mounted on a pole comprises a flower pot body (1) for group planting of flower plants or the like, and a cylindrical mounting member (2) mounted vertically on the bottom of the body (1).

The flower pot body (1), in this embodiment, is formed by a basket formed by wires and comprises a ring frame (3) for keeping the entire body (1) in a large bowl shape, which is formed by three thick and strong wire rings with different diameters, namely a ring frame (3a) with a large diameter, a ring frame (3b) with a medium diameter arranged under the ring frame (3a), and a ring frame (3c) with a small diameter arranged centrally in the bottom; a bottom frame (4) which is formed by a plurality of wire bars (4a) radially connecting the medium diameter ring frame (3b) and small diameter ring frame (3b) by welding; and a peripheral frame (5) formed by a plurality of bent wires (5a) which are formed by bending wires in a reversed or inverted U-shape and arranged longitudinally around the ring frames (3a) and (3b) with predetermined intervals and connected to the ring frames (3a) and (3b) at each cross point by welding. The bent part (5a₁) of each of the bent wires (5a) is projected upward from the upper ring frame (3a) and planting openings (6) for flower plants or like, of which an upper part is opened, are defined between the bent parts (5a₁).

Thus, the flower pot body (1) has a plurality of planting openings (6) in its periphery, a plurality of through openings (7) over its entire periphery, and an insertion hole (8) centrally located in the bottom and through which the upper part of a pole (P) mentioned below can be inserted. The insertion hole (8) is surrounded by the ring frame (3c).

The cylindrical mounting member (2), in this embodiment, consists of a steel cylinder whose top and bottom are opened, and has an outer diameter suitable for being mounted vertically on the small diameter ring frame (3c) of the flower pot body (1). The mounting member 2 has a height that is nearly equal to the depth of the flower pot body (1).

The cylindrical mounting member (2) is placed on the small diameter ring frame (3c) arranged centrally in the bottom of the flower pot body (1) constructed as above described. In this embodiment, the periphery of the cylindrical mounting member (2), at its portion placed on the small diameter ring frame (3c), is vertically fixedly mounted (9) to the small diameter ring frame (3c) by welding so as to form a flower pot for group planting of flower plants or the like.

How to use the first embodiment of this invention constructed as described above will now be explained with its function and effect. At first, though not shown in the

drawings, a sheet or sheets or the like are laid inside the flower pot body (1). Each sheet has slits formed so as to correspond with the positions of the respective planting openings (6) and to prevent nutritious soil or the like from falling. Then, as illustrated roughly in Figure 4, the flower plants (F) are inserted from the upper opened portions of the planting openings (6) so that the root portions of the flower plants (F) are positioned inside the flower pot body (1) while the flower portions of the flower plants (F) are positioned outside the flower pot body (1), and then a required amount of nutritious soil is filled for completing the group planting.

Then, as shown in Figures 5 and 6 in which the flower plants are not shown, the cylindrical mounting member (2), which is fixedly mounted on the flower pot body (1), is fitted on the upper part of a cylindrical steel pole (P) which is vertically installed on the street or the like and which, for instance, has an open top and an open bottom and a length that is nearly equal to human height. A stopper (S) is fitted on and welded to the upper part of the pole (P). Thus, a beautiful pole-supported flower (PF) having a number of flower plants (F) planted in a group is obtained as shown in Figure 7.

The pole-supported flower (PF) formed as described above has an advantage that the outer face of the flower pot

body (1) is covered with the flower plants planted in a group and is not exposed so that the outer face of the flower pot body (1) does not mismatch with the beautiful flower plants (F), and the decorative effect for the streets or the like is not decreased at all by the pole-supported flower (PF) even when it is positioned at a level that is nearly equal to the level of the pedestrian's eye, and accordingly the pole-supported flower (PF) remarkably contributes to beautification of the streets.

In addition, the flower pot for group planting of this pole-supported flower (PF) has an advantage in that there is no fear that the flower pot will fall from the pole (P) even when subjected to strong winds because the cylindrical mounting member (2) is fixedly mounted vertically on the flower pot body (1) and is fitted on the upper part of the pole (P). Accordingly, the flower pot will not be broken, and the flower plants (F) will not be scattered and pedestrians are not injured.

In this embodiment, a cylindrical mounting member (2), which is open at its top and bottom, is fitted on a cylindrical pole (P) to mount the flower pot for group planting. Therefore, it has a further advantage that, it is easy to insert a water supply tube (WP) through the pole (P) as shown in Figs. 6-7. The supply tube is from a known

automatic sprinkler having a controller and is connected to a water service pipe for timely sprinkling water. A plurality of sprinkling tubes can branch off from the upper part of the water supply tube such that the tip ends of the sprinkling tubes are placed in faced relation to the inner upper portion of the flower pot so that withering and blasting of the group planted flower plants (F) are prevented.

Figure 8 shows a main part of the second embodiment of this invention. This embodiment is different from the first embodiment with respect to the means for mounting the cylindrical mounting member on the flower pot body (1). More particularly, the second embodiment is different from the first embodiment only in that a use is made of a cylindrical mounting member (12) having a flange (12a) around the periphery of the lower end. The cylindrical mounting member (12) is open at its top and bottom, and the flange (12a) is placed on the upper surface of a small diameter ring frame (13c) formed by a narrow steel plate that is arranged centrally in the bottom of the flower pot body (1). The flange (12a) and the small diameter ring frame (13c) are secured to each other at a plurality of positions with bolts (10) and nuts (11), and thereby the cylindrical mounting member (12) is removably mounted vertically on the flower pot body (1).

The second embodiment of this invention has an economical advantage in that it is unnecessary to replace the entire flower pot but either one of the flower pot body (1) or the cylindrical mounting member (12) may be replaced when either one becomes unusable for some reason.

The construction, function and advantages of the second embodiment in other respects are the same as those of the first embodiment, and therefore, the same reference numerals are applied to the same elements and unnecessary illustrations are omitted.

This invention has been described with reference to the typical embodiments. This invention, however, is not limited to these embodiments but various modifications may be made without departing from the spirit of the invention subject to achieve the object of the invention. Then these modifications will fall within the scope of the claims.

For example, with regard to the materials for the flower pot body (1) and the cylindrical mounting member (2), use can be made of materials other than the wire or steel pipe mentioned above, e.g. formed plastic articles or natural materials such as thin rods, plates, bamboo, etc., or synthetic materials imitating such natural materials or combinations of them. Furthermore, as the means for mounting

the cylindrical mounting member to the flower pot body (1), screwing in or press fitting may be also used.

As described above, the present invention provides a flower pot for group planting of flower plants or the like which is mounted on a pole. The flower pot comprises a flower pot body having planting openings of which an upper part is open and the openings are provided in a plurality of locations in the periphery of the body. Also, a hole is provided in the bottom of the body for inserting the pole, and a cylindrical mounting member is provided for receiving the upper part of the pole. At least the bottom of the mounting member is open and the mounting member is fixedly or removably mounted vertically around the hole and the flower pot is used as described above so that the following remarkable advantages are brought about by this invention.

(1) Like the conventional flower pots for group planting, a pole-supported group planted flower for being mounted on the pole can be formed easily in a simple manner with a use of a plurality of planting openings provided in the periphery of the flower pot body and having an open upper part.

(2) The group planted pole-supported flower, as mounted on the pole, does not present mismatching between the outer face of the flower pot body and the beautiful flower

plants because the outer face of the flower pot body is covered with the flower plants planted in a group and is not exposed so that the decorative effect for the streets or the like is not decreased at all by the pole-supported flower even if the level of the pole-supported flower is nearly equal to the level of the pedestrian's eyes, and accordingly the pole-supported flower remarkably contributes to the beatification of the streets.

(3) In this flower pot for group planting, there is no fear that the flower pot will fall from the pole even when subjected to strong winds because the cylindrical mounting member is fixedly or removably mounted vertically on the flower pot body and is fitted on the upper part of the pole. Accordingly, there is a safety in that the flower pot will be not broken, the flower plants will not be scattered and pedestrians will not be injured.

(4) In the case where the cylindrical mounting member opened at its top and bottom is used and it is fitted on the upper part of a cylindrical pole opened at its top and bottom, it is easily possible to insert through the pole a water supply tube of a known automatic sprinkler having a controller and connected to a water service pipe for timely sprinkling of water. The supply can branch off into a plurality of sprinkling tubes from the upper part of the water

supply tube. Also, the sprinkling tubes can be arranged in faced relation to the inner upper portion of the flower pot so that withering and blasting of the group planted flower plants are securely prevented.

Claims:

1. A device for displaying a group plants, said device comprising:

a pot for holding the group of plants, said pot including a cylindrical mounting member and a pot body having a plurality of planting openings and a hold provided in a bottom portion of said pot body, wherein said cylindrical mounting member has opposite open ends and extends upwardly from said hole to a height that is approximately equal to a depth of said pot body;

a pole having an upper portion that extends through said hole and is received in said cylindrical mounting member;

a stopper provided on the upper portion of said pole for supporting the bottom of said pot body; and

a water supply tube extending through an interior portion of said pole and having a discharge portion for supplying water through the open upper end of said cylindrical mounting member to the group of plants, said water supply tube being connectable to a water supply.

2. The device as claimed in claim 1, wherein said cylindrical mounting member is permanently fixed around said hole.

3. The device as claimed in claim 1, wherein said cylindrical mounting member is removably mounted around said hole.

4. The device as claimed in claim 1, wherein said pot body is formed by wires in a basket shape.

5. The device as claimed in claim 1, wherein said planting openings are distributed at regular intervals around an entire periphery of said pot body.

6. The device as claimed in claim 5, wherein said wires define a plurality of through openings, and each of said through openings is positioned between a pair of said planting openings.

7. The device as claimed in claim 1, wherein said hole is centrally positioned in the bottom of said pot body.

8. The device as claimed in claim 1, wherein said hole of said pot body is defined by a frame ring that is arranged centrally in the bottom of said pot body, and a bottom end of said cylindrical mounting member is mounted on said frame ring.

9. The device as claimed in claim 1, wherein said cylindrical mounting member is welded in place around said hole.

10. The device as claimed in claim 1, wherein said cylindrical mounting member includes a flange projecting radially outwardly from a lower end of said cylindrical mounting member, and said flange is secured around said hole by nuts and bolts.

11. The device as claimed in claim 1, wherein said water supply tube comprises a discharge portion having a plurality of sprinkling tubes extending radially outwardly relative to said cylindrical mounting member so that outlet ends of said sprinkling tubes oppose an upper peripheral portion of said pot body.

Fig. 1

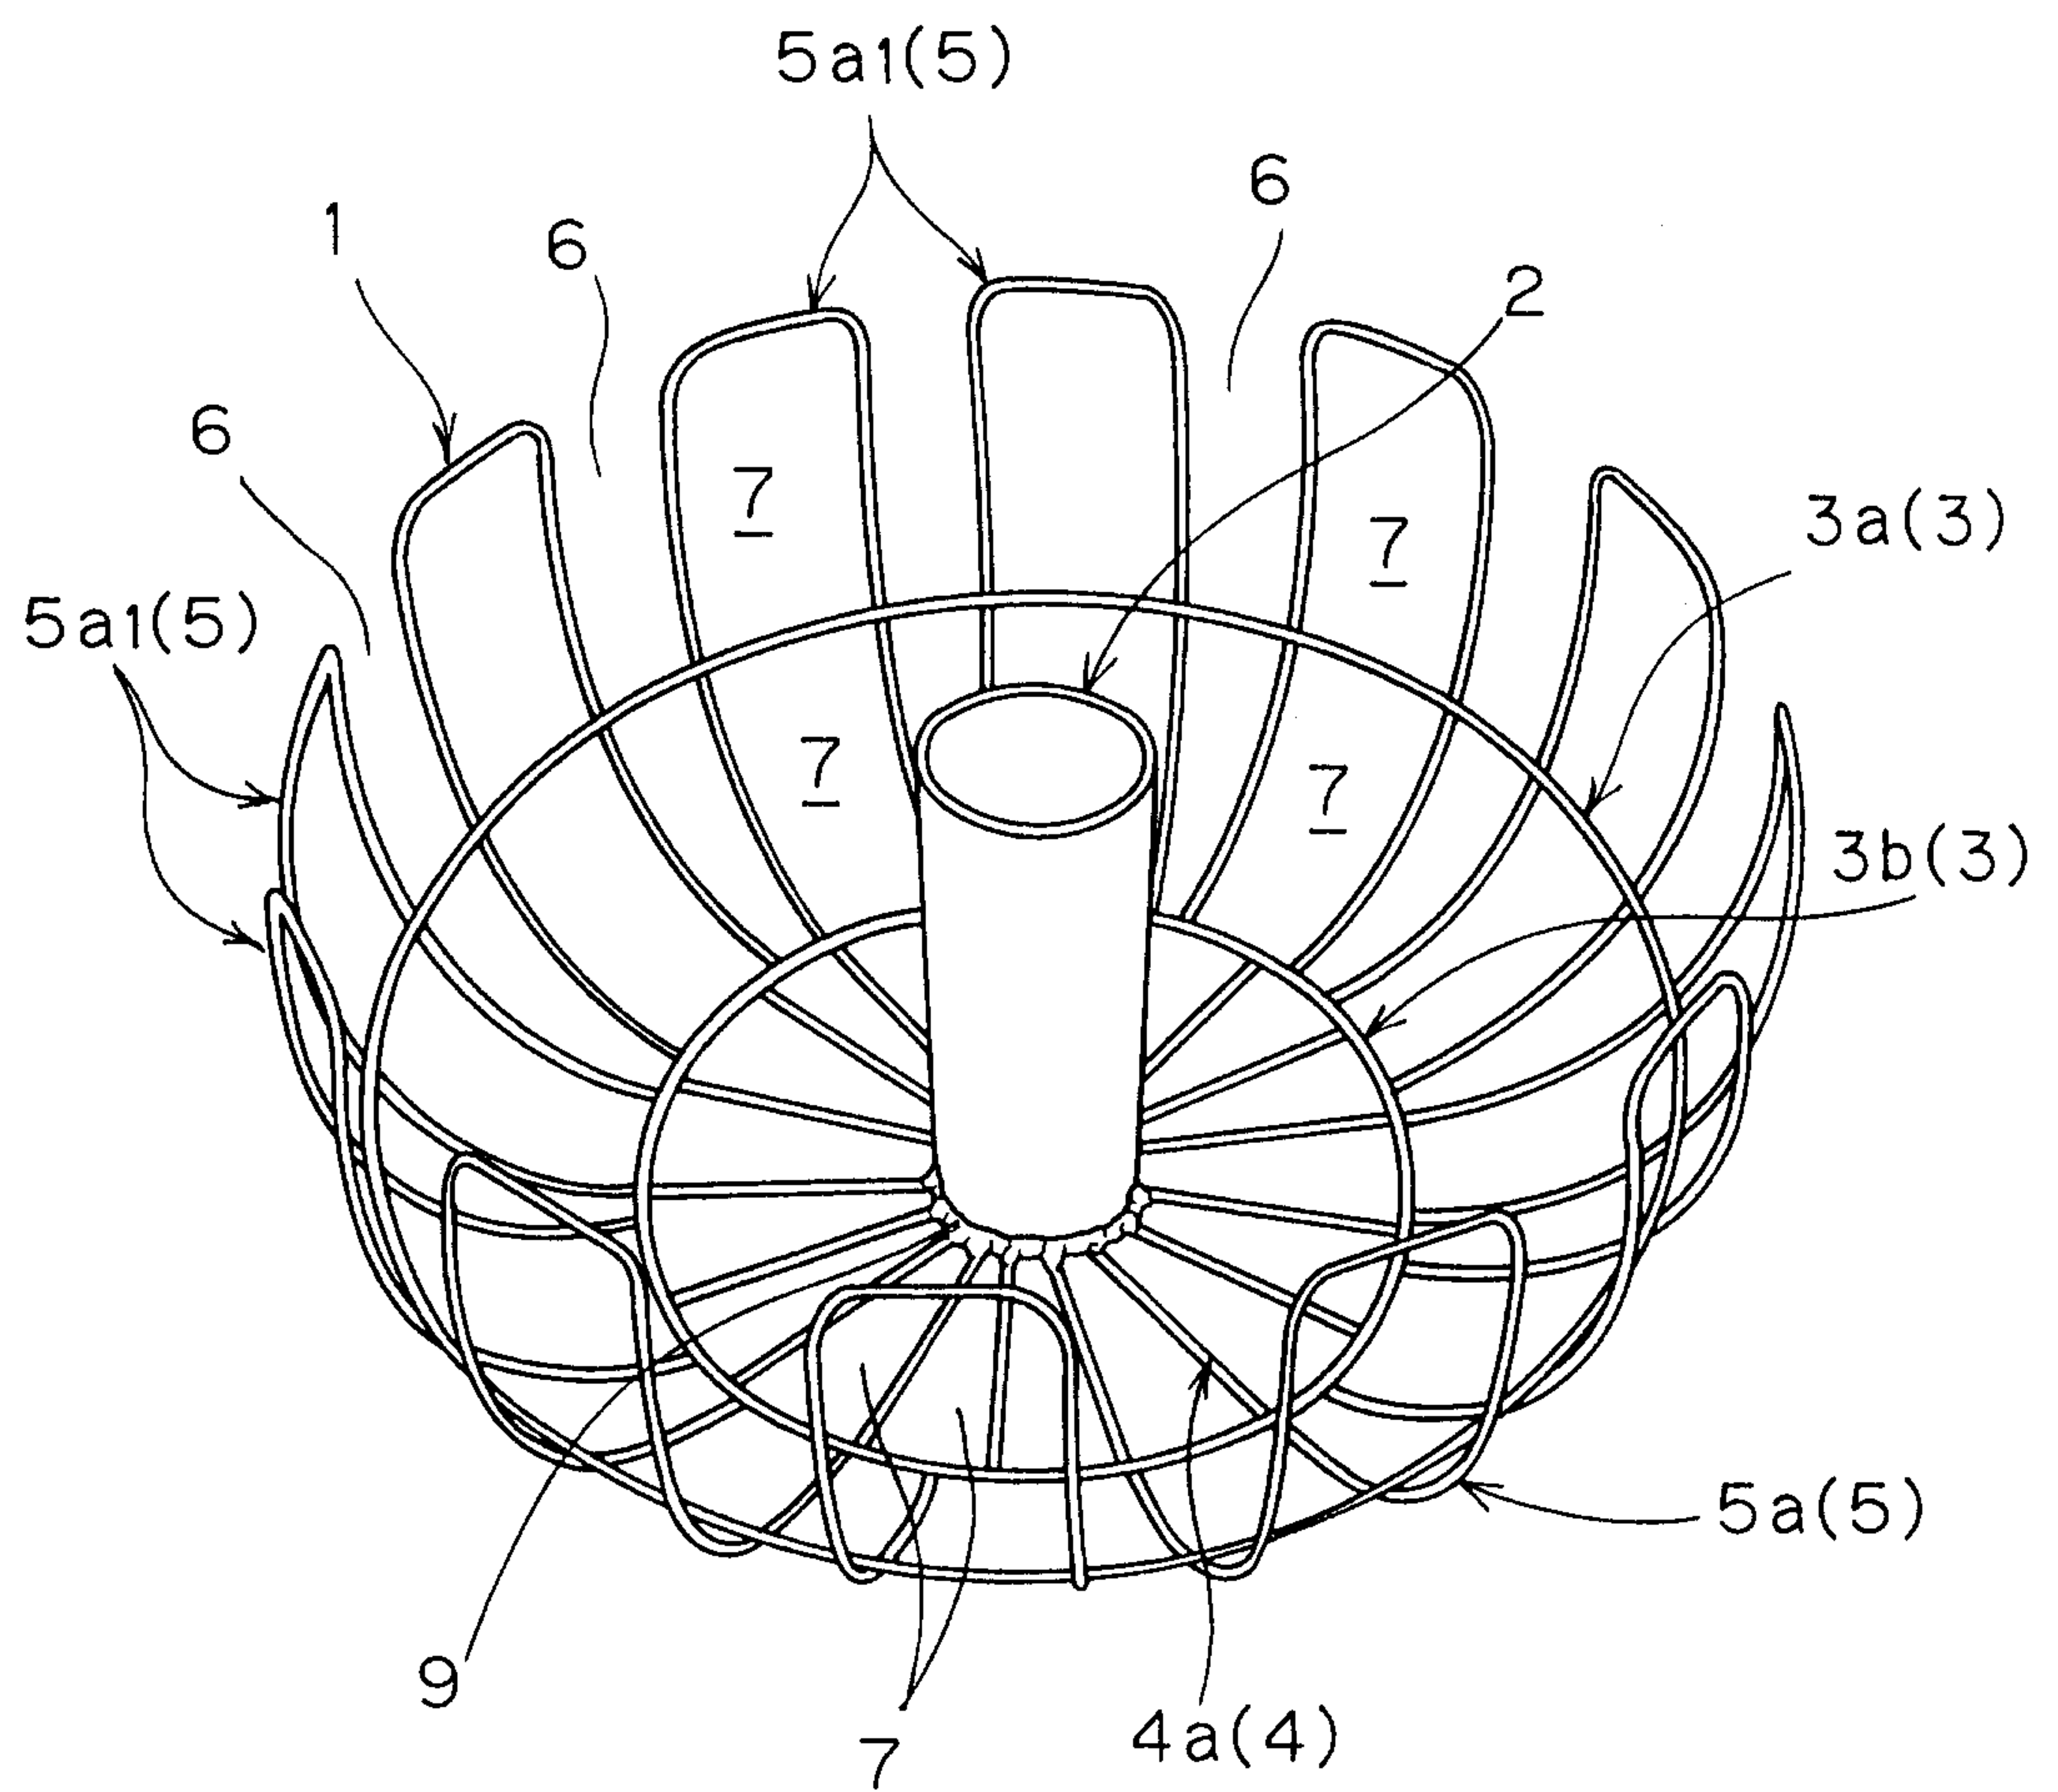


Fig. 2

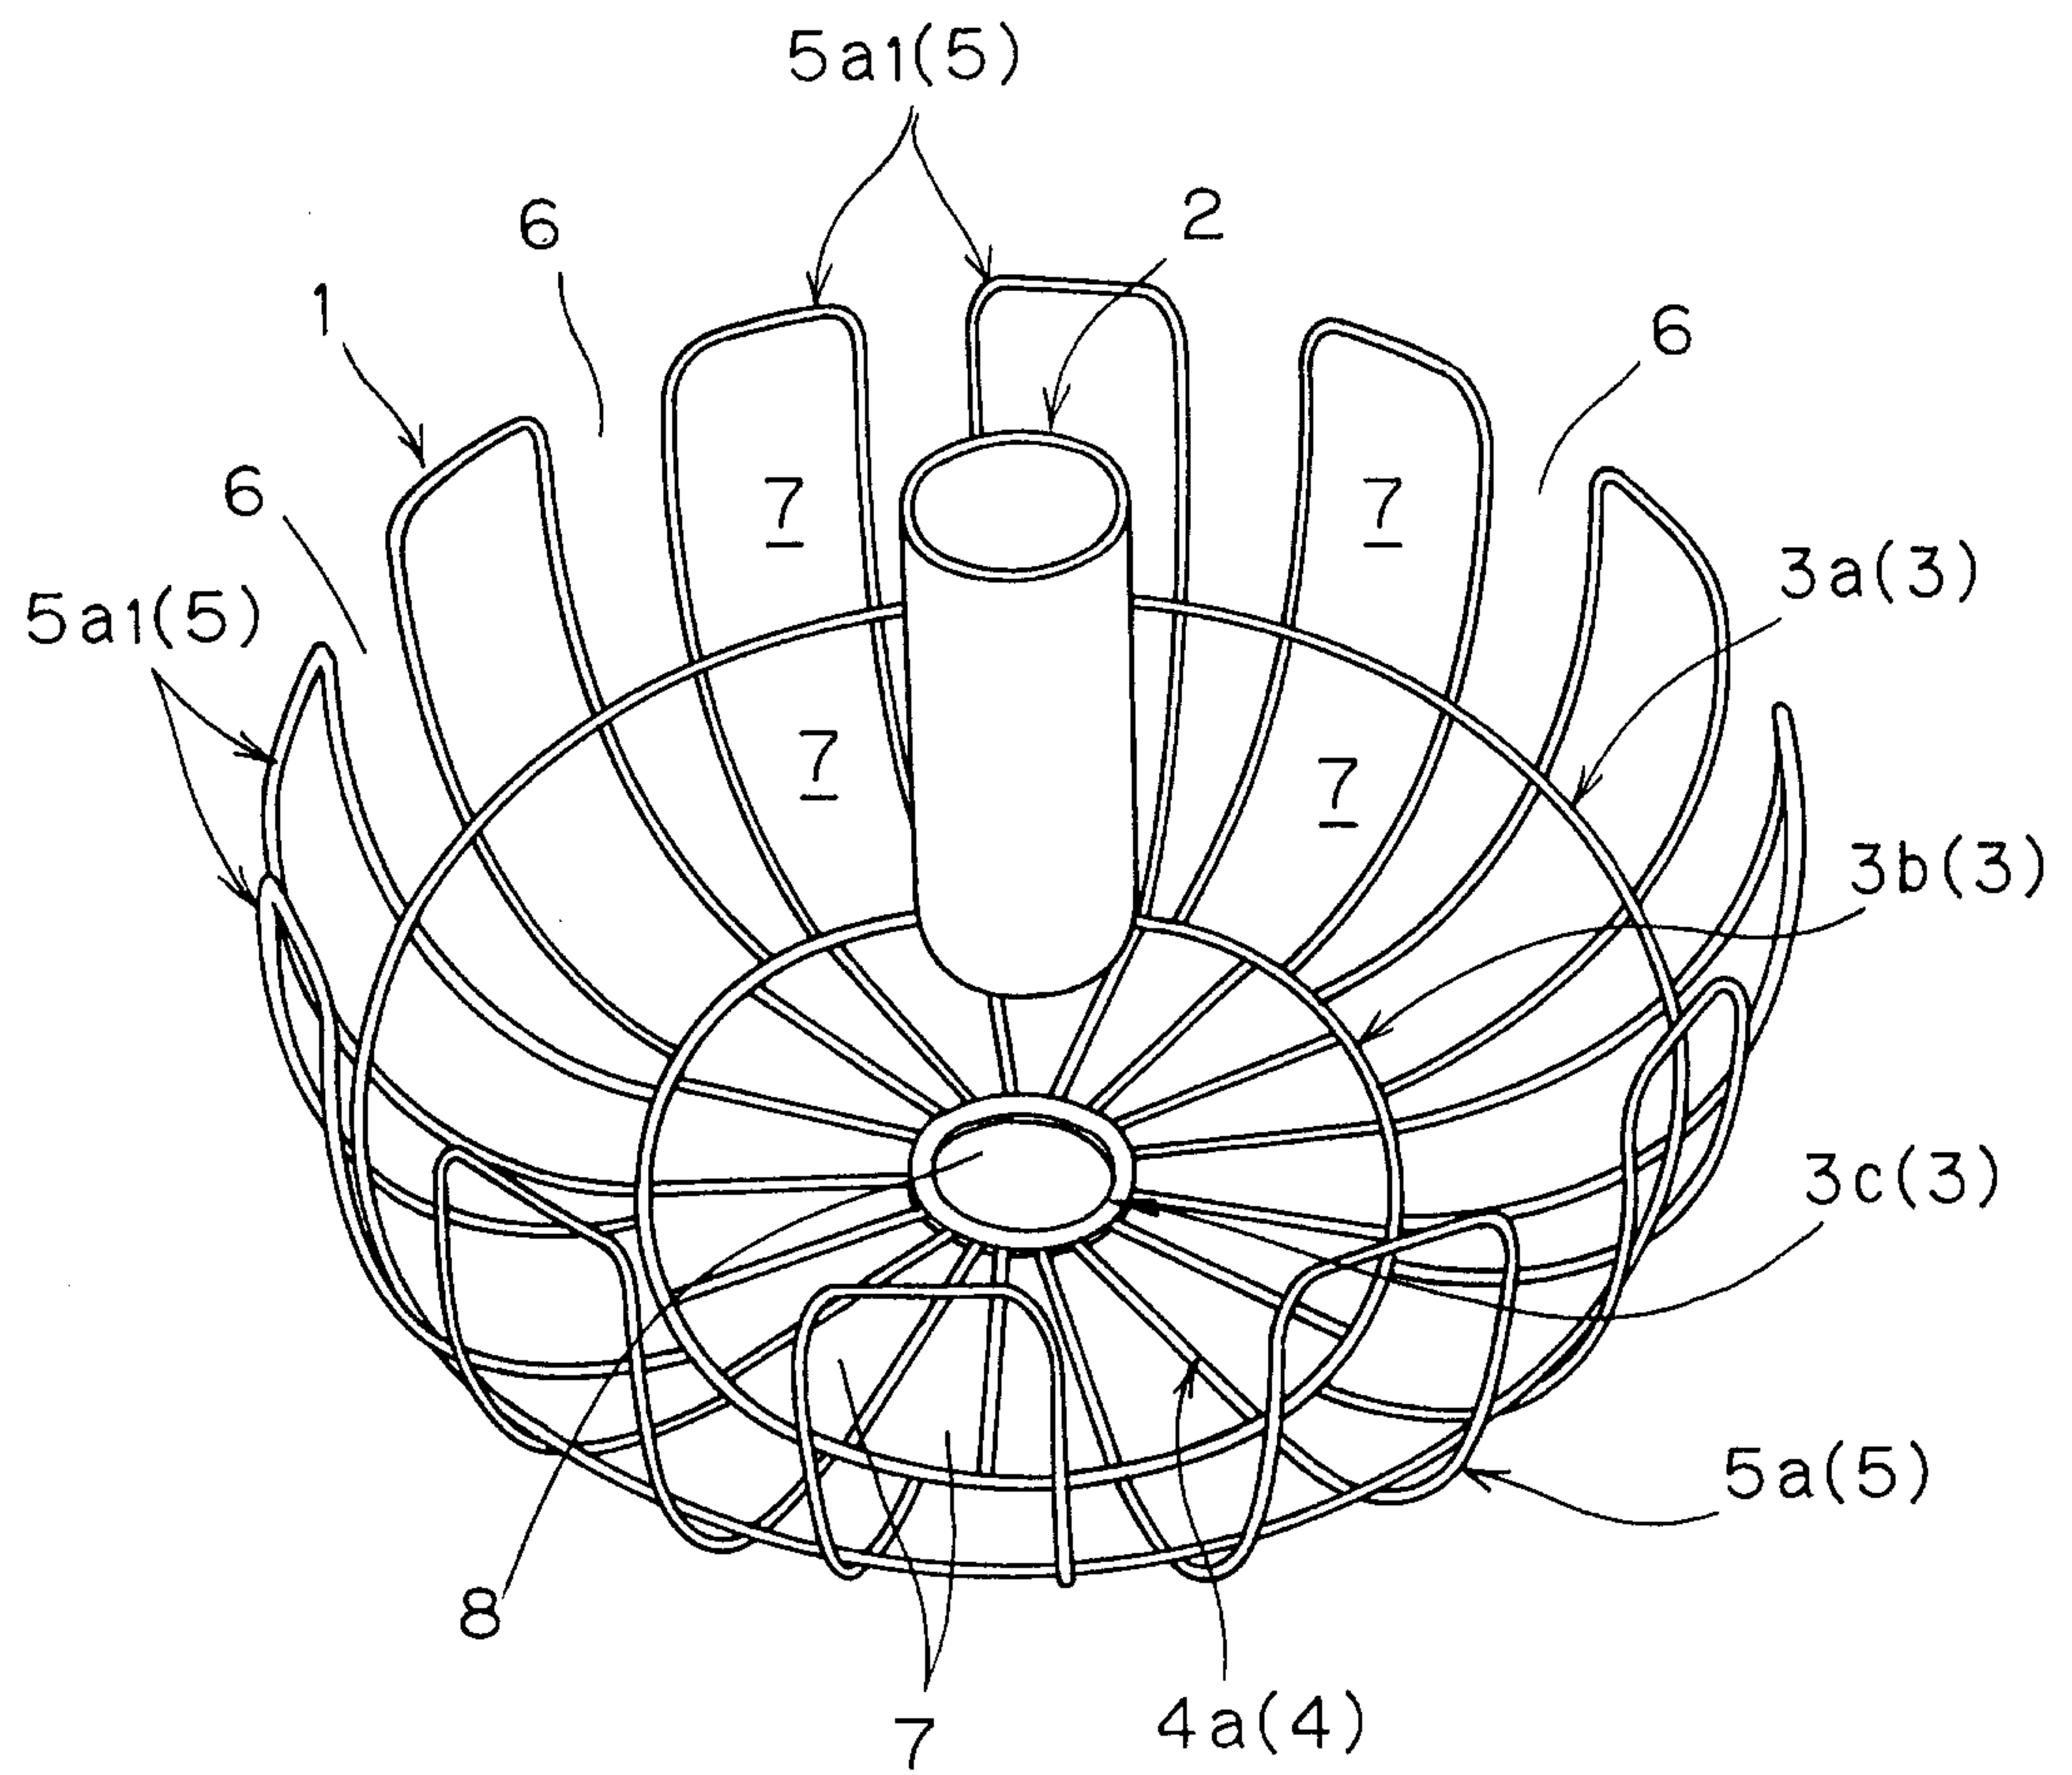


Fig. 3

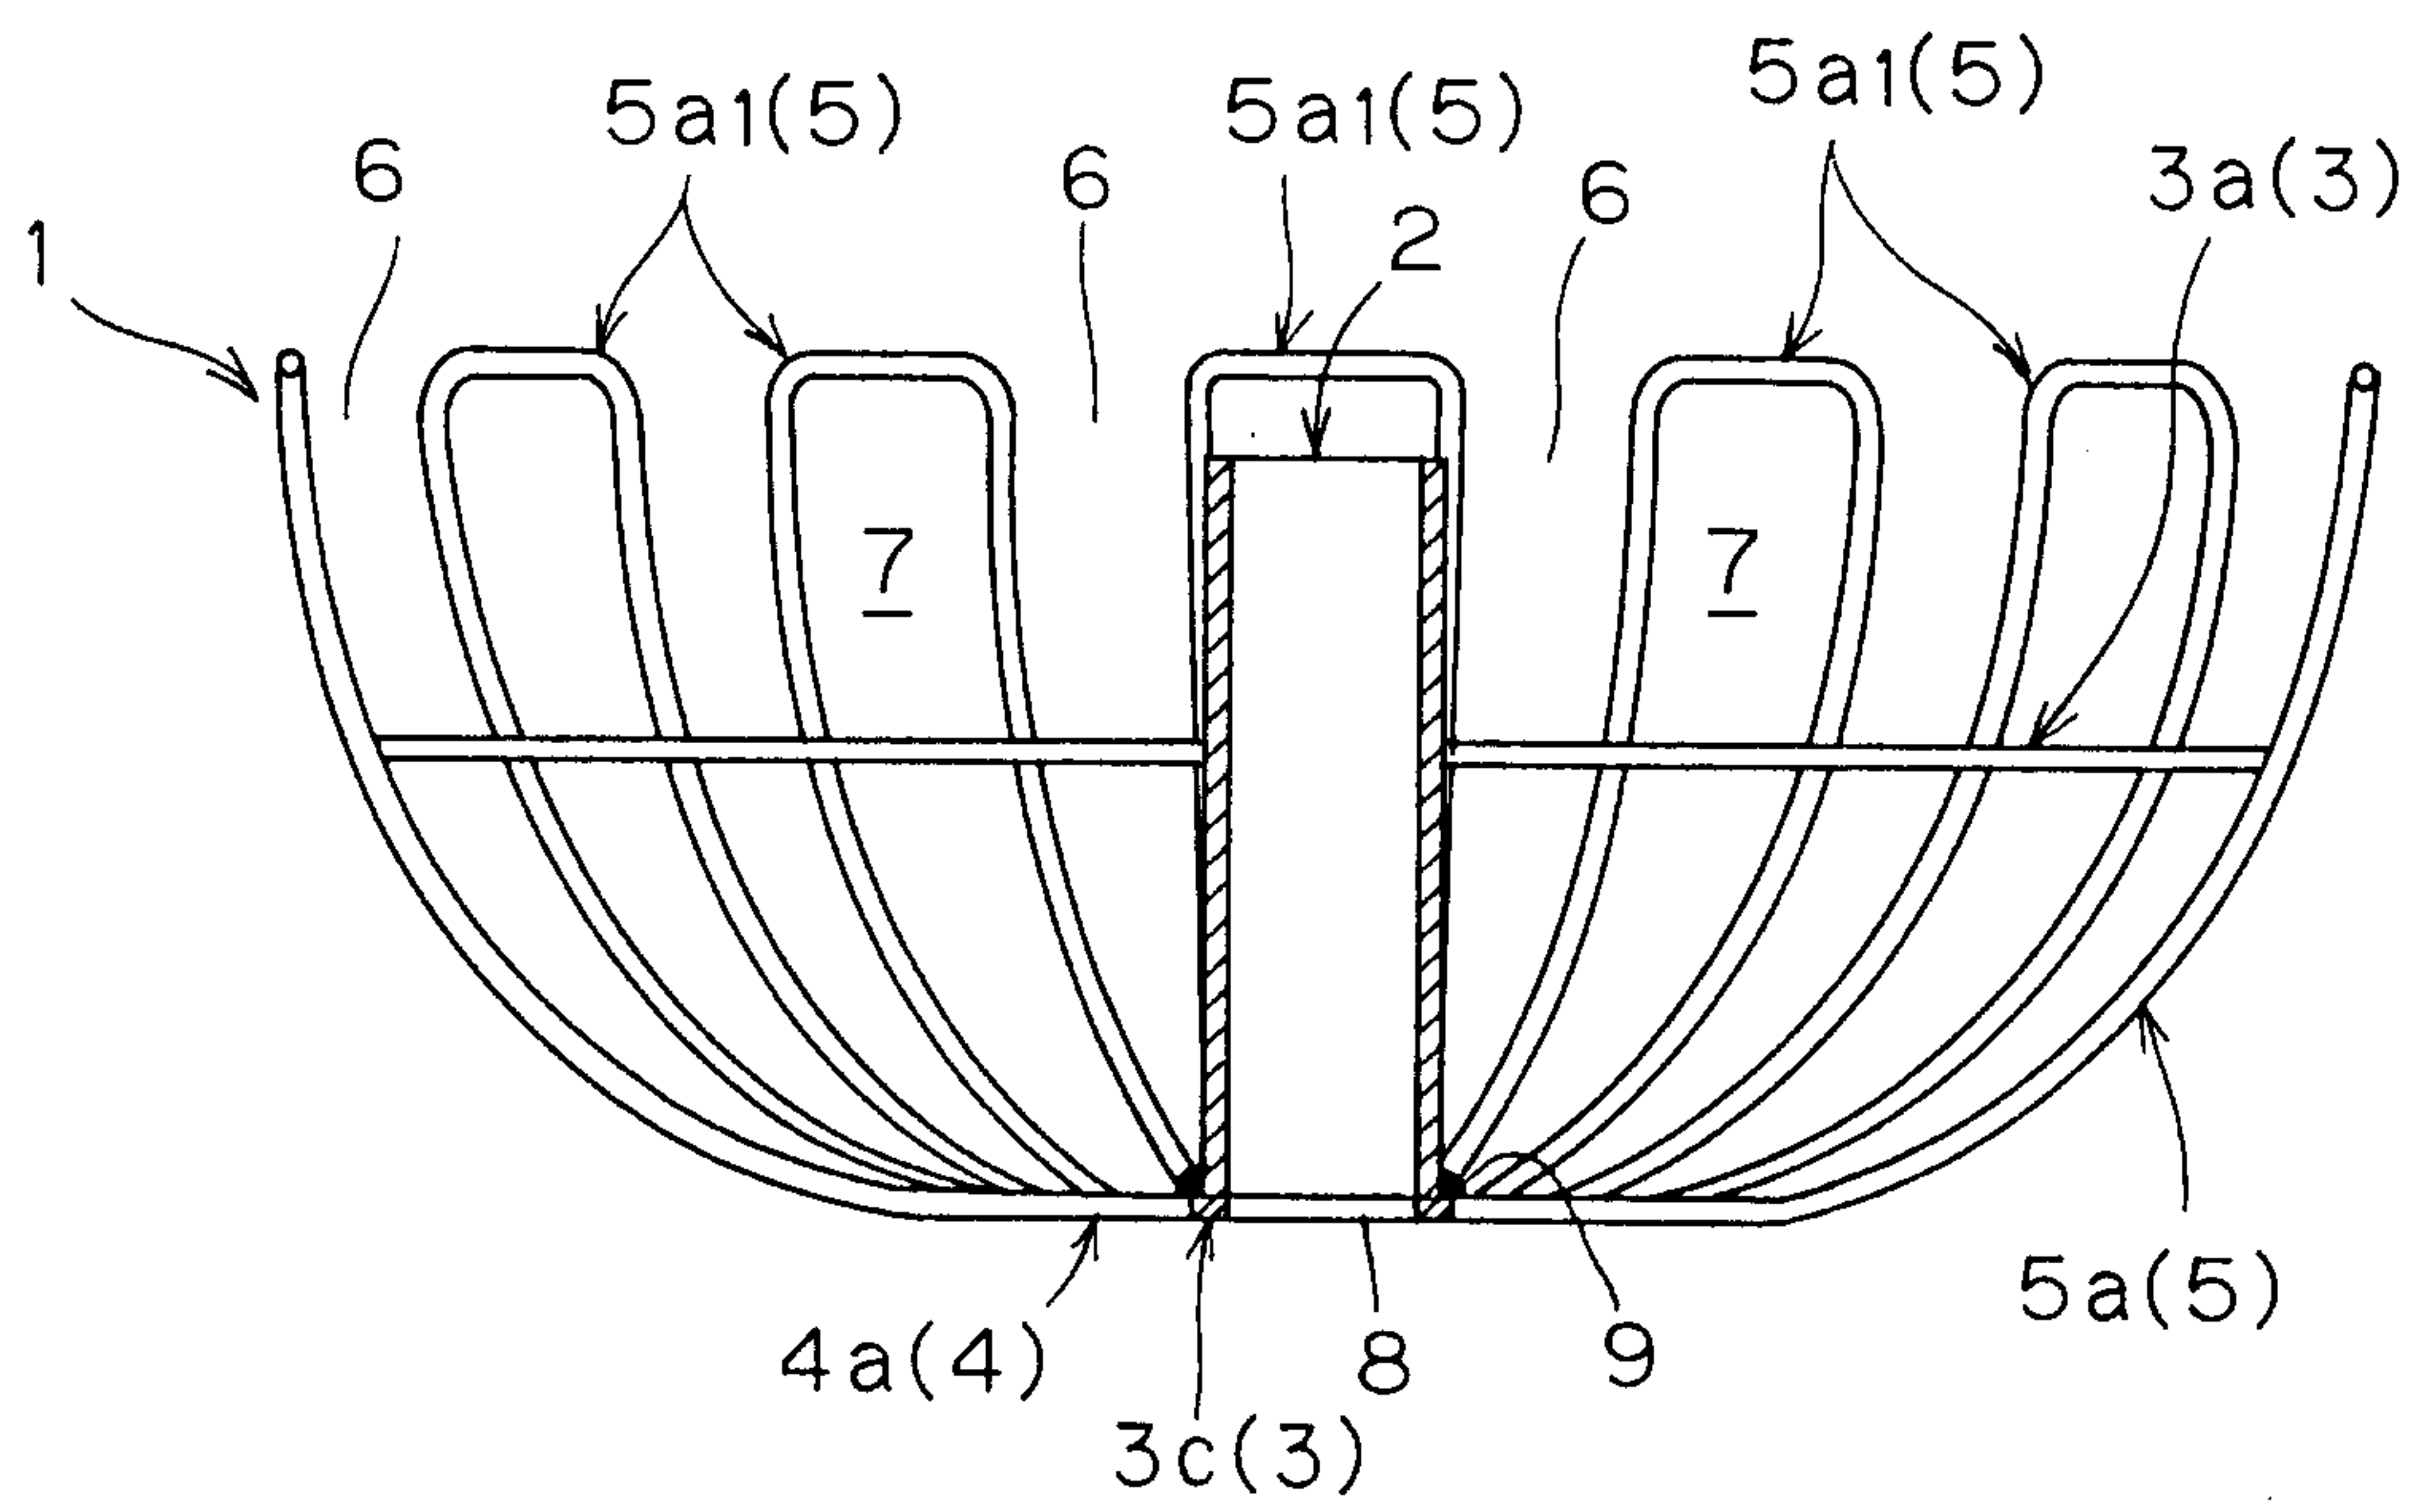


Fig. 4


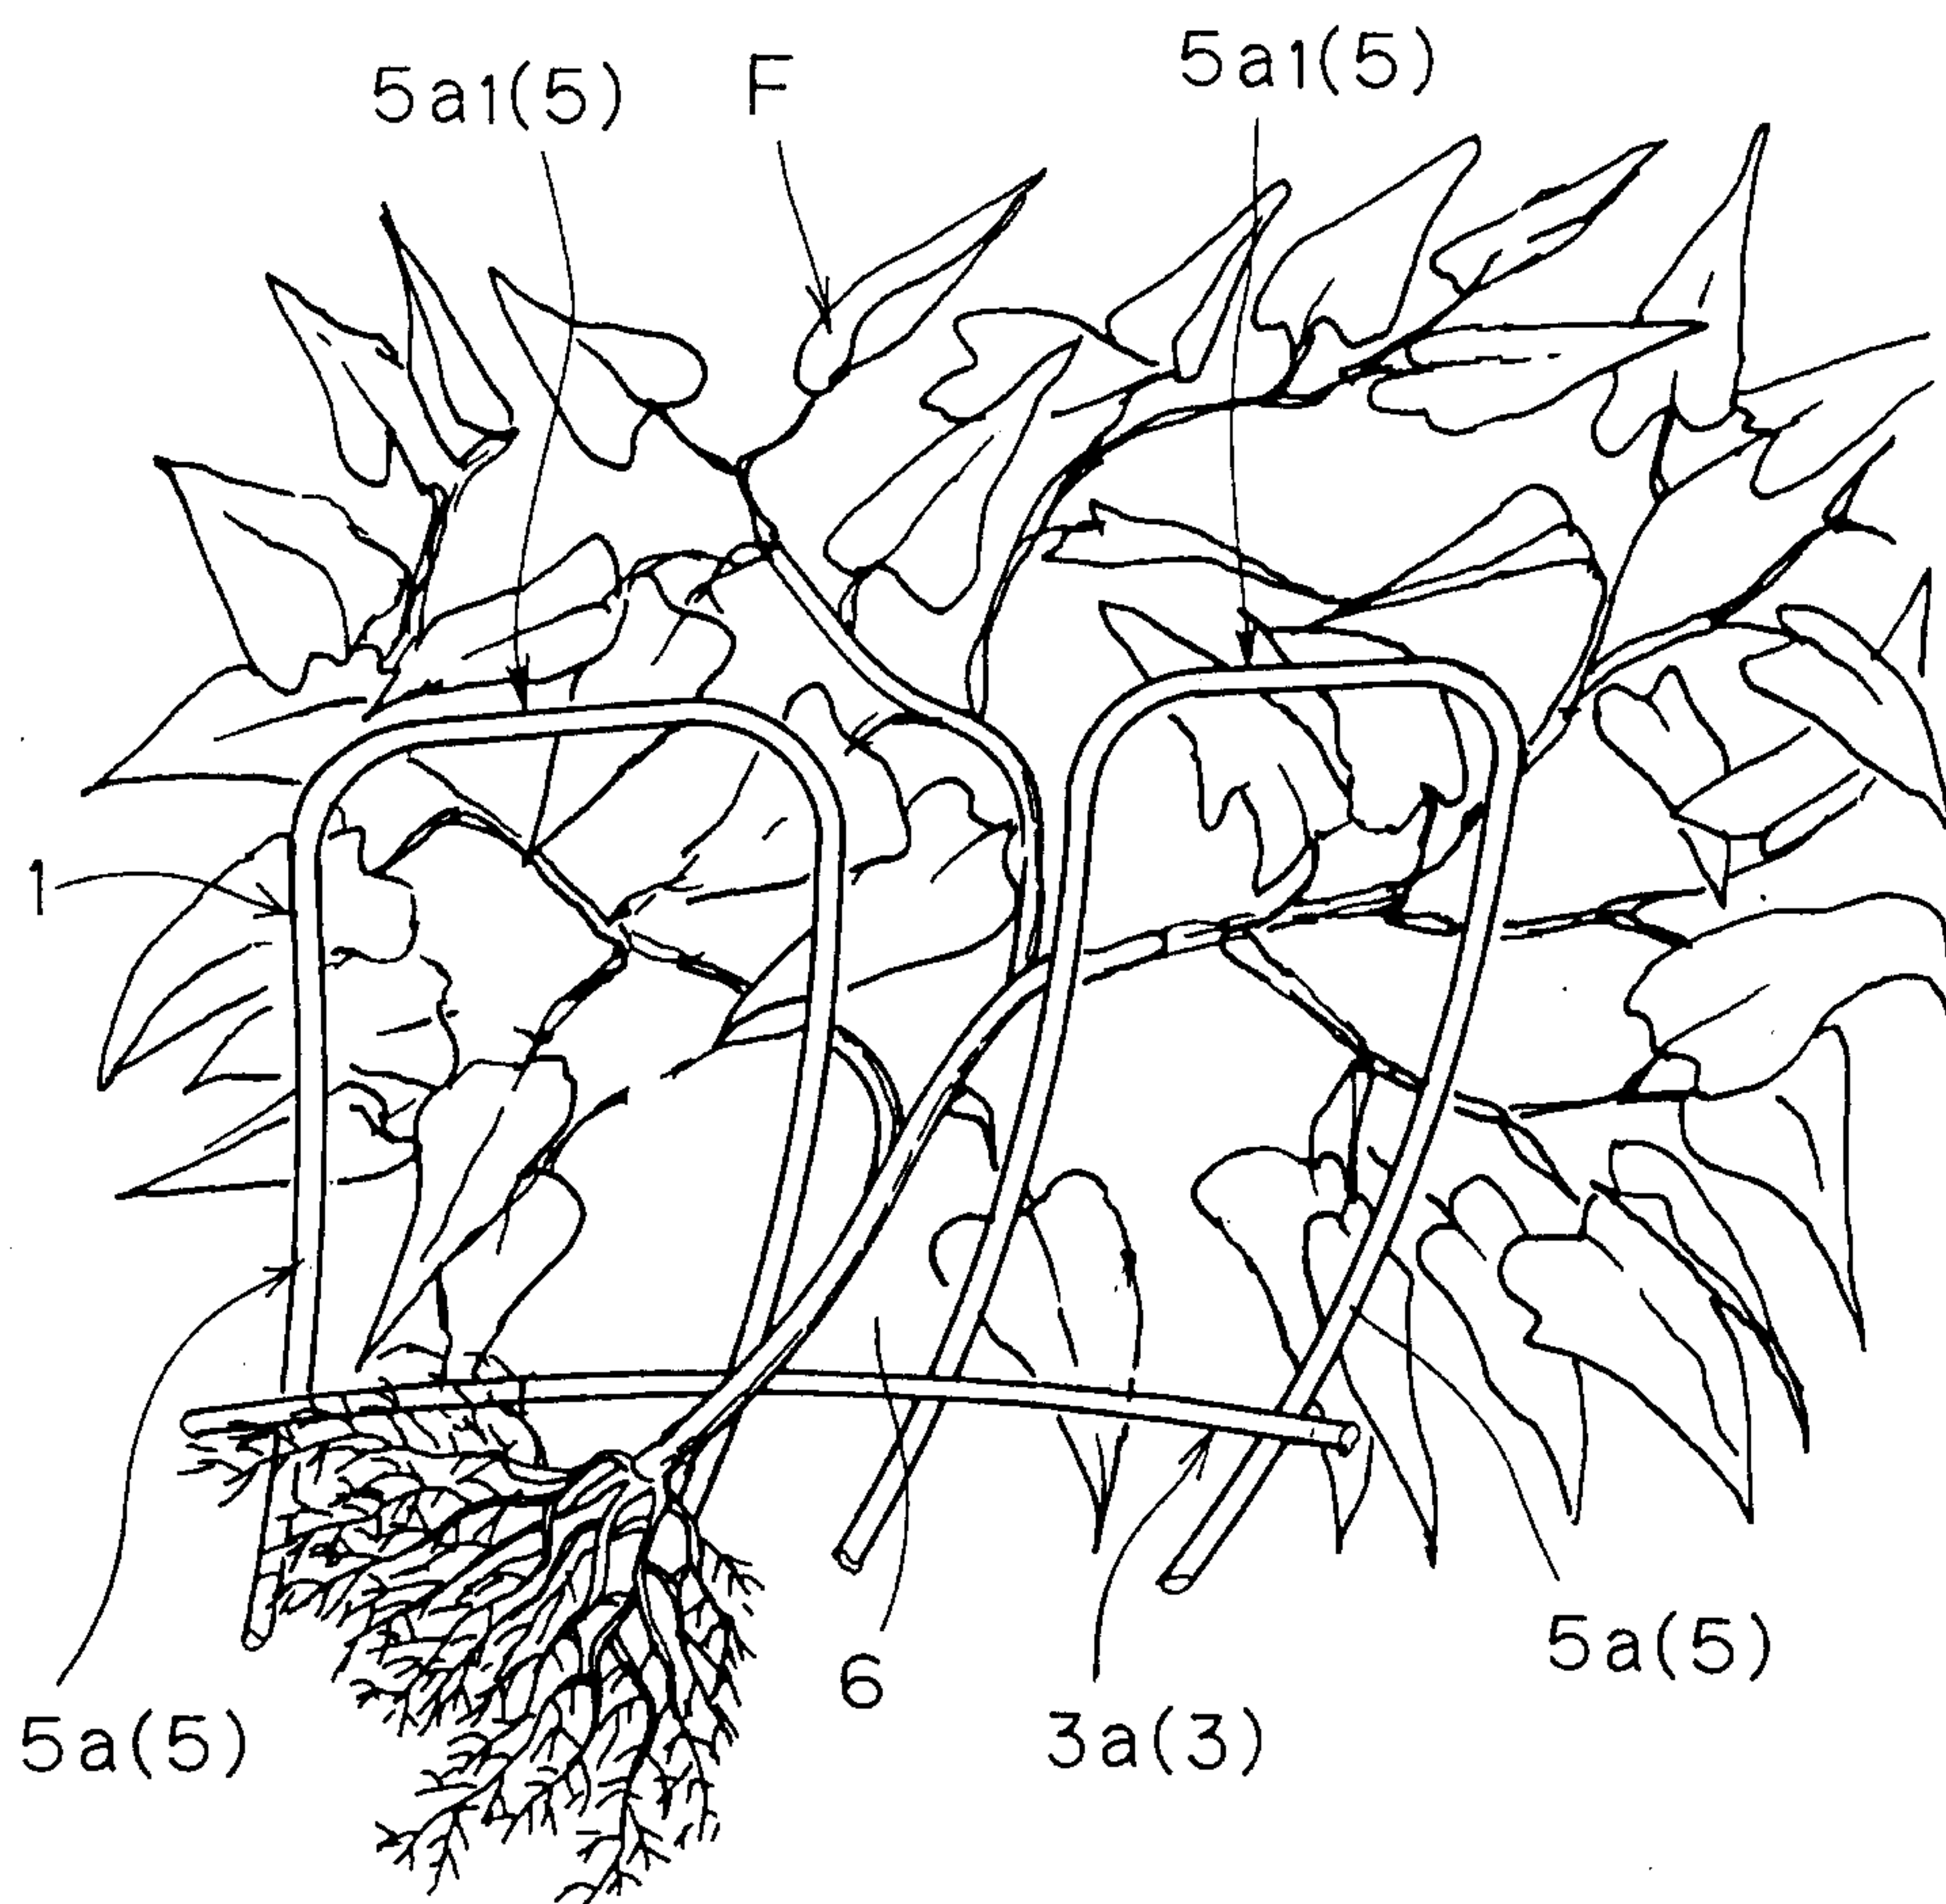


Fig. 5

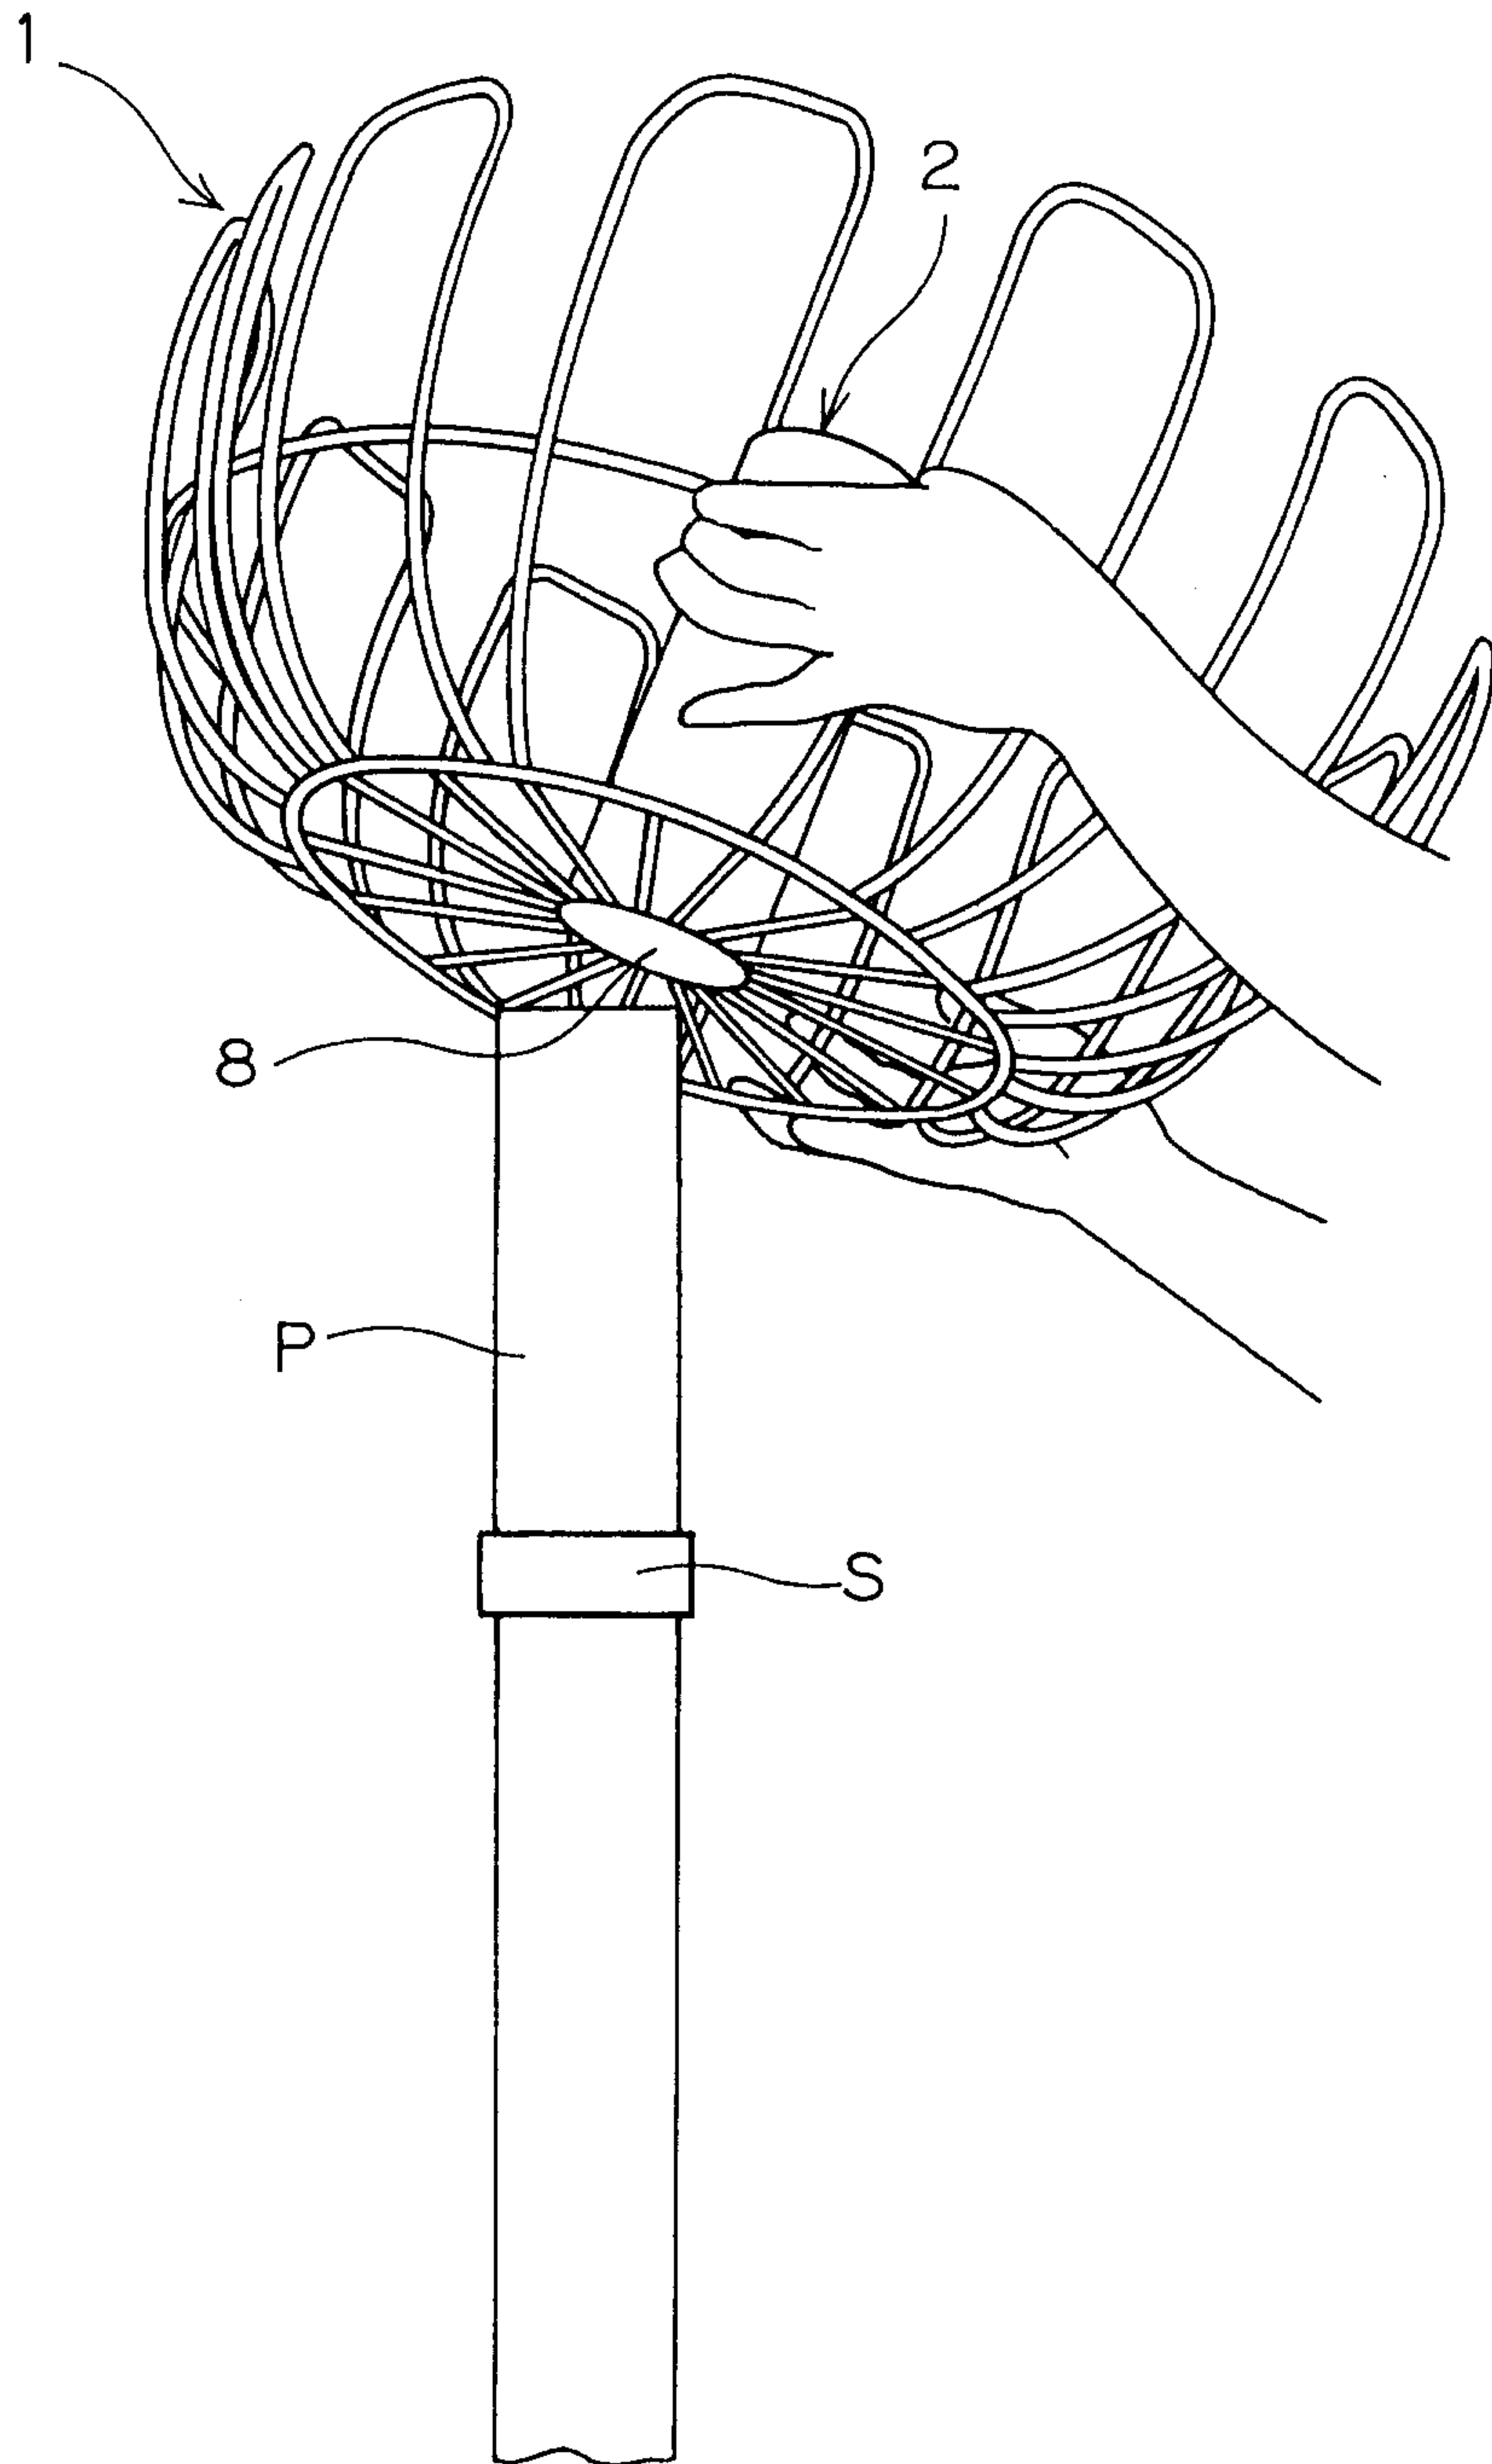

Proposed Drawing Correction

Fig. 6

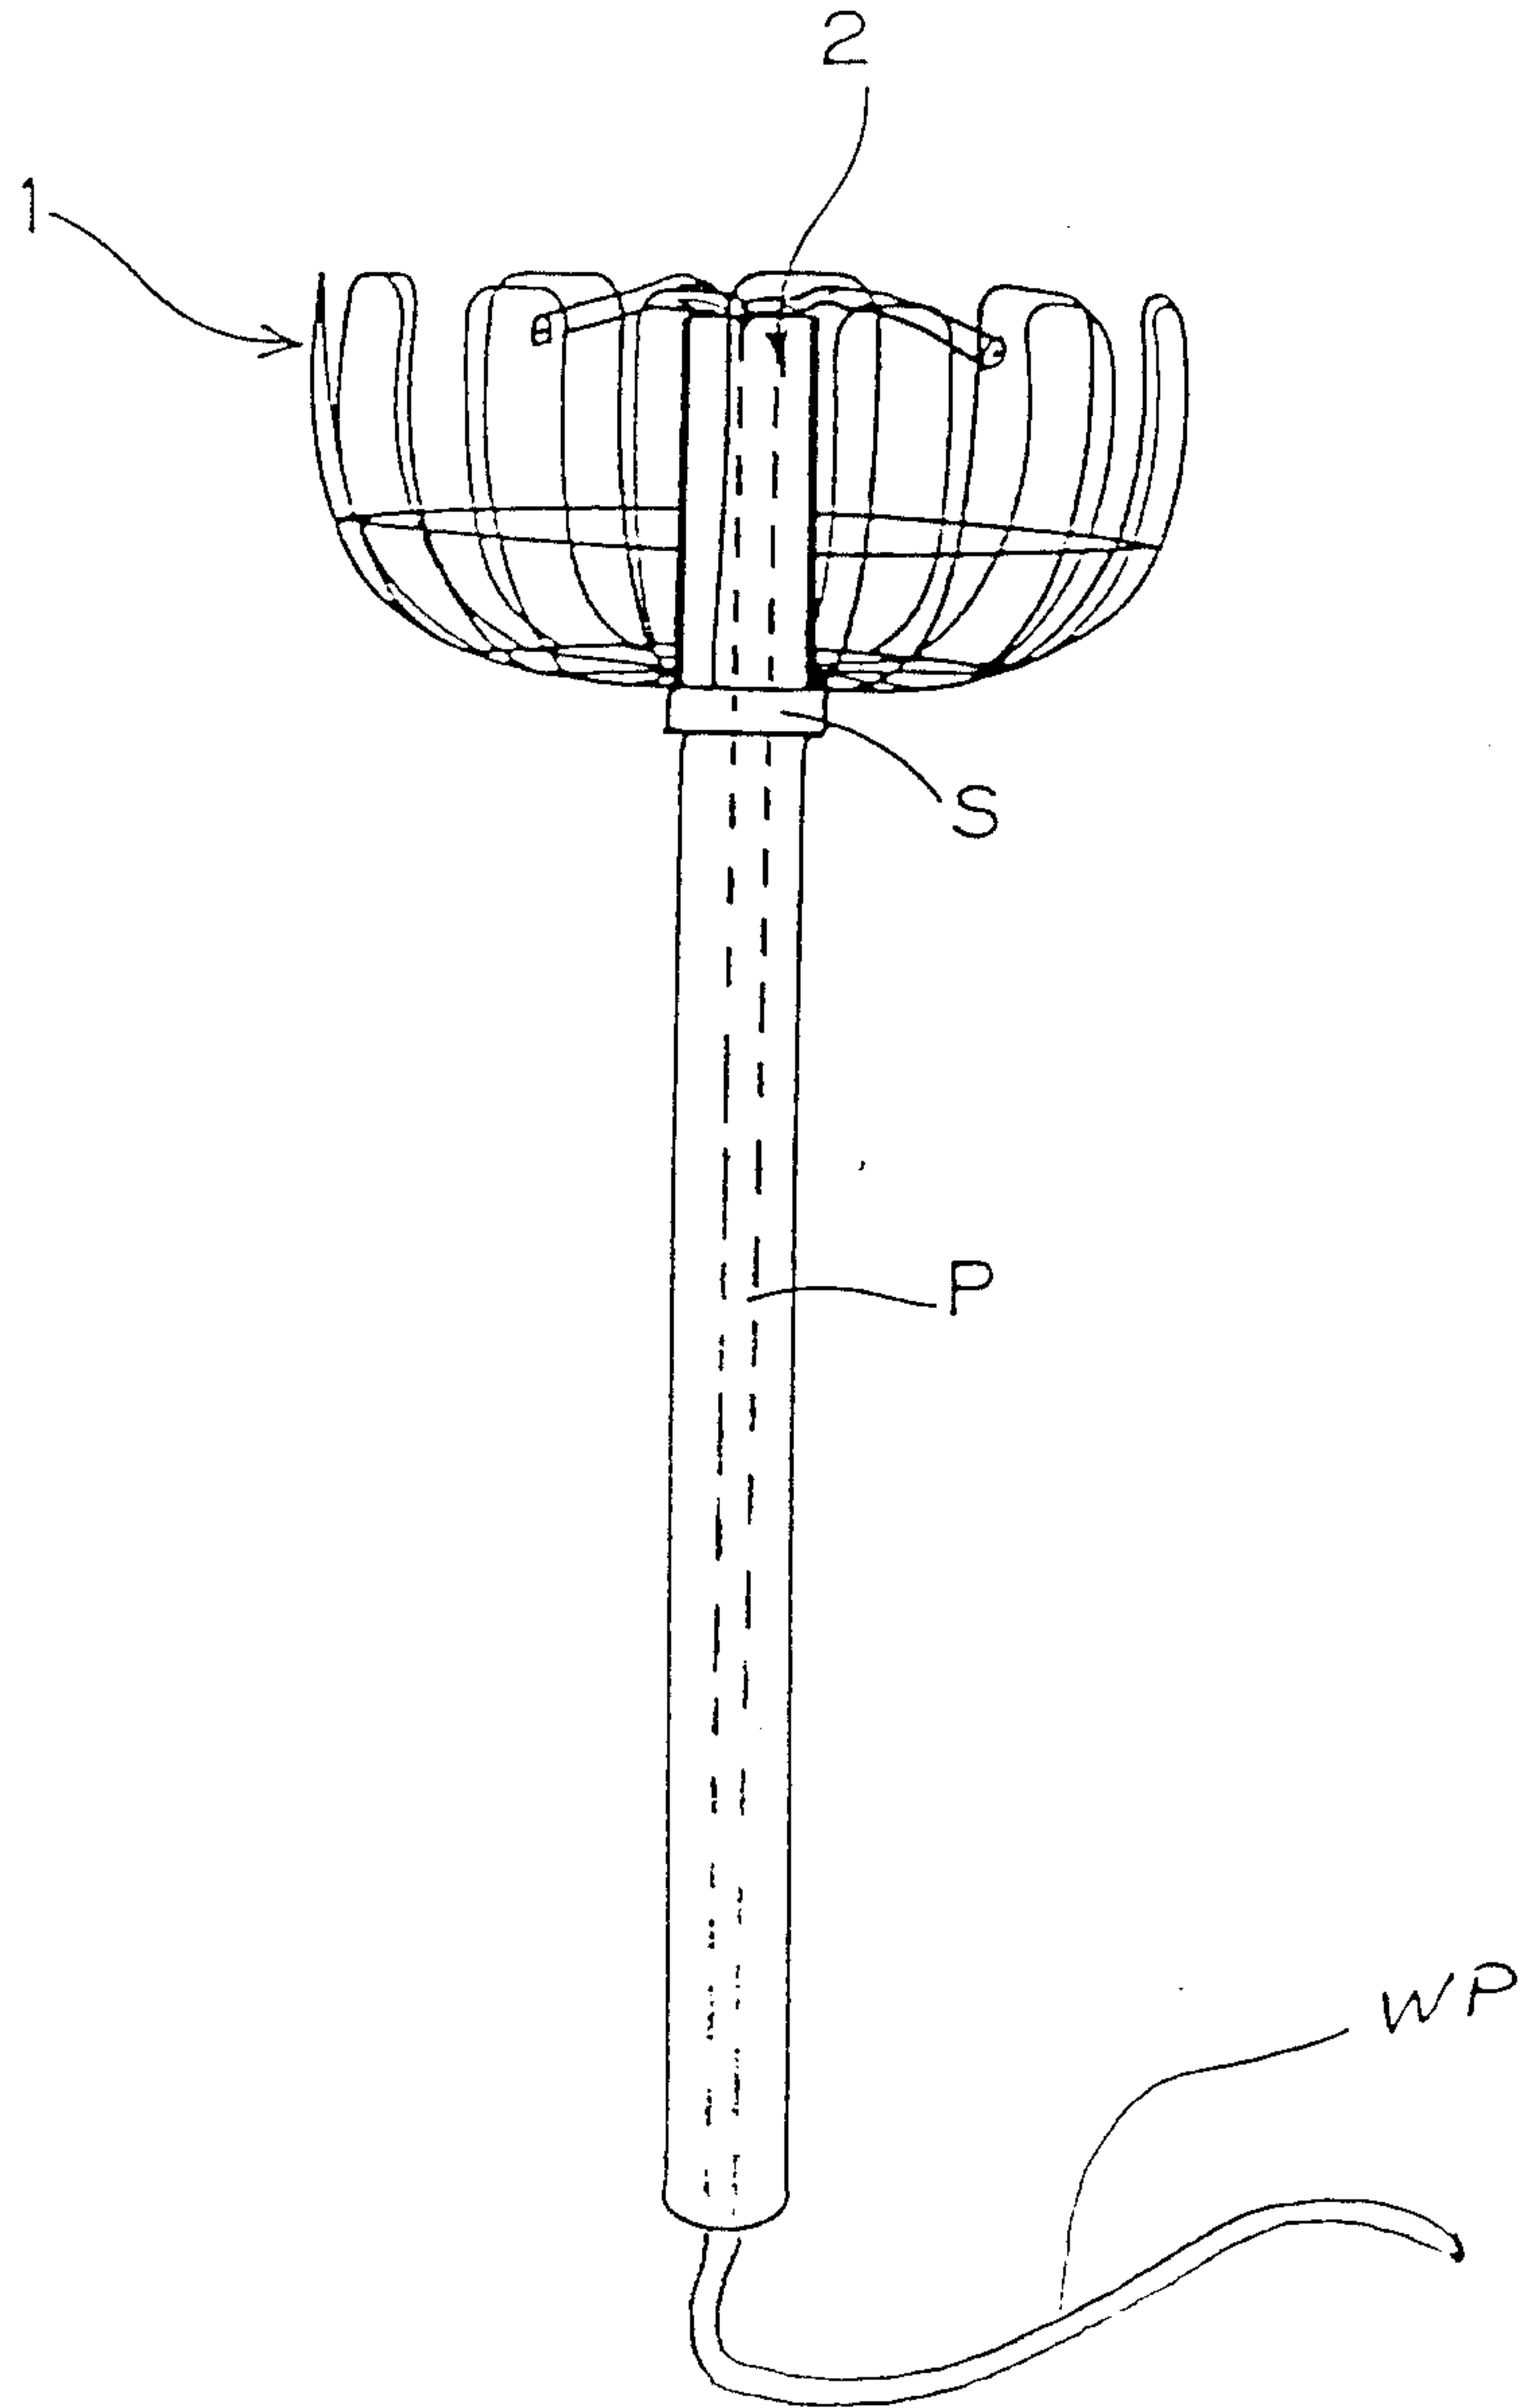


Fig. 7

Proposed Drawing Correction

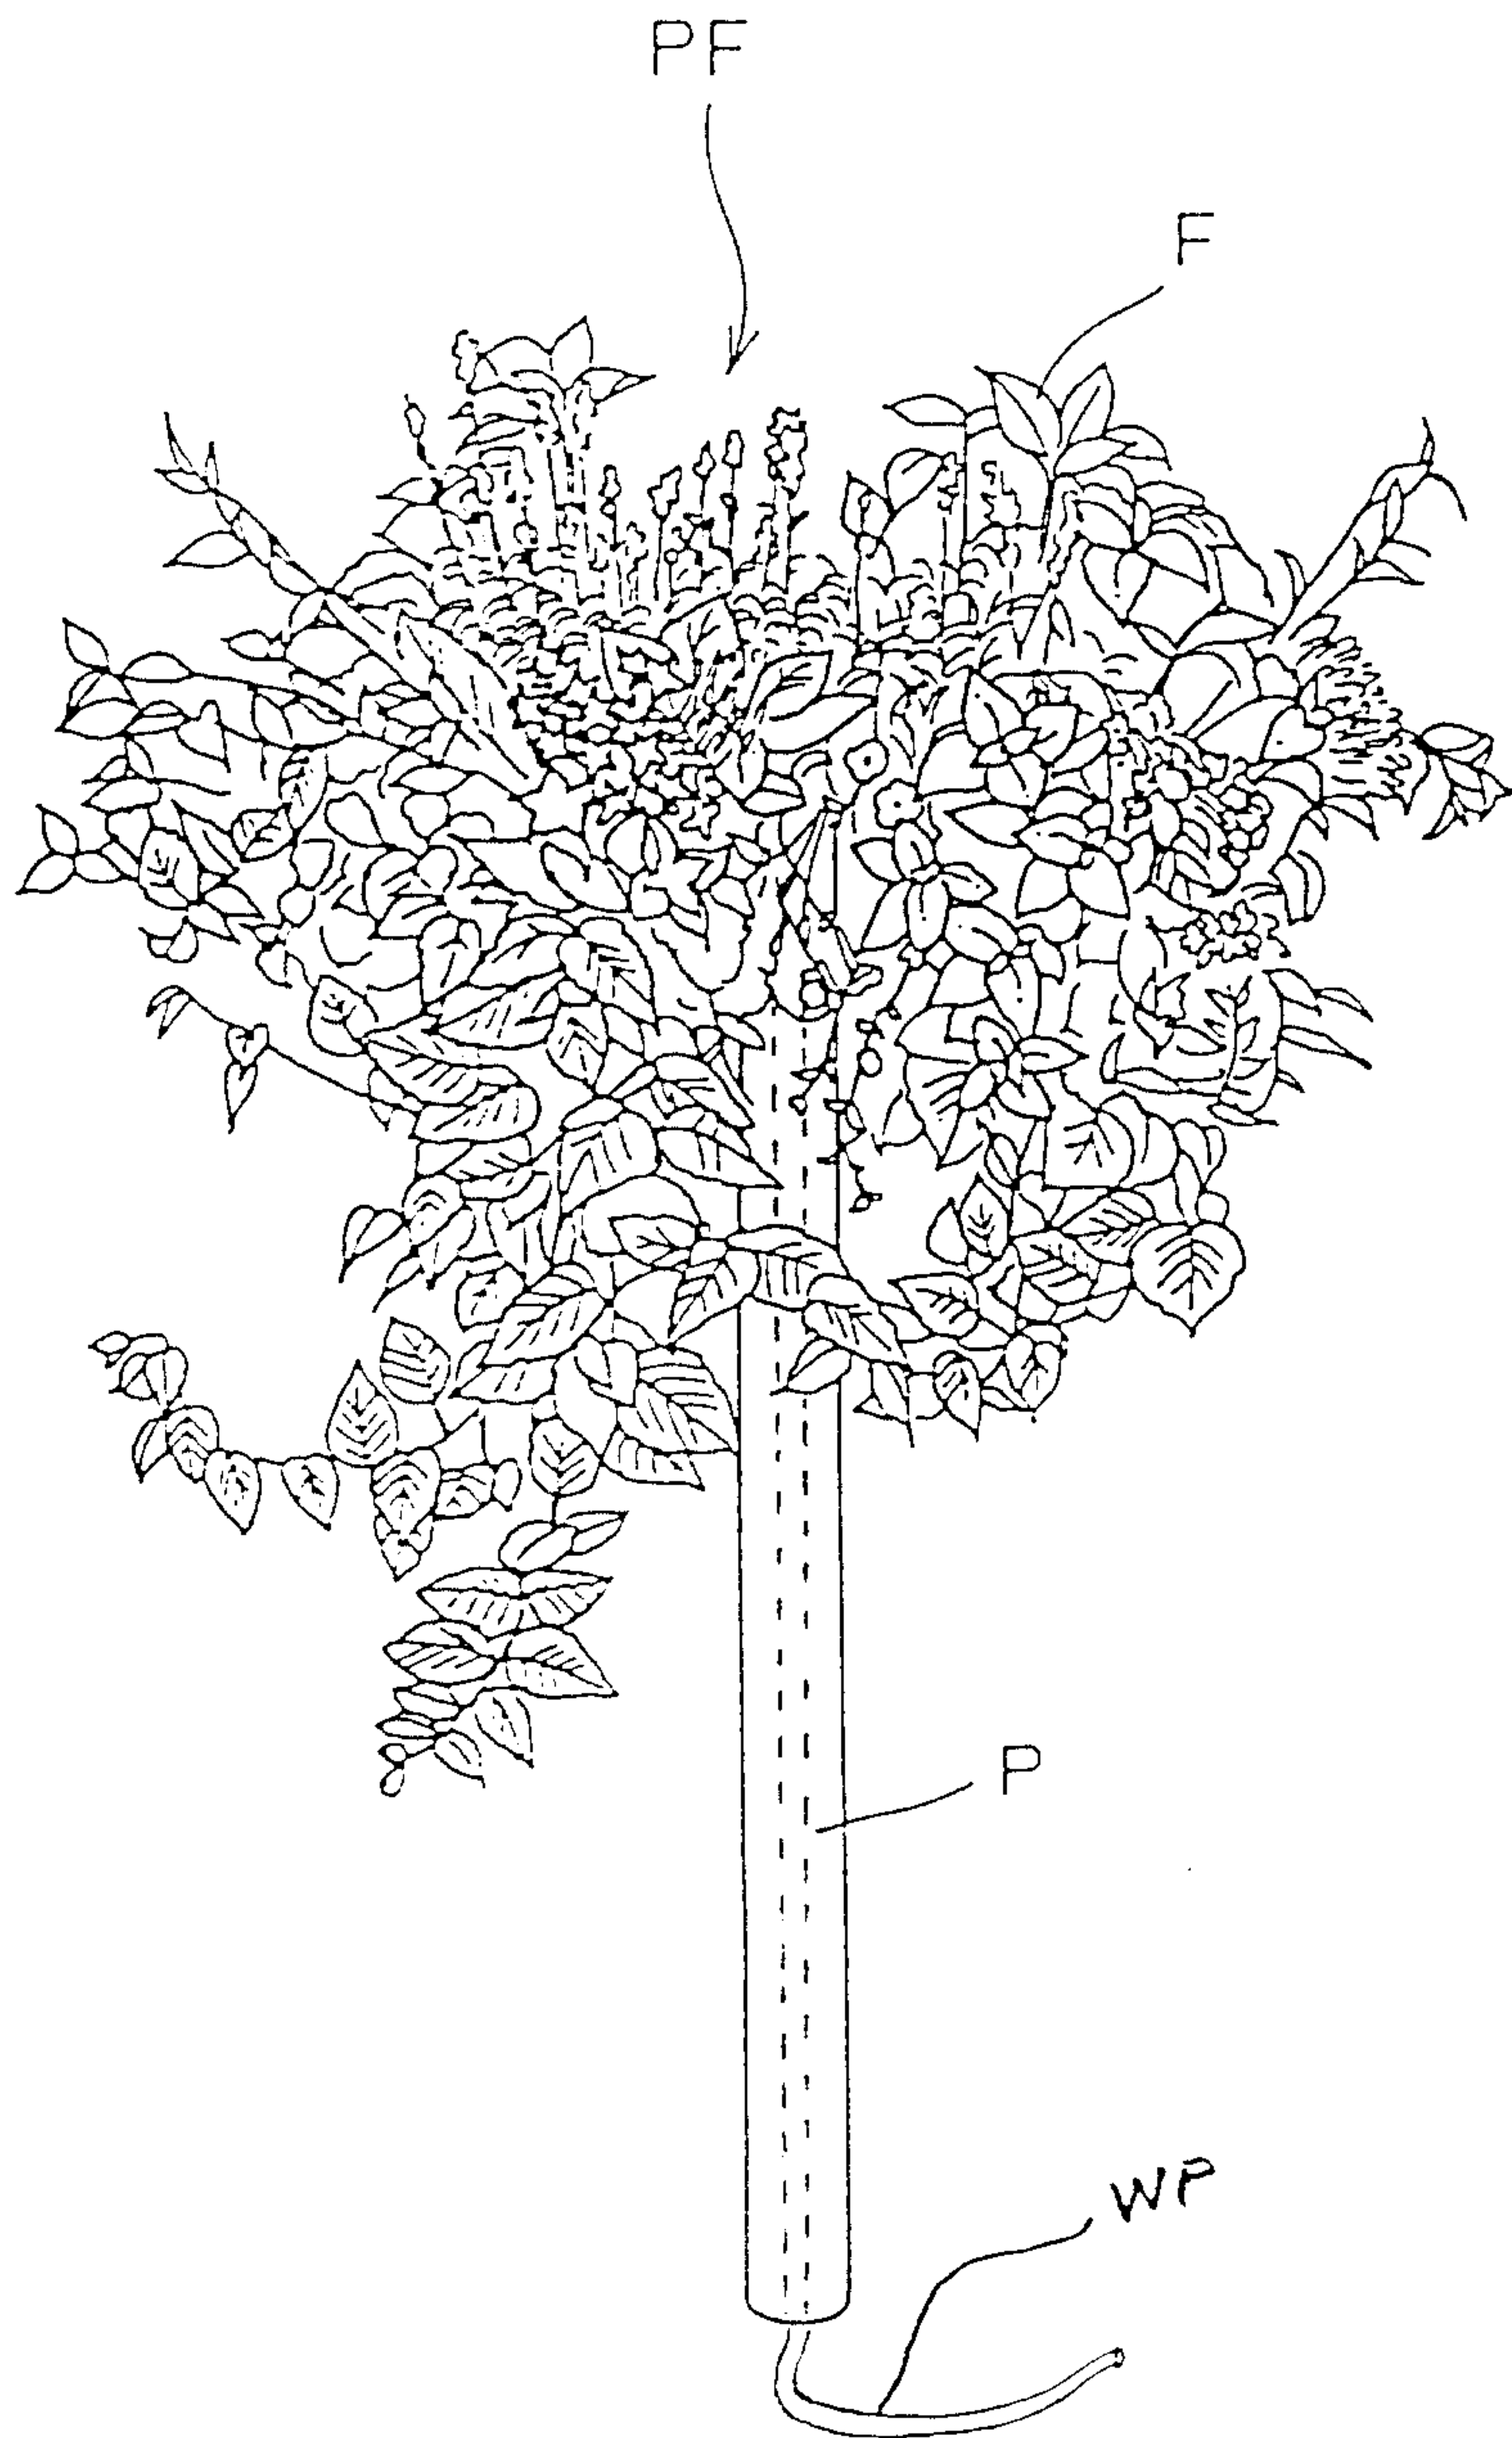


Fig. 8

