

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2007 (10.05.2007)

PCT

(10) International Publication Number
WO 2007/053688 A2

(51) International Patent Classification:
C07C 17/25 (2006.01) *C07C 21/18* (2006.01)
C07C 17/383 (2006.01)

(74) Agent: MALONEY, Daniel, Mark; E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).

(21) International Application Number:
PCT/US2006/042667

(22) International Filing Date:
1 November 2006 (01.11.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/732,041 1 November 2005 (01.11.2005) US

(71) Applicant (for all designated States except US): E. I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MILLER, Ralph, Newton [US/US]; 39 Hillstream Road, Newark, Delaware 19711 (US). MINOR, Barbara, Haviland [US/US]; 233 Greenhaven Drive, Elkton, Maryland 21921 (US). NAPPA, Mario, Joseph [US/US]; 3 Oakridge Court, Newark, Delaware 19711 (US). RAO, Vellyur, Nott, Mallikarjuna [US/US]; 1 Georgetown Avenue, Wilmington, Delaware 19809 (US). SIEVERT, Allen, Capron [US/US]; 215 Rhett Lane, Elkton, Maryland 21921 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AZEOTROPE COMPOSITIONS COMPRISING 1,1,1,2,3-PENTAFLUOROPROPENE AND HYDROGEN FLUORIDE AND USES THEREOF

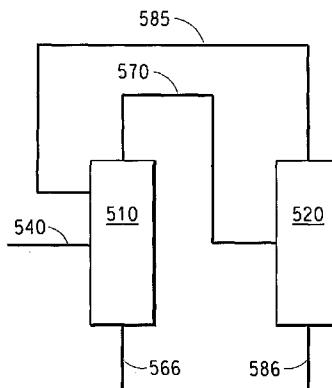

(57) Abstract: Disclosed herein are azeotrope compositions comprising 1,2,3,3,3-pentafluoropropene and hydrogen fluoride. The azeotrope compositions are useful in processes to produce and in processes to purify 1,2,3,3,3-pentafluoropropene.

WO 2007/053688 A2

TITLE OF INVENTION**AZEOTROPE COMPOSITIONS COMPRISING 1,1,1,2,3-PENTAFLUOROPROPENE AND HYDROGEN FLUORIDE AND USES THEREOF**

5

BACKGROUND OF THE INVENTION**1. Field of the Invention.**

Disclosed herein are relates to azeotrope compositions comprising Z-1,2,3,3,3-pentafluoropropene and hydrogen fluoride. The 10 azeotrope compositions are useful in processes to produce and in processes to purify Z-1,2,3,3,3-pentafluoropropene.

2. Description of Related Art.

Chlorine-containing compounds, such as chlorofluorocarbons 15 (CFCs) are considered to be detrimental to the Earth's ozone layer. Many of the hydrofluorocarbons (HFCs), used to replace CFCs, have been found to contribute to global warming. Therefore, there is a need to identify new compounds that do not damage the environment, but also possess the properties necessary to function as refrigerants, solvents, 20 cleaning agents, foam blowing agents, aerosol propellants, heat transfer media, dielectrics, fire extinguishing agents, sterilants and power cycle working fluids. Fluorinated olefins, containing one or more hydrogens in the molecule, are being considered for use in some of the applications, like for example in refrigeration.

25

BRIEF SUMMARY OF THE INVENTION

One aspect relates to an azeotrope or near-azeotrope composition comprising Z-1,2,3,3,3-pentafluoropropene (Z-HFC-1225ye) and hydrogen fluoride (HF).

30 A further aspect relates to a process for the separation of Z-HFC-1225ye from 1,1,1,2,3,3-hexafluoropropane (HFC-236ea) comprising: a) forming a mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride; and b) subjecting said mixture to a distillation step forming a column distillate composition comprising an azeotrope or near-azeotrope 35 composition of hydrogen fluoride and Z-HFC-1225ye essentially free of HFC-236ea.

A further aspect relates to a process for the separation of Z-HFC-1225ye from a mixture comprising an azeotrope or near-azeotrope

composition of Z-HFC-1225ye and HF, said process comprising: a) subjecting said mixture to a first distillation step in which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a first distillate composition with a first bottoms composition being enriched 5 in the other of said components (i) or (ii); and b) subjecting said first distillate composition to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched as first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same 10 component which was enriched in the first distillate composition.

A further aspect relates to a process for the purification of Z-HFC-1225ye from a mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride, said process comprising: a) subjecting said mixture to a first distillation step to form a first distillate comprising an azeotrope or near- 15 azeotrope composition containing Z-HFC-1225ye and hydrogen fluoride and a first bottoms comprising HFC-236ea; b) subjecting said first distillate to a second distillation step from which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate composition with a second bottoms composition being enriched in the 20 other of said components (i) or (ii); and c) subjecting said second distillate composition to a third distillation step conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (b) is removed in a third distillate composition with a third bottoms composition enriched in the same 25 component that was enriched in the second distillate composition.

A further aspect relates to a process to produce Z-HFC-1225ye comprising: a) feeding HFC-236ea to a reaction zone for dehydrofluorination to form a reaction product composition comprising Z-HFC-1225ye, unreacted HFC-236ea and hydrogen fluoride; b) subjecting 30 said reaction product composition to a first distillation step to form a first distillate composition comprising an azeotrope or near-azeotrope composition containing Z-HFC-1225ye and hydrogen fluoride and a first bottoms composition comprising HFC-236ea; c) subjecting said first distillate composition to a second distillation step from which a 35 composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate composition with a second bottoms composition being enriched in the other of said components (i) or (ii); and d) subjecting said second distillate composition to a third distillation step

conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (c) is removed in a third distillate composition with a third bottoms composition enriched in the same component that was enriched in the second distillate 5 composition.

A further aspect relates to a process for the separation of HFC-236ea from a mixture comprising an azeotrope or near-azeotrope composition of HFC-236ea and HF, said process comprising: a) subjecting said mixture to a first distillation step in which a composition 10 enriched in either (i) hydrogen fluoride or (ii) HFC-236ea is removed as a first distillate composition with a first bottoms composition being enriched in the other of said components (i) or (ii); and b) subjecting said first distillate composition to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched as 15 first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same component which was enriched in the first distillate composition.

BRIEF DESCRIPTION OF THE DRAWING(S)

20 Figure 1 is a schematic flow diagram illustrating one embodiment for practicing a two-column azeotropic distillation process.

Figure 2 is a schematic flow diagram illustrating one embodiment for practicing a process for production of Z-HFC-1225ye.

DETAILED DESCRIPTION OF THE INVENTION

One aspect relates to compositions containing 1,2,3,3,3-pentafluoropropene (HFC-1225ye, $CF_3CF=CHF$). HFC-1225ye may exist as one of two configurational isomers, *E* or *Z*. Z-HFC-1225ye as used herein refers to a mixture of the isomers, *E*-HFC-1225ye (CAS reg no. 30 5595-10-8) and *Z*-HFC-1225ye (CAS reg. no. 5528-43-8) wherein the predominant isomer is *Z*-HFC-1225ye. *Z*-HFC-1225ye may be prepared by methods known in the art, such as those described in US Patent Nos. 5,396,000, 5,679,875, 6,031,141, and 6,369,284, all of which are incorporated herein by reference.

35 As used herein, predominant isomer is intended to mean that isomer which is present in the composition at a concentration of greater than 50 mole percent, preferably greater than 60 mole percent, more

preferably greater than 70 mole percent, even more preferably greater than 80 mole percent, and most preferably greater than 90 mole percent.

Anhydrous hydrogen fluoride (HF) has CAS reg. no. 7664-39-3 and is commercially available.

5 Also useful in the processes disclosed herein is 1,1,1,2,3,3-hexafluoropropane (HFC-236ea, CAS reg. no. 431-63-0). HFC-236ea may be prepared by methods known in the art.

10 In considering a process for the dehydrofluorination of HFC-236ea to Z-HFC-1225ye and HF and the isolation of Z-HFC-1225ye from such a process, it has been discovered surprisingly that the hydrofluoroolefin Z-HFC-1225ye forms an azeotrope with HF.

15 One aspect provides a composition, which comprises Z-HFC-1225ye and an effective amount of hydrogen fluoride (HF) to form an azeotrope composition. By effective amount is meant an amount, which, when combined with Z-HFC-1225ye, results in the formation of an azeotrope or near-azeotrope mixture. As recognized in the art, an azeotrope or a near-azeotrope composition is an admixture of two or more different components which, when in liquid form under a given pressure, will boil at a substantially constant temperature, which temperature may be 20 higher or lower than the boiling temperatures of the individual components, and which will provide a vapor composition essentially identical to the liquid composition undergoing boiling.

25 For the purpose of this discussion, near-azeotrope composition (also commonly referred to as an "azeotrope-like composition") means a composition that behaves like an azeotrope (i.e., has constant boiling characteristics or a tendency not to fractionate upon boiling or evaporation). Thus, the composition of the vapor formed during boiling or evaporation is the same as or substantially the same as the original liquid composition. Hence, during boiling or evaporation, the liquid composition, 30 if it changes at all, changes only to a minimal or negligible extent. This is to be contrasted with non-azeotrope compositions in which during boiling or evaporation, the liquid composition changes to a substantial degree.

35 Additionally, near-azeotrope compositions exhibit dew point pressure and bubble point pressure with virtually no pressure differential. That is to say that the difference in the dew point pressure and bubble point pressure at a given temperature will be a small value. It may be stated that compositions with a difference in dew point pressure and

bubble point pressure of less than or equal to 3 percent (based upon the bubble point pressure) may be considered to be a near-azeotrope.

Accordingly, the essential features of an azeotrope or a near-azeotrope composition are that at a given pressure, the boiling point of the liquid composition is fixed and that the composition of the vapor above the boiling composition is essentially that of the boiling liquid composition (i.e., no fractionation of the components of the liquid composition takes place). It is also recognized in the art that both the boiling point and the weight percentages of each component of the azeotrope composition may change when the azeotrope or near-azeotrope liquid composition is subjected to boiling at different pressures. Thus, an azeotrope or a near-azeotrope composition may be defined in terms of the unique relationship that exists among the components or in terms of the compositional ranges of the components or in terms of exact weight percentages of each component of the composition characterized by a fixed boiling point at a specified pressure. It is also recognized in the art that various azeotrope compositions (including their boiling points at particular pressures) may be calculated (see, e.g., W. Schotte Ind. Eng. Chem. Process Des. Dev. (1980) 19, 432-439). Experimental identification of azeotrope compositions involving the same components may be used to confirm the accuracy of such calculations and/or to modify the calculations at the same or other temperatures and pressures.

Compositions may be formed that comprise azeotrope combinations of hydrogen fluoride with Z-HFC-1225ye. These include compositions comprising from about 31.0 mole percent to about 35.5 mole percent HF and from about 69.0 mole percent to about 64.5 mole percent Z-HFC-1225ye (which forms an azeotrope boiling at a temperature from between about -25 °C and about 100 °C and at a pressure from between about 12.8 psi (88.3 kPa) and about 551 psi (3799 kPa)).

Additionally, near-azeotrope compositions containing HF and Z-HFC-1225ye may also be formed. Such near-azeotrope compositions comprise about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and about 39.0 mole percent to about 21.6 mole percent HF at temperatures ranging from about -25 °C to about 100 °C and at pressures from about 12 psi (88 kPa) to about 550 psi (3792 kPa).

It should be understood that while an azeotrope or near-azeotrope composition may exist at a particular ratio of the components at

given temperatures and pressures, the azeotrope composition may also exist in compositions containing other components.

Compositions may be formed that consist essentially of azeotrope combinations of hydrogen fluoride with Z-HFC-1225ye. These 5 include compositions consisting essentially of from about 31.0 mole percent to about 35.5 mole percent HF and from about 69.0 mole percent to about 64.5 mole percent Z-HFC-1225ye (which forms an azeotrope boiling at a temperature from between about -25 °C and about 100 °C and at a pressure from between about 12.8 psi (88.3 kPa) and about 551 psi 10 (3799 kPa)).

Near azeotrope compositions may also be formed that consist essentially of about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and about 39.0 mole percent to about 21.6 mole percent HF at temperatures ranging from about -25 °C to about 100 °C and at pressures 15 from about 12 psi (88 kPa) to about 550 psi (3792 kPa).

At atmospheric pressure, the boiling points of hydrofluoric acid and Z-HFC-1225ye are about 19.5 °C and -20 °C, respectively. The relative volatility at 72 psi (479 kPa) and 19.5 °C of HF and Z-HFC-1225ye was found to be nearly 1.0 as 34.4 mole percent HF and 65.6 mole 20 percent Z-HFC-1225ye was approached. The relative volatility at 288 psi (1987 kPa) and 70 °C was found to be nearly 1.0 as 35.2 mole percent HF and 64.8 mole percent Z-HFC-1225ye was approached. These data indicate that the use of conventional distillation procedures will not result in the separation of a substantially pure compound because of the low value 25 of relative volatility of the compounds.

To determine the relative volatility of HF with Z-HFC-1225ye, the so-called PTx Method was used. In this procedure, the total absolute pressure in a cell of known volume is measured at a constant temperature for various known binary compositions. Use of the PTx Method is 30 described in greater detail in "Phase Equilibrium in Process Design", Wiley-Interscience Publisher, 1970, written by Harold R. Null, on pages 124 to 126, the entire disclosure of which is hereby incorporated by reference. Samples of the vapor and liquid, or vapor and each of the two liquid phases under those conditions where two liquid phases exist, were 35 obtained and analyzed to verify their respective compositions.

These measurements can be reduced to equilibrium vapor and liquid compositions in the cell by an activity coefficient equation model, such as the Non-Random, Two-Liquid (NRTL) equation, to represent liquid

phase non-idealities. Use of an activity coefficient equation, such as the NRTL equation, is described in greater detail in "The Properties of Gases and Liquids", 4th Edition, publisher McGraw Hill, written by Reid, Prausnitz and Poling, on pages 241 to 387; and in "Phase Equilibria in Chemical 5 Engineering", published by Butterworth Publishers, 1985, written by Stanley M. Walas, pages 165 to 244; the entire disclosure of each of the previously identified references are hereby incorporated by reference.

Without wishing to be bound by any theory or explanation, it is believed that the NRTL equation can sufficiently predict whether or not 10 mixtures of HF and Z-HFC-1225ye behave in an ideal manner, and can sufficiently predict the relative volatilities of the components in such mixtures. Thus, while HF has a good relative volatility compared to Z-HFC-1225ye at low Z-HFC-1225ye concentrations, the relative volatility 15 becomes nearly 1.0 as 65.6 mole percent Z-HFC-1225ye was approached at 19.5 °C. This would make it impossible to separate Z-HFC-1225ye from HF by conventional distillation from such a mixture. Where the relative volatility approaches 1.0 defines the system as forming a near-azeotrope or azeotrope composition.

It has been found that azeotropes of Z-HFC-1225ye and HF 20 are formed at a variety of temperatures and pressures. Azeotrope compositions may be formed between 88 kPa (at a temperature of –25 °C) and 3799 kPa (at a temperature of 100 °C) said compositions consisting essentially of Z-HFC-1225ye and HF range from about 31.0 mole percent HF (and 69.0 mole percent Z-HFC-1225ye) to about 35.5 mole percent HF 25 (and 64.5 mole percent Z-HFC-1225ye). An azeotrope of HF and Z-HFC-1225ye has been found at 19.5 °C and 72.1 psi (497 kPa) consisting essentially of about 34.4 mole percent HF and about 65.6 mole percent Z-HFC-1225ye. An azeotrope of HF and Z-HFC-1225ye has also been found at 70 °C and 288 psi (1987 kPa) consisting essentially of about 35.2 30 mole percent HF and about 64.8 mole percent Z-HFC-1225ye. Based upon the above findings, azeotrope compositions at other temperatures and pressures may be calculated. It has been calculated that an azeotrope composition of about 31.0 mole percent HF and about 69.0 mole percent Z-HFC-1225ye can be formed at –25 °C and 12.8 psi (88.3 35 kPa) and an azeotrope composition of about 35.5 mole percent HF and about 64.5 mole percent Z-HFC-1225ye can be formed at 100 °C and 551 psi (3797 kPa). Accordingly, one aspect provides an azeotrope composition consisting essentially of from about 31.0 mole percent to

about 35.5 mole percent HF and from about 69.0 mole percent to about 64.5 mole percent Z-HFC-1225ye, said composition having a boiling point of about -25 °C at 12.8 psi (88.3 kPa) to about 100 °C at 551 psi (3797 kPa).

5 It has also been found that azeotrope or near-azeotrope compositions may be formed between about 12 psi (88 kPa) to about 550 psi (3792 kPa) at temperatures ranging from about -25 °C to about 100 °C, said compositions consisting essentially of about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and about 39.0 mole percent to 10 about 21.6 mole percent HF.

The HF/Z-HFC-1225ye azeotrope and near-azeotrope compositions are useful in processes to produce Z-HFC-1225ye and in processes to purify Z-HFC-1225ye. In fact, the HF/Z-HFC-1225ye azeotrope and near-azeotrope compositions may be useful in any process 15 that creates a composition containing Z-HFC-1225ye and HF.

Azeotropic distillation may be carried out to separate Z-HFC-1225ye from HFC-236ea, which is the starting material for production of Z-HFC-1225ye, by vapor phase dehydrofluorination. A two-column azeotropic distillation may then be carried out to separate the co-produced 20 HF from the desired Z-HFC-1225ye product. And another two-column azeotropic distillation may be carried out to separate HF from HFC-236ea. HF may be removed from the halogenated hydrocarbon components of the product mixture using, for example, standard aqueous solution scrubbing techniques. However, the production of substantial amounts of 25 scrubbing discharge can create aqueous waste disposal concerns. Thus, there remains a need for processes utilizing HF from such product mixtures.

While the initial mixture treated in accordance with the processes disclosed herein can be obtained from a variety of sources, 30 including by adding Z-HFC-1225ye to HF-containing compositions, an advantageous use of the present processes resides in treating the effluent mixtures from the preparation of Z-HFC-1225ye.

Z-HFC-1225ye may be prepared by the vapor phase dehydrofluorination of HFC-236ea by processes known in the art, such as 35 those described in US Patent Nos. 5,396,000, 5,679,875, 6,031,141, and 6,369,284, all of which are incorporated herein by reference.

Another aspect provides a process for the separation of Z-HFC-1225ye from HFC-236ea comprising: a) forming a mixture of Z-HFC-

1225ye, HFC-236ea, and hydrogen fluoride; and b) subjecting said mixture to a distillation step forming a column distillate composition comprising an azeotrope or near-azeotrope composition of HF and Z-HFC-1225ye essentially free of HFC-236ea.

5 As described herein, by "essentially free of HFC-236ea" is meant that the composition contains less than about 100 ppm (mole basis), preferably less than about 10 ppm and most preferably less than about 1 ppm, of HFC-236ea.

10 This azeotropic distillation takes advantage of the low boiling azeotrope composition formed by Z-HFC-1225ye and HF. The azeotrope composition boils at a temperature lower than the boiling point of either pure component and lower than the boiling point of HFC-236ea as well.

15 As stated previously, the mixture of Z-HFC-1225ye, HFC-236ea and HF may be formed by any practical means. Generally, the present process is particularly useful for the separation of Z-HFC-1225ye from the reaction mixture produced by the dehydrofluorination of HFC-236ea. HF is a co-product formed in this dehydrofluorination reaction. The reaction mixture produced may then be treated by the instant process to remove HFC-236ea. The Z-HFC-1225ye is taken overhead as the distillate from 20 the distillation column as an azeotrope or near-azeotrope composition of Z-HFC-1225ye with HF. The HFC-236ea is taken out of the bottom of the column as a bottoms composition and may contain some amount of HF, as well. The amount of HF in the HFC-236ea from the bottom of the distillation column may vary from about 35 mole percent to less than 1 part 25 per million (ppm, mole basis) depending on the manner in which the dehydrofluorination reaction is conducted. In fact, if the dehydrofluorination reaction is conducted in a manner to provide 50 percent conversion of the HFC-236ea and the reaction mixture leaving the reaction zone is fed directly to the distillation step, the HFC-236ea leaving 30 the bottom of the distillation process will contain about 34 mole percent HF.

35 In one embodiment, operating the present azeotropic distillation involves providing an excess of Z-HFC-1225ye to the distillation column. If the proper amount of Z-HFC-1225ye is fed to the column, then all the HF may be taken overhead as an azeotrope composition containing Z-HFC-1225ye and HF. Thus, the HFC-236ea removed from the column bottoms will be essentially free of HF.

As described herein, by "essentially free of HF" is meant that the composition contains less than about 100 ppm (mole basis), preferably less than about 10 ppm and most preferably less than about 1 ppm, of HF.

In the distillation step, the distillate exiting the distillation

5 column overhead comprising HF and Z-HFC-1225ye may be condensed using, for example, standard reflux condensers. At least a portion of this condensed stream may be returned to the top of the column as reflux. The ratio of the condensed material, which is returned to the top of the distillation column as reflux, to the material removed as distillate is

10 commonly referred to as the reflux ratio. The specific conditions which may be used for practicing the distillation step depend upon a number of parameters, such as the diameter of the distillation column, feed points, and the number of separation stages in the column, among others. The operating pressure of the distillation column may range from about 10 psi

15 pressure to about 200 psi (1380 kPa), normally about 20 psi to about 50 psi. The distillation column is typically operated at a pressure of about 25 psi (172 kPa) with a bottoms temperature of about 22°C and a tops temperature of about 8 °C. Normally, increasing the reflux ratio results in increased distillate stream purity, but generally the reflux ratio ranges

20 between 1/1 to 200/1. The temperature of the condenser, which is located adjacent to the top of the column, is normally sufficient to substantially fully condense the distillate that is exiting from the top of the column, or is that temperature required to achieve the desired reflux ratio by partial condensation.

25 The column distillate composition comprising an azeotrope or near-azeotrope composition of HF and Z-HFC-1225ye, essentially free of HFC-236ea, must be treated to remove the HF and provide pure Z-HFC-1225ye as product. This may be accomplished, for example, by neutralization or by a second distillation process, as described herein.

30 A further aspect provides a process for the separation of Z-HFC-1225ye from a mixture comprising an azeotrope or near-azeotrope composition of Z-HFC-1225ye and HF, said process comprising: a) subjecting said mixture to a first distillation step in which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as

35 a first distillate composition with a first bottoms composition being enriched in the other of said components (i) or (ii); and b) subjecting said first distillate composition to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched in

the first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same component which was enriched in the first distillate composition.

The process as described above takes advantage of the
5 change in azeotrope composition at different pressures to effectuate the separation of Z-HFC-1225ye and HF. The first distillation step may be carried out at high pressure relative to the second distillation step. At higher pressures, the HF/Z-HFC-1225ye azeotrope contains less Z-HFC-1225ye. Thus, this high-pressure distillation step produces an excess of
10 Z-HFC-1225ye, which boiling at a higher temperature than the azeotrope will exit the column as the bottoms as pure Z-HFC-1225ye. The first column distillate is then fed to a second distillation step operating at lower pressure. At the lower pressure, the HF/Z-HFC-1225ye azeotrope shifts to lower concentrations of HF. Therefore, in this second distillation step,
15 there exists an excess of HF. The excess HF, having a boiling point higher than the azeotrope, exits the second distillation column as the bottoms composition. The present process may be conducted in such as manner as to produce Z-HFC-1225ye essentially free of HF. Additionally, the present process may be conducted in such a manner as to produce
20 HF essentially free of Z-HFC-1225ye.

Alternatively, the first distillation step may be carried out at low pressure relative to the second distillation step. At lower pressures, the HF/Z-HFC-1225ye azeotrope contains less HF. Thus, this low-pressure distillation step produces an excess of HF, which boiling at a higher
25 temperature than the azeotrope will exit the column as the bottoms as pure HF. The first column distillate is then fed to a second distillation step operating at higher pressure. At the higher pressure, the HF/Z-HFC-1225ye azeotrope shifts to lower concentrations of Z-HFC-1225ye. Therefore, in this second distillation step, there exists an excess of Z-HFC-1225ye. The excess Z-HFC-1225ye, having a boiling point higher than the azeotrope, exits the second distillation column as the bottoms composition. The present process may be conducted in such as manner as to produce Z-HFC-1225ye essentially free of HF. Additionally, the present process may be conducted in such a manner as to produce HF
30 essentially free of Z-HFC-1225ye.
35

As described herein, by "essentially free of Z-HFC-1225ye" is meant that the composition contains less than about 100 ppm (mole

basis), preferably less than about 10 ppm and most preferably less than about 1 ppm, of Z-HFC-1225ye.

The endothermic dehydrofluorination reaction of HFC-236ea to produce Z-HFC-1225ye may be accomplished, for example, in a tubular reactor with catalyst in the tubes and with a heating medium on the shellside of the reactor. Alternatively, a heat carrier may be used to permit adiabatic operation. Either pure HFC-236ea or pure Z-HFC-1225ye, both being produced by the distillation processes described herein, may be recycled back to the reactor to serve as heat carrier. HFC-236ea would be a preferred heat carrier, as introduction of Z-HFC-1225ye to the dehydrofluorination reactor will result in a reduction in single-pass conversion of HFC-236ea.

In both the first and second distillation steps, the distillate exiting the distillation column overhead comprising HF and Z-HFC-1225ye may be condensed using, for example, standard reflux condensers. At least a portion of this condensed stream may be returned to the top of the column as reflux. The ratio of the condensed material, which is returned to the top of the distillation column as reflux, to the material removed as distillate is commonly referred to as the reflux ratio. The specific conditions which may be used for practicing the distillation step depend upon a number of parameters, such as the diameter of the distillation column, feed points, and the number of separation stages in the column, among others. The operating pressure of the high pressure (whether the high pressure distillation column is the first or second column) distillation column may range from about 50 psi (345 kPa) pressure to about 225 psi (1550 kPa), normally about 50 psi (345 kPa) to about 100 psi (690 kPa). The high pressure distillation column is typically operated at a pressure of about 75 psi (520 kPa) with a bottoms temperature of about 86 °C and a tops temperature of about 77 °C. Normally, increasing the reflux ratio results in increased distillate stream purity, but generally the reflux ratio ranges between 0.1/1 to 100/1. The temperature of the condenser, which is located adjacent to the top of the column, is normally sufficient to substantially fully condense the distillate that is exiting from the top of the column, or is that temperature required to achieve the desired reflux ratio by partial condensation.

The operating pressure of the low pressure (whether the low pressure distillation column is the first or second distillation column) distillation column may range from about 5 psi (34 kPa) pressure to about

50 psi (345 kPa), normally about 5 psi (34 kPa) to about 20 psi (138 kPa). The low pressure distillation column is typically operated at a pressure of about 17 psi (117 kPa) with a bottoms temperature of about 86 °C and a tops temperature of about 77 °C. Normally, increasing the reflux ratio
5 results in increased distillate stream purity, but generally the reflux ratio ranges between 0.1/1 to 50/1. The temperature of the condenser, which is located adjacent to the top of the column, is normally sufficient to substantially fully condense the distillate that is exiting from the top of the column, or is that temperature required to achieve the desired reflux ratio
10 by partial condensation.

Figure 1 is illustrative of one embodiment for practicing the present two-column distillation process for the separation of Z-HFC-1225ye and HF. Referring to Figure 1, a feed mixture derived from a prior azeotropic distillation comprising HF and Z-HFC-1225ye, wherein the
15 molar ratio of HF:Z-HFC-1225ye is about 0.48:1 (or lower), is passed through line (540) to a multiple stage distillation column (510), operating at a temperature of about 77 °C and a pressure of about 335 psi (2310 kPa). The bottoms of the distillation column (510), containing essentially pure Z-HFC-1225ye at a temperature of about 86 °C and a pressure of about 337
20 psi (2320 kPa) is removed from the bottom of column (510) through line (566). The distillate from column (510), containing the HF/Z-HFC-1225ye azeotrope (HF:Z-HFC-1225ye molar ratio is about 0.54:1) at a temperature of about 77 °C and a pressure of about 335 psi (2310 kPa) is removed from the top of column (510) and sent through line (570) to a
25 multiple stage distillation column (520). The distillate from column (520), containing the HF/Z-HFC-1225ye azeotrope (molar ratio is about 0.47:1) at a temperature of about -19 °C and a pressure of about 17 psi (117 kPa), is removed from column (520) through line (585) and is recycled back to column (510). The bottoms of column (520) containing essentially
30 pure HF at a temperature of about 26 °C and a pressure of about 19 psi (131 kPa) is removed through line (586).

U. S. Patent No. 6,388,147, incorporated herein by reference, discloses azeotrope and near-azeotrope compositions consisting essentially of HFC-236ea and HF ranging from about 31 mole percent to
35 about 60 mole percent HFC-236ea and from about 69 mole percent to about 40 mole percent HF. The existence of this azeotrope allows the separation of HFC-236ea from HF to be accomplished in a similar manner

to the separation of Z-HFC-1225ye from HF, that being a two-column azeotropic distillation.

A further aspect provides a process for the separation of HFC-236ea from a mixture comprising an azeotrope or near-azeotrope

5 composition of HFC-236ea and HF, said process comprising: a) subjecting said mixture to a first distillation step in which a composition enriched in either (i) hydrogen fluoride or (ii) HFC-236ea is removed as a first distillate composition with a first bottoms composition being enriched in the other of said components (i) or (ii); and b) subjecting said first distillate composition

10 to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched as first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same component which was enriched in the first distillate composition.

15 Similar to the previously described two-column azeotropic distillation, for both the first and second distillation steps, the distillate exiting the distillation column overhead comprising HF and HFC-236ea may be condensed using, for example, standard reflux condensers. At least a portion of this condensed stream may be returned to the top of the

20 column as reflux. The ratio of the condensed material, which is returned to the top of the distillation column as reflux, to the material removed as distillate is commonly referred to as the reflux ratio. The specific conditions which may be used for practicing the distillation step depend upon a number of parameters, such as the diameter of the distillation

25 column, feed points, and the number of separation stages in the column, among others. The operating pressure of the low pressure (whether the low pressure distillation column is the first or second column) distillation column may range from about 5 psi (34 kPa) pressure to about 50 psi (345 kPa), normally about 10 psi (70 kPa) to about 30 psi (209 kPa). The low pressure distillation column is typically operated at a pressure of about 25 psi (172 kPa) with a bottoms temperature of about 12 °C and a tops temperature of about 22 °C. Normally, increasing the reflux ratio results in increased distillate stream purity, but generally the reflux ratio ranges between 0.1/1 to 50/1. The temperature of the condenser, which is

30 located adjacent to the top of the column, is normally sufficient to substantially fully condense the distillate that is exiting from the top of the column, or is that temperature required to achieve the desired reflux ratio by partial condensation.

35

The operating pressure of the high pressure (whether the high pressure distillation column is the first or second column) distillation column may range from about 100 psi (690 kPa) pressure to about 300 psi (2070 kPa), normally about 200 psi (1380 kPa) to about 300 psi (2070 kPa). The high pressure distillation column is typically operated at a pressure of about 265 psi (1830 kPa) with a bottoms temperature of about 125 °C and a tops temperature of about 92 °C. Normally, increasing the reflux ratio results in increased distillate stream purity, but generally the reflux ratio ranges between 0.1/1 to 50/1. The temperature of the condenser, which is located adjacent to the top of the column, is normally sufficient to substantially fully condense the distillate that is exiting from the top of the column, or is that temperature required to achieve the desired reflux ratio by partial condensation.

Figure 1 is also illustrative of one embodiment for practicing the present two-column distillation process for separation of HFC-236ea and HF. Referring to Figure 1, a feed mixture derived from a prior azeotropic distillation comprising HFC-236ea and HF, wherein the molar ratio of HF:HFC-236ea is about 0.52:1 (or lower), is passed through line (540) to a multiple stage distillation column (510), operating at a temperature of about 12 °C and a pressure of about 25 psi (172 kPa). The bottoms of the distillation column (510), containing essentially pure HFC-236ea at a temperature of about 22 °C and a pressure of about 27 psi (186 kPa) is removed from the bottom of column (510) through line (566). The distillate from column (510), containing the HF/HFC-236ea azeotrope (HF:HFC-236ea molar ratio is about 1.33:1) at a temperature of about 12 °C and a pressure of about 25 psi (172 kPa) is removed from the top of column (510) and sent through line (570) to a multiple stage distillation column (520). The distillate from column (520), containing the HF/HFC-236ea azeotrope (molar ratio is about 1:1) at a temperature of about 92 °C and a pressure of about 265 psi (1830 kPa), is removed from column (520) through line (585) and is recycled back to column (510). The bottoms of column (520) containing essentially pure HF at a temperature of about 125 °C and a pressure of about 267 psi (1840 kPa) is removed through line (586).

35 A further aspect provides a process for the purification of Z-HFC-1225ye from a mixture of Z-HFC-1225ye, HFC-236ea, and HF, said process comprising: a) subjecting said mixture to a first distillation step to form a first distillate comprising an azeotrope or near-azeotrope

composition containing Z-HFC-1225ye and HF and a first bottoms comprising HFC-236ea; b) subjecting said first distillate to a second distillation step from which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate

5 composition with a second bottoms composition being enriched in the other of said components (i) or (ii); and c) subjecting said second distillate composition to a third distillation step conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (b) is removed in a third distillate

10 composition with a third bottoms composition enriched in the same component that was enriched in the second distillate composition.

A further aspect provides a process to produce Z-HFC-1225ye comprising: a) feeding HFC-236ea to a reaction zone for dehydrofluorination to form a reaction product composition comprising Z-15 HFC-1225ye, unreacted HFC-236ea and hydrogen fluoride; b) subjecting said reaction product composition to a first distillation step to form a first distillate composition comprising an azeotrope or near-azeotrope composition containing Z-HFC-1225ye and HF and a first bottoms composition comprising HFC-236ea; c) subjecting said first distillate

20 composition to a second distillation step from which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate composition with a second bottoms composition being enriched in the other of said components (i) or (ii); and d) subjecting said second distillate composition to a third distillation step conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (c) is removed in a third distillate composition with a third bottoms composition enriched in the same component that was enriched in the second distillate composition.

25 Optionally, the process may further comprise recycling at least some portion of said first bottoms composition (HFC-236ea) to said reaction zone. Optionally, the process may further comprise recycling at least some portion of said second bottoms composition or third bottoms composition to said reaction zone. Optionally, the process may further comprise recycling at least some portion of said second bottoms

30 composition or third bottoms composition to said first distillation step. Optionally, the process may further comprise recovering at least some portion of said second bottoms composition or third bottoms composition as Z-HFC-1225ye essentially free of HFC-236ea and HF.

35

As described herein, by "essentially free of HFC236ea and HF" is meant that the composition contains less than about 100 ppm (mole basis), preferably less than about 10 ppm and most preferably less than about 1 ppm, of each of HFC-236ea and HF.

5 The reaction zone for the dehydrofluorination may comprise a flow reactor preferably containing a fixed bed of dehydrofluorination catalyst. The process equipment for all the processes disclosed herein and the associated feed lines, effluent lines and associated units may be constructed of materials resistant to hydrogen fluoride. Typical materials 10 of construction, well-known to the art, include stainless steels, in particular of the austenitic type, and the well-known high nickel alloys such as Monel® nickel-copper alloys, Hastelloy® nickel based alloys and Inconel® nickel-chromium alloys.

Figure 2 is illustrative of one embodiment for practicing the 15 present process for production of Z-HFC-1225ye. HFC-236ea is fed through line (360) to reactor (320). The reactor effluent mixture comprising HF, HFC-236ea and Z-HFC-1225ye, exits the reactor through line (450) and is fed to a multiple stage distillation column (410). The bottoms of distillation column (410), containing essentially pure HFC- 20 236ea is removed from the bottom of column (410) through line (466) and may be recycled back to the reactor. The distillate from column (410), containing the HF/Z-HFC-1225ye azeotrope is removed from the top of column (410) and is sent through line (540) to a second multiple stage distillation column (510). The bottoms from column (510), which is 25 essentially pure Z-HFC-1225ye, is removed from column (510) through line (566) and may be recycled back to the reactor (320) as a heat carrier. The distillate from column (510), containing the HF/Z-HFC-1225ye azeotrope, is fed through line (570) to a third multiple stage distillation column (520). The distillate from column (520) comprising HF/Z-HFC- 30 1225ye is removed through line (585) and may be recycled to the second distillation column (510). The bottoms composition from column (520) is essentially pure HF and is removed from column (520) through line (586). The essentially pure HF product from this process may be used in any manner appropriate such as feeding to a fluorination reactor for production 35 of a fluorocarbon compound, or may be neutralized for disposal.

While not illustrated in the figures, it is understood that certain pieces of process equipment may be used in the processes described herein, for optimization. For instance, pumps, heaters or coolers may be

used where appropriate. As an example, it is desirable to have the feed to a distillation column at the same temperature as the point in the column to which it is fed. Therefore, heating or cooling of the process stream may be necessary to match the temperature.

5 Without further elaboration, it is believed that one skilled in the art can, using the description herein, utilize the disclosed compositions and processes to their fullest extent. The following exemplary embodiments are, therefore, to be construed as merely illustrative, and do not constrain the remainder of the disclosure in any way whatsoever.

10

EXAMPLES

EXAMPLE 1

15 Dehydrofluorination of HFC-236ea to HFC-1225ye (E and Z isomers) over carbonaceous catalyst

To a Hastelloy nickel alloy reactor (1.0" OD X 0.854" ID X 9.5" L) was charged 14.32 g (25 mL) of spherical (8 mesh) three dimensional matrix porous carbonaceous material prepared substantially as described in U.S. Patent No. 4,978,649, incorporated herein by reference. The 20 packed portion of the reactor was heated by a 5" X 1" ceramic band heater clamped to the outside of the reactor. A thermocouple, positioned between the reactor wall and the heater measured the reactor temperature. After charging the reactor with the carbonaceous material, nitrogen (10 mL/min) was passed through the reactor and the temperature 25 was raised to 200 °C during a period of one hour and maintained at this temperature for an additional 4 hours. The reactor temperature was then raised to the desired operating temperature and a flow of HFC-236ea and nitrogen was started through the reactor.

30 A portion of the total reactor effluent was sampled on-line for organic product analysis using a gas chromatograph equipped with a mass selective detector (GC-MS). The bulk of the reactor effluent containing organic products and also inorganic acid, such as HF, was treated with aqueous caustic for neutralization.

35 The results obtained in GC mole percent are summarized in Table 1.

TABLE 1

Reactor Temp. (°C)	236ea feed (mL/min)	N ₂ feed (mL/min)	Mole Percent			
			Z-1225ye	E-1225ye	236ea	Unknowns
200	10	20	0.03	ND	99.97	ND
250	10	20	0.2	0.03	99.8	ND
300	10	20	1.4	0.22	98.4	0.01
350	10	20	5.4	0.96	93.1	0.5
400	10	20	38.1	9.0	51.7	1.1
400	10	10	37.9	8.7	51.6	1.8
400	10	5	42.6	9.5	46.7	1.2
400	10	40	13.2	2.5	71.6	12.7

ND = not detected

EXAMPLE 2

5 Phase Studies of mixtures of HF and Z-HFC-1225ye

A phase study was performed for a composition consisting essentially of Z-HFC-1225ye and HF, wherein the composition was varied and the vapor pressures were measured at both 19.5 °C and 70 °C. Based upon the data from the phase studies, azeotrope compositions at 10 other temperature and pressures have been calculated.

Table 2 provides a compilation of experimental and calculated azeotrope compositions for HF and Z-HFC-1225ye at specified temperatures and pressures.

15

TABLE 2

Temperature, °C	Pressure, psi (kPa)	Mole % HF	Mole % Z-HFC-1225ye
-25	12.8 (88.3)	31.0	69.0
-20	16.7 (115)	31.7	68.3
-10	24.7 (170)	32.6	67.4
0	36.5 (252)	33.4	66.6
19.5	72.1 (497)	34.4	65.6
25	85.8 (592)	34.5	65.5
50	175 (1208)	35.0	65.0

75	323 (2226)	35.2	64.8
77	335 (2308)	35.2	64.8
80	361 (2490)	35.3	64.7
85	403 (2777)	35.3	64.7
90	448 (3090)	35.4	64.6
95	497 (3429)	35.4	64.6
100	551 (3799)	35.5	64.5

EXAMPLE 3

Dew point and bubble point vapor pressures

The dew point and bubble point vapor pressures for 5 compositions disclosed herein were calculated from measured and calculated thermodynamic properties. The near-azeotrope range is indicated by the minimum and maximum concentration of Z-HFC-1225ye (mole percent, mol%) for which the difference in dew point and bubble point pressures is less than or equal to 3% (based upon bubble point 10 pressure). The results are summarized in Table 3.

TABLE 3

Temperature, ° C	Azeotrope composition, mol% Z-HFC-1225ye	Near azeotrope compositions, mol% Z-HFC-1225ye	
		Minimum	Maximum
-25	69.0	62.6	78.4
70	64.8	61.2	73.8
100	64.5	61.0	74.0

EXAMPLE 4

15 Azeotropic distillation for separation of Z-HFC-1225ye from HFC-236ea

A mixture of HF, Z-HFC-1225ye, and HFC-236ea is fed to a distillation column for the purpose of purification of the Z-HFC-1225ye. The data in Table 4 were obtained by calculation using measured and calculated thermodynamic properties.

TABLE 4

Component or variable	Column feed	Column overhead (distillate)	Column bottoms
HFC-236ea, mol %	33.4	1 ppm	66.0
Z-HFC-1225ye, mol %	33.3	67.4	180 ppm
HF, mol %	33.3	32.6	34.0
Temp, °C	--	-10.0	13.8
Pressure, psi (kPa)	--	24.7 (170)	26.7 (184)

EXAMPLE 5Azeotropic distillation for separation of Z-HFC-1225ye from HFC-236ea

5 A mixture of HF, Z-HFC-1225ye, and HFC-236ea is fed to a distillation column for the purpose of purification of the Z-HFC-1225ye. The data in Table 5 were obtained by calculation using measured and calculated thermodynamic properties.

10

TABLE 5

Component or variable	Column feed	Column overhead (distillate)	Column bottoms
HFC-236ea, mol %	24.4	1 ppm	99.99
Z-HFC-1225ye, mol %	51.2	67.7	68 ppm
HF, mol %	24.4	32.3	trace
Temp, °C	--	-8.3	21.8
Pressure, psi (kPa)	--	24.7 (170)	26.7 (184)

EXAMPLE 6Azeotropic distillation for separation of Z-HFC-1225ye from HFC-236ea

15 A mixture of HF, Z-HFC-1225ye, and HFC-236ea is fed to a distillation column for the purpose of purification of the Z-HFC-1225ye. The data in Table 6 were obtained by calculation using measured and calculated thermodynamic properties.

TABLE 6

Compound or variable	Column feed	Column overhead (distillate)	Column bottoms
HFC-236ea, mol %	27.3	1 ppm	99.99
Z-HFC-1225ye, mol %	63.6	87.5	114 ppm
HF, mol %	9.1	12.5	trace
Temp, °C	--	-7.7	21.8
Pressure, psi (kPa)	--	24.7 (170)	26.7 (184)

EXAMPLE 7Azeotropic distillation for separation of Z-HFC-1225ye from HFC-236ea

5 A mixture of HF, Z-HFC-1225ye, and HFC-236ea is fed to a distillation column for the purpose of purification of the Z-HFC-1225ye. The data in Table 7 were obtained by calculation using measured and calculated thermodynamic properties.

10

TABLE 7

Compound or variable	Column feed	Column overhead (distillate)	Column bottoms
HFC-236ea, mol %	17.6	1 ppm	99.99
Z-HFC-1225ye, mol %	76.5	92.9	91 ppm
HF, mol %	5.9	7.1	trace
Temp, °C	--	-7.4	21.8
Pressure, psi (kPa)	--	24.7 (170)	26.7 (184)

EXAMPLE 8Two-column azeotropic distillation for separation of Z-HFC-1225ye from HF

15

A mixture of HF and Z-HFC-1225ye is fed to a distillation process for the purpose of purification of the Z-HFC-1225ye. The data in Table 8 were obtained by calculation using measured and calculated thermodynamic properties. The numbers at the top of the columns refer to Figure 1.

TABLE 8

Compound or variable	540 Feed Mixture	570 Column (510) distillate	566 HFC-1225ye product	585 Column (520) distillate	586 HF product
HF, mol %	32.1	35.0	trace	32.0	100
Z-HFC-1225ye, mol %	67.9	65.0	100	68.0	--
Temp., °C	--	76.6	86.0	-19.2	26.2
Pres., psi (kPa)	--	334.7 (2307)	336.7 (2321)	16.7 (115)	18.7 (129)

EXAMPLE 9Two-column azeotropic distillation for separation of Z-HFC-1225ye from HF

5

A mixture of HF and Z-HFC-1225ye is fed to a distillation process for the purpose of purification of the Z-HFC-1225ye. The data in Table 9 were obtained by calculation using measured and calculated thermodynamic properties. The numbers at the top of the columns refer to 10 Figure 1.

TABLE 9

Compound or variable	540 Feed Mixture	570 Column (510) distillate	566 Z-HFC-1225ye product	585 Column (520) distillate	586 HF product
HF, mol %	26.7	35.0	trace	32.0	100
Z-HFC-1225ye, mol %	73.3	65.0	100	68.0	--
Temp., °C	--	76.6	86.0	-19.2	26.2
Pres., psi (kPa)	--	334.7 (2307)	336.7 (2321)	16.7 (115)	18.7 (129)

EXAMPLE 10**Two-column azeotropic distillation for separation of Z-HFC-1225ye from HF**

5 A mixture of HF and Z-HFC-1225ye is fed to a distillation process for the purpose of purification of the Z-HFC-1225ye. The data in Table 10 were obtained by calculation using measured and calculated thermodynamic properties. The numbers at the top of the columns refer to Figure 1.

TABLE 10

Compound or variable	540 Feed Mixture	570 Column (510) distillate	566 Z-HFC-1225ye product	585 Column (520) distillate	586 HF product
HF, mol %	22.2	35.0	trace	32.0	100
Z-HFC-1225ye, mol %	77.8	65.0	100	68.0	--
Temp., °C	--	76.6	86.0	-19.2	26.2
Pres., psi (kPa)	--	334.7 (2307)	336.7 (2321)	16.7 (115)	18.7 (129)

10

EXAMPLE 11**Two-column azeotropic distillation for separation of HFC-236ea from HF**

15 A mixture of HF and HFC-236ea is fed to a distillation process for the purpose of purification of the HFC-236ea. The data in Table 11 were obtained by calculation using measured and calculated thermodynamic properties. The numbers at the top of the columns refer to Figure 1.

TABLE 11

Compound or variable	540 Feed Mixture	570 Column (510) distillate	566 HFC-236ea product	585 Column (520) distillate	586 HF product
HF, mol %	34.0	57.0	--	50.0	100
HFC-236ea, mol %	66.0	43.0	100	50.0	--
Temp., °C	--	11.5	21.8	92.4	125
Pres., psi (kPa)	--	24.7 (170)	26.7 (184)	264.7 (1825)	266.7 (1839)

CLAIM(S)

What is claimed is :

1. An azeotrope or near-azeotrope composition comprising Z-HFC-1225ye and hydrogen fluoride.
2. The azeotrope or near-azeotrope composition of claim 1 comprising Z-HFC-1225ye and an effective amount of hydrogen fluoride.
3. The azeotrope or near-azeotrope composition of claim 1 comprising from about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and hydrogen fluoride.
4. The azeotrope or near-azeotrope composition of claim 1 comprising from about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and from about 39.0 mole percent to about 21.6 mole percent hydrogen fluoride.
5. The azeotrope or near-azeotrope composition of claim 1 comprising from about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and from about 39.0 mole percent to about 21.6 mole percent hydrogen fluoride, wherein the vapor pressure is from about 12 psi (88 kPa) to about 550 psi (3792 kPa) at a temperature of from about -25 °C to about 100 °C.
6. The azeotrope or near-azeotrope composition of claim 1 wherein said composition consists essentially of from about 61.0 mole percent to about 78.4 mole percent Z-HFC-1225ye and from about 39.0 mole percent to about 21.6 mole percent hydrogen fluoride, wherein the vapor pressure is from about 12 psi (88 kPa) to about 550 psi (3792 kPa) at a temperature of from about -25 °C to about 100 °C.
7. The azeotrope composition of claim 1 comprising from about 64.5 mole percent to about 69.0 mole percent Z-HFC-1225ye and from about 35.5 mole percent to about 31.0 mole percent hydrogen fluoride, wherein the vapor pressure is from about 12.8 psi (88.3 kPa) to about 551 psi (3797 kPa) at a temperature of from about -25 °C to about 100 °C.

8. The azeotrope composition of claim 1 wherein said composition consists essentially of from about 64.5 mole percent to about 69.0 mole percent Z-HFC-1225ye and from about 35.5 mole percent to about 31.0 mole percent hydrogen fluoride, wherein the vapor pressure is from about 12.8 psi (88.3 kPa) to about 551 psi (3797 kPa) at a temperature of from about -25 °C to about 100 °C.
9. The azeotrope or near-azeotrope composition of claim 1, wherein said composition is characterized by a difference between dew point pressure and bubble point pressure that is less than or equal to 3 %, based upon bubble point pressure.
10. A process for the separation of Z-HFC-1225ye from HFC-236ea comprising:
 - (a) forming a mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride; and
 - (b) subjecting said mixture to a distillation step forming a column distillate composition comprising an azeotrope or near-azeotrope composition of hydrogen fluoride and Z-HFC-1225ye essentially free of HFC-236ea.
11. The process of claim 10 wherein said distillation step further forms a column-bottoms composition comprising HFC-236ea.
12. The process of claim 11 wherein said column-bottoms composition comprises HFC-236ea essentially free of hydrogen fluoride.
13. The process of claim 10 wherein said mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride comprises equimolar quantities of each component.
14. The process of claim 10 wherein said mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride comprises excess Z-HFC-1225ye.

15. A process for the separation of Z-HFC-1225ye from a mixture comprising an azeotrope or near-azeotrope composition of Z-HFC-1225ye and hydrogen fluoride, said process comprising:
 - a) subjecting said mixture to a first distillation step in which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a first distillate composition with a first bottoms composition being enriched in the other of said components (i) or (ii); and
 - b) subjecting said first distillate composition to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched as first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same component which was enriched in the first distillate composition.
16. The process of claim 15 wherein said first bottoms composition comprises Z-HFC-1225ye essentially free of hydrogen fluoride.
17. The process of claim 15 wherein said second bottoms composition comprises hydrogen fluoride essentially free of Z-HFC-1225ye.
18. The process of claim 15 wherein said first distillation step is carried out at a pressure greater than the pressure of the second distillation step.
19. The process of claim 15 wherein said mixture consists essentially of Z-HFC-1225ye in combination with an effective amount of hydrogen fluoride to form an azeotrope or near-azeotrope composition with hydrogen fluoride, said azeotrope or near-azeotrope composition containing from about 64.5 mole percent to about 69.0 mole percent Z-HFC-1225ye.
20. A process for the purification of Z-HFC-1225ye from a mixture of Z-HFC-1225ye, HFC-236ea, and hydrogen fluoride, said process comprising:
 - a) subjecting said mixture to a first distillation step to form a first distillate comprising an azeotrope or near-azeotrope composition

containing Z-HFC-1225ye and hydrogen fluoride and a first bottoms comprising HFC-236ea;

- b) subjecting said first distillate to a second distillation step from which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate composition with a second bottoms composition being enriched in the other of said components (i) or (ii); and
- c) subjecting said second distillate composition to a third distillation step conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (b) is removed in a third distillate composition with a third bottoms composition enriched in the same component that was enriched in the second distillate composition.

21. A process to produce Z-HFC-1225ye comprising:

- a) feeding HFC-236ea to a reaction zone for dehydrofluorination to form a reaction product composition comprising Z-HFC-1225ye, unreacted HFC-236ea and hydrogen fluoride;
- b) subjecting said reaction product composition to a first distillation step to form a first distillate composition comprising an azeotrope or near-azeotrope composition containing Z-HFC-1225ye and hydrogen fluoride and a first bottoms composition comprising HFC-236ea;
- c) subjecting said first distillate composition to a second distillation step from which a composition enriched in either (i) hydrogen fluoride or (ii) Z-HFC-1225ye is removed as a second distillate composition with a second bottoms composition being enriched in the other of said components (i) or (ii); and
- d) subjecting said second distillate composition to a third distillation step conducted at a different pressure than the second distillation step in which the component enriched in the second bottoms composition in (c) is removed in a third distillate composition with a third bottoms composition enriched in the same component that was enriched in the second distillate composition.

22. The process of claim 21, further comprising recycling at least some portion of said first bottoms composition to said reaction zone.

23. The process of claim 21, further comprising recycling at least some portion of said second bottoms composition or third bottoms composition to said reaction zone.
24. The process of claim 21, further comprising recovering at least some portion of said second bottoms composition or third bottoms composition as Z-HFC-1225ye essentially free of HFC-236ea and hydrogen fluoride.
25. The process of claim 21, further comprising recycling at least some portion of said second bottoms composition or third bottoms composition to said first distillation step.
26. A process for the separation of HFC-236ea from a mixture comprising an azeotrope or near-azeotrope composition of HFC-236ea and hydrogen fluoride, said process comprising:
 - a) subjecting said mixture to a first distillation step in which a composition enriched in either (i) hydrogen fluoride or (ii) HFC-236ea is removed as a first distillate composition with a first bottoms composition being enriched in the other of said components (i) or (ii); and
 - b) subjecting said first distillate composition to a second distillation step conducted at a different pressure than the first distillation step in which the component enriched as first bottoms composition in (a) is removed in a second distillate composition with a second bottoms composition enriched in the same component which was enriched in the first distillate composition.
27. The process of claim 26 wherein said first bottoms composition comprises HFC-236ea essentially free of hydrogen fluoride.
28. The process of claim 26 wherein said second bottoms composition comprises hydrogen fluoride essentially free of HFC-236ea.
29. The process of claim 26 wherein said second distillation step is carried out at a pressure greater than the pressure of the first distillation step.

1/1

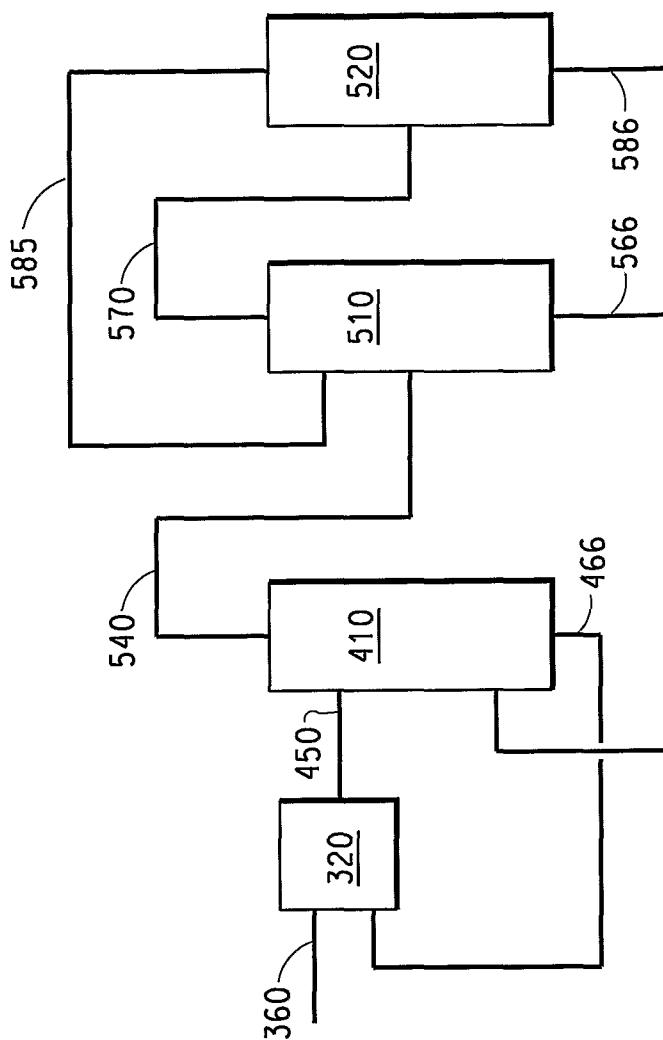


FIG. 2

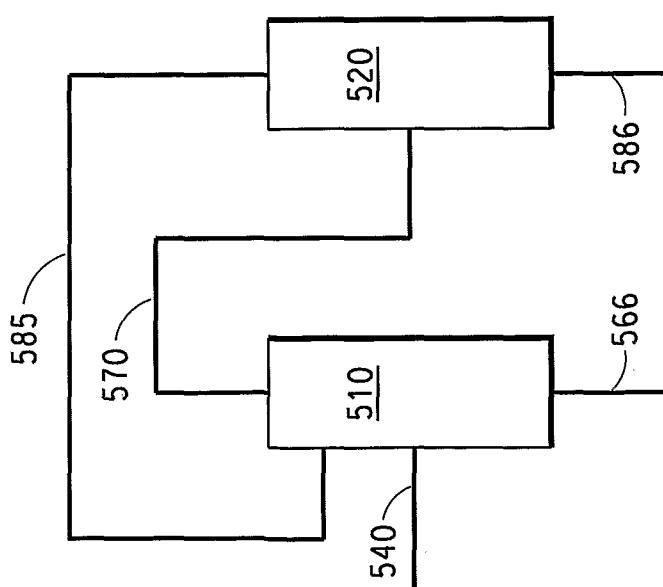


FIG. 1