

(19)



(11)

EP 3 080 346 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.05.2019 Bulletin 2019/22

(51) Int Cl.:
D04H 11/08 (2006.01) **E01C 13/08** (2006.01)
D05C 17/02 (2006.01) **D06N 7/00** (2006.01)

(21) Application number: **14824790.1**

(86) International application number:
PCT/EP2014/077092

(22) Date of filing: **09.12.2014**

(87) International publication number:
WO 2015/086626 (18.06.2015 Gazette 2015/24)

(54) TUFTED STRUCTURE FOR LANDSCAPE AND SPORTS

KUNSTRASEN FÜR LANDSCHAFT UND SPORT

GAZON ARTIFICIEL POUR PAYSAGE ET SPORT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.12.2013 EP 13197271**
13.12.2013 US 201314105298

(43) Date of publication of application:
19.10.2016 Bulletin 2016/42

(73) Proprietor: **BFS Europe NV**
9770 Kruisem (BE)

(72) Inventors:
• **VERLEYEN, Marc**
B-8531 Hulste (BE)
• **BEAUPREZ, Mathijs**
B-9040 Sint-Amandsberg (BE)

(74) Representative: **IPLodge bvba**
Technologielaan 9
3001 Heverlee (BE)

(56) References cited:
EP-A2- 1 988 204 WO-A1-98/40559
DE-A1- 2 452 136 DE-U1-202005 013 023
US-A- 3 975 224

EP 3 080 346 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The present invention relates to surfaces simulating natural grass and, more specifically, to an artificial turf, imitating the volume effect and density of natural grass and manufacturing such turf.

Background of the Invention

[0002] Artificial turf, also often referred to as synthetic grass, is a surface of synthetic fibers made to look like natural grass. It is most often used in sports applications. However, it is now being used on residential lawns and landscaping as well. Artificial turf stands up to heavy use and requires no irrigation or trimming. Domed, covered, and partially covered stadiums may require artificial turf because of the difficulty of getting grass enough sunlight to stay healthy. But, artificial turfs currently available still fail to provide the excellent shock absorbing properties of natural grass surfaces and also fall short in mimicking the volume effect of natural grass.

[0003] Today's generation artificial turfs are typically made from UV-enhanced polypropylene fiber or polyethylene fiber that is tufted into a woven synthetic primary backing that receives a secondary backing in form of a coating or laminate on the opposite side of the face fibers to give the turf dimensional stability and to aid fiber binding.

[0004] When installed, the turf's face (i.e., the grass "blades") is generally given a layer of sand to augment water drainage and/or a layer of cryogenic rubber granules to help keeping the tufts more vertically oriented and to provide shock-absorbency.

The infill typically provides ballast and structure for the artificial turf, helping the fibers to stand and to provide a "cushion" effect when stepping over the turf. This protects the roots of the tuft fibers.

[0005] Currently, non-infill artificial turf refers to those artificial turf models with short pile height, narrow gauge (distance between rows), and high stitch rate. Artificial turfs that are used without such infill are typically made from shorter, denser polyethylene fibers that include even shorter crimped fibers to keep the tufts resembling grass blades upright. Some non-infill systems provide an underlay under the turf to provide cushioning.

[0006] Due to an ever increasing number of residential and commercial applications of artificial turf, artificial turf with improved properties that more and more resemble natural grass is sought after, as illustrated in the following examples.

[0007] GB 1,154,842 discloses raised tufted, bonded fibrous structures. A fibrous web of desired weight and structure was placed on top of another such web and the assembled fibrous structure then needle punched in a conventional single bed needle loom. On passage through the needle loom, fibres from one fibrous web are

carried by the needles through the other fibrous web as the foundation layer and the needle penetration is controlled so as to ensure that the aligned fibres pass through the foundation layer and project beyond its surface as fibre tufts.

[0008] WO 2001/37657 A1 discloses a vertically draining, rubber filled synthetic turf. The vertically draining synthetic turf comprises a porous geotextile membrane positioned between an open graded aggregate layer and a sand layer. The synthetic turf also includes a pile fabric comprising a plurality of pile elements tufted to a woven or non-woven backing above the open graded aggregate layer. An infill layer consisting of resilient particles, preferably a mixture of high and low density rubber, is interspersed among the pile elements of the pile fabric. The backing layer may be solely a non-woven, in a single layer or in multiple layers. A suitable non-woven, dimensionally stable material is a polyester/nylon blend, spun-bonded, non-woven material.

[0009] WO 2012/125513 A1 discloses a synthetic ground cover system for erosion control to be placed atop the ground, which includes a synthetic grass comprising a composite of one or more geotextiles tufted with synthetic yarns. The synthetic ground cover also includes a sand/soil infill ballast applied to the synthetic grass and a binding agent applied to the sand/soil infill to stabilize the sand/soil infill against high velocity water shear forces. The system includes a synthetic turf which includes a backing and synthetic turf blades secured to the backing. The synthetic grass blades are tufted into the substrate or backing comprising a synthetic woven or non-woven fabric. The backing can be a single ply backing or can be a multi-ply backing, as desired. A filter can be secured to the substrate to reinforce the substrate and better secure the synthetic grass blades. Preferably, the at least one filter fabric may also comprise non-woven synthetic fabric.

[0010] As more artificial turf and less natural grass is used to cover the ground for an increasing number of applications, it is increasingly important to provide artificial turf that is eco-friendly.

Summary of the Invention

[0011] From the foregoing, it can be seen that there is a need for a tufted structure that resembles more closely natural grass.

[0012] The present invention seeks to provide a tufted structure forming an artificial turf for use in landscape and sports applications, that imitates more closely the root zone, the volume effect, and density of natural grass and that has an improved wear and drainage property.

[0013] It is an advantage of embodiments of the present invention to provide the artificial turf with a bounded layer of fibers, in particular a mechanically bounded layer of fibers, functioning as the root zone of natural grass that assists the pile yarn of the tufts to stand and that protects the bending points of the tufts such that the

application of an infill can be eliminated. The bounded layer of fibers allows moving of the fiber so that compaction of the surface, thus hardening of the surface will be extensively be reduced.

[0014] It is another advantage of embodiments of the present invention that the tufted structure can be made from materials that are entirely recyclable thereby reducing the amount of waste that presently has to be disposed of in landfills.

[0015] It is still another advantage of embodiments of the present invention to enable surface water to drain easily in all directions to the ground underneath the tufted structure when installed as an artificial turf.

[0016] It is yet another advantage of embodiments of the present invention to provide artificial turf with a bounded layer of fibers for equalizing for uneven/rocky soils.

[0017] It is yet another advantage of embodiments of the present invention to provide a tufted structure with a bounded layer of fibers that has shock absorbing properties and, thus, contributes to a more natural feeling of the artificial turf.

[0018] According to an aspect of the present invention, there is provided a tufted structure forming an artificial turf for use in landscape and sports applications according to claim 1. According to an aspect of the present invention, there is provided a tufted structure forming an artificial turf for use in landscape and sports applications according to claim 2.

[0019] The tufted structure forms an artificial turf. By providing a bounded layer of fibers, such as a mechanically bounded layer of fibers, which may be formed as a non-woven matting, surface water can drain easily to the soil underneath the artificial turf once installed. As a result, the artificial turf in accordance with advantageous embodiments of the present invention dries quickly provided drainage of the subsoil. By using a mixture of natural and, therefore, moisture absorbent fibers and synthetic fibers, the water holding capacity of the artificial turf can be improved compared to known prior art products.

[0020] According to preferred embodiments of the present invention, decrease in density occurs at a constant rate. As a result, the layer provides structural support for the tufts and shock-absorbance to contribute to a more natural feeling of the artificial turf.

[0021] According to preferred embodiments of the present invention, the bounded layer of fibers includes a lower layer and an upper layer, the lower layer being positioned at the bottom of the bounded layer of fibers and the upper layer being positioned on top of the lower layer, and the upper layer having a higher fiber coarseness than the lower layer.

[0022] The terms "upper" and "top", on the one hand, and "lower" and "bottom", on the other hand, are used herein to designate sides or portions of the artificial turf with reference to their relative positioning when the turf is deployed for normal use on a ground surface. Thus, "upper" and "top" refer to portions at or near the side from

which free ends of the tufts stick out; and "lower" and "bottom" refer to portions at or near the opposite side.

[0023] This embodiment also provides structural support for the tufts and shock-absorbance to contribute to a natural feeling of the artificial turf, while allowing an efficient manufacturing process starting from two homogeneous non-woven mats having different fiber coarseness.

[0024] According to preferred embodiments of the present invention, the lower layer provides structural support for the pile yarn.

[0025] According to preferred embodiments of the present invention, the upper layer acts as a shock-absorbing layer and contributes to a natural feeling of the artificial turf.

[0026] According to preferred embodiments of the present invention, the lower layer is formed by fibers that are more flexible and form a denser structure than fibers forming the upper layer, the fibers of the lower layer having a smaller linear mass density than fibers forming the upper layer.

[0027] According to preferred embodiments of the present invention, the fibers of the lower layer have a linear mass density in the range of about 3,3 dtex to about 110 dtex.

[0028] According to preferred embodiments of the present invention, wherein the fibers of the upper layer have a linear mass density in the range of about 11 dtex to about 600 dtex.

[0029] According to preferred embodiments of the present invention, the upper layer is thicker and has a higher fiber coarseness than the lower layer.

[0030] According to preferred embodiments of the present invention, fill yarn is created on the upper surface of the upper layer through velour needle-punching, the fill yarn giving the upper surface of the upper layer a velour-like appearance, thereby imitating the root zone of natural grass, providing cushioning, and assisting the pile yarn of the tufts to stand. By velour-needle punching the upper surface of the upper layer, the surface is given a fluffy structure that provides cushioning. Since the fill yarn assists the pile yarn to stand, no infill, as often used in the known prior art is needed with the artificial turf in accordance with advantageous embodiments of the present invention.

[0031] According to preferred embodiments of the present invention, the bounded layer of fibers is manufactured as a single fabric or as two separate fabrics that are joined together.

[0032] According to preferred embodiments of the present invention, the bounded layer of fibers is formed by needle-punching.

[0033] According to preferred embodiments of the present invention, the bounded layer of fibers consists of up to eight different types of fibers.

[0034] According to preferred embodiments of the present invention, the bounded layer of fibers, the pile yarn, and a backing anchoring the pile yarn to the bound-

ed layer of fibers are made of eco-friendly materials that are 100% recyclable by being mechanically deconstructable. It is furthermore advantageous to choose a homogenous polymer composition for all elements of the inventive artificial turf to support the recyclability.

[0035] Independently of the considerations explained above, a similar technical effect can be obtained by a tufted structure for use in landscape and sports applications, comprising a bounded layer of fibers made of one or more natural and/or synthetic fibers, and pile yarn inserted through the bounded layer of fibers, the pile yarn being anchored to the bounded layer of fibers, wherein the bounded layer of fibers has a thickness of at least 3 mm. The thickness referred to herein may be measured in accordance with European standard EN1765.

[0036] According to an aspect of the present invention, there is provided a method for manufacturing a tufted structure forming an artificial turf for use in landscape and sports applications in accordance with claim 13.

[0037] According to an aspect of the present invention, there is provided a method for manufacturing a tufted structure forming an artificial turf for use in landscape and sports applications in accordance with claim 14.

Brief Description of the Drawings

[0038] The above and other characteristics, features, and advantages of the present invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, which illustrate, by way of example, the principles of the invention. This description is given for the sake of example only, without limiting the scope of the invention. The reference figures quoted below refer to the attached drawings.

Fig. 1 is a schematic cross-sectional view of the artificial turf in accordance with a first preferred embodiment of the present invention; and

Fig. 2 is a schematic cross-sectional view of the artificial turf in accordance with a second preferred embodiment of the present invention.

Detailed Description of the Invention

[0039] The present invention will be described with respect to particular embodiments and with reference to certain drawings but the invention is not limited thereto but only by the claims. Any reference signs in the claims shall not be construed as limiting the scope. The drawings described are only schematic and are nonlimiting. In the drawings, the size of some of the elements may be exaggerated and not drawn on scale for illustrative purposes.

[0040] Where the term "comprising" is used in the present description and claims, it does not exclude other elements or steps. Where an indefinite or definite article is used when referring to a singular noun e.g. "a" or "an",

"the", this includes a plural of that noun unless something else is specifically stated.

[0041] Reference throughout this specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily all referring to the same embodiment, but may. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner, as would be apparent to one of ordinary skill in the art from this disclosure, in one or more embodiments.

[0042] Similarly it should be appreciated that in the description of exemplary embodiments of the invention, various features of the invention are sometimes grouped together in a single embodiment, figure, or description thereof for the purpose of streamlining the disclosure and aiding in the understanding of one or more of the various inventive aspects. This method of disclosure, however, is not to be interpreted as reflecting an intention that the claimed invention requires more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects lie in less than all features of a single foregoing disclosed embodiment. Thus, the claims following the detailed description are hereby expressly incorporated into this detailed description, with each claim standing on its own as a separate embodiment of this invention.

[0043] Furthermore, while some embodiments described herein include some but not other features included in other embodiments, combinations of features of different embodiments are meant to be within the scope of the invention, and form different embodiments, as would be understood by those in the art. For example, in the following claims, any of the claimed embodiments can be used in any combination.

[0044] In the description provided herein, numerous specific details are set forth. However, it is understood that embodiments of the invention may be practiced without these specific details. In other instances, well-known methods, structures, and techniques have not been shown in detail in order not to obscure an understanding of this description.

[0045] The following terms or definitions are provided solely to aid in the understanding of the invention.

[0046] The term "backside" is used herein to denote the side of the bounded layer of fibers which faces away from the side from which free edges of the tufts stick out.

[0047] As employed herein, the term "fiber coarseness" is defined as weight per fiber length and is normally expressed in units of mg/m or g/m. The fiber coarseness depends on fiber diameter, cell wall thickness, cell wall density, and fiber cross section. A high coarseness value indicates a thick fiber wall, giving stiff fibers unable to collapse. Thin walled fibers with low coarseness value give flexible fibers and a denser structure. The coarser

the fibers, the stronger they will be.

[0048] As employed herein, the term "tex" refers to a unit of measure for the linear mass density of fibers and is defined as the mass in grams per 1000 meters. The most commonly used unit is the decitex, abbreviated dtex, which is the mass in grams per 10,000 meters. When measuring objects that consist of multiple fibers the term "filament tex" is sometimes used, referring to the mass in grams per 1000 meters of a single filament.

[0049] As employed herein, the term "tufting" refers to a type of textile process in which a thread is inserted on a carrier base. Tufted carpets are manufactured by insertion of tufts (a short cluster of elongates strands of yarn attached at the base) through a backing fabric, creating a pile surface of cut and/or loop ends.

[0050] As employed herein, the term "filament" refers to a single continuous strand of natural or synthetic fiber.

[0051] As employed herein, the term "yarn" refers to a continuous strand of twisted or untwisted threads of natural or synthetic material.

[0052] As employed herein, the term "pile" refers to the visible surface (wearing surface) of carpet consisting of upright ends of yarn or yarn tufts in loop and/or cut configuration. Sometimes it is called "face" or "nap".

[0053] As employed herein, the term "backing" refers to a substrate applied to the back of the carpet to increase dimensional stability and enhances the anchoring of the pile yarn.

[0054] As employed herein, the term "non-woven" refers to engineered fabric (sheet or web structure) bonded together by entangling fibers mechanically, thermally, or chemically.

[0055] As employed herein, the term "needle-punch" refers to a mechanical process involving thousands of needles that orient and interlock fibers to create nonwoven fabric.

[0056] Referring to **Fig. 1**, the schematic cross-section of an artificial turf 10 is illustrated in accordance with preferred embodiments of the present invention. The artificial turf 10 includes a bounded layer of fibers 20, preferably mechanically bounded, a backing 30, and a plurality of tufts 40.

[0057] The bounded layer of fibers 20 may be formed as a non-woven matting made of one or more natural and/or synthetic fibers or yarns. The bounded layer of fibers 20 serves as a carrier for the tufts 40.

[0058] As illustrated in **Fig. 1**, the bounded layer of fibers 20 can be a single layer containing a mixture of fibers. According to preferred embodiments of the present invention, the coarseness of the fibers forming the bounded layer of fibers 20 may increase from the bottom to the top of the layer 20. For example, the coarseness may gradually increase at a constant rate.

[0059] Alternatively, as illustrated in **Fig. 2**, the bounded layer of fibers 20 can include visually two or more layers, such as, a structural layer 21 and a volume simulating layer 22. The structural layer 21 is positioned at the bottom of the bounded layer of fibers 20 facing away

from the pile yarn 41. The volume simulating layer 22 is positioned on top of the structural layer 21 facing the pile yarn 41. In case of multiple layers of fibers, the bounded layer of fibers is divided into multiple functionalities, such as, for example, structural enhancements (layer 21) and volume simulating (layer 22).

[0060] The bounded layer of fibers 20 can be manufactured as a single fabric or as two separate fabrics that are joined together. In accordance with preferred embodiment of the present invention, the bounded layer of fibers 20 is formed by needle-punching. During this mechanical bonding method, fibers are transported with felting needles and interlocked in the non-woven structure. This procedure increases the friction between the fibers, which reinforces the non-woven fabric. To differentiate the structure of the non-woven fabric, the web can be further structured using special machines equipped with structuring fork or crown needles. The surface can be structured as a velour or rib, or with geometrical or linear patterns. Needle-punching is an ecologically friendly technology, as it permits the use of recycled material including that from polyethylene terephthalate bottles and regenerated fibers from apparel, as well as natural fibers. It may be possible to use other technologies to form non-woven fabrics to obtain the bounded layer of fibers 20.

[0061] The bounded layer of fibers 20 may consist of up to eight different types of fibers. Each of the fibers can have a different color, if desired. The types of fibers can include moisture absorbent fibers, such as coco, cotton, jute, wool, rayon or other natural or synthetic fibers. The types of fibers can further include synthetic fibers, such as polypropylene (PP), polyethylene (PE), polyamides (PA), and polyester (PES) or a combination thereof. The fibers can be treated, for example, with anti-algae, with herbicide, UV-stabilizer, or to be anti-static. The fibers can be melt fibers. The fibers can among others further include mineral based fibers, animal based fibers, or plant based fibers.

[0062] If the bounded layer of fibers 20 is formed as a single layer, as shown in **Fig. 1**, a mixture of relatively thin walled fibers that are flexible and form a relatively dense structure and, thus, having a relatively low coarseness value and relatively thick walled fibers that are stiff and form a relatively sparse structure and, thus, having a relatively low coarseness value is used in combination. In an exemplary embodiment of the invention, the density of the bounded layer of fibers 20 can gradually decrease from the bottom to the top of the layer 20. Accordingly, the coarseness of the fibers will gradually increase from the bottom to the top of the layer 20. By designing the bounded layer of fibers 20 that way, structural support for the tufts 40 and protection for bending points 42 of the tufts 40 is provided as well as shock-absorbance to contribute to a more natural feeling of the artificial turf 10.

[0063] If, according to preferred embodiments of the present invention, the bounded layer of fibers 20 is formed as a single layer, as shown in **Fig. 2**, the structural layer 21 is formed by relatively thin walled fibers that are

flexible and form a relatively dense structure. Accordingly, fibers with the relatively low linear mass density (dtex value) are selected for the structural layer 21. The structural layer 21 is utilized for anchoring the tufts 40. The structural layer 21 provides dimensional stability for the artificial turf 10 and protection for the bending points 42 of the tufts 40. The fibers of the structural layer 21 have preferably a linear mass density in the range of about 3,3 dtex to about 110 dtex, and more preferably of about 11 dtex.

[0064] The volume simulating layer 22 is formed by fibers having a larger linear mass density than the fibers of the structural layer 21. The fibers of the volume simulating layer 22 have preferably a linear mass density in the range of about 11 dtex to about 600 dtex, and more preferably of about 110 dtex. Consequently, the volume simulating layer 22 has also a higher fiber coarseness (weight per fiber length) than the structural layer 21. A high coarseness value indicates a thick fiber wall, giving stiff fibers unable to collapse. Therefore, the volume simulating layer 22 of the bounded layer of fibers 20 is thicker and coarser than the structural layer 21. Fibers with a higher dtex value are selected for the volume simulating layer 22 so that the bounded layer of fibers 20 can act as a shock-absorbing layer and contribute to a natural feeling of the artificial turf 10.

[0065] In addition, the fibers of the bounded layer of fibers 20 can be given a velour effect by needling to mimic the root zone volume effect of natural grass. Due to a mechanical needling process, fiber is pushed out of the upper surface of the layer 20. Velour needle-punched non-woven material can be produced by placing a non-woven material on a brush-like stitch base and needling of the non-woven material on this stitch base. Since with this method the fibers seized by the needles are needed into the bristles or lamellas of the needle stitch base, the non-woven material needed in this way is given a velour-like appearance where the fiber stands out above the surface.

[0066] By velour needle-punching the bounded layer of fibers 20, fill yarn 23 is created. The fill yarn 23 is punched out of the non-woven fibrous matting of the bounded layer of fibers 20 creating a natural grass like root zone. The fill yarn 23 gives the upper surface of the bounded layer of fibers 20 (facing the pile yarn 41) a fluffy appearance and provide cushioning. The fill yarn 23 also assists the pile yarn 41 of the tufts 40 to stand. Thus, no infill, as often used with prior art artificial turf, is needed with the artificial turf 10 in accordance with preferred embodiments of the present invention.

[0067] Strands of pile yarn 41 form each tuft 40. A tuft 40 is a short cluster of elongates strands of pile yarn 41 attached at the base, the bending point 42. The tufts 40 are inserted through the bounded layer of fibers 20. Tufting usually is accomplished by inserting reciprocating needles threaded with pile yarn 41 into the bounded layer of fibers 20 to form tufts 40 of yarn. Loopers or hooks, typically working in timed relationship with the needles,

are located such that the loopers are positioned just above the needle eye when the needles are at an extreme point in their stroke through the bounded layer of fibers 20. When the needles reach that point, pile yarn 41 is picked up from the needles by the loopers and held briefly. Loops or tufts 40 of yarn result from passage of the needles back through the bounded layer of fibers 20. This process typically is repeated as the loops move away from the loopers due to advancement of the backing through the needling apparatus. Subsequent, the loops can be cut to form a cut pile, for example, by using a looper and knife combination in the tufting process to cut the loops.

[0068] The pile yarn 41 can consist of up to four different types of yarns. Each yarn can have a different color, if desired. The pile yarn 41 can be monofilament, tape or a combination thereof. The pile yarn 41 has preferably a linear mass density of about 400 dtex to about 3000 dtex and, more preferably of about 1600 dtex. The number of strands of pile yarn 41 in a tuft 40 is between 2 and 10, and preferably 6. The tuft gauge (distance between rows) is between 1/2" and 1/16" and typical 3/8" or 3/16" or 1/8". The stitch rate of the tufting is between 8/10 cm and 30/10 cm and preferably 12/10 cm.

[0069] In accordance with preferred embodiments of the invention and as shown in Fig. 2, the bounded layer of fibers 20 may have a height H3 of about 3 mm to about 15 mm, and more preferably about 8 mm. The fill yarn 23 may extend from the upper surface of the bounded layer of fibers 20 for a height H2 of about 1 mm to about 20 mm, and more preferably of about 10 mm. The pile yarns 41 may extend from the fill yarn 23 for about 1 mm to about 20 mm, and more preferably 10 mm (height H1). The total height H4 of the artificial turf 10 may be about 10 mm to about 60 mm, and more preferably about 28 mm.

[0070] The backing 30 is applied to the bounded layer of fibers 20 as a last finishing step to enhance the anchoring of the tufts to the bounded layer of fibers 20. In accordance with preferred embodiments of the present invention the backing 30 can be a coated backing such as, for example, a polyethylene (PE) backing that is applied by means of powder or hot melt coating. The backing 30 can further be a calender backing or latex backing.

[0071] In the finishing operation, the backside or stitched surface of the bounded layer of fibers 20 is coated with an adhesive, such as a natural or synthetic rubber or resin latex or emulsion or a powder or hot melt adhesive, to enhance locking or anchoring of tufts 40 to the bounded layer of fibers 20. Use of such further improves dimensional stability of the tufted turf 10, resulting in more durable turf. Further stabilization can be provided in the finishing operation by laminating, for example, a thermoplastic film or a woven or nonwoven fabric made from polypropylene, polyethylene, or ethylene-propylene copolymers or natural fibers such as jute, to the tufted bounded layer of fibers 20. The adhesive bonds the bounded layer of fibers 20 to the backing 30.

[0072] To provide an eco-friendly artificial turf 10 in accordance with preferred embodiments of the present invention the bounded layer of fibers 20, the tufts 40, and the backing 30 may all be made of materials that are recyclable, such as, for example, 100% polyolefin.

[0073] It is to be understood that although preferred embodiments, specific constructions and configurations, as well as materials, have been discussed herein for devices according to the present invention, various changes or modifications in form and detail may be made without departing from the scope of this invention as defined by the claims.

Claims

1. A tufted structure (10) forming an artificial turf for use in landscape and sports applications, comprising:

a bounded layer of fibers (20) made of one or more natural and/or synthetic fibers, and pile yarn (41) inserted through the bounded layer of fibers (20), the pile yarn (41) being anchored to the bounded layer of fibers (20), wherein the bounded layer of fibers (20) has a density that decreases from the bottom to the top of the bounded layer of fibers (20); and wherein:

- fill yarn (23) extending from the upper surface of the bounded layer of fibers (20) is created through velour needle-punching, the fill yarn (23) giving the upper surface of the bounded layer of fibers (20) a velour-like appearance, thereby providing structural support for the pile yarn (41) by assisting the pile yarn (41) to stand, imitating the root zone of natural grass, and providing cushioning,

or

- the bounded layer of fibers (20) includes a lower layer (21) and an upper layer (22), the lower layer (21) being positioned at the bottom of the bounded layer of fibers (20) and the upper layer (22) being positioned on top of the lower layer (21), and the upper layer (22) having a higher fiber coarseness than the lower layer (21).

2. A tufted structure forming an artificial turf for use in landscape and sports applications, comprising:

a bounded layer of fibers (20) made of one or more natural and/or synthetic fibers, and pile yarn (41) inserted through the bounded layer of fibers (20), the pile yarn (41) being anchored

to the bounded layer of fibers, wherein the bounded layer of fibers has a thickness of at least 3 mm; and wherein:

- fill yarn (23) extending from the upper surface of the bounded layer of fibers (20) is created through velour needle-punching, the fill yarn (23) giving the upper surface of the bounded layer of fibers (20) a velour-like appearance, thereby providing structural support for the pile yarn (41) by assisting the pile yarn (41) to stand, imitating the root zone of natural grass, and providing cushioning,

or

- the bounded layer of fibers (20) includes a lower layer (21) and an upper layer (22), the lower layer (21) being positioned at the bottom of the bounded layer of fibers (20) and the upper layer (22) being positioned on top of the lower layer (21), and the upper layer (22) having a higher fiber coarseness than the lower layer (21).

3. The tufted structure (10) according to claim 1 or claim 2, wherein said bounded layer of fibers (20) includes said lower layer (21) and said upper layer (22), wherein the lower layer (21) is a structural layer that is utilized for anchoring the pile yarn (41) and that provides dimensional stability.

4. The tufted structure (10) according to claim 1 or claim 2, wherein said bounded layer of fibers (20) includes said lower layer (21) and said upper layer (22), wherein the upper layer (22) is a volume simulating layer that acts as a shock-absorbing layer and contributes to a natural feeling of the artificial turf (10).

5. The tufted structure (10) according to claim 1 or claim 2, wherein said bounded layer of fibers (20) includes said lower layer (21) and said upper layer (22), wherein the lower layer (21) is formed by fibers that are more flexible and form a denser structure than fibers forming the upper layer (22), the fibers of the lower layer (21) having a smaller linear mass density than the fibers forming the upper layer (22).

6. The tufted structure (10) according to claim 5, wherein the fibers of the lower layer (21) have a linear mass density in the range of about 3,3 dtex to about 110 dtex.

7. The tufted structure (10) according to claim 5 or claim 6, wherein the fibers of the upper layer (22) have a linear mass density in the range of about 11 dtex to

about 600 dtex.

8. The tufted structure (10) according to any of claims 1 to 7, wherein the bounded layer of fibers (20) is manufactured as a single fabric or as two separate fabrics that are joined together. 5
9. The tufted structure (10) according to any of claims 1 to 8, wherein the bounded layer of fibers (20) is formed by needle-punching. 10
10. The tufted structure (10) according to any of claims 1 to 9, wherein the bounded layer of fibers (20) consists of up to eight different types of fibers.
11. The tufted structure (10) according to any of claims 1 to 10, wherein the bounded layer of fibers (20), the pile yarn (41), and a backing (30) enhancing the anchoring the pile yarn (41) to the bounded layer of fibers (20) are made of eco-friendly materials that are 100% recyclable by being mechanically deconstructable. 20
12. The tufted structure (10) according to any of claims 1 to 11, wherein the bounded layer of fibers (20), the pile yarn (41), and the backing (30) are made of 100% polyolefin. 25
13. A method for manufacturing a tufted structure forming an artificial turf (10) for use in landscape and sports applications, comprising the steps of: 30
forming by needle-punching a bounded layer of fibers (20) having a density that decreases from the bottom to the top of the bounded layer of fibers (20); 35
creating fill yarn (23) extending the upper surface of the bounded layer of fibers (20) through velour needle-punching, thereby giving the upper surface of the bounded layer of fibers (20) a velour-like appearance; 40
inserting pile yarn (41) through the bounded layer of fibers (20); and
anchoring the pile yarn (41) at the backside of the bounded layer of fibers (20). 45

14. A method for manufacturing a tufted structure forming an artificial turf (10) for use in landscape and sports applications, comprising the steps of: 50
forming by needle-punching a lower layer (21) from a plurality of natural and/or synthetic fibers; forming by needle-punching an upper layer (22) from a plurality of natural and/or synthetic fibers that have a higher linear mass density than the fibers of the lower layer (21), the upper layer (22) having a less dense structure than the lower layer (21); 55

placing the upper layer (22) on top of the lower layer (21) to form a bounded layer of fibers (20); creating fill yarn (23) extending the upper surface of the upper layer (22) through velour needle-punching thereby giving the upper surface of the upper layer (22) a velour-like appearance; inserting pile yarn (41) through the bounded layer of fibers (20); and anchoring the pile yarn (41) at the backside of the bounded layer of fibers (20).

Patentansprüche

1. Getuftete Struktur (10), die einen Kunstrasen zur Verwendung bei Landschafts- und Sportanwendungen bildet, umfassend:

eine gebundene Schicht aus Fasern (20), die aus einer oder mehreren natürlichen und/oder synthetischen Fasern hergestellt ist, und Florgarn (41), das durch die gebundene Schicht aus Fasern (20) eingeführt ist, wobei das Florgarn (41) mit der gebundenen Schicht aus Fasern (20) verankert ist, wobei die gebundene Schicht aus Fasern (20) eine Dichte aufweist, die sich von der Unterseite zur Oberseite der gebundenen Schicht aus Fasern (20) verringert; und wobei:

- Schussgarn (23), das sich von der oberen Fläche der gebundenen Schicht aus Fasern (20) erstreckt, durch Veloursvernadelung erzeugt wird, wobei das Schussgarn (23) der oberen Fläche der gebundenen Schicht aus Fasern (20) eine veloursartige Erscheinung verleiht, wodurch eine strukturelle Stütze für das Florgarn (41) bereitgestellt wird, indem das Florgarn (41) beim Stehen unterstützt wird, wodurch der Wurzelbereich von natürlichem Gras nachgeahmt und eine Abfederung bereitgestellt wird,

oder

- die gebundene Schicht aus Fasern (20) eine untere Schicht (21) und eine obere Schicht (22) enthält, wobei die untere Schicht (21) an der Unterseite der gebundenen Schicht aus Fasern (20) positioniert ist und die obere Schicht (22) an der Oberseite der unteren Schicht (21) positioniert ist, und wobei die obere Schicht (22) eine höhere Faserrauhheit aufweist als die untere Schicht (21) .

2. Getuftete Struktur, die einen Kunstrasen zur Ver-

wendung bei Landschafts- und Sportanwendungen bildet, umfassend:

eine gebundene Schicht aus Fasern (20), die aus einer oder mehreren natürlichen und/oder synthetischen Fasern hergestellt ist, und Florgarn (41), das durch die gebundene Schicht aus Fasern (20) eingeführt ist, wobei das Florgarn (41) mit der gebundenen Schicht aus Fasern verankert ist, wobei die gebundene Schicht aus Fasern eine Dicke von mindestens 3 mm aufweist; und wobei:

- Schussgarn (23), das sich von der oberen Fläche der gebundenen Schicht aus Fasern (20) erstreckt, durch Veloursvernadelung erzeugt wird, wobei das Schussgarn (23) der oberen Fläche der gebundenen Schicht aus Fasern (20) eine veloursartige Erscheinung verleiht, wodurch eine strukturelle Stütze für das Florgarn (41) bereitgestellt wird, indem das Florgarn (41) beim Stehen unterstützt wird, wodurch der Wurzelbereich von natürlichem Gras nachgeahmt und eine Abfederung bereitgestellt wird,

oder

- die gebundene Schicht aus Fasern (20) eine untere Schicht (21) und eine obere Schicht (22) enthält, wobei die untere Schicht (21) an der Unterseite der gebundenen Schicht aus Fasern (20) positioniert ist und die obere Schicht (22) an der Oberseite der unteren Schicht (21) positioniert ist, und wobei die obere Schicht (22) eine höhere Faserrauhheit aufweist als die untere Schicht (21) .

3. Getuftete Struktur (10) nach Anspruch 1 oder Anspruch 2, wobei die gebundene Schicht aus Fasern (20) die untere Schicht (21) und die obere Schicht (22) enthält, wobei die untere Schicht (21) eine strukturelle Schicht ist, die zum Verankern des Florgarns (41) verwendet wird und die eine dimensionale Stabilität bereitstellt.
4. Getuftete Struktur (10) nach Anspruch 1 oder Anspruch 2, wobei die gebundene Schicht aus Fasern (20) die untere Schicht (21) und die obere Schicht (22) enthält, wobei die obere Schicht (22) eine volumensimulierende Schicht ist, die als eine stoßdämpfende Schicht fungiert und zu einem natürlichen Eindruck des Kunstrasens (10) beiträgt.
5. Getuftete Struktur (10) nach Anspruch 1 oder Anspruch 2, wobei die gebundene Schicht aus Fasern

(20) die untere Schicht (21) und die obere Schicht (22) enthält, wobei die untere Schicht (21) durch Fasern gebildet wird, die flexibler sind und eine dichtere Struktur bilden als die Fasern, die die obere Schicht (22) bilden, wobei die Fasern der unteren Schicht (21) eine kleinere lineare Massendichte aufweisen als die Fasern, die die obere Schicht (22) bilden.

6. Getuftete Struktur (10) nach Anspruch 5, wobei die Fasern der unteren Schicht (21) eine lineare Massendichte im Bereich von etwa 3,3 dtex bis etwa 110 dtex aufweisen.
7. Getuftete Struktur (10) nach Anspruch 5 oder Anspruch 6, wobei die Fasern der oberen Schicht (22) eine lineare Massendichte im Bereich von etwa 11 dtex bis etwa 600 dtex aufweisen.
8. Getuftete Struktur (10) nach einem der Ansprüche 1 bis 7, wobei die gebundene Schicht aus Fasern (20) als ein einzelnes Gewebe oder als zwei getrennte Gewebe, die zusammengefügt sind, hergestellt wird.
9. Getuftete Struktur (10) nach einem der Ansprüche 1 bis 8, wobei die gebundene Schicht aus Fasern (20) durch Vernadelung gebildet wird.
10. Getuftete Struktur (10) nach einem der Ansprüche 1 bis 9, wobei die gebundene Schicht aus Fasern (20) aus bis zu acht unterschiedlichen Arten von Fasern besteht.
11. Getuftete Struktur (10) nach einem der Ansprüche 1 bis 10, wobei die gebundene Schicht aus Fasern (20), das Florgarn (41) und eine Verstärkung (30), die die Verankerung des Florgarns (41) mit der gebundenen Schicht aus Fasern (20) verbessert, aus umweltfreundlichen Materialien hergestellt werden, die zu 100 % recyclebar sind, indem sie mechanisch zerlegt werden können.
12. Getuftete Struktur (10) nach einem der Ansprüche 1 bis 11, wobei die gebundene Schicht aus Fasern (20), das Florgarn (41) und die Verstärkung (30) zu 100 % aus Polyolefin hergestellt werden.
13. Verfahren zum Herstellen einer getufteten Struktur, die einen Kunstrasen (10) zur Verwendung bei Landschafts- und Sportanwendungen bildet, umfassend die folgenden Schritte:

Bilden durch Vernadelung einer gebundenen Schicht aus Fasern (20) mit einer Dichte, die sich von der Unterseite zur Oberseite der gebundenen Schicht aus Fasern (20) verringert; Erzeugen eines Schussgarns (23), das sich von der oberen Fläche der gebundenen Schicht aus

Fasern (20) erstreckt, durch Veloursvernadelung, wodurch der oberen Fläche der gebundenen Schicht aus Fasern (20) eine veloursartige Erscheinung verliehen wird;

Einführen des Florgarns (41) durch die gebundene Schicht aus Fasern (20); und
Verankern des Florgarns (41) an der Rückseite der gebundenen Schicht aus Fasern (20).

14. Verfahren zum Herstellen einer getufteten Struktur, die einen Kunstrasen (10) zur Verwendung bei Landschafts- und Sportanwendungen bildet, umfassend die folgenden Schritte:

Bilden durch Vernadelung einer unteren Schicht (21) aus einer Vielzahl von natürlichen und/oder synthetischen Fasern,
Bilden durch Vernadelung einer oberen Schicht (22) aus einer Vielzahl von natürlichen und/oder synthetischen Fasern, die eine höhere lineare Massendichte aufweisen als die Fasern der unteren Schicht (21), wobei die obere Schicht (22) eine Struktur mit geringerer Dichte aufweist als die untere Schicht (21);

Anordnen der oberen Schicht (22) auf der Oberseite der unteren Schicht (21), um eine gebundene Schicht aus Fasern (20) zu bilden;

Erzeugen eines Schussgarns (23), das sich von der oberen Fläche der oberen Schicht (22) erstreckt, durch Veloursvernadelung, wodurch der oberen Fläche der oberen Schicht (22) eine veloursartige Erscheinung verliehen wird;
Einführen des Florgarns (41) durch die gebundene Schicht aus Fasern (20); und
Verankern des Florgarns (41) an der Rückseite der gebundenen Schicht aus Fasern (20).

Revendications

1. Structure touffetée (10) formant un gazon artificiel à utiliser dans des applications de paysage et de sport, comprenant :

une couche liée de fibres (20) faites d'une ou plusieurs fibres naturelles et/ou synthétiques, et un fil de poil (41) inséré à travers la couche liée de fibres (20), le fil de poil (41) étant ancré à la couche liée de fibres (20),
dans laquelle la couche liée de fibres (20) a une densité qui diminue du fond au sommet de la couche liée de fibres (20) ;
et dans laquelle :

- un fil de trame (23) s'étendant depuis la surface supérieure de la couche liée de fibres (20) est créé par aiguilletage velours, le fil de trame (23) donnant à la surface su-

périeure de la couche liée de fibres (20) une apparence semblable au velours, fournissant de ce fait un support structurel pour le fil de poil (41) en aidant le fil de poil (41) à se dresser, imitant la zone racinaire de l'herbe naturelle et fournissant un matelassage,

ou

- la couche liée de fibres (20) inclut une couche inférieure (21) et une couche supérieure (22), la couche inférieure (21) étant positionnée au niveau du fond de la couche liée de fibres (20) et la couche supérieure (22) étant positionnée sur le dessus de la couche inférieure (21), et la couche supérieure (22) ayant une rudesse de fibre plus élevée que la couche inférieure (21).

2. Structure touffetée formant un gazon artificiel à utiliser dans des applications de paysage et de sport, comprenant :

une couche liée de fibres (20) faites d'une ou plusieurs fibres naturelles et/ou synthétiques, et un fil de poil (41) inséré à travers la couche liée de fibres (20), le fil de poil (41) étant ancré à la couche liée de fibres,
dans laquelle la couche liée de fibres a une épaisseur d'au moins 3 mm ;
et dans laquelle :

- un fil de trame (23) s'étendant depuis la surface supérieure de la couche liée de fibres (20) est créé par aiguilletage velours, le fil de trame (23) donnant à la surface supérieure de la couche liée de fibres (20) une apparence semblable au velours, fournissant de ce fait un support structurel pour le fil de poil (41) en aidant le fil de poil (41) à se dresser, imitant la zone racinaire de l'herbe naturelle et fournissant un matelassage,

ou

- la couche liée de fibres (20) inclut une couche inférieure (21) et une couche supérieure (22), la couche inférieure (21) étant positionnée au niveau du fond de la couche liée de fibres (20) et la couche supérieure (22) étant positionnée sur le dessus de la couche inférieure (21), et la couche supérieure (22) ayant une rudesse de fibre plus élevée que la couche inférieure (21).

3. Structure touffetée (10) selon la revendication 1 ou la revendication 2, dans laquelle ladite couche liée de fibres (20) inclut ladite couche inférieure (21) et

ladite couche supérieure (22), dans laquelle la couche inférieure (21) est une couche structurale qui est utilisée pour ancrer le fil de poil (41) et qui fournit une stabilité dimensionnelle.

4. Structure touffetée (10) selon la revendication 1 ou la revendication 2, dans laquelle ladite couche liée de fibres (20) inclut ladite couche inférieure (21) et ladite couche supérieure (22), dans laquelle la couche supérieure (22) est une couche simulant le volume qui agit comme une couche absorbant les chocs et contribue à un rendu naturel du gazon artificiel (10).

5. Structure touffetée (10) selon la revendication 1 ou la revendication 2, dans laquelle ladite couche liée de fibres (20) inclut ladite couche inférieure (21) et ladite couche supérieure (22), dans laquelle la couche inférieure (21) est formée par des fibres qui sont plus souples et forment une structure plus dense que des fibres formant la couche supérieure (22), les fibres de la couche inférieure (21) ayant une masse volumique linéaire plus petite que les fibres formant la couche supérieure (22).

6. Structure touffetée (10) selon la revendication 5, dans laquelle les fibres de la couche inférieure (21) ont une masse volumique linéaire dans la plage d'environ 3,3 dtex à environ 110 dtex.

7. Structure touffetée (10) selon la revendication 5 ou la revendication 6, dans laquelle les fibres de la couche supérieure (22) ont une masse volumique linéaire dans la plage d'environ 11 dtex à environ 600 dtex.

8. Structure touffetée (10) selon l'une quelconque des revendications 1 à 7, dans laquelle la couche liée de fibres (20) est fabriquée comme un tissu unique ou comme deux tissus distincts qui sont joints ensemble.

9. Structure touffetée (10) selon l'une quelconque des revendications 1 à 8, dans laquelle la couche liée de fibres (20) est formée par aiguilletage.

10. Structure touffetée (10) selon l'une quelconque des revendications 1 à 9, dans laquelle la couche liée de fibres (20) consiste en jusqu'à huit types différents de fibres.

11. Structure touffetée (10) selon l'une quelconque des revendications 1 à 10, dans laquelle la couche liée de fibres (20), le fil de poil (41) et un envers (30) améliorant l'ancrage du fil de poil (41) à la couche liée de fibres (20) sont faits de matières écologiques qui sont 100 % recyclables en pouvant être mécaniquement déconstruites.

12. Structure touffetée (10) selon l'une quelconque des revendications 1 à 11, dans laquelle la couche liée de fibres (20), le fil de poil (41) et l'envers (30) sont faits de polyoléfine à 100 %.

13. Procédé pour fabriquer une structure touffetée formant un gazon artificiel (10) à utiliser dans des applications de paysage et de sport, comprenant les étapes de :

formation par aiguilletage d'une couche liée de fibres (20) ayant une densité qui diminue du fond au sommet de la couche liée de fibres (20) ;
création d'un fil de trame (23) étendant la surface supérieure de la couche liée de fibres (20) par aiguilletage velours, donnant de ce fait à la surface supérieure de la couche liée de fibres (20) une apparence semblable au velours ;
insertion d'un fil de poil (41) à travers la couche liée de fibres (20) ; et
ancrage du fil de poil (41) au niveau du côté arrière de la couche liée de fibres (20).

14. Procédé pour fabriquer une structure touffetée formant un gazon artificiel (10) à utiliser dans des applications de paysage et de sport, comprenant les étapes de :

formation par aiguilletage d'une couche inférieure (21) à partir d'une pluralité de fibres naturelles et/ou synthétiques ;
formation par aiguilletage d'une couche supérieure (22) à partir d'une pluralité des fibres naturelles et/ou synthétiques qui ont une masse volumique linéaire plus élevée que les fibres de la couche inférieure (21), la couche supérieure (22) ayant une structure moins dense que la couche inférieure (21) ;
placement de la couche supérieure (22) sur le dessus de la couche inférieure (21) pour former une couche liée de fibres (20) ;
création d'un fil de trame (23) étendant la surface supérieure de la couche supérieure (22) par aiguilletage velours donnant de ce fait à la surface supérieure de la couche supérieure (22) une apparence semblable au velours ;
insertion d'un fil de poil (41) à travers la couche liée de fibres (20) ; et
ancrage du fil de poil (41) au niveau du côté arrière de la couche liée de fibres (20).

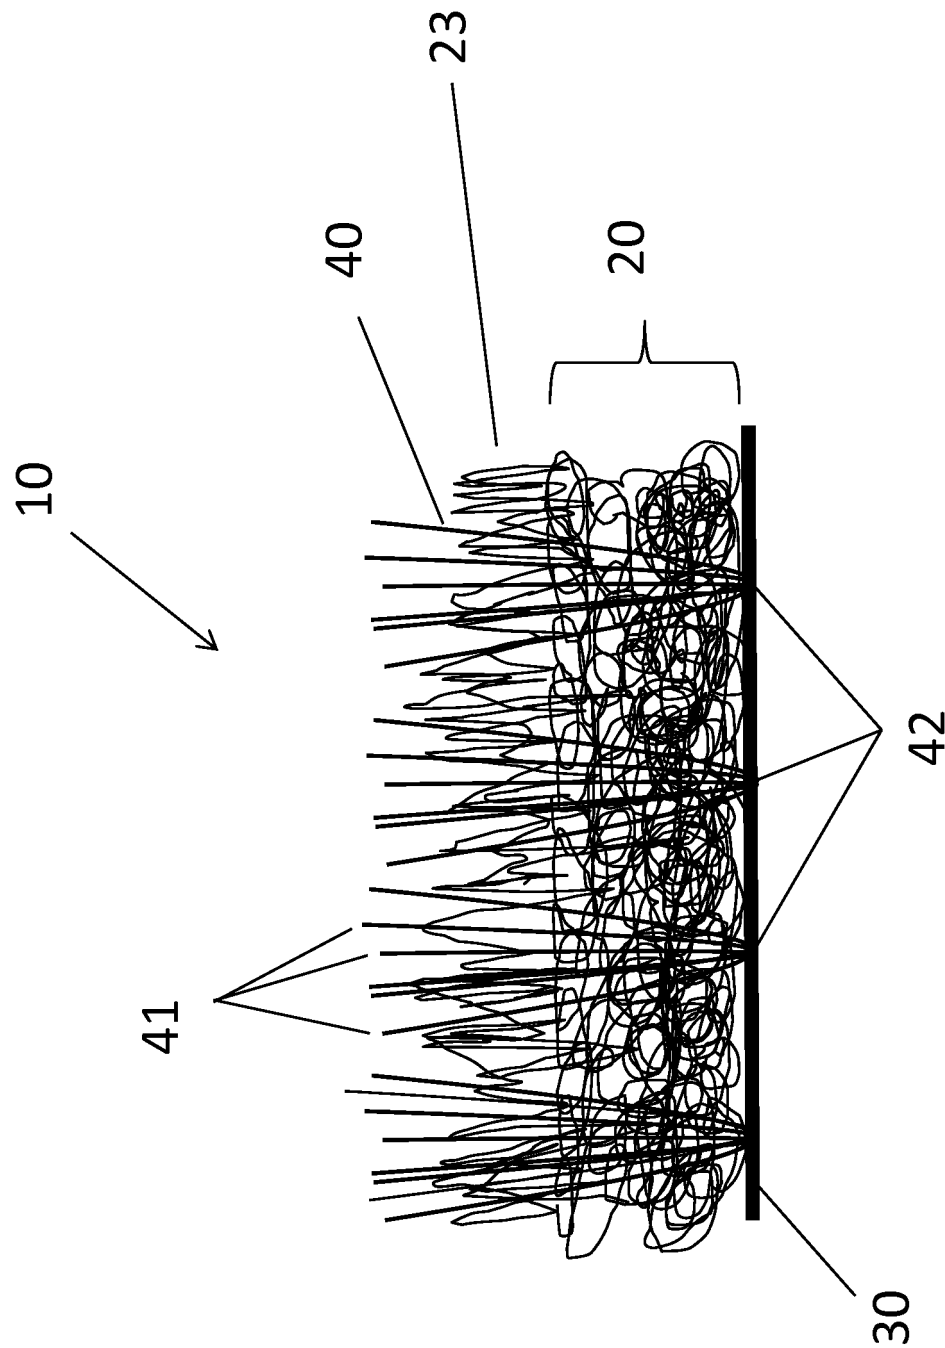


Fig. 1

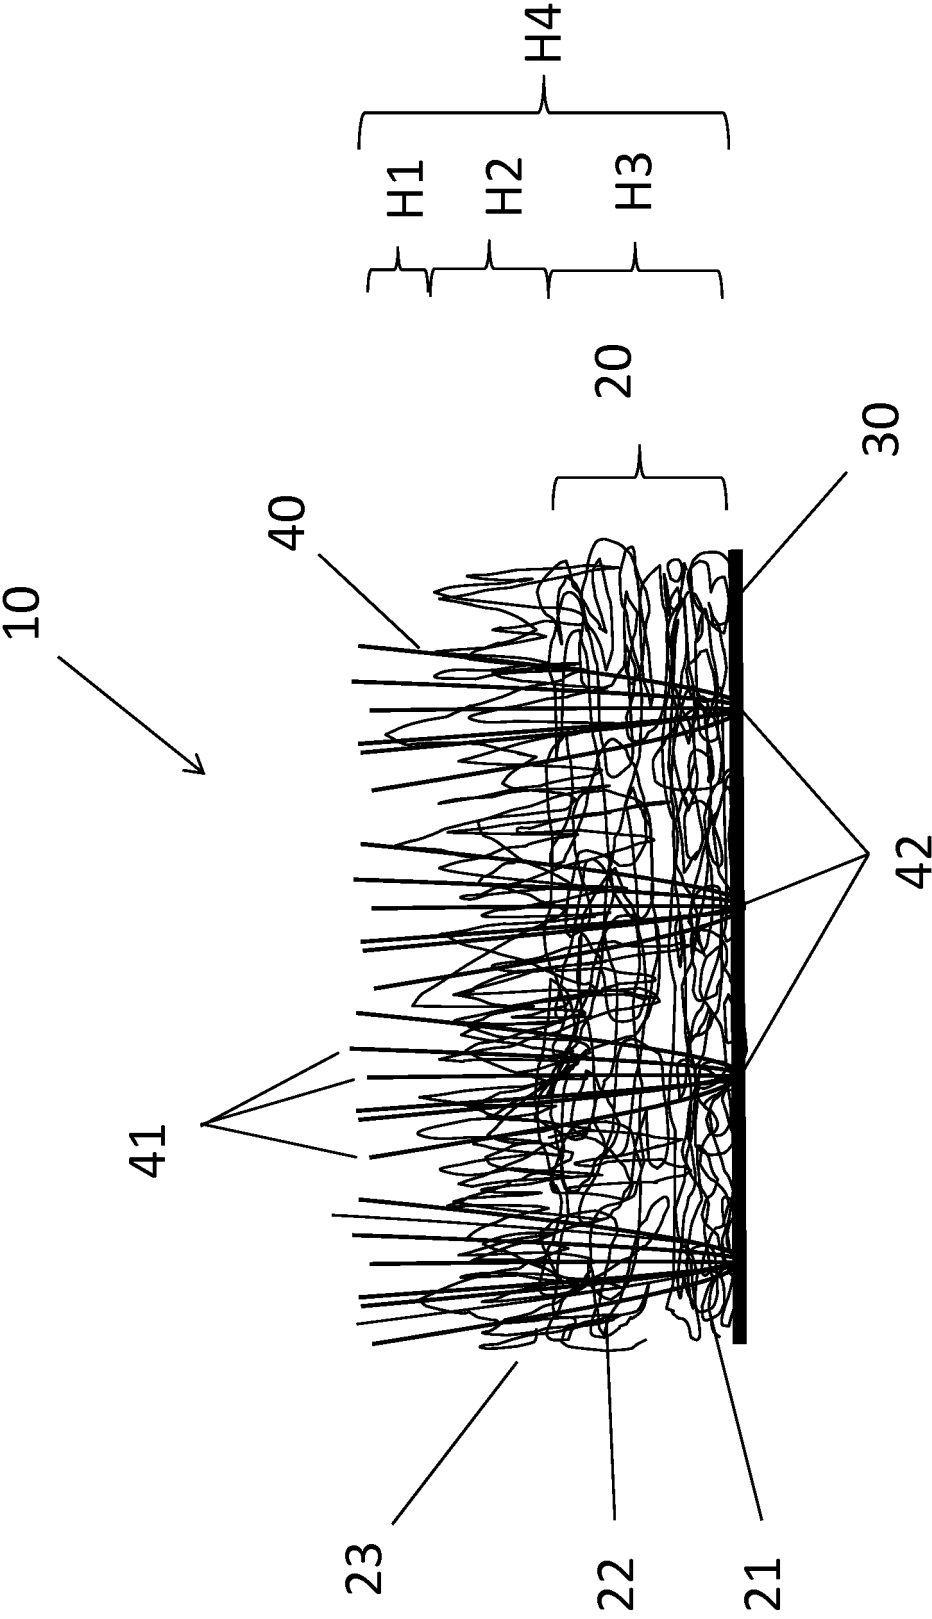


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 1154842 A [0007]
- WO 200137657 A1 [0008]
- WO 2012125513 A1 [0009]