




(22) Date de dépôt/Filing Date: 2006/09/26
(41) Mise à la disp. pub./Open to Public Insp.: 2007/07/20
(30) Priorité/Priority: 2006/01/20 (US60/760,403)

(51) Cl.Int./Int.Cl. *G06K 9/78* (2006.01),
B62D 63/02 (2006.01), *G06Q 10/00* (2006.01)
(71) Demandeur/Applicant:
GEO 3D INC., CA
(72) Inventeur/Inventor:
LAFLAMME, CLAUDE, CA
(74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : DETECTION, MESURE DE LOCALISATION ET RECONNAISSANCE AUTOMATISEES D'ACTIFS
(54) Title: AUTOMATED ASSET DETECTION, LOCATION MEASUREMENT AND RECOGNITION

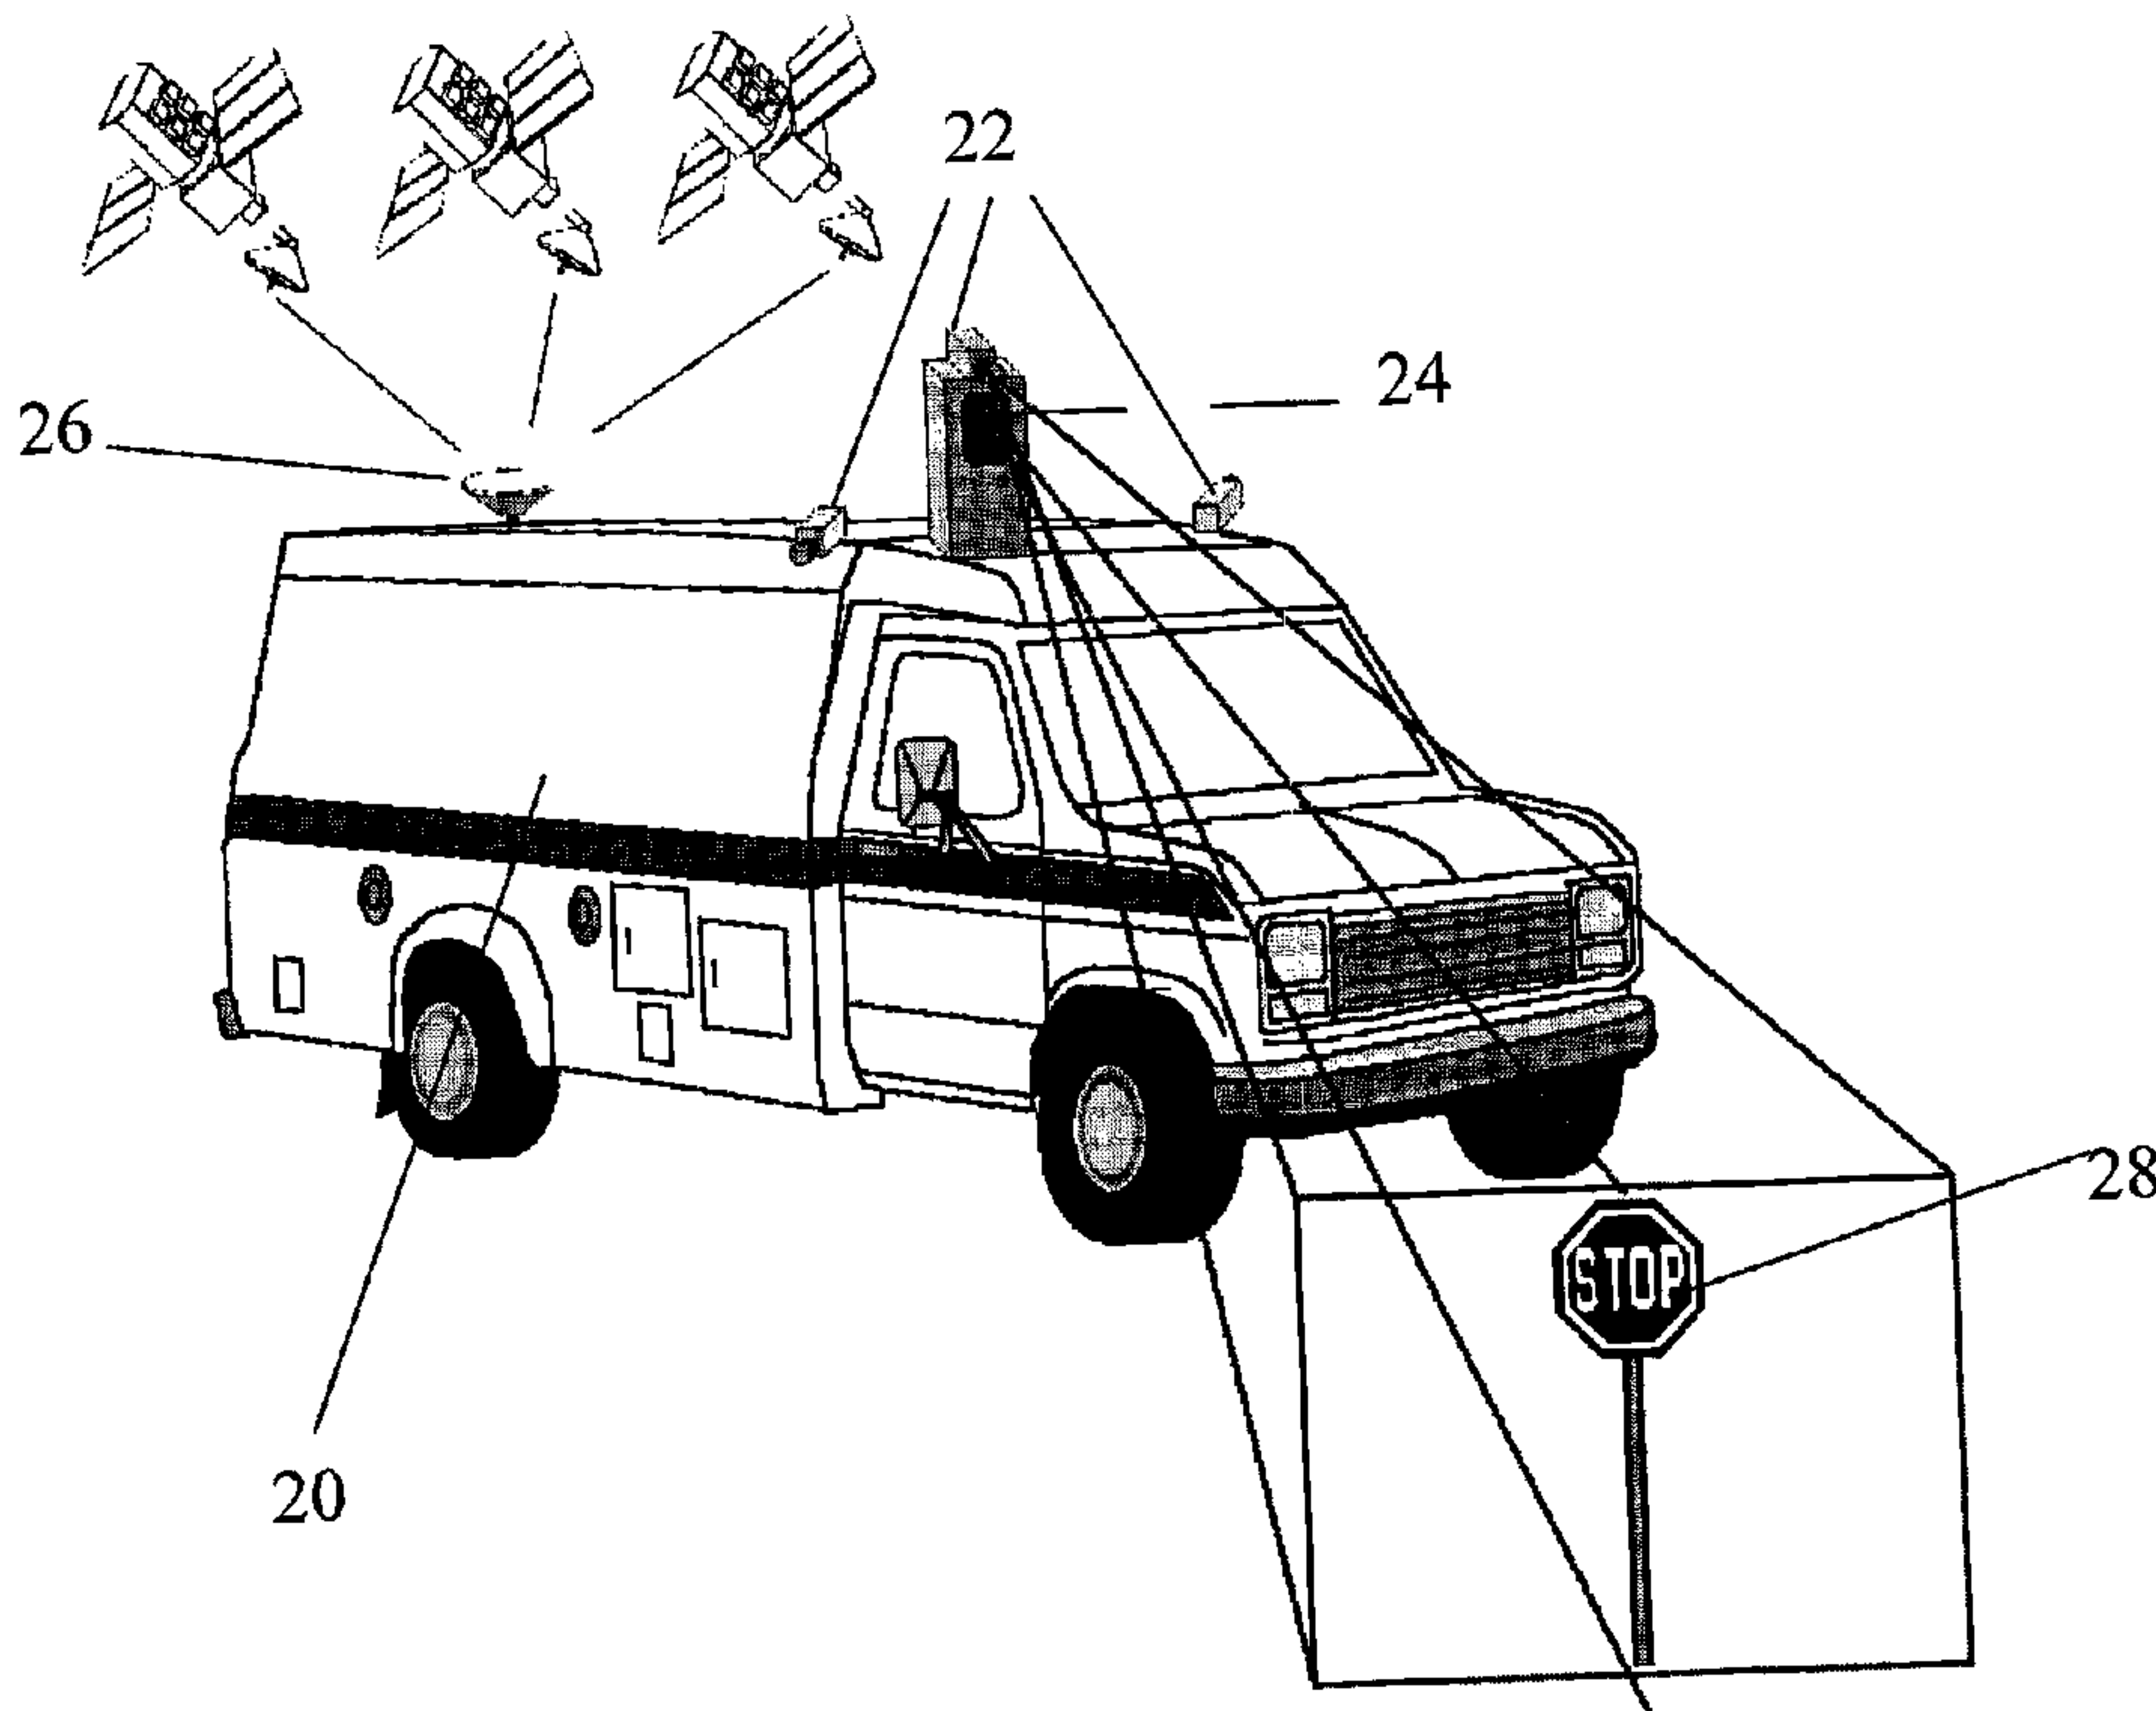

(57) **Abrégé/Abstract:**

From a survey vehicle, two types of data are obtained: images from a camera and reflections from a laser. The laser data is filtered in order to detect assets. The detected assets are then processed to locate and measure the assets. Once this information has been obtained, it is combined with the images captured by the camera in order to recognize the assets.

12936-2CA

ABSTRACT

From a survey vehicle, two types of data are obtained: images from a camera and reflections from a laser. The laser data is filtered in order to detect assets. The
5 detected assets are then processed to locate and measure the assets. Once this information has been obtained, it is combined with the images captured by the camera in order to recognize the assets.

AUTOMATED ASSET DETECTION, LOCATION
MEASUREMENT AND RECOGNITION

TECHNICAL FIELD

5 The present invention relates to the field of automated asset management systems, and more specifically, to devices and methods used to detect, locate geographically, measure, and recognize objects found within right-of-ways.

10 BACKGROUND OF THE INVENTION

Several factors act as incentives for public and private organizations to build the equipment inventory of their infrastructure network. These may originate due to legislature or are associated with operations relative to
15 maintenance, procurement, traffic, valuation, or safety and emergency response issues.

Geographic information systems (GIS) are often used to meet these goals in many fields, including those of transportation, electric distribution, and property
20 assessments. Meanwhile, asset managers are interested in populating their customized GIS applications using either data conversion or data collection techniques. This may require that data captured be converted into a proper GIS format. Although this technique is widely used because it
25 is reasonably economic, it is not as accurate as field data collection.

For field collection, a crew of technicians gather relevant information in the field, using either a Global Positioning System (GPS) receiver combined with data logging devices,
30 or palm computers equipped with GPS receivers. However, proceeding to an infrastructure network inventory by

12936-2CA

traditional surveying or GPS foot survey methods may prove to be a tedious and costly operation. Furthermore, constraints for some organizations may translate into difficulties maintaining network data up-to-date. This prevents managers from completing efficient planning over time to orientate organizational development.

SUMMARY OF THE INVENTION

The present invention presents an alternative solution to field data collection. There is described a method and system for detecting, locating geographically, measuring, and recognizing objects found within right-of-ways.

The objects in question may be varied, for example a road sign, guard-rail, pavement marking, tree, light pole, telecommunication pole, electric pole, curb, sidewalk, shoulder, etc.

In accordance with a first broad aspect of the present invention, there is provided a method for recognizing an asset found in a path using a survey vehicle, the method comprising: capturing images on a camera as the vehicle advances along a road and assigning geographical locations to the images; emitting a beam of light from a laser mounted on the vehicle and capturing laser data reflected as the beam of light comes into contact with various objects; detecting an object of interest from the various objects by filtering the laser data using a plurality of parameters; locating the object of interest geographically by aggregating proximal laser scanned points into single objects; measuring the object of interest by computing a bounding box of the aggregated set of points for each object; and recognizing the asset by locating the object of

12936-2CA

interest in one of the images captured by the camera and template-matching with predefined images in a database.

In accordance with a second broad aspect of the present invention, there is provided a survey vehicle comprising:
5 at least one two-dimensional laser scanning device; reception means to capture laser data reflected off an object of interest; at least one camera for capturing images; a positioning system to attach geographical locations to the images; and a data capture computer
10 adapted to receive the laser data, said images and positioning information.

In a preferred embodiment, the survey vehicle may also comprise a positioning sub-system, including an orientation system. The camera may be video or digital. The two-
15 dimensional scanning laser device may have intensity and color measurements.

In another preferred embodiment, the scanning laser device and the reception means are the same device, such as the Riegl™ LMS-Q120 industrial scanner laser.

20

BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages of the present invention will become apparent from the following detailed description, taken in combination with the appended
25 drawings, in which:

Fig. 1 illustrates the survey vehicle with the camera and laser scanning device mounted thereon;

Fig. 2 is a flowchart illustrating a preferred embodiment of the method of the present invention for asset
30 identification;

12936-2CA

Fig. 3 is a flowchart illustrating a preferred method of the present invention for detecting road signs.

It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The system of the present invention can be used to perform the inventory of roadside infrastructure assets and features managed by transportation authorities (roads, public transit, railways, etc), utilities (telecommunications, electric distribution, etc), and municipalities. It is also possible to plan and monitor linear rights-of-ways (roads, railways, pipelines, electric transmission lines, etc) as well as shore evolution.

15 Data collection occurs in two phases. The first phase involves geo-referenced image and/or laser data collection performed on-board a land or rail vehicle. The second phase involves data extraction. This may be done either onboard the vehicle if the appropriate software is provided, or it
20 may be undertaken by a computer that is not onboard the vehicle. A preferred embodiment of the system is based on the use of data acquisition and extraction software components coupled to high resolution cameras, 2D laser scanning devices, and/or positioning systems. The output of
25 the automated extraction process consists of a database of stored GIS layers. The layers can be stored, for example, in a relational database where a table corresponds to a layer or to a class of objects. The database is connected to the automated extraction software and is populated in
30 real time during the extraction process.

Figure 1 illustrates a survey vehicle 20 in accordance with a preferred embodiment of the present invention. One or

12936-2CA

more cameras 22 and at least one laser scanning device 24 are mounted on a road vehicle 20, such as a mini-van, in order to acquire data as the vehicle advances at traffic speed. The camera 22 can be a video camera or a digital camera capable of capturing images from a triggered signal. The 2D laser scanning device 24 has a minimum of range and angle measurement outputs. Intensity and color measurements are optional features the scanning device 24 may also have. At least one GPS antenna 26 is also present on the survey vehicle 20, in combination with a positioning system (with or without an orientation system). Software components are then present to perform synchronization and data capture from the devices (22, 24, 26) in real time.

The laser scanning device 24 is positioned to scan the road side laterally in order to detect objects 28 on the side of the right-of-way. The laser 24 is oriented with a heading angle different than that of the vehicle to guarantee hits on surfaces perpendicular to the right-of-way. The laser 24 can be installed to scan horizontally in front or in back of the vehicle 20 to scan and map pavement lines and measure right-of-way profiles. The cameras 22 are installed at any heading angle.

System calibration is used to ensure proper sensor registration. The interior orientation of the cameras 22 are calibrated prior to their installation on the vehicle 20. Exterior installation of the cameras 22 are calibrated prior to survey using calibration sites with known control points. Exterior orientation of the laser scanning device 24 is calibrated using known control points and retro-reflecting material for easy target identification.

With respect to the data extraction phase of the process, this can be done by a combination of various software tools. Known mobile mapping tools may be used to attach

12936-2CA

geographic locations to camera images while driving. These images can be used with other software tools for analysis, or can be used as a visual GIS layer.

The system of the present invention may include data acquisition software to manage different system components, 5 640x480 or greater pixel resolution cameras, a positioning system (GPS, DMI and/or DMU), hard disks with removable trays to record geo-referenced imagery in real time on the field, and an electrical powering system for all of the 10 above (power supply, cables, peripherals, etc). Only one camera is required to enable stereoscopy, but more may be used if desired. As many cameras with the preferred orientation (frontal, lateral, etc) may be integrated during a survey to complement information collected. One or 15 more 2D laser scanning devices may be used if desired with preferred orientation.

Each captured image is further geo-referenced according to a geographic coordinate system. During image capture operations, specific attributes are associated to each 20 individual image. During capture, images are recorded to AVI files or JPG folders. Each image has a reference to a geographic location from a GPS receiver, time and date in Universal Time Code (UTC) format, linear information from a Distance Measurement Instrument (DMI), orientation of the 25 platform if an orientation sub-system is present, as well as information regarding the quality of the GPS solution and the accuracy of recorded coordinates.

The method of the preferred embodiment of the present invention can be broken down into a series of steps, namely 30 detection (finding an object of interest), location (positioning geographically the object), measurement (defining the object size, using height, height above ground, etc), classification (regrouping objects of

12936-2CA

interest of a same type, such as road sign, tree, pole, guardrail, etc), and recognition (the object is identified and can be classified in a database of objects of the same type).

- 5 The purpose of detection is to find an object of interest in the recorded data stream. This means using the captured laser data to identify points of interest. Location requires an aggregation of laser scanned points into single objects. This aggregation uses proximity: points belonging
- 10 to a same object are close by. The filter used for this step can be adjusted to vary the proximity requirement (i.e. how close does a point need to be to belong to the same object). Once the points have been regrouped, a centroid is computed (averaged X, Y, Z attributes) and this
- 15 becomes the object location. For objects that span along the road over certain parametric distances, extremity points are computed instead of a unique centroid. Points are added between the extremities to produce linear objects.
- 20 Object measurement is done by computing the extent (or bounding box) of the aggregated set of points for each object. According to laser orientation, frequency, scans per second, and traveling speed, a threshold is used to best approximate object size.
- 25 Object classification is based on one or more of the following object classification characteristics: retro-reflection properties (road signs), morphology (trees, poles), size (guard-rails), height, distance from road, etc. For certain types of objects (classes), it is useful
- 30 to find the exact object model. For example, for a stop sign, its class (or GIS layer) is a road sign, but the exact model is a stop sign. Typically, for road signs, recognition consists of finding the MUTCD (Manual on

12936-2CA

Uniform Traffic Control Devices) code of the sign. Most other objects other than road signs do not need any further processing than classification. For certain objects, such as guardrails, attachment point types need to be
5 recognized.

Figure 2 illustrates the process of asset identification from beginning to end, in accordance with a preferred embodiment of the present invention. From the survey vehicle, two types of data are obtained: images from the
10 camera and reflections (range and angle) from the laser. The laser data is filtered in order to detect assets. The detected assets are then processed to locate and measure the assets. Once this information has been obtained, it is combined with the images captured by the camera in order to
15 recognize the assets. To locate the image (or frame) comprising the object of interest previously detected, the known orientation and field of view of the camera is used. A perspective transformation is then applied to the detected object in order to go from geographic coordinates
20 (world coordinates) to image coordinates, i.e. 3D to 2D. The detected object has known coordinates (X_0 , Y_0 , Z_0) and dimensions. In order to find the object on the image (or the ROI), the 3D coordinates of the object bounding box must be translated into the 2D coordinates available on the
25 image. The region of interest, including the detected object, can then be located in the image and the asset can be recognized and/or classified.

Figure 3 illustrates a preferred method to be used for the automated detection of road signs. Initially, laser data is
30 captured and images are concurrently captured and assigned geographic locations. The laser data is then scanned for points with high intensity by a filtering process. Since road signs exhibit high retro-reflective properties, the

12936-2CA

intensity value of the laser data points will make the points reflected off of road signs stand out with respect to other points reflected off of other objects. The coordinates X, Y, Z are computed for the points of interest
5 using angle, range, and global positioning information. Points are then filtered once again, this time based on their height from the ground. The filtered points are re-grouped using a proximity filter to identify points that belong to a same object. The objects that are identified
10 are estimated for size and a centroid (unique object location) is computed. Objects are then filtered based on size to eliminate those that are too small to be road signs.

For recognition of road signs, the images captured by the
15 camera are used. From the object location and size, and using photogrammetry functions, it is possible to find the region of interest in an image where the sign appears. Using the known camera angle and its angle of view, the closest image showing the road sign to recognize is
20 identified. Using 3D to 2D photogrammetry projection techniques, the region of interest containing the road sign in the image is found. From the image region of interest, a template-matching algorithm along with a database of predefined road signs is used to recognize automatically
25 the road sign and extract its corresponding MUTCD code.

In the case of objects such as road signs, it is possible to obtain a measurement of the quality of the retro-reflection. From the laser data, after road sign detection filtering, the average intensity of the reflected signal is
30 computed from the laser measurements (if available from the laser scanner). The average intensity is computed from the points that belong to the sign (same points as for the centroid calculation). The output value is a percentage of

12936-2CA

the reflected signal strength. It can be transformed to "Candela per sq. meter (cd/m²) or lumens" if required.

In a preferred embodiment, the laser used is the RIEGLTM LMS-Q120 2D - laser scanner. It provides non-contact line
5 scanning using a narrow infrared laser beam. The instrument makes use of the time-of-flight laser range measurement principle and of fast line scanning by means of a high-speed opto-mechanical scan mechanism, providing fully linear, unidirectional and parallel scan lines. As for the
10 camera, a Sony DFW-SX910 may be used. The DFW-SX910 features a 1/2" CCD that delivers uncompressed, high-resolution, digital color images and features an easy-to-use asynchronous electronic shutter function with an exposure range from 1/100,000 to 17.5 seconds, allowing for
15 the clear capture of fast moving objects or still images in low light environments. It should be understood that alternative lasers and cameras may be used without deviating from the present invention.

The embodiment(s) of the invention described above is(are)
20 intended to be exemplary only. The scope of the invention is therefore intended to be limited solely by the scope of the appended claims.

12936-2CA

I/WE CLAIM:

1. A method for recognizing an asset found in a path using a survey vehicle, the method comprising:

capturing images on a camera as said vehicle advances along a road and assigning geographical locations to said images;

emitting a beam of light from a laser mounted on said vehicle and capturing laser data reflected as said beam of light comes into contact with various objects;

detecting an object of interest from said various objects by filtering said laser data using a plurality of parameters;

locating said object of interest geographically by aggregating proximal laser scanned points into single objects;

measuring said object of interest by computing a bounding box of the aggregated set of points for each object; and

recognizing said asset by locating said object of interest in one of said images captured by said camera and template-matching with predefined images in a database.

2. A survey vehicle comprising:

at least one two-dimensional laser scanning device;

reception means to capture laser data reflected off an object of interest;

at least one camera for capturing images;

12936-2CA

a positioning system to attach geographical locations to said images; and

a data capture computer adapted to receive said laser data and said images.

3. A survey vehicle as claimed in claim 2, wherein said data capture computer is adapted to process said laser data by filtering to detect, locate, and measure said object of interest, and uses template-matching techniques to recognize said object in said images.

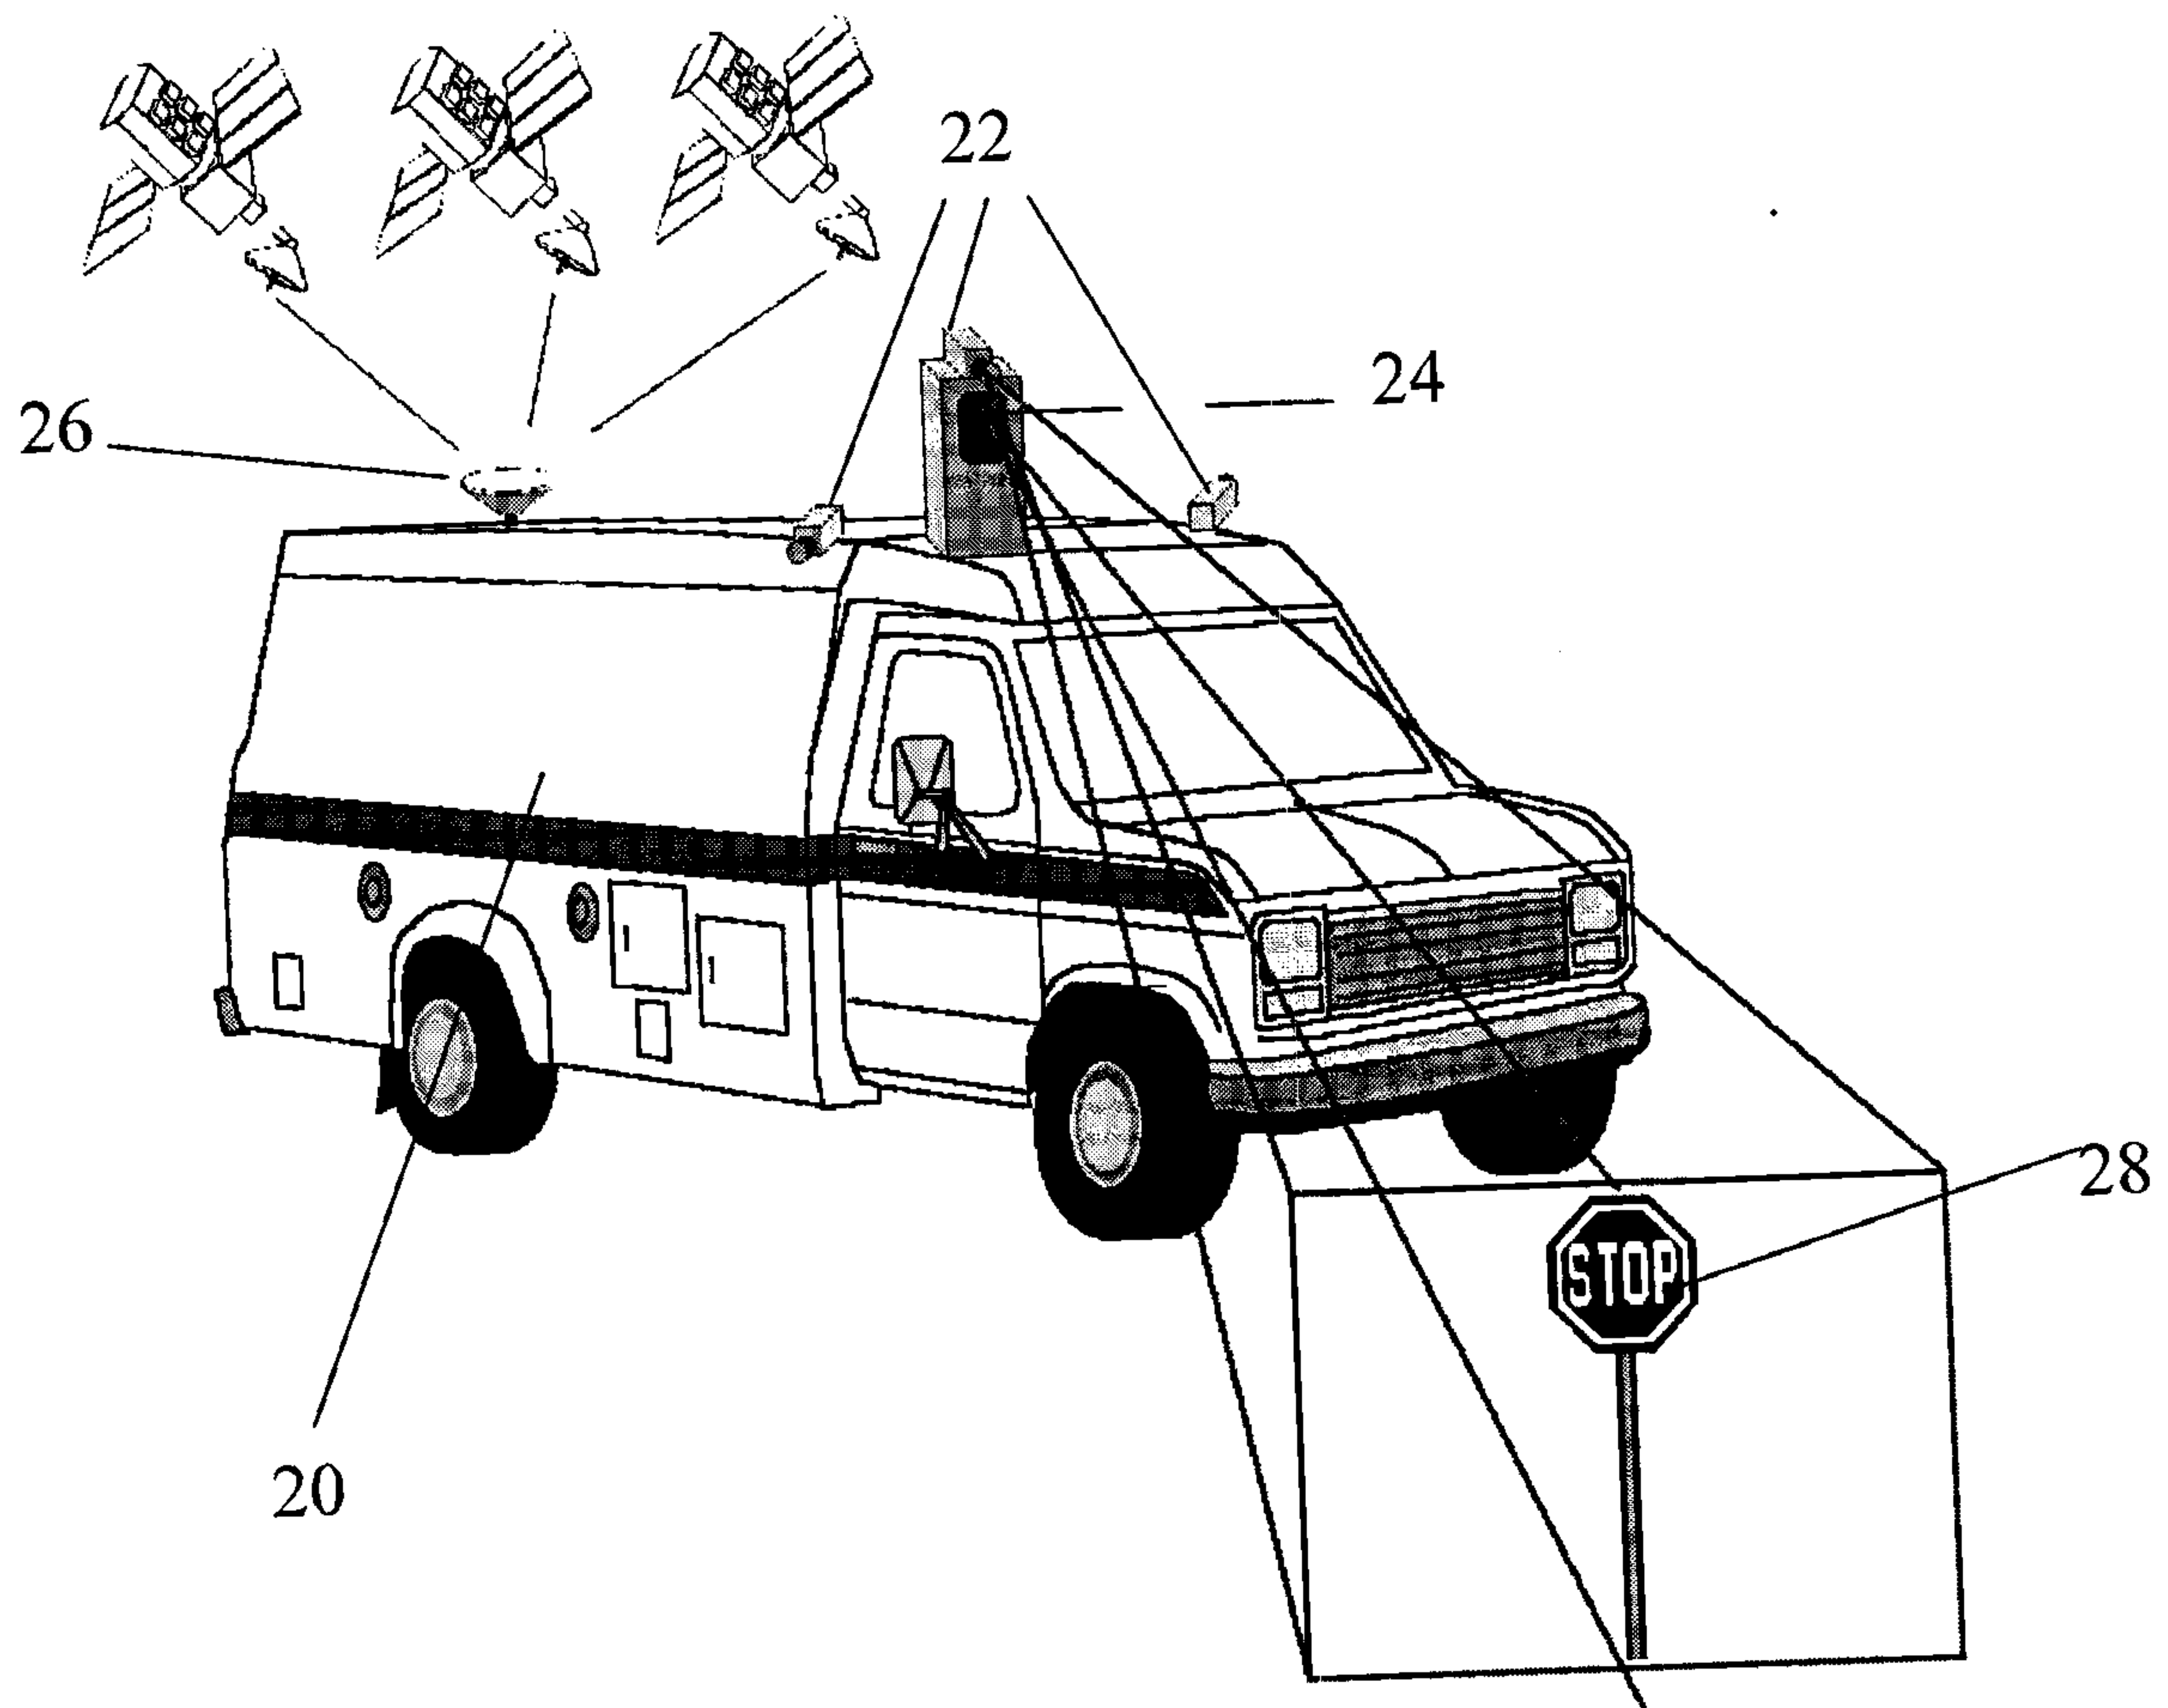


FIGURE 1

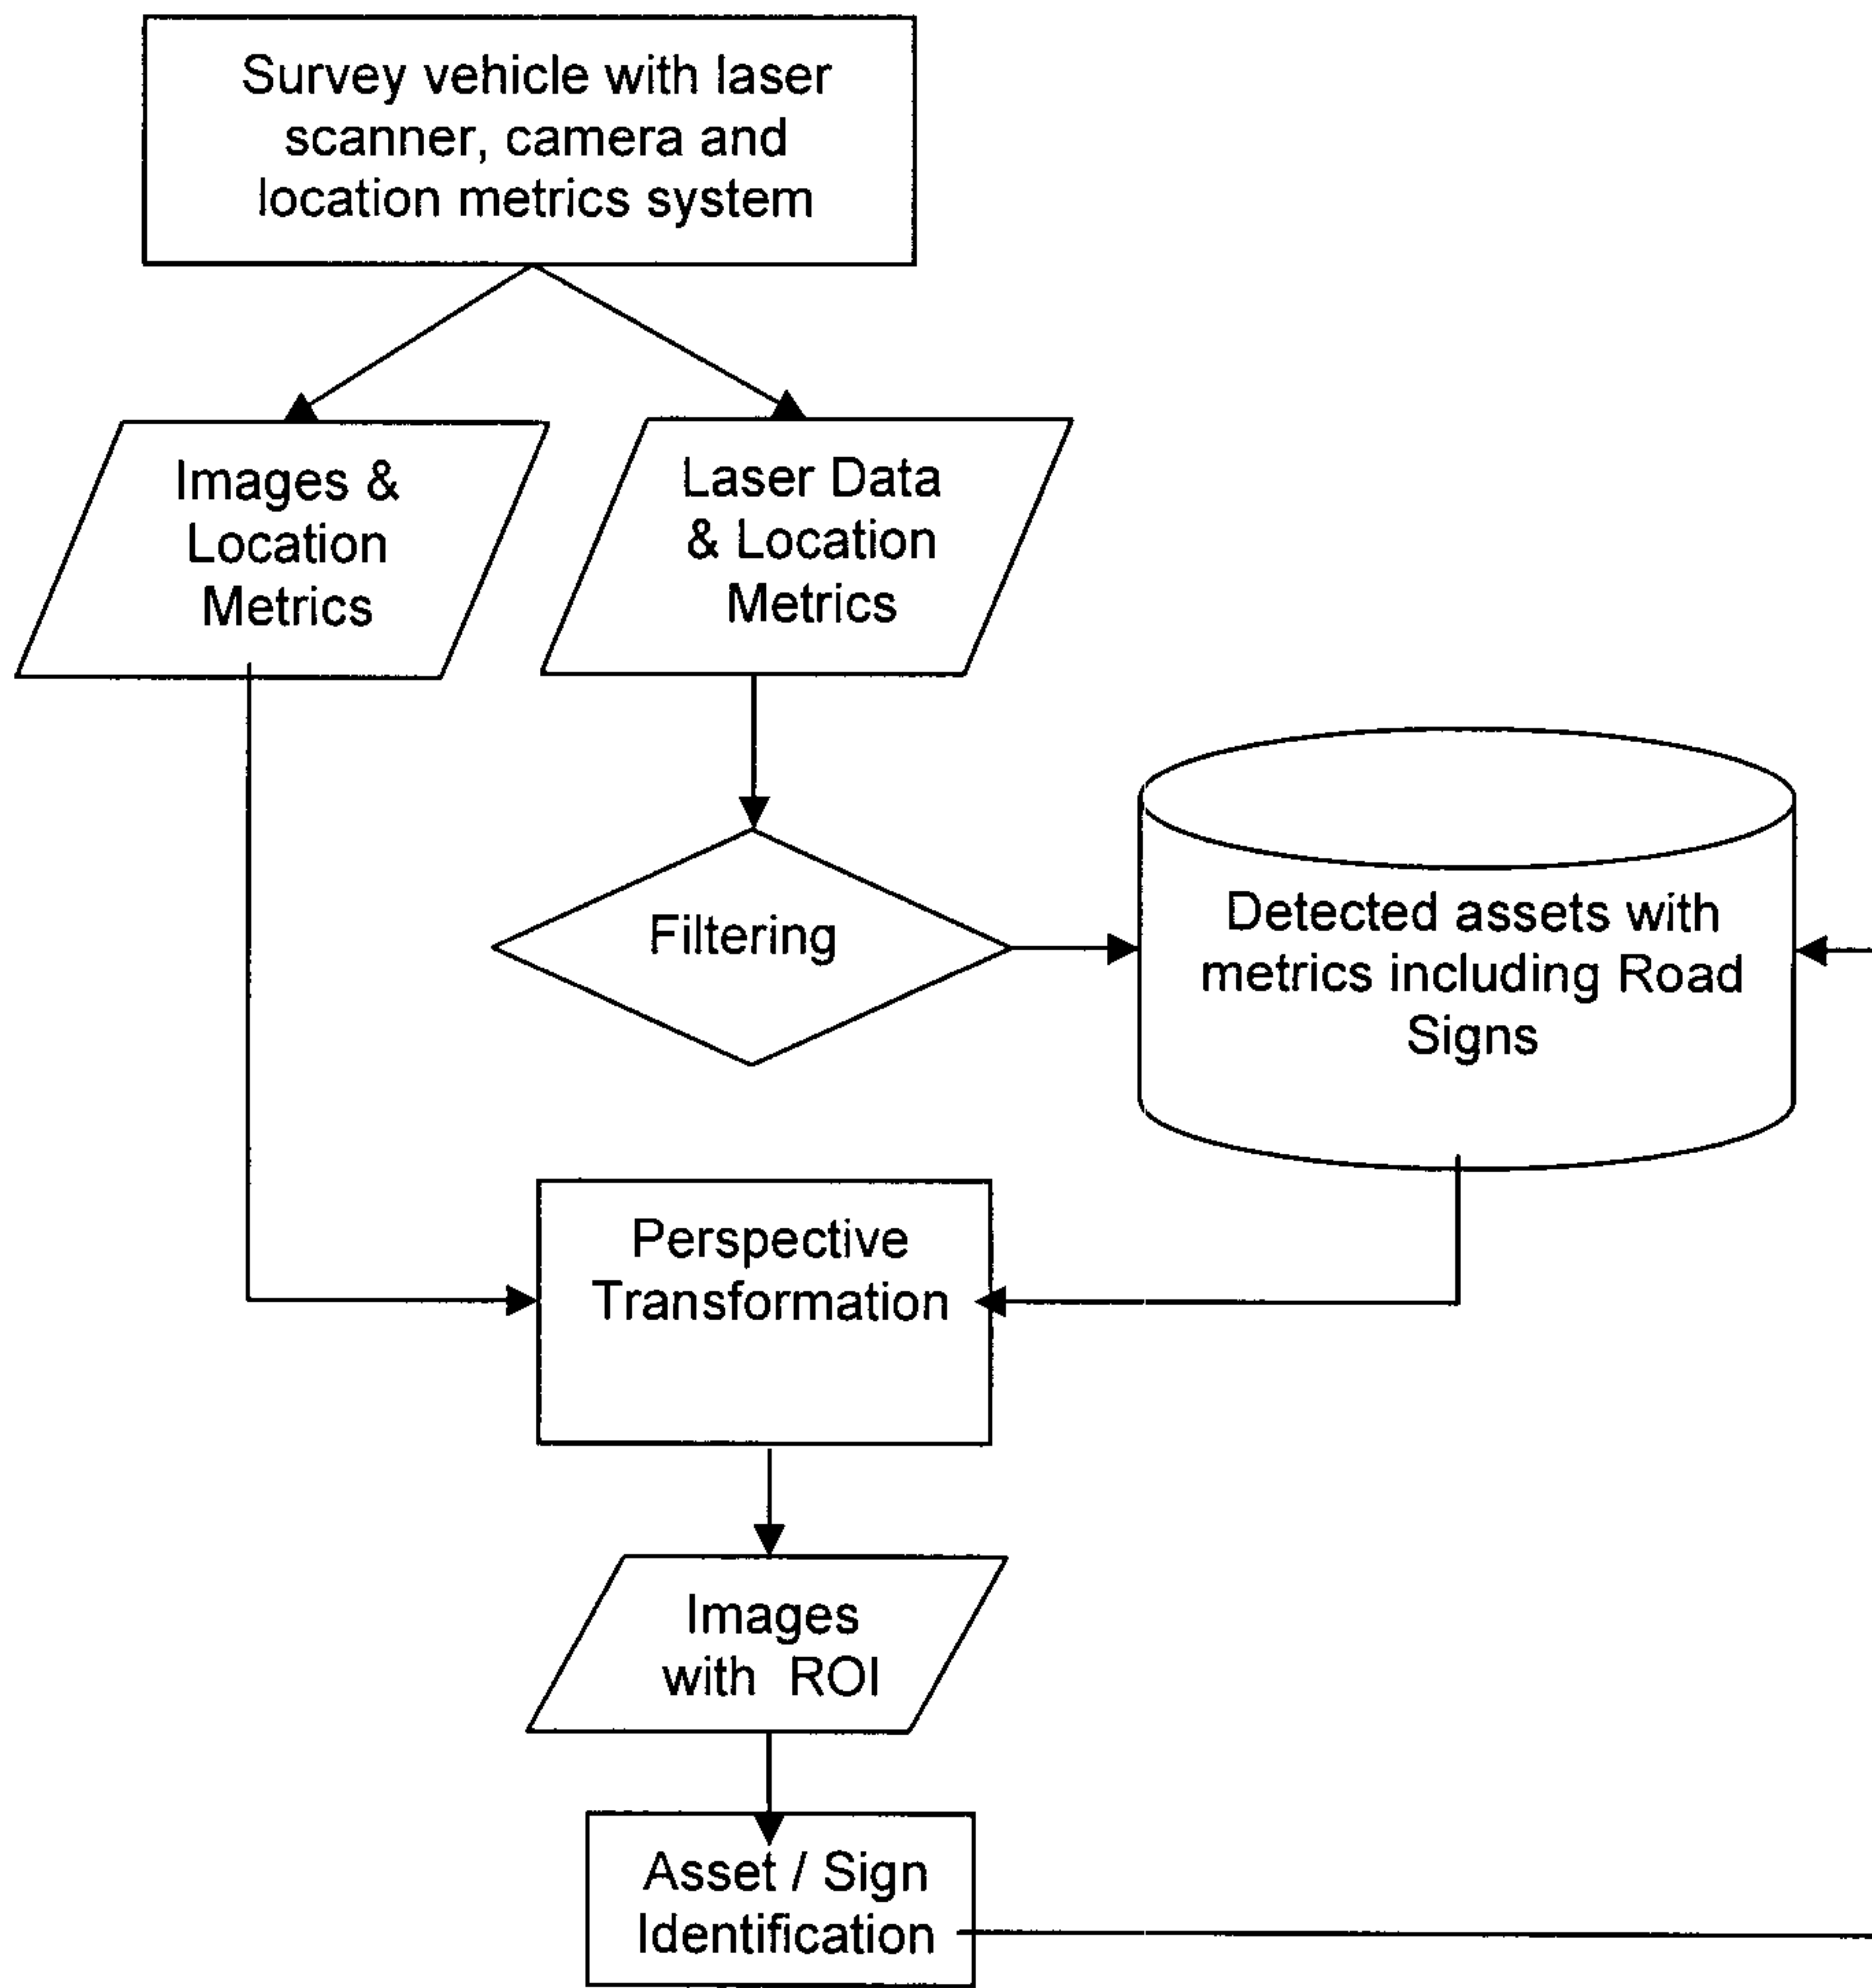


FIGURE 2

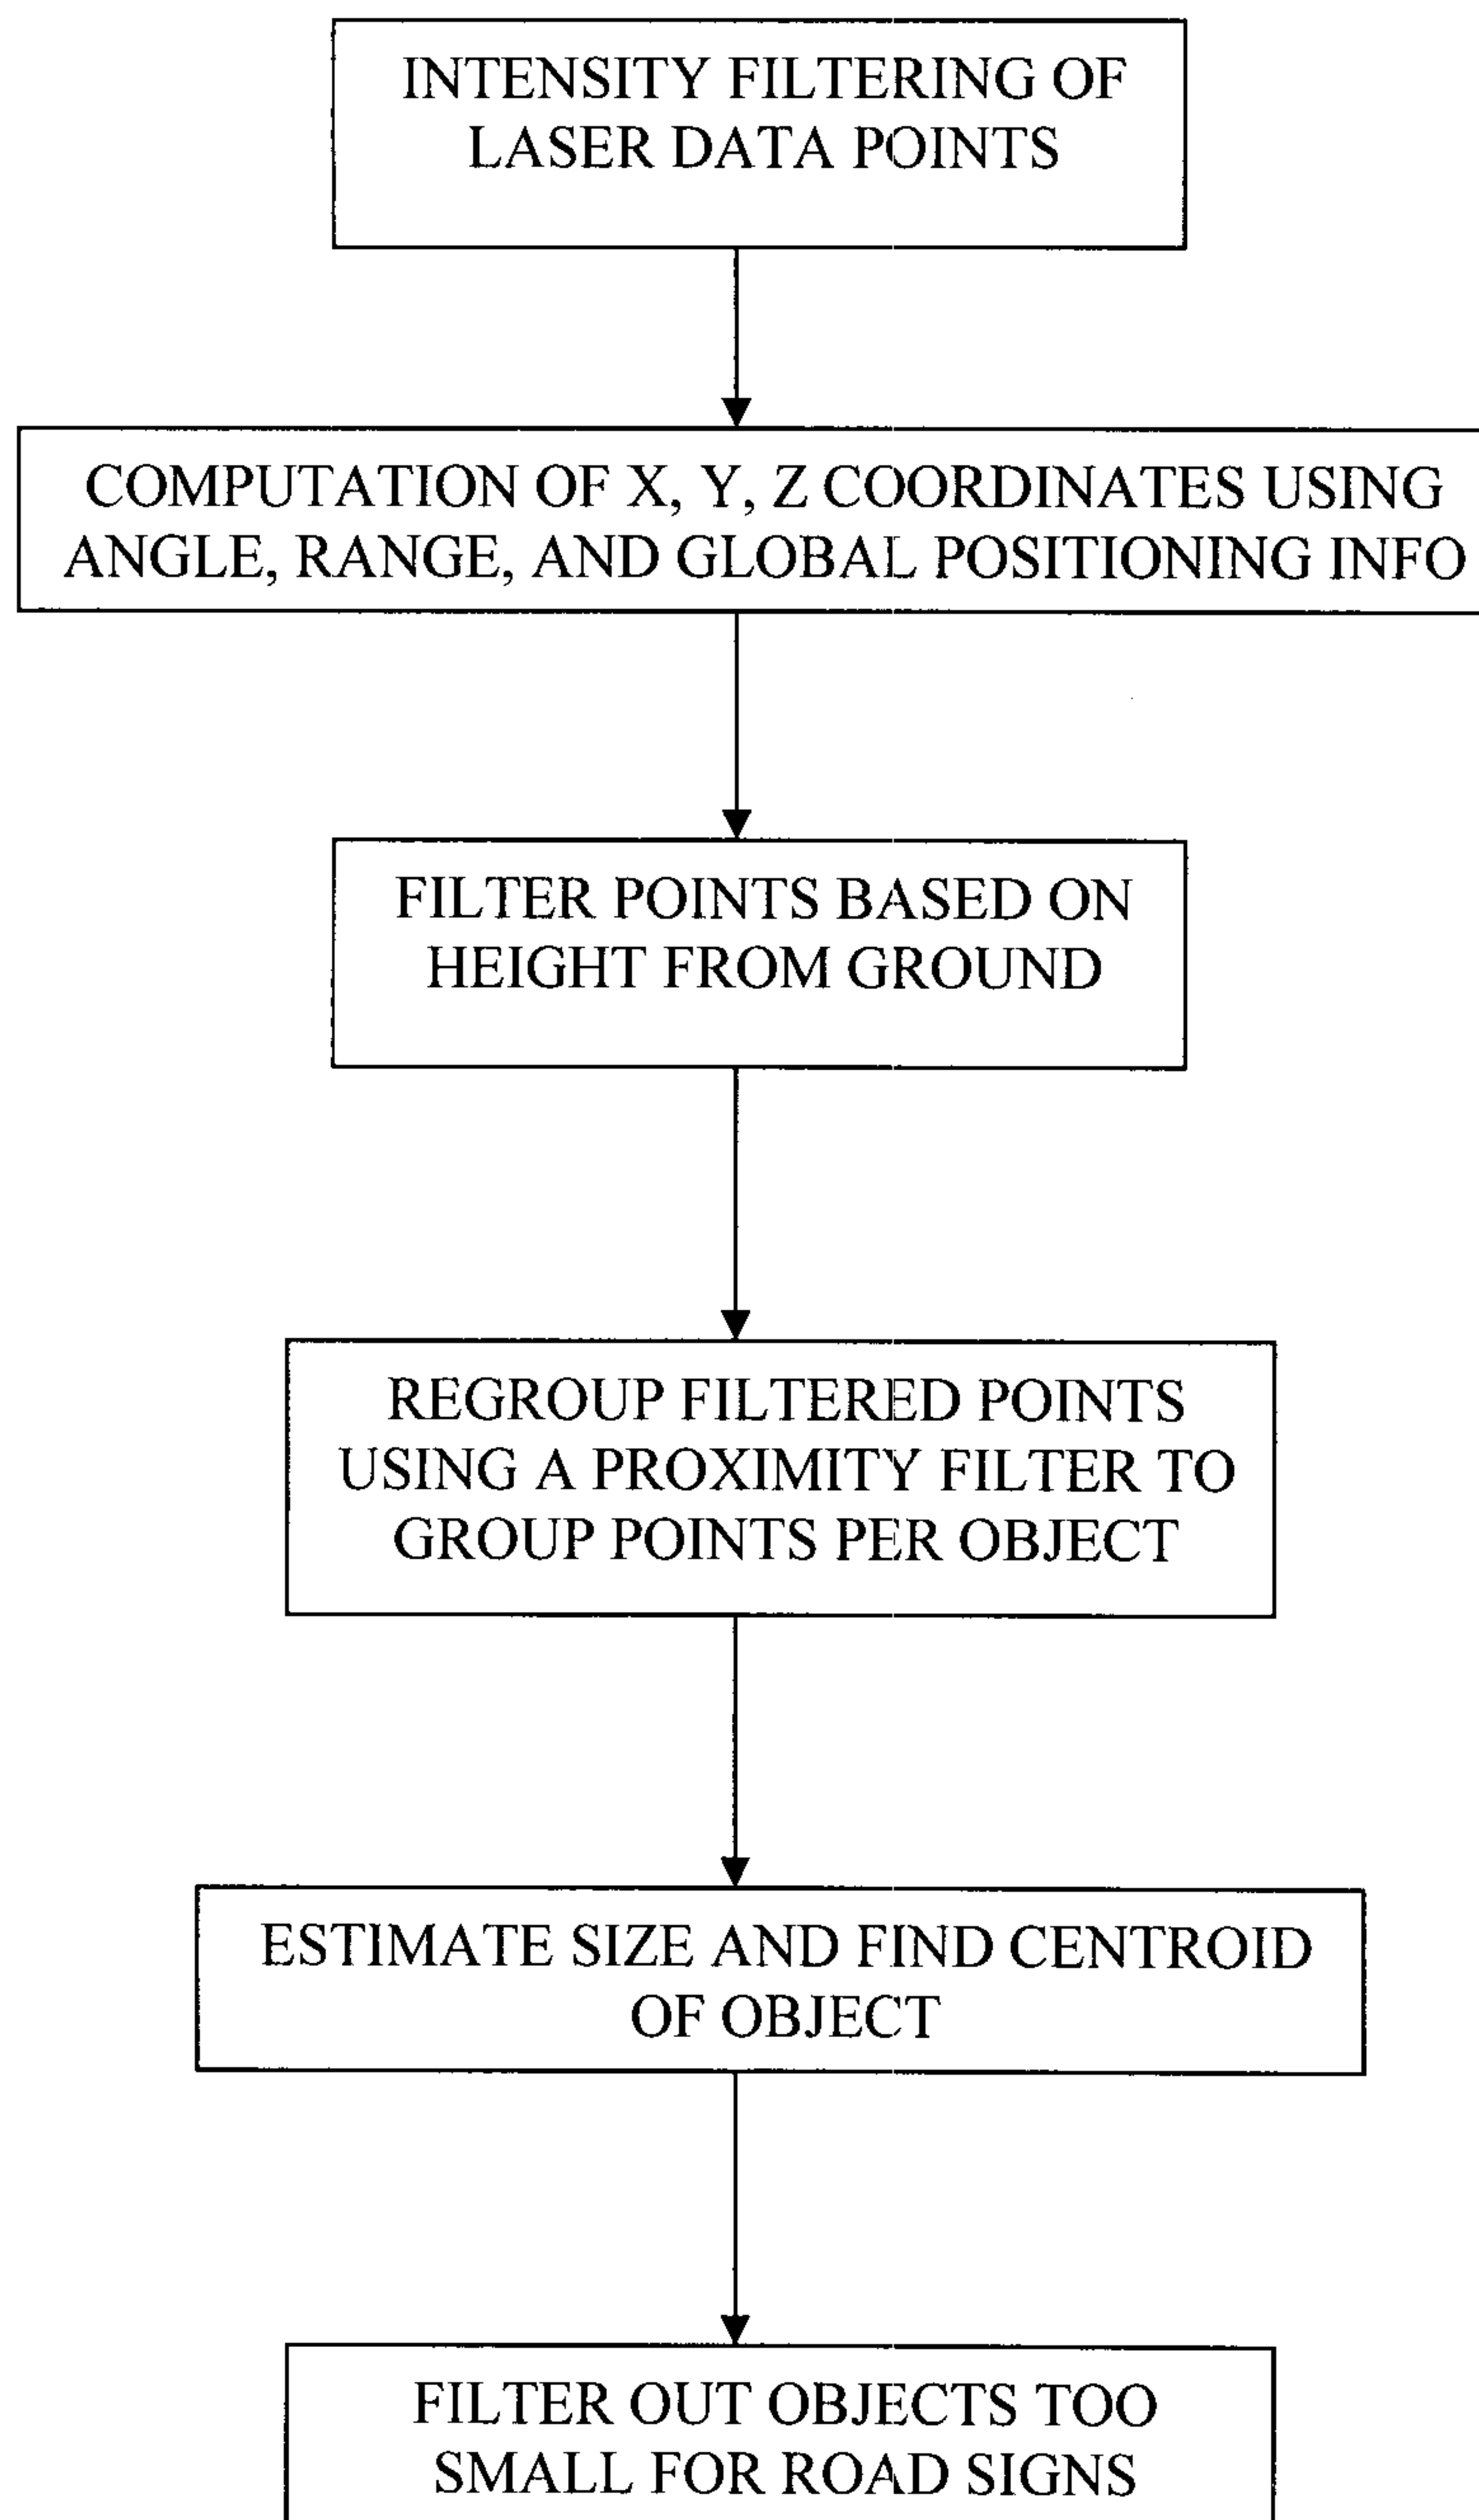


FIGURE 3

