



(51) International Patent Classification:

B29C 70/20 (2006.01) D04H 1/593 (2012.01)

D04H 1/4218 (2012.01) E04B 1/74 (2006.01)

D04H 1/64 (2012.01) B32B 19/00 (2006.01)

D04H 1/4209 (2012.01)

(21) International Application Number:

PCT/EP2017/061410

(22) International Filing Date:

11 May 2017 (11.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16169635.6 13 May 2016 (13.05.2016) EP

16169638.0 13 May 2016 (13.05.2016) EP

16169641.4 13 May 2016 (13.05.2016) EP

(71) Applicant: ROCKWOOL INTERNATIONAL A/S [DK/DK]; Hovedgaden 584, 2640 Hedehusene (DK).

(72) Inventors: HJELMGAARD, Thomas; Kovangen 119B, 3480 Fredensborg (DK). MERES, Oskar; Bækkeskovvej 12b, 2665 Vallensbæk Strand (DK). JACOBSEN, Bent; Lysholmparken 12, Østed, 4320 Lejre (DK).

(74) Agent: HØIBERG P/S; Adelgade 12, 1304 Copenhagen K (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD OF PRODUCING A MINERAL WOOL PRODUCT COMPRISING A MULTIPLE OF LAMELLAE AND A PRODUCT OF SUCH KIND

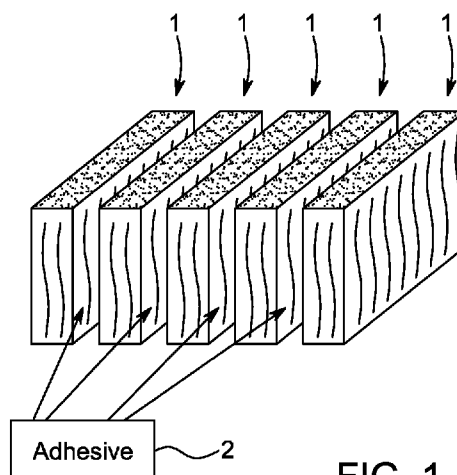


FIG. 1

(57) Abstract: The present invention concerns a method and a mineral wool product comprising a multiple of lamellae, such as a sandwich panel core, said product comprising - a plurality of lamellae cut from a mineral wool web, and bonded together by applying an adhesive on the surfaces of two adjacent lamellae to form a web-like product, wherein the adhesive comprises at least one hydrocolloid.



A method of producing a mineral wool product comprising a multiple of lamellae and a product of such kind

Field of the invention

The present invention relates to a method of producing a mineral wool product comprising a multiple of lamellae and a product of such kind.

Background of the invention

In some mineral wool products, such as sandwich panel products, the mineral wool product is a so-called sandwich panel core. A sandwich panel core may be made by the general method where a cured mineral wool web is cut longitudinally into elements being lamellae and the lamellae thus formed are turned 90° about their longitudinal axis where after the lamellae thus oriented are bonded together with the adhesive to form a web-like product which is then cut into desired lengths to form board elements. Due to the turning of the lamellae the fibres of the finished boards will predominantly be oriented in a plane perpendicular to the surfaces of the boards and as a result thereof boards having a considerable stiffness and strength perpendicularly to the surfaces of the boards are obtained. An example of such assembly of lamellae and the manufacturing process thereof is known from e.g. WO 2005/068574 A1.

In WO 2005/068574 A1 there is disclosed a method of manufacturing a board using a hot melt adhesive to bond the mineral wool fibre elements together. The elements are bonded together by the hot-melt adhesive, which is cured by heating the bonded structure to a temperature of approx. 150-185°C.

An alternative way of forming the lamellae board is known from DE 32 23 246 A1. In this disclosure the lamellae board is formed by gluing batts together on top of each other and subsequently cut a slice.

When using such lamellae product as a sandwich panel core, the core is provided with metal sheets on major surfaces of the panel to provide a sandwich panel product, such as by adhesion with the adhesive.

The lamellae product may also be used for insulation of facades (e.g. Fasrock XL) or flat roof insulation, where compression strength is an important parameter.

Bonding together or laminating elements is utilized for different purposes respectively to achieve improved insulation, strength, stability, appearance or other properties.

Insulating characteristics of ready-made panels depend among other things upon the way in which individual panels are installed and/or bonded together at a construction site. The bigger the number of small panels necessary to form a requested surface, the bigger the number of edges at which panels are in mutual contact. The bigger the number of contact edges between the panels, the bigger the number of thermal bridges will be formed on the insulated surface as a result of inaccurate laying, improper adjustment of individual panels, and also as a result of increased risk of soiling contact surfaces.

In the past, phenol-formaldehyde resins which can be economically produced have been used as adhesive compositions for bonding together mineral wool elements.

However, these adhesives suffer from the disadvantage that they contain formaldehyde and they are therefore potentially harmful to handle and require protective measures when handling them on-site.

Non-phenol-formaldehyde binders which can be used as adhesives are sugar based binders, such as for example the compositions disclosed in EP2990494A1, PCT/EP2015/080758, WO2007/014236, WO2011/138458 and WO2009/080938.

However, all these binders, when used as adhesives for bonding together the surfaces of mineral wool elements, suffer from the disadvantage that they require high temperatures for curing which makes it necessary to apply heat over a prolonged time to the elements to be bonded together. This does not only require additional equipment but can also cause a fire hazard, e.g. when bonding together isolation elements for a roof insulation on-site. Further, the high temperature curing of these known adhesives can cause the emission of harmful or irritating fumes which may require protective measures for the handling of this matter.

Another type of adhesive that has been used for gluing together mineral wool elements with each other or with other elements such as glass fleece or metal sheet is a

polyurethane based adhesive. This may be a one- or two-component adhesive. Such adhesives do not necessarily have to be cured at high temperatures. However, these adhesives may also be harmful when handling and are not based on naturally occurring ingredients.

Other adhesives are based on PVA, bitumen, inorganic binders PUR, and/or polyacrylates.

Summary of invention

Accordingly, it was an object of the present invention to provide a method of producing mineral wool fibre boards comprising a multiple of lamellae, whereby the method uses an adhesive that does not require high temperatures for curing and whereby during the handling, application, and curing of the adhesive exposure to harmful substances is minimized and no protective measures are necessary.

This object is achieved by a method of producing a mineral wool product comprising a multiple of lamellae, said method comprising the steps of:

- providing a cured mineral wool web;
- cutting said mineral wool web into a plurality of lamellae,
- bonding the lamellae together by applying an adhesive on the surfaces of two adjacent lamellae,
- curing the adhesive, wherein the adhesive comprises at least one hydrocolloid.

Producing the mineral wool product by cutting lamellae and bonding the lamellae together is very versatile in production as any number of lamellae may be bonded together, and the mutual position of neighbouring lamellae may be adjusted to form a staggered pattern for making a large mineral wool product, e.g. having a length longer than the individual lamellae. A staggered pattern of the lamellae in the mineral wool product may be advantageous to not have breaking points at the same location across a mineral wool product as such breaking points introduce weaknesses.

According to an alternative embodiment the adhesive is applied to the surface of the cured mineral wool web before cutting the mineral wool web into lamellae. This should be understood to include an embodiment comprising bonding a plurality of mineral wool webs

together to form a laminate and cutting slices of the laminate. The slices would then be formed of a plurality of lamellae bonded together. This embodiment may be preferable for producing a standard product of a length, which is the same as or shorter length than the individual lamellae.

This alternative embodiment should also be understood to include an embodiment comprising the consecutive steps of applying adhesive to the cured mineral wool web, cutting the mineral wool web into lamellae, and bonding these lamellae together. This embodiment may have the advantage that it is easier to apply the adhesive to the relatively large surface of the mineral wool web compared to the relatively small surface of the lamellae.

By lamellae is meant that the mineral wool web is cut into strips which are relatively long and thin, such as 1200 x 200 mm. The lamellae may be cut cross-wise to the web or along the longitudinal axis of the web. Generally the dominant fibre direction in a mineral wool web is a plane more or less parallel to the major surfaces of the web.

By the invention it is found advantageous to use the particular type of adhesive, especially when it has the preferred features set out, as there can be provided particularly durable connections for lamellae.

It is surprisingly found that it is possible to bond together the surfaces of not only mineral wool elements with each other but also one or more another kinds of element, such as metal sheets, by using the method described. It is further advantageous that the adhesive used can be cured at relatively low temperatures. Furthermore, since the adhesive used for the method in some embodiments does usually not contain any harmful substances and does usually not set free any harmful substances during the curing, the method can be carried out by any person on-site of use without any protective measures and without a need for specific training for the persons to carry out the method.

Accordingly, the mineral wool product is preferably a sandwich panel core.

In order to achieve a compression resistant product it is advantageous that the mineral wool web is cut longitudinally into lamellae and the lamellae thus formed are turned 90° about their longitudinal axis where after the lamellae with this orientation are bonded together with the adhesive. This is found advantageous as the fibre orientation of the

mineral wool fibre board may be substantially in a plane perpendicular to the surfaces of the mineral wool product after the bonding. The surfaces of the mineral wool product are preferably the surfaces which are intended for facing a building construction or facing away from a construction.

Mineral wool webs are generally produced by collecting fibres produced on a horizontal conveyor, and fibre direction in the mineral wool web produced in this way is generally dominantly horizontal. When such mineral wool webs are cut into lamellae (or elongated strips), which are turned 90° about their longitudinal axis, the main fibre direction of the lamellae will be substantially parallel to a vertical plane.

In a preferred embodiment, the adhesive corresponds with the binder in the mineral wool fibre product. Hereby, a particularly strong bonding is achieved.

According to the method of the invention, the step of curing preferably comprises a drying process, involving blowing air or gas over/through the mineral wool product and/or by increasing temperature. Preferably, the step of curing is carried out at temperatures from 5 to 95 °C, such as 10 to 80 °C, such as 20 to 60 °C, such as 40 to 50 °C.

In some preferred embodiment of the invention, the density of the mineral wool fibre product is 50-300 kg/m³, preferably approx. 50-200 kg/m³, more preferably approx. 65-100 kg/m³.

In a second aspect of the invention there is provided a mineral wool product comprising a multiple of lamellae, such as a sandwich panel core, said product comprising

- a plurality of lamellae cut from a mineral wool web, and bonded together by applying an adhesive on the surfaces of two adjacent lamellae to form a web-like product, wherein the adhesive comprises at least one hydrocolloid.

In the product the fibres of the lamellae are predominantly oriented in a plane perpendicular to the major surfaces of the web-like product. The mineral wool fibre product is preferably a cured mineral wool fibre product.

Density of the mineral wool product is a compromise as increasing density increases the strength, but also the cost. In relation to thermal insulation properties optimum densities depends on the materials, fibre diameter etc., but for stone wool insulation the best

thermal insulation properties are typically found at densities in the range of 65-80 kg/m³. Suitable density ranges of the mineral wool product is 50-300 kg/m³, preferably approx. 50-200 kg/m³, more preferably approx. 65-100 kg/m³.

Detailed description of preferred embodiments

In the following the present invention is described with reference to some preferred embodiments and the accompanying drawings, in which

Fig. 1 is a schematic perspective view of a lamellae product prior to the bonding process, and

Fig. 2 is the same after the lamellae are bonded together.

A façade insulation product

In one embodiment the mineral wool product is a façade insulation product for external insulation of facades, such as an External Thermal Insulation Composite System (ETICS). Such external insulation of buildings is of particular advantage for existing buildings in need of a renovation. Insulation of the building as a whole from the outside is the most efficient way of protection against thermal energy loss, as it fully prevents thermal bridges. Further a render (finish layer or top coat mortar) can be applied directly to the mineral wool providing a visual upgrade of the façade.

A façade insulation product may be made up of for example two lamellae of 1200 x 200 mm turned 90° about their longitudinal direction and glued together side-by-side to form a board of 1200 x 400 mm. Thickness may vary depending on the needs, such as from 80 mm to 200 mm. When lamellae are glued together the number of potential thermal bridges between the lamellae are minimized, and the time consumption for mounting the insulation also minimized compared to installation of the individual lamellae.

A flat roof product

In another embodiment the mineral wool product is a flat roof insulation product. Such flat roof insulation products may be made of two or more lamellae glued together in a similar way as described above in relation to the façade insulation product.

A sandwich panel product

With reference to the figures, in one embodiment, the mineral wool product is a so-called sandwich panel core. A sandwich panel core may be made by the general method where a cured mineral wool web is cut longitudinally into elements being lamellae 1 and the lamellae thus formed are turned 90° about their longitudinal axis where after the lamellae thus oriented are bonded together with the adhesive to form a web-like product which is then cut into desired lengths to form board elements. Due to the turning of the lamellae the fibres of the finished boards will predominantly be oriented in a plane perpendicular to the surfaces of the boards and as a result thereof boards having a considerable stiffness and strength perpendicularly to the surfaces of the boards are obtained.

The sandwich panel core is provided with metal sheets (not shown) on major surfaces of the panel to provide a sandwich panel product, such as by adhesion with the adhesive 2.

The adhesive may be applied to the surfaces of the lamellae 1 for instance by spraying or otherwise applied. When a predetermined number of lamellae are aligned the lamellae are bonded together by adjacent surfaces of two neighbouring lamellae contacting each other and then curing the adhesive.

By the invention it is realised that the mineral wool product may also be an uncured mineral wool product, if the lamellae are made of uncured mineral wool.

The adhesive for use in the method of the present invention

In one embodiment, the adhesive comprises at least one hydrocolloid.

In one embodiment, the at least one hydrocolloid is selected from the group consisting of gelatine, pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum, cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.

In one embodiment, the at least one hydrocolloid is a polyelectrolytic hydrocolloid.

In one embodiment, the at least one hydrocolloid is selected from the group consisting of gelatine, pectin, alginate, carrageenan, gum arabic, xanthan gum, cellulose derivatives such as carboxymethylcellulose.

In one embodiment, the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least one other hydrocolloid is selected from the group consisting of pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum, cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.

Hydrocolloid

Hydrocolloids are hydrophilic polymers, of vegetable, animal, microbial or synthetic origin, that generally contain many hydroxyl groups and may be polyelectrolytes. They are widely used to control the functional properties of aqueous foodstuffs.

Hydrocolloids may be proteins or polysaccharides and are fully or partially soluble in water and are used principally to increase the viscosity of the continuous phase (aqueous phase) i.e. as gelling agent or thickener. They can also be used as emulsifiers since their stabilizing effect on emulsions derives from an increase in viscosity of the aqueous phase.

A hydrocolloid usually consists of mixtures of similar, but not identical molecules and arising from different sources and methods of preparation. The thermal processing and for example, salt content, pH and temperature all affect the physical properties they exhibit. Descriptions of hydrocolloids often present idealised structures but since they are natural products (or derivatives) with structures determined by for example stochastic enzymatic action, not laid down exactly by the genetic code, the structure may vary from the idealised structure.

Many hydrocolloids are polyelectrolytes (for example alginate, gelatine, carboxymethylcellulose and xanthan gum).

Polyelectrolytes are polymers where a significant number of the repeating units bear an electrolyte group. Polycations and polyanions are polyelectrolytes. These groups dissociate in aqueous solutions (water), making the polymers charged. Polyelectrolyte

properties are thus similar to both electrolytes (salts) and polymers (high molecular weight compounds) and are sometimes called polysalts.

The charged groups ensure strong hydration, particularly on a per-molecule basis. The presence of counterions and co-ions (ions with the same charge as the polyelectrolyte) introduce complex behavior that is ion-specific.

A proportion of the counterions remain tightly associated with the polyelectrolyte, being trapped in its electrostatic field and so reducing their activity and mobility.

In one embodiment the adhesive comprise one or more counter-ion(s) selected from the group of Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} .

Another property of a polyelectrolyte is the high linear charge density (number of charged groups per unit length).

Generally neutral hydrocolloids are less soluble whereas polyelectrolytes are more soluble.

Many hydrocolloids also gel. Gels are liquid-water-containing networks showing solid-like behavior with characteristic strength, dependent on their concentration, and hardness and brittleness dependent on the structure of the hydrocolloid(s) present.

Hydrogels are hydrophilic crosslinked polymers that are capable of swelling to absorb and hold vast amounts of water. They are particularly known from their use in sanitary products. Commonly used materials make use of polyacrylates, but hydrogels may be made by crosslinking soluble hydrocolloids to make an insoluble but elastic and hydrophilic polymer.

Examples of hydrocolloids comprise: Agar agar, Alginate, Arabinoxylan, Carrageenan, Carboxymethylcellulose, Cellulose, Curdlan, Gelatine, Gellan, β -Glucan, Guar gum, Gum arabic, Locust bean gum, Pectin, Starch, Xanthan gum. In one embodiment, the at least one hydrocolloid is selected from the group consisting of gelatine, pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum, cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.

Examples of polyelectrolytic hydrocolloids comprise: gelatine, pectin, alginate, carrageenan, gum arabic, xanthan gum, cellulose derivatives such as carboxymethylcellulose.

In one embodiment, the at least one hydrocolloid is a polyelectrolytic hydrocolloid.

In one embodiment, the at least one hydrocolloid is selected from the group consisting of gelatine, pectin, alginate, carrageenan, gum arabic, xanthan gum, cellulose derivatives such as carboxymethylcellulose.

In one embodiment, the at least one hydrocolloid is a gel former.

In one embodiment, the at least one hydrocolloid is used in form of a salt, such as a salt of Na⁺, K⁺, NH₄⁺, Mg²⁺, Ca²⁺, Sr²⁺, Ba²⁺.

Gelatine

Gelatine is derived from chemical degradation of collagen. Gelatine is water soluble and has a molecular weight of 10.000 to 500.000 g/mol, such as 30.000 to 300.000 g/mol dependent on the grade of hydrolysis. Gelatine is a widely used food product and it is therefore generally accepted that this compound is totally non-toxic and therefore no precautions are to be taken when handling gelatine.

Gelatine is a heterogeneous mixture of single or multi-stranded polypeptides, typically showing helix structures. Specifically, the triple helix of type I collagen extracted from skin and bones, as a source for gelatine, is composed of two $\alpha 1(I)$ and one $\alpha 2(I)$ chains.

Gelatine solutions may undergo coil-helix transitions.

A type gelatins is produced by acidic treatment. B type gelatines are produced by basic treatment.

Chemical cross-links may be introduced to gelatine. In one embodiment, transglutaminase is used to link lysine to glutamine residues; in one embodiment, glutaraldehyde is used to link lysine to lysine, in one embodiment, tannins are used to link lysine residues.

The gelatine can also be further hydrolysed to smaller fragments of down to 3000 g/mol.

On cooling a gelatine solution, collagen like helices may be formed.

Other hydrocolloids may also comprise helix structures such as collagen like helices.

Gelatine may form helix structures.

In one embodiment, the cured adhesive comprising hydrocolloid comprises helix structures.

In one embodiment, the at least one hydrocolloid is a low strength gelatine, such as a gelatine having a gel strength of 30 to 125 Bloom.

In one embodiment, the at least one hydrocolloid is a medium strength gelatine, such as a gelatine having a gel strength of 125 to 180 Bloom.

In one embodiment, the at least one hydrocolloid is a high strength gelatine, such as a gelatine having a gel strength of 180 to 300 Bloom.

In a preferred embodiment, the gelatine is preferably originating from one or more sources from the group consisting of mammal, bird species, such as from cow, pig, horse, fowl, and/or from scales, skin of fish.

In one embodiment, urea may be added to the adhesives according to the present invention. The inventors have found that the addition of even small amounts of urea causes denaturation of the gelatin, which can slow down the gelling, which might be desired in some embodiments. The addition of urea might also lead to a softening of the product.

The inventors have found that the carboxylic acid groups in gelatins interact strongly with trivalent and tetravalent ions, for example aluminium salts. This is especially true for type B gelatines which contain more carboxylic acid groups than type A gelatines.

The present inventors have found that in some embodiments, curing/drying of adhesives according to the present invention including gelatin should not start off at very high temperatures.

The inventors have found that starting the curing at low temperatures may lead to stronger products. Without being bound to any particular theory, it is assumed by the inventors that starting curing at high temperatures may lead to an impenetrable outer shell of the adhesive which hinders water from underneath to get out.

Surprisingly, the adhesives according to the present invention including gelatines are very heat resistant. The present inventors have found that in some embodiments the cured adhesives can sustain temperatures up to 300 °C without degradation.

Pectin

Pectin is a heterogeneous grouping of acidic structural polysaccharides, found in fruit and vegetables which form acid-stable gels.

Generally, pectins do not possess exact structures, instead it may contain up to 17 different monosaccharides and over 20 types of different linkages.

D-galacturonic acid residues form most of the molecules.

Gel strength increases with increasing Ca^{2+} concentration but reduces with temperature and acidity increase ($\text{pH} < 3$).

Pectin may form helix structures.

The gelling ability of the di-cations is similar to that found with alginates (Mg^{2+} is much less than for Ca^{2+} , Sr^{2+} being less than for Ba^{2+}).

Alginate

Alginates are scaffolding polysaccharides produced by brown seaweeds.

Alginates are linear unbranched polymers containing β -(1,4)-linked D-mannuronic acid (M) and α -(1,4)-linked L-guluronic acid (G) residues. Alginate may also be a bacterial alginate,

such as which are additionally O-acetylated. Alginates are not random copolymers but, according to the source algae, consist of blocks of similar and strictly alternating residues (that is, MMMMMM, GGGGGG and GMGMGMGM), each of which have different conformational preferences and behavior. Alginates may be prepared with a wide range of average molecular weights (50 - 100000 residues). The free carboxylic acids have a water molecule H_3O^+ firmly hydrogen bound to carboxylate. Ca^{2+} ions can replace this hydrogen bonding, zipping guluronate, but not mannuronate, chains together stoichiometrically in a so-called egg-box like conformation. Recombinant epimerases with different specificities may be used to produce designer alginates.

Alginate may form helix structures.

Carrageenan

Carrageenan is a collective term for scaffolding polysaccharides prepared by alkaline extraction (and modification) from red seaweed.

Carrageenans are linear polymers of about 25,000 galactose derivatives with regular but imprecise structures, dependent on the source and extraction conditions.

κ -carrageenan (kappa-carrageenan) is produced by alkaline elimination from μ -carrageenan isolated mostly from the tropical seaweed *Kappaphycus alvarezii* (also known as *Eucheuma cottonii*).

ι -carrageenan (iota-carrageenan) is produced by alkaline elimination from ν -carrageenan isolated mostly from the Philippines seaweed *Eucheuma denticulatum* (also called *Spinosum*).

λ -carrageenan (lambda-carrageenan) (isolated mainly from *Gigartina pistillata* or *Chondrus crispus*) is converted into θ -carrageenan (theta-carrageenan) by alkaline elimination, but at a much slower rate than causes the production of ι -carrageenan and κ -carrageenan.

The strongest gels of κ -carrageenan are formed with K^+ rather than Li^+ , Na^+ , Mg^{2+} , Ca^{2+} , or Sr^{2+} .

All carrageenans may form helix structures.

Gum arabic

Gum arabic is a complex and variable mixture of arabinogalactan oligosaccharides, polysaccharides and glycoproteins. Gum arabic consists of a mixture of lower relative molecular mass polysaccharide and higher molecular weight hydroxyproline-rich glycoprotein with a wide variability.

Gum arabic has a simultaneous presence of hydrophilic carbohydrate and hydrophobic protein.

Xanthan gum

Xanthan gum is a microbial desiccation-resistant polymer prepared e.g. by aerobic submerged fermentation from *Xanthomonas campestris*.

Xanthan gum is an anionic polyelectrolyte with a β -(1,4)-D-glucopyranose glucan (as cellulose) backbone with side chains of $-(3,1)\text{-}\alpha\text{-linked D-mannopyranose-(2,1)-}\beta\text{-D-glucuronic acid-(4,1)-}\beta\text{-D-mannopyranose}$ on alternating residues.

Xanthan gums natural state has been proposed to be bimolecular antiparallel double helices. A conversion between the ordered double helical conformation and the single more-flexible extended chain may take place at between 40 °C - 80 °C. Xanthan gums may form helix structures.

Xanthan gums may contain cellulose.

Cellulose derivatives

An example of a cellulose derivative is carboxymethylcellulose.

Carboxymethylcellulose (CMC) is a chemically modified derivative of cellulose formed by its reaction with alkali and chloroacetic acid.

The CMC structure is based on the β -(1,4)-D-glucopyranose polymer of cellulose. Different preparations may have different degrees of substitution, but it is generally in the range 0.6 - 0.95 derivatives per monomer unit.

Agar agar

Agar agar is a scaffolding polysaccharide prepared from the same family of red seaweeds (Rhodophyceae) as the carrageenans. It is commercially obtained from species of Gelidium and Gracilariae.

Agar agar consists of a mixture of agarose and agarpectin. Agarose is a linear polymer, of relative molecular mass (molecular weight) about 120,000, based on the -(1,3)- β -D-galactopyranose-(1,4)-3,6-anhydro- α -L-galactopyranose unit.

Agarpectin is a heterogeneous mixture of smaller molecules that occur in lesser amounts.

Agar agar may form helix structures.

Arabinoxylan

Arabinoxylans are naturally found in the bran of grasses (Graminae).

Arabinoxylans consist of α -L-arabinofuranose residues attached as branch-points to β -(1,4)-linked D-xylopyranose polymeric backbone chains.

Arabinoxylan may form helix structures.

Cellulose

Cellulose is a scaffolding polysaccharide found in plants as microfibrils (2-20 nm diameter and 100 - 40 000 nm long). Cellulose is mostly prepared from wood pulp. Cellulose is also produced in a highly hydrated form by some bacteria (for example, *Acetobacter xylinum*).

Cellulose is a linear polymer of β -(1,4)-D-glucopyranose units in $4C_1$ conformation. There are four crystalline forms, I α , I β , II and III.

Cellulose derivatives may be methyl cellulose, hydroxypropyl methylcellulose, hydroxyethyl methylcellulose, hydroxyethyl cellulose, hydroxypropyl cellulose.

Curdlan

Curdlan is a polymer prepared commercially from a mutant strain of *Alcaligenes faecalis* var. *myxogenes*. Curdlan (curdlan gum) is a moderate relative molecular mass, unbranched linear 1,3 β -D glucan with no side-chains.

Curdlan may form helix structures.

Curdlan gum is insoluble in cold water but aqueous suspensions plasticize and briefly dissolve before producing reversible gels on heating to around 55 °C. Heating at higher temperatures produces more resilient irreversible gels, which then remain on cooling.

Scleroglucan is also a 1,3 β -D glucan but has additional 1,6 β -links that confer solubility under ambient conditions.

Gellan

Gellan gum is a linear tetrasaccharide 4)-L-rhamnopyranosyl-(α -1,3)-D-glucopyranosyl-(β -1,4)-D-glucuronopyranosyl-(β -1,4)-D-glucopyranosyl-(β -1, with O(2) L-glyceryl and O(6) acetyl substituents on the 3-linked glucose.

Gellan may form helix structures.

β -Glucan

β -Glucans occur in the bran of grasses (Gramineae).

β -Glucans consist of linear unbranched polysaccharides of linked β -(1,3)- and β -(1,4)-D-glucopyranose units in a non-repeating but non-random order.

Guar gum

Guar gum (also called guaran) is a reserve polysaccharide (seed flour) extracted from the seed of the leguminous shrub *Cyamopsis tetragonoloba*.

Guar gum is a galactomannana similar to locust bean gum consisting of a (1,4)-linked β -D-mannopyranose backbone with branch points from their 6-positions linked to α -D-galactose (that is, 1,6-linked- α -D-galactopyranose).

Guar gum is made up of non-ionic polydisperse rod-shaped polymer.

Unlike locust bean gum, it does not form gels.

Locust bean gum

Locust bean gum (also called Carob bean gum and Carubin) is a reserve polysaccharide (seed flour) extracted from the seed (kernels) of the carob tree (*Ceratonia siliqua*).

Locust bean gum is a galactomannana similar to guar gum consisting of a (1,4)-linked β -D-mannopyranose backbone with branch points from their 6-positions linked to α -D-galactose (that is, 1,6-linked α -D-galactopyranose).

Locust bean gum is polydisperse consisting of non-ionic molecules.

Starch

Starch consists of two types of molecules, amylose (normally 20-30%) and amylopectin (normally 70-80%). Both consist of polymers of α -D-glucose units in the $4C_1$ conformation. In amylose these are linked -(1,4)-, with the ring oxygen atoms all on the same side, whereas in amylopectin about one residue in every twenty or so is also linked -(1,6)- forming branch-points. The relative proportions of amylose to amylopectin and -(1,6)- branch-points both depend on the source of the starch. The starch may derive from the source of corn (maize), wheat, potato, tapioca and rice. Amylopectin (without amylose) can be isolated from 'waxy' maize starch whereas amylose (without amylopectin) is best isolated after specifically hydrolyzing the amylopectin with pullulanase.

Amylose may form helix structures.

In one embodiment, the at least one hydrocolloid is a functional derivative of starch such as cross-linked, oxidized, acetylated, hydroxypropylated and partially hydrolyzed starch.

In a preferred embodiment, the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least one other hydrocolloid is selected from the group consisting of pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum, cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.

In one embodiment, the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least other hydrocolloid is pectin.

In one embodiment, the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least other hydrocolloid is alginate.

In one embodiment, the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least other hydrocolloid is carboxymethylcellulose.

In a preferred embodiment, the adhesive according to the present invention comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and wherein the gelatine is present in the aqueous adhesive in an amount of 10 to 95 wt.-%, such as 20 to 80 wt.-%, such as 30 to 70 wt.-%, such as 40 to 60 wt.-%, based on the weight of the hydrocolloids.

In one embodiment, the adhesive comprises at least two hydrocolloids, wherein the one hydrocolloid and the at least other hydrocolloid have complementary charges.

In one embodiment, the one hydrocolloid is one or more of gelatine or gum arabic having complementary charges from one or more hydrocolloid(s) selected from the group of pectin, alginate, carrageenan, xanthan gum or carboxymethylcellulose.

In a preferred embodiment, the adhesive according to the present invention comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and wherein the gelatine is present in the aqueous adhesive in an amount of 10 to 95 wt.-%, such as 20 to 80 wt.-%, such as 30 to 70 wt.-%, such as 40 to 60 wt.-%, based on the weight of the hydrocolloids. In one embodiment, the adhesive comprises at least two hydrocolloids, wherein the one hydrocolloid and the at least other hydrocolloid have complementary charges.

In one embodiment, the one hydrocolloid is one or more of gelatine or gum arabic having complementary charges from one or more hydrocolloid(s) selected from the group of pectin, alginate, carrageenan, xanthan gum or carboxymethylcellulose.

In one embodiment, the adhesive is capable of curing at a temperature of not more than 95 °C, such as 5-95 °C, such as 10-80 °C, such as 20-60 °C, such as 40-50 °C.

The curing process may commence immediately after application of the adhesive to the fibres. The curing is defined as a process whereby the adhesive undergoes a physical and/or chemical reaction which in case of a chemical reaction usually increases the molecular weight of the compounds in the adhesive and thereby increases the viscosity of the adhesive, usually until the adhesive reaches a solid state.

In one embodiment the curing process comprises cross-linking and/or water inclusion as crystal water.

In one embodiment the cured adhesive contains crystal water that may decrease in content and raise in content depending on the prevailing conditions of temperature, pressure and humidity.

In one embodiment the curing process comprises a drying process.

In one embodiment the curing process comprises drying by pressure. The pressure may be applied by blowing air or gas through/over the mixture of mineral fibres and adhesive. The blowing process may be accompanied by heating or cooling or it may be at ambient temperature.

In one embodiment the curing process takes place in a humid environment.

The humid environment may have a relative humidity RH of 60-99%, such as 70-95%, such as 80-92%. The curing in a humid environment may be followed by curing or drying to obtain a state of the prevalent humidity.

In one embodiment the curing is performed in oxygen-depleted surroundings.

Without wanting to be bound by any particular theory, the applicant believes that performing the curing in an oxygen-depleted surrounding is particularly beneficial when the adhesive includes an enzyme because it increases the stability of the enzyme component in some embodiments, in particular of the transglutaminase enzyme, and thereby improves the crosslinking efficiency. In one embodiment, the curing process is therefore performed in an inert atmosphere, in particular in an atmosphere of an inert gas, like nitrogen.

In some embodiments, in particular in embodiments in which the adhesive includes phenolics, in particular tannins oxidizing agents can be added. Oxidising agents as additives can serve to increase the oxidising rate of the phenolics in particular tannins. One example is the enzyme tyrosinase which oxidizes phenols to hydroxy-phenols/quinones and therefore accelerates the adhesive forming reaction. In another embodiment, the oxidising agent is oxygen, which is supplied to the adhesive. In one embodiment, the curing is performed in oxygen-enriched surroundings.

In one embodiment, the adhesive is not crosslinked.

In an alternative embodiment, the adhesive is crosslinked.

In one embodiment, the aqueous adhesive according to the present invention is not a thermoset adhesive.

A thermosetting composition is in a soft solid or viscous liquid state, preferably comprising a prepolymer, preferably comprising a resin that changes irreversibly into an infusible, insoluble polymer network by curing. Curing is typically induced by the action of heat, whereby typically temperatures above 95 °C are needed.

A cured thermosetting resin is called a thermoset or a thermosetting plastic/ polymer - when used as the bulk material in a polymer composite, they are referred to as the thermoset polymer matrix.

In one embodiment, the aqueous adhesive according to the present invention does not contain a poly(meth)acrylic acid, a salt of a poly(meth)acrylic acid or an ester of a poly(meth)acrylic acid.

In one embodiment, the at least one hydrocolloid is a biopolymer or modified biopolymer.

Biopolymers are polymers produced by living organisms. Biopolymers may contain monomeric units that are covalently bonded to form larger structures.

There are three main classes of biopolymers, classified according to the monomeric units used and the structure of the biopolymer formed: Polynucleotides (RNA and DNA), which are long polymers composed of 13 or more nucleotide monomers; Polypeptides, such as proteins, which are polymers of amino acids; Polysaccharides, such as linearly bonded polymeric carbohydrate structures.

Polysaccharides may be linear or branched; they are typically joined with glycosidic bonds. In addition, many saccharide units can undergo various chemical modifications, and may form parts of other molecules, such as glycoproteins.

In one embodiment, the at least one hydrocolloid is a biopolymer or modified biopolymer with a polydispersity index regarding molecular mass distribution of 1, such as 0.9 to 1.

In one embodiment, the adhesive comprises proteins from animal sources, including collagen, gelatine and hydrolysed gelatine, and the adhesive further comprises at least one phenol and/or quinone containing compound, such as tannin selected from one or more components from the group consisting of tannic acid, condensed tannins (proanthocyanidins), hydrolysable tannins, gallotannins, ellagitannins, complex tannins, and/or tannin originating from one or more of oak, chestnut, staghorn sumac and fringe cups.

In one embodiment, the adhesive comprises proteins from animal sources, including collagen, gelatine and hydrolysed gelatine, and wherein the adhesive further comprises at least one enzyme selected from the group consisting of transglutaminase (EC 2.3.2.13), protein disulfide isomerase (EC 5.3.4.1), thiol oxidase (EC 1.8.3.2), polyphenol oxidase (EC 1.14.18.1), in particular catechol oxidase, tyrosine oxidase, and phenoloxidase, lysyl oxidase (EC 1.4.3.13), and peroxidase (EC 1.11.1.7).

In a preferred embodiment, the adhesive according to the present invention is formaldehyde free.

For the purpose of the present application, the term "formaldehyde free" is defined to characterize a mineral wool product where the emission is below 5 $\mu\text{g}/\text{m}^2/\text{h}$ of formaldehyde from the mineral wool product, preferably below 3 $\mu\text{g}/\text{m}^2/\text{h}$. Preferably, the test is carried out in accordance with ISO 16000 for testing aldehyde emissions.

A surprising advantage of embodiments of mineral wool products according to the present invention is that they show self-healing properties. After being exposed to very harsh conditions when mineral wool products lose a part of their strength, the mineral wool products according to the present invention can regain a part of, the whole of or even exceed the original strength. In one embodiment, the aged strength is at least 80%, such as at least 90%, such as at least 100%, such as at least 130%, such as at least 150% of the unaged strength. This is in contrast to conventional mineral wool products for which the loss of strength after being exposed to harsh environmental conditions is irreversible. While not wanting to be bound to any particular theory, the present inventors believe that this surprising property in mineral wool products according to the present invention is due to the complex nature of the bonds formed in the network of the cured adhesive, such as the protein crosslinked by the phenol and/or quinone containing compound or crosslinked by an enzyme, which also includes quaternary structures and hydrogen bonds and allows bonds in the network to be established after returning to normal environmental conditions. For an insulation product, which when e.g. used as a roof insulation can be exposed to very high temperatures in the summer, this is an important advantage for the long term stability of the product.

In one embodiment, the adhesive consists essentially of
at least one hydrocolloid;
optionally at least one oil;
optionally at least one pH-adjuster;
optionally at least one crosslinker;
optionally at least one anti-fouling agent;
optionally at least one anti-swelling agent;
water.

In one embodiment, the at least one oil is a non-emulsified hydrocarbon oil.

In one embodiment, the at least one oil is an emulsified hydrocarbon oil.

In one embodiment, the at least one oil is a plant-based oil.

In one embodiment, the at least one crosslinker is tannin selected from one or more components from the group consisting of tannic acid, condensed tannins (proanthocyanidins), hydrolysable tannins, gallotannins, ellagitannins, complex tannins, and/or tannin originating from one or more of oak, chestnut, staghorn sumac and fringe cups.

In one embodiment, the at least one crosslinker is an enzyme selected from the group consisting of transglutaminase (EC 2.3.2.13), protein disulfide isomerase (EC 5.3.4.1), thiol oxidase (EC 1.8.3.2), polyphenol oxidase (EC 1.14.18.1), in particular catechol oxidase, tyrosine oxidase, and phenoloxidase, lysyl oxidase (EC 1.4.3.13), and peroxidase (EC 1.11.1.7).

In one embodiment, the at least one anti-swelling agent is tannic acid and/or tannins.

In one embodiment, the at least one anti-fouling agent is an antimicrobial agent.

Antimicrobial agents may be benzoic acid, propionic acid, sodium benzoate, sorbic acid, and potassium sorbate to inhibit the outgrowth of both bacterial and fungal cells. However, natural biopreservatives may be used. Chitosan is regarded as being antifungal and antibacterial. The most frequently used biopreservatives for antimicrobial are lysozyme and nisin. Common other biopreservatives that may be used are bacteriocins, such as lactacin and pediocin and antimicrobial enzymes, such as chitinase and glucose oxidase. Also, the use of the enzyme lactoperoxidase (LPS) presents antifungal and antiviral activities. Natural antimicrobial agents may also be used, such as tannins, rosemary, and garlic essential oils, oregano, lemon grass, or cinnamon oil at different concentrations.

In one aspect of the invention, there is provided a mineral wool product comprising a multiple of lamellae, such as a sandwich panel core, said product comprising

- a plurality of lamellae cut from a mineral wool web, and bonded together by applying an adhesive on the surfaces of two adjacent lamellae to form a web-like product, wherein the adhesive comprises at least one hydrocolloid.

In this aspect of the invention any of the features discussed above with respect to the adhesive may be applied.

The adhesive process

In one embodiment, after application of the adhesive the elements are subjected to pressure during bonding and preferably the total time for application of the adhesive and subjection to pressure is not more than 120 seconds, such as 60 seconds, such as 30 seconds, such as 20 seconds.

In one embodiment, the panels can be moved along stationary nozzles or stationary panels can be sprayed with the use of movable nozzles or applied with rollers. Spraying time and adhesive bonding time is 120 seconds maximum. Panels sprayed with the adhesive are pressed together.

In one embodiment, the adhesive can be applied to just one of the surfaces to be bonded but it may be applied to both.

In one embodiment, the protein component of the adhesive can be applied to a first surface to be bonded and the phenol and/or quinone containing compound and/or at least one enzyme can be applied to a second surface to be bonded and then the first and second surfaces are contacted with each other.

In one embodiment, the amount of cured adhesive is 10-1000 g/m² surface, such as 50-500 g/m² surface, such as 100-400 g/m² surface.

It is advantageous to achieve a balanced penetration of the adhesive into deeper layers of the element; such a connection would be more durable than a connection made by another method. Generally the adhesive does not penetrate more than 2 mm into the element.

In one embodiment, the adhesive is applied by means of a spraying, rolling, brushing, curtain painting, a sponge or a soft sponge roll.

Examples

In the following examples, several adhesives which fall under the definition of the present invention were prepared and compared to adhesives according to the prior art.

Adhesives according to the prior art

The following properties were determined for the adhesives according the prior art.

Reagents

Silane (Momentive VS-142) was supplied by Momentive and was calculated as 100% for simplicity. All other components were supplied in high purity by Sigma-Aldrich and were assumed anhydrous for simplicity unless stated otherwise.

Adhesive component solids content – definition

The content of each of the components in a given adhesive solution before curing is based on the anhydrous mass of the components. The following formula can be used:

$$\text{Binder component solids content (\%)} = \frac{\text{binder component A solids (g)} + \text{binder component B solids (g)} + \dots}{\text{total weight of mixture (g)}} \times 100\%$$

Adhesive solids – definition and procedure

The content of adhesive after curing is termed “adhesive solids”.

Disc-shaped stone wool samples (diameter: 5 cm; height 1 cm) were cut out of stone wool and heat-treated at 580 °C for at least 30 minutes to remove all organics. The solids of the adhesive mixture (see below for mixing examples) were measured by distributing a sample of the adhesive mixture (approx. 2 g) onto a heat treated stone wool disc in a tin foil container. The weight of the tin foil container containing the stone wool disc was weighed before and directly after addition of the adhesive mixture. Two such adhesive mixture loaded stone wool discs in tin foil containers were produced and they were then heated at 200 °C for 1 hour. After cooling and storing at room temperature for 10 minutes,

the samples were weighed and the adhesive solids were calculated as an average of the two results. A adhesive with the desired adhesive solids could then be produced by diluting with the required amount of water and 10% aq. silane (Momentive VS-142).

Reaction loss – definition

The reaction loss is defined as the difference between the adhesive component solids content and the adhesive solids.

Mechanical strength studies (bar tests) – procedure

The mechanical strength of the adhesives was tested in a bar test. For each adhesive, 16 bars were manufactured from a mixture of the adhesive and stone wool shots from the stone wool spinning production. The shots are particles which have the same melt composition as the stone wool fibers, and the shots are normally considered a waste product from the spinning process. The shots used for the bar composition have a size of 0.25-0.50 mm.

A 15% adhesive solids adhesive solution containing 0.5% silane (Momentive VS-142) of adhesive solids was obtained as described above under “adhesive solids”. A sample of this adhesive solution (16.0 g) was mixed well with shots (80.0 g). The resulting mixture was then divided evenly into four slots in a heat resistant silicone form for making small bars (4×5 slots per form; slot top dimension: length = 5.6 cm, width = 2.5 cm; slot bottom dimension: length = 5.3 cm, width = 2.2 cm; slot height = 1.1 cm). The mixtures placed in the slots were then pressed hard with a suitably sized flat metal bar to generate even bar surfaces. 16 bars from each adhesive were made in this fashion. The resulting bars were then cured at 200 °C for 1 h. After cooling to room temperature, the bars were carefully taken out of the containers. Eight of the 16 bars were aged in an autoclave (15 min / 120 °C / 1.2 bar).

After drying for 1-2 days, all bars were then broken in a 3 point bending test (test speed: 10.0 mm/min; rupture level: 50%; nominal strength: 30 N/mm²; support distance: 40 mm; max deflection 20 mm; nominal e-module 10000 N/mm²) on a Bent Tram machine to investigate their mechanical strengths. The bars were placed with the “top face” up (i.e. the face with the dimensions length = 5.6 cm, width = 2.5 cm) in the machine.

Loss of ignition (LOI) of bars

The loss of ignition (LOI) of bars was measured in small tin foil containers by treatment at 580 °C. For each measurement, a tin foil container was first heat-treated at 580 °C for 15 minutes to remove all organics. The tin foil container was allowed to cool to ambient temperature, and was then weighed. Four bars (usually after being broken in the 3 point bending test) were placed into the tin foil container and the ensemble was weighed. The tin foil container containing bars was then heat-treated at 580 °C for 30 minutes, allowed to cool to ambient temperature, and finally weighed again. The LOI was then calculated using the following formula:

$$LOI (\%) = \frac{\text{Weight of bars before heat treatment (g)} - \text{Weight of bars after heat treatment (g)}}{\text{Weight of bars before heat treatment (g)}} \times 100\%$$

Reference adhesives from the prior art prepared as comparative examples

Adhesive example, reference adhesive A (phenol-formaldehyde resin modified with urea, a PUF-resol)

A phenol-formaldehyde resin is prepared by reacting 37% aq. formaldehyde (606 g) and phenol (189 g) in the presence of 46% aq. potassium hydroxide (25.5 g) at a reaction temperature of 84 °C preceded by a heating rate of approximately 1 °C per minute. The reaction is continued at 84 °C until the acid tolerance of the resin is 4 and most of the phenol is converted. Urea (241 g) is then added and the mixture is cooled.

The acid tolerance (AT) expresses the number of times a given volume of a adhesive can be diluted with acid without the mixture becoming cloudy (the adhesive precipitates). Sulfuric acid is used to determine the stop criterion in a adhesive production and an acid tolerance lower than 4 indicates the end of the adhesive reaction. To measure the AT, a titrant is produced from diluting 2.5 mL conc. sulfuric acid (>99 %) with 1 L ion exchanged water. 5 mL of the adhesive to be investigated is then titrated at room temperature with this titrant while keeping the adhesive in motion by manually shaking it; if preferred, use a

magnetic stirrer and a magnetic stick. Titration is continued until a slight cloud appears in the adhesive, which does not disappear when the adhesive is shaken.

The acid tolerance (AT) is calculated by dividing the amount of acid used for the titration (mL) with the amount of sample (mL):

$$AT = (\text{Used titration volume (mL)}) / (\text{Sample volume (mL)})$$

Using the urea-modified phenol-formaldehyde resin obtained, a adhesive is made by addition of 25% aq. ammonia (90 mL) and ammonium sulfate (13.2 g) followed by water (1.30 kg). The adhesive solids were then measured as described above and the mixture was diluted with the required amount of water and silane (Momentive VS-142) for mechanical strength studies (15% adhesive solids solution, 0.5% silane of adhesive solids).

Adhesives according to the present invention

The following properties were determined for the adhesives according the present invention.

Reagents

Gelatines (Speisegelatine, type A, porcine, 120 and 180 bloom; Imagel LB, type B, 122 bloom) were obtained from Gelita AG. Tannorouge chestnut tree tannin was obtained from Brouwland bvba. Agar agar (05039), gellan gum (P8169), pectin from citrus peel (P9135), sodium alginate from brown algae (A0682), sodium carboxymethyl cellulose (419303), soluble starch (S9765), and sodium hydroxide were obtained from Sigma-Aldrich. For simplicity, these reagents were considered completely pure and anhydrous.

Adhesive component solids content – definition

The content of each of the components in a given adhesive solution before curing is based on the anhydrous mass of the components. The following formula can be used:

$$\text{Binder component solids content (\%)} = \frac{\text{binder component A solids (g)} + \text{binder component B solids (g)} + \dots}{\text{total weight of mixture (g)}} \times 100\%$$

Mechanical strength studies (bar tests) – procedure

The mechanical strength of the adhesives was tested in a bar test. For each adhesive, 8-16 bars were manufactured from a mixture of the adhesive and stone wool shots from the stone wool spinning production. The shots are particles which have the same melt composition as the stone wool fibers, and the shots are normally considered a waste product from the spinning process. The shots used for the bar composition have a size of 0.25-0.50 mm.

A adhesive solution was obtained as described in the examples below. For comparatively slower setting adhesives, a sample of the adhesive solution (16.0 g for adhesives with 10-15% adhesive component solids; 32.0 g for adhesives with 5% adhesive component solids) was mixed well with shots (80.0 g). The resulting mixture was then divided evenly into four slots in a heat resistant silicone form for making small bars (4×5 slots per form; slot top dimension: length = 5.6 cm, width = 2.5 cm; slot bottom dimension: length = 5.3 cm, width = 2.2 cm; slot height = 1.1 cm). For comparatively faster setting adhesives, a sample of the adhesive solution (8.0 g for adhesives with 10-15% adhesive component solids and 16.0 g for adhesives with 5% adhesive component solids) was mixed well with shots (40.0 g, pre-heated to 35-40 °C before use), and the resulting mixture was then divided evenly into two slots only. During the manufacture of each bar, the mixtures placed in the slots were pressed as required and then evened out with a plastic spatula to generate an even bar surface. 8-16 bars from each adhesive were made in this fashion. The resulting bars were then cured at room temperature for 1-2 days or first cured for 15 minutes in an oven at the temperatures listed in the tables followed by curing for 1-2 days at room temperature. If still not sufficiently cured after that time, the bars were cured for 1 day at 35 °C. The bars were then carefully taken out of the containers, turned upside down and left for a day at room temperature to cure completely. Half of the 8-16 bars were aged in an autoclave (15 min / 120 °C / 1.2 bar).

After drying for 1-2 days, all bars were then broken in a 3 point bending test (test speed: 10.0 mm/min; rupture level: 50%; nominal strength: 30 N/mm²; support distance: 40 mm; max deflection 20 mm; nominal e-module 10000 N/mm²) on a Bent Tram machine to

investigate their mechanical strengths. The bars were placed with the “top face” up (i.e. the face with the dimensions length = 5.6 cm, width = 2.5 cm) in the machine.

Loss of ignition (LOI) of bars

The loss of ignition (LOI) of bars was measured in small tin foil containers by treatment at 580 °C. For each measurement, a tin foil container was first heat-treated at 580 °C for 15 minutes to remove all organics. The tin foil container was allowed to cool to ambient temperature, and was then weighed. Four bars (usually after being broken in the 3 point bending test) were placed into the tin foil container and the ensemble was weighed. The tin foil container containing bars was then heat-treated at 580 °C for 30 minutes, allowed to cool to ambient temperature, and finally weighed again. The LOI was then calculated using the following formula:

$$LOI (\%) = \frac{\text{Weight of bars before heat treatment (g)} - \text{Weight of bars after heat treatment (g)}}{\text{Weight of bars before heat treatment (g)}} \times 100\%$$

Adhesives according to the present invention

Adhesive example, entry 1

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 7.5 g) in water (42.5 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 5.1). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 3

A mixture of gelatine (Speisegelatine, type A, porcine, 180 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 5.2). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 5

A mixture of gelatine (Imagel LB, type B, 122 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 5.1). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 7

To water (50.0 g) stirred vigorously at 85 °C was added sodium carboxymethyl cellulose (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained (pH 8.4). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 8

To water (50.0 g) stirred vigorously at 85 °C was added soluble starch (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained (pH 6.4). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 9

To water (50.0 g) stirred vigorously at 85 °C was added agar agar (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained. A portion of the above agar agar solution (19.6 g, thus efficiently 0.98 g agar agar and 18.6 g water) was then added and stirring was continued at 50 °C for 5 min further (pH 5.3). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 10

To water (50.0 g) stirred vigorously at 85 °C was added gellan gum (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained. A portion of the above gellan gum solution (19.6 g, thus efficiently 0.98 g gellan gum and 18.6 g water) was then added and stirring was continued at 50 °C for 5 min further (pH 5.3). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 11

To water (50.0 g) stirred vigorously at 85 °C was added pectin (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained. A portion of the above pectin solution (19.6 g, thus efficiently 0.98 g pectin and 18.6 g water) was then added and stirring was continued at 50 °C for 5 min further (pH 4.8). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 12

To water (50.0 g) stirred vigorously at 85 °C was added sodium alginate (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 8.82 g) in water (50.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained. A portion of the above sodium alginate solution (19.6 g, thus efficiently 0.98 g sodium alginate and 18.6 g water) was then added and stirring was continued at 50 °C for 5 min further (pH 5.3). The resulting solution was then used in the subsequent experiments.

Adhesive example, entry 13

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 8.00 g) in water (72.0 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.8). 1M NaOH (3.50 g) was then added (pH 9.3) followed by a portion of the above chestnut tree tannin solution (3.60 g; thus efficiently 0.80 g chestnut tree tannin). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 9.2) was used in the subsequent experiments.

Adhesive example, entry 14

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.9). 1M NaOH (4.00 g) was then added (pH 9.1) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 9.1) was used in the subsequent experiments.

Adhesive example, entry 17

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 180 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.8). 1M NaOH (3.50 g) was then added (pH 9.2) followed by a portion of the

above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 9.2) was used in the subsequent experiments.

Adhesive example, entry 19

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Imagel LB, type B, 122 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.7). 1M NaOH (3.50 g) was then added (pH 9.2) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 9.2) was used in the subsequent experiments.

Adhesive example, entry 21

To water (50.0 g) stirred vigorously at 85 °C was added agar agar (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.6). 1M NaOH (4.00 g) was then added (pH 9.1) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin) and then a portion of the above agar agar solution (20.0 g; thus efficiently 1.00 g agar agar). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 8.8) was used in the subsequent experiments.

Adhesive example, entry 22

To water (50.0 g) stirred vigorously at 85 °C was added pectin (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.6). 1M NaOH (4.50 g) was then added (pH 9.6) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin) and then a portion of the above pectin solution (20.0 g; thus efficiently 1.00 g pectin). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 8.9) was used in the subsequent experiments.

Adhesive example, entry 23

To water (50.0 g) stirred vigorously at 85 °C was added sodium alginate (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.6). 1M NaOH (4.00 g) was then added (pH 9.2) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin) and then a portion of the above sodium alginate solution (20.0 g; thus efficiently 1.00 g sodium alginate). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 9.0) was used in the subsequent experiments.

Adhesive example, entry 24

To water (50.0 g) stirred vigorously at 85 °C was added soluble starch (2.63 g) portion-wise over approx. 15 minutes. Stirring was continued for 0.5-1 h further at 85 °C until a clear solution was obtained.

To 1M NaOH (15.75 g) stirred at room temperature was added chestnut tree tannin (4.50 g). Stirring was continued at room temperature for 5-10 min further, yielding a deep red-brown solution.

A mixture of gelatine (Speisegelatine, type A, porcine, 120 bloom, 10.0 g) in water (56.7 g) was stirred at 50 °C for approx. 15-30 min until a clear solution was obtained (pH 4.8). 1M NaOH (4.00 g) was then added (pH 9.1) followed by a portion of the above chestnut tree tannin solution (4.50 g; thus efficiently 1.00 g chestnut tree tannin) and then a portion of the above soluble starch solution (20.0 g; thus efficiently 1.00 g soluble starch). After stirring for 1-2 minutes further at 50 °C, the resulting brown mixture (pH 8.8) was used in the subsequent experiments.

TABLE 1-1: Reference adhesive

Example	A
Adhesive properties	
Adhesive solids (%)	15.0
Reaction loss (%)	28.5
pH	9.6
Bar curing conditions	
Temperature (°C / 1h)	200
Bar properties	
Mechanical strength, unaged (kN)	0.39
Mechanical strength, aged (kN)	0.28
LOI, unaged (%)	2.8

TABLE 1-2: Various hydrocolloids

Example	1	2	3	4	5	6	7	8	9	10	11	12
Adhesive												
Hydrocolloid (%-wt.)												
Gelatine, Speisegelatine, 120 bloom	100	100	-	-	-	-	-	-	90	90	90	90
Gelatine, Speisegelatine, 180 bloom	-	-	100	100	-	-	-	-	-	-	-	-
Gelatine, Imigel LB, 122 bloom	-	-	-	-	100	100	-	-	-	-	-	-
Agar agar	-	-	-	-	-	-	-	-	10	-	-	-
Gellan gum	-	-	-	-	-	-	-	-	-	10	-	-
Pectin	-	-	-	-	-	-	-	-	-	-	10	-
Sodium alginate	-	-	-	-	-	-	-	-	-	-	-	10
Sodium carboxymethyl cellulose	-	-	-	-	-	-	100	-	-	-	-	-
Soluble starch	-	-	-	-	-	-	-	100	-	-	-	-
Crosslinker (%-wt.) ^[a]												
Chestnut tree tannin	-	-	-	-	-	-	-	-	-	-	-	-
Base (%-wt.) ^[b]												
Sodium hydroxide	-	-	-	-	-	-	-	-	-	-	-	-
Adhesive mixing and bar manufacture												
Mixing temperature (°C)	50	50	50	50	50	50	85	85	50/85	50/85	50/85	50/85
Adhesive component solids content (%)	15.0	10.0	15.0	10.0	15.0	10.0	5.0	5.0	12.5	12.5	12.5	12.5
pH	5.1	4.9	5.2	4.9	5.1	5.0	8.4	6.4	5.3	5.3	4.8	5.3
Pre-heated shots (35-40 °C)	-	-	Yes	Yes	-	-	-	-	-	-	-	-
Curing Temperature (°C/15 min to rt)	rt	rt	rt	rt	rt	rt	rt	rt	rt	rt	rt	rt
Bar properties												
Mechanical strength, unaged (kN)	0.31	0.24	0.28	0.13	0.20	0.13	0.13	0.11	0.11	0.09	0.13	0.13
Mechanical strength, aged (kN)	0.30	0.28	0.27	0.17	0.22	0.15	0.15	0.12	0.15	0.11	0.14	0.22
LOI, unaged (%)	2.9	1.9	2.9	1.9	2.8	1.9	1.9	2.0	2.4	2.5	2.4	2.3

^[a] Of hydrocolloid(s). ^[b] Of hydrocolloid(s) + crosslinker.

TABLE 1-3: Various hydrocolloids, crosslinkers

Example	13	14	15	16	17	18	19	20	21	22	23	24
Adhesive												
Polyelectrolytic hydrocolloid (%-wt.)												
Gelatin, Speisegelatine, 120 bloom	100	100	100	100	-	-	-	-	91	91	91	91
Gelatin, Speisegelatine, 180 bloom	-	-	-	-	100	100	-	-	-	-	-	-
Gelatin, Imigel LB, 122 bloom	-	-	-	-	-	-	100	100	-	-	-	-
Agar agar	-	-	-	-	-	-	-	-	9	-	-	-
Gellan gum	-	-	-	-	-	-	-	-	-	-	-	-
Pectin	-	-	-	-	-	-	-	-	-	9	-	-
Sodium alginate	-	-	-	-	-	-	-	-	-	-	9	-
Sodium carboxymethyl cellulose	-	-	-	-	-	-	-	-	-	-	-	-
Soluble starch	-	-	-	-	-	-	-	-	-	-	-	9
Crosslinker (%-wt.) ^[a]												
Chestnut tree tannin	10	10	10	10	10	10	10	10	9	9	9	9
Base (%-wt.) ^[b]												
Sodium hydroxide	2.7	2.6	2.6	2.6	2.4	2.4	2.4	2.4	2.4	2.5	2.4	2.4
Adhesive mixing and bar manufacture												
Mixing temperature (°C)	50	50	50	50	50	50	50	50	50/85	50/85	50/85	50/85
Adhesive component solids content (%)	10.4	15.0	15.0	15.0	15.1	15.1	15.1	15.1	12.9	12.9	12.9	12.9
pH	9.2	9.1	9.1	9.1	9.2	9.2	9.2	9.2	8.8	8.9	9.0	8.8
Pre-heated shots (35-40 °C)	-	-	-	-	Yes	Yes	-	-	-	-	-	-
Curing Temperature (°C/15 min to rt)	rt	rt	35	55	35	55	35	55	rt	rt	rt	rt
Bar properties												
Mechanical strength, unaged (kN)	0.16	0.23	0.26	0.27	0.30	0.27	0.25	0.27	0.16	0.18	0.17	0.18
Mechanical strength, aged (kN)	0.15	0.21	0.25	0.25	0.25	0.31	0.27	0.26	0.15	0.13	0.15	0.18
LOI, unaged (%)	1.9	2.7	2.7	2.7	2.7	2.8	2.8	2.8	2.4	2.6	2.4	2.4

^[a] Of hydrocolloid(s). ^[b] Of hydrocolloid(s) + crosslinker

As can be seen from comparing the results in Table 1.1 with Tables 1.2 and 1.3, the adhesives used in the present invention require lower temperatures for curing. The reference adhesive requires temperatures of 200 °C for curing, while adhesives 1 to 24 cure at 55 °C and below, typically at ambient temperature. This means that the adhesives of the present invention are capable of being cured on-site or at the manufacturing or process stage.

Claims

1. A method of producing a mineral wool product comprising a multiple of lamellae, said method comprising the steps of:
- 5 - providing a cured mineral wool web;
- cutting said mineral wool web into a plurality of lamellae,
- bonding the lamellae together by applying an adhesive on the surfaces of two adjacent lamellae,
- curing the adhesive, wherein the adhesive comprises at least one hydrocolloid.
- 10 2. A method according to claim 1, wherein the adhesive is applied to the surface of the cured mineral wool web before cutting the mineral wool web into lamellae.
3. A method according to claim 1 or 2, wherein the at least one hydrocolloid is selected
- 15 from the group consisting of gelatine, pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum, cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.
4. A method according to claim 1 to 3, wherein the at least one hydrocolloid is a
- 20 polyelectrolytic hydrocolloid.
5. A method according to any of the claims 1 to 4, wherein the at least one hydrocolloid is selected from the group consisting of gelatine, pectin, alginate, carrageenan, gum arabic, xanthan gum, cellulose derivatives such as carboxymethylcellulose.
- 25 6. A method according to any of the claims 1 to 5, wherein the adhesive comprises at least two hydrocolloids, wherein one hydrocolloid is gelatine and the at least one other hydrocolloid is selected from the group consisting of pectin, starch, alginate, agar agar, carrageenan, gellan gum, guar gum, gum arabic, locust bean gum, xanthan gum,
- 30 cellulose derivatives such as carboxymethylcellulose, arabinoxylan, cellulose, curdlan, β -glucan.
7. A method according to any of the claims 1 to 6, wherein the gelatine is present in the adhesive an amount of 10 to 95 wt.%, such as 20 to 80 wt.%, such as 30 to 70 wt.%,
- 35 such as 40 to 60 wt.%, based on the weight of the hydrocolloids.

8. A method according to any of the claims 6 or 7, wherein the one hydrocolloid and the at least other hydrocolloid have complementary charges.

5 9. A method according to any of the claims 1 to 8, wherein the adhesive is not a thermoset adhesive.

10 10. A method according to any of the claims 1 to 9, wherein the adhesive does not contain a poly(meth)acrylic acid, a salt of a poly(meth)acrylic acid or an ester of a poly(meth)acrylic acid.

11. A method according to any of the claims 1 to 10, wherein the at least one hydrocolloid is a biopolymer or modified biopolymer.

15 12. A method according to any of the claims 1 to 11, wherein the adhesive comprises proteins from animal sources, including collagen, gelatine and hydrolysed gelatine, and the adhesive further comprises at least one phenol and/or quinone containing compound, such as tannin selected from one or more components from the group consisting of tannic acid, condensed tannins (proanthocyanidins), hydrolysable tannins, gallotannins, ellagitannins, complex tannins, and/or tannin originating from one or more
20 of oak, chestnut, staghorn sumac and fringe cups.

13. A method according to any of the claims 1 to 12, wherein the adhesive comprises proteins from animal sources, including collagen, gelatine and hydrolysed gelatine, and
25 wherein the adhesive further comprises at least one enzyme selected from the group consisting of transglutaminase (EC 2.3.2.13), protein disulfide isomerase (EC 5.3.4.1), thiol oxidase (EC 1.8.3.2), polyphenol oxidase (EC 1.14.18.1), in particular catechol oxidase, tyrosine oxidase, and phenoloxidase, lysyl oxidase (EC 1.4.3.13), and peroxidase (EC 1.11.1.7).

30 14. A method according to any of the claims 1 to 13, wherein the adhesive is formaldehyde-free.

35 15. A method according to any of the claims 1 to 14, wherein the adhesive consists essentially of

at least one hydrocolloid;
optionally at least one oil;
optionally at least one pH-adjuster;
optionally at least one crosslinker;
5 optionally at least one anti-fouling agent;
optionally at least one anti-swelling agent;
water.

10 16. A method according to any one of the preceding claims, wherein the mineral wool web is cut longitudinally into lamellae and the lamellae thus formed are turned 90° about their longitudinal axis where after the lamellae with this orientation are bonded together with the adhesive.

15 17. A method according to any one of the preceding claims, wherein the mineral wool product is a sandwich panel core.

18. A method according to any one of the preceding claims, wherein the adhesive corresponds with the binder in the mineral wool product.

20 19. A method according to any one of the preceding claims, wherein the step of curing comprises a drying process, involving blowing air or gas over/through the mineral wool product and/or by increasing temperature.

25 20. A method according to any one of the preceding claims, wherein the step of curing is carried out at temperatures from 5 to 95°C, such as 10 to 80°C, such as 20 to 60°C, such as 40 to 50°C.

30 21. A method according to any one of the preceding claims, wherein the main fibre orientation of the mineral wool is substantially in a plane perpendicular to the surfaces of the mineral wool product after the bonding.

22. A method according to any of the preceding claims, wherein the density of the mineral wool product is 50-300 kg/m³, preferably approx. 50-200 kg/m³, more preferably approx. 65-100 kg/m³.

35

23. A mineral wool product comprising a multiple of lamellae, such as a sandwich panel core, said product comprising

- a plurality of lamellae cut from a mineral wool web, and bonded together by applying an adhesive on the surfaces of two adjacent lamellae to form a web-like product,

5 wherein the adhesive comprises at least one hydrocolloid.

24. A mineral wool product according to claim 23, wherein the fibres of the lamellae are predominantly oriented in a plane perpendicular to the major surfaces of the web-like product.

10

25. A mineral wool product according to claim 23 or 24, wherein the mineral wool product is a cured mineral wool product.

26. A mineral wool product according to any one of claims 23-25, wherein the adhesive corresponds with the binder in the mineral wool fibre product.

15

27. A mineral wool product according to any one of claims 23-26, wherein the fibre orientation of the mineral wool product is substantially in a plane perpendicular to the surfaces of the mineral wool product after the bonding.

20

28. A mineral wool product according to any of the preceding claims, wherein the density of the mineral wool fibre product is $50\text{-}300\text{ kg/m}^3$, preferably approx. $50\text{-}200\text{ kg/m}^3$, more preferably approx. $65\text{-}100\text{ kg/m}^3$.

25 29. A mineral wool product according to any one of claims 23 to 29 made by the method according to any one of the claims 1 to 22.

1/1

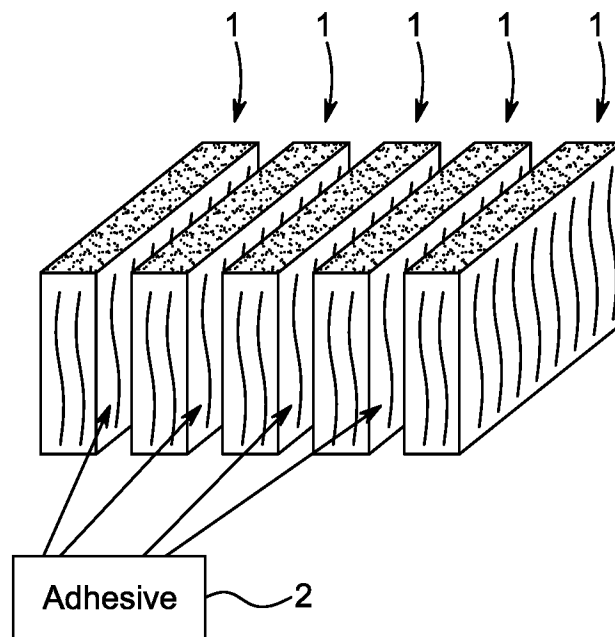


FIG. 1

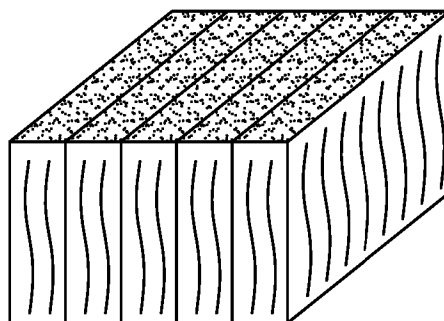


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/061410

A. CLASSIFICATION OF SUBJECT MATTER		
INV.	B29C70/20 E04B1/74	D04H1/4218 B32B19/00
	D04H1/64	D04H1/4209 D04H1/593
ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) C03C C09J D04H E04B B29C B32B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data, COMPENDEX, CHEM ABS Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2005/068574 A1 (ROCKWOOL INT [DK]; NOWAK ZBIGNIEW [PL]) 28 July 2005 (2005-07-28) cited in the application claim 18 -----	1-29
A	WO 88/07614 A1 (ROCKWOOL INT [DK]) 6 October 1988 (1988-10-06) page 3, line 8 - line 31 -----	1-29
A	WO 92/10602 A1 (ROCKWOOL INT [DK]) 25 June 1992 (1992-06-25) claim 1 -----	1-29
A	EP 1 020 198 A2 (JENTEC INC [US]) 19 July 2000 (2000-07-19) claim 3 -----	1,3,23
	-/--	
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 18 July 2017		Date of mailing of the international search report 27/07/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Pollio, Marco

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2017/061410

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ES 1 074 717 U (ABILITY DISEÑO GRAFICO S L [ES]) 3 June 2011 (2011-06-03) claim 5 -----	1,3,23

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2017/061410

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 1, 2, 4-29(all partially)
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 1, 2, 4-29(all partially)

Present claims 1, 23 are characterised by the fact that the adhesive comprises at least one hydrocolloid. The man skilled in the art associates the word hydrocolloid with an extremely large number of possible compounds. Furthermore, there is no universal definition of the word hydrocolloid. Some authors define the word hydrocolloid as indicating any material that forms a colloid (dispersion/emulsion) when mixed with water. Some other define a hydrocolloid as being a substance that yields a gel when mixed with water.

Support and disclosure in the sense of Article 6 and 5 PCT is to be found for only a very small proportion of all possible compounds falling within the scope of the expression hydrocolloid (see page 8, line 9). Even though a synthetic origin is not excluded in this passage, the description does not give any concrete hint to use as hydrocolloid in the frame of the invention a polymer of synthetic origin. In page 8, lines 19 it is underlined that an hydrocolloid is of natural origin. The examples only involve the use of hydrocolloids of natural origin. It is also noticed that the adhesive described as a comparative adhesive on page 27 of the description, falls within the scope of a broad interpretation of the word hydrocolloid as well. In addition it has to be noticed that none of the examples describes an adhesive composition comprising synthetic polymers. The set of claims has to be able to solve the subjective (and objective) technical problem. According to the prior art known to the applicant the problem to be solved is to avoid curing at high temperature and exposure to harmful substances (see page 2, lines 20-27), as well as providing adhesives made of natural ingredients (see page 3, lines 2-4). A composition comprising 1 ppm of starch and phenol formaldehyde is within the scope of present claim 1, but it is not able to solve the technical problems described by the applicant. It is noticed as well that the word hydrocolloid does not imply the presence of water, whereas a powder of (for example) starch taken alone would not work as an adhesive. Therefore, the presence of water is essential to define the adhesive of the invention.

In view of all these reasons, the non-compliance with the substantive provisions is to such an extent, that the search was performed taking into consideration the non-compliance in determining the extent of the search of claims 1-29 (PCT Guidelines 9.19 and 9.23). Claim 3 provides a direct and unambiguous disclosure of materials which work as hydrocolloids in the frame of the present application. A generalisation to hydrocolloids of specific classes of compounds, such as proteins or polysaccharides is not sufficient to delimit claim 1, respectively 23 to a clear scope. If one dissolves saccharose (disaccharide) in water and starts heating to evaporate a part of the water at a certain point arrives to a high viscosity gel composition. Therefore, this specific disaccharide behaves as an hydrocolloid. Nevertheless, it is not self evident, whether this adhesive is suitable within the frame of the application. The man skilled in the art would be left with an undue burden to determine, which hydrocolloids among all possible polysaccharides or proteins are suitable within the frame of the

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

present application.

In view of these observations the search had to be restricted to the broadest disclosure of hydrocolloids, which are expected to work in the frame of the application and which are disclosed in the application. This group of hydrocolloids is described in claim 3. Furthermore, it had to be limited by those features which are essential to the solution of the technical problem to be solved.

Therefore, the search of claims 1,2, 4-29 was restricted to adhesive consisting essentially of the hydrocolloids described in claim 3, water and the optional components described in claim 15.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guidelines C-IV, 7.2), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/061410

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005068574	A1	28-07-2005	AT 396242 T 15-06-2008
		DK 1709132 T3 29-09-2008	
		EA 200601349 A1 27-02-2007	
		EP 1709132 A1 11-10-2006	
		HR P20080386 T3 30-09-2008	
		SI 1709132 T1 30-04-2009	
		WO 2005068574 A1 28-07-2005	
WO 8807614	A1	06-10-1988	AT 86340 T 15-03-1993
		DD 280988 A5 25-07-1990	
		DE 3878930 T2 21-11-1996	
		DK 150687 A 26-09-1988	
		EP 0420837 A1 10-04-1991	
		FI 885431 A 23-11-1988	
		NO 885247 A 24-01-1989	
		US 4906504 A 06-03-1990	
		WO 8807614 A1 06-10-1988	
WO 9210602	A1	25-06-1992	AT 113087 T 15-11-1994
		AU 9080591 A 08-07-1992	
		CA 2095532 A1 08-06-1992	
		CZ 282594 B6 13-08-1997	
		DE 69104730 D1 24-11-1994	
		DE 69104730 T2 04-05-1995	
		DK 291590 A 17-06-1992	
		EP 0560878 A1 22-09-1993	
		ES 2062884 T3 16-12-1994	
		FI 932566 A 04-06-1993	
		PL 168628 B1 29-03-1996	
		SK 56293 A3 11-05-1994	
		WO 9210602 A1 25-06-1992	
EP 1020198	A2	19-07-2000	DE 69932311 T2 12-07-2007
		DK 1020198 T3 06-11-2006	
		EP 1020198 A2 19-07-2000	
		US 6616642 B1 09-09-2003	
		US 2002018801 A1 14-02-2002	
ES 1074717	U	03-06-2011	NONE