

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2008 (14.08.2008)

PCT

(10) International Publication Number
WO 2008/097879 A1

(51) International Patent Classification:

A61G 5/06 (2006.01) A61G 5/04 (2006.01)

(21) International Application Number:

PCT/US2008/052878

(22) International Filing Date: 4 February 2008 (04.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/900,137 8 February 2007 (08.02.2007) US

(71) Applicant (for all designated States except US): **INVACARE CORPORATION** [US/US]; One Invacare Way, Elyria, OH 44036-2125 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEKOSCKE, Robert** [US/US]; 4690 Erhart Road, Medina, OH 44256 (US). **JURKIEWICZ, Damon** [US/US]; 1437 Graber Drive, Lakewood, OH 44107 (US).

(74) Agent: **PEJIC, Nenad**; Calfee, Halter & Griswold LLP, 800 Superior Avenue, Suite 1400, Cleveland, OH 44114 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: WHEELCHAIR SUSPENSION

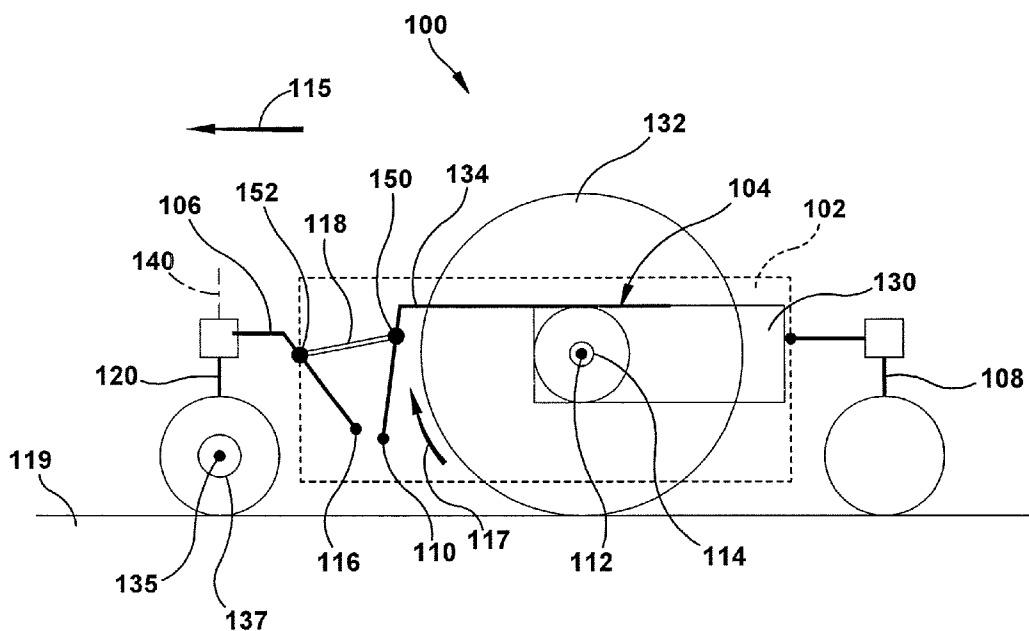


FIG. 1

(57) Abstract: A suspension for a vehicle is provided. The suspension includes, for example, a frame, at least one drive assembly and at least one caster pivot arm. The at least one drive assembly and the at least one caster pivot arm are coupled to enhance the vehicle's ability to traverse obstacles.

WO 2008/097879 A1

WHEELCHAIR SUSPENSION

RELATED APPLICATIONS

[0001] This application claims the benefit of United States provisional patent application serial no. 60/900,137 for WHEELCHAIR SUSPENSION filed February 8, 2007, the entire disclosure of which is fully incorporated herein by reference.

BACKGROUND

[0002] Wheelchairs and scooters are an important means of transportation for a significant portion of society. Whether manual or powered, these vehicles provide an important degree of independence for those they assist. However, this degree of independence can be limited if the wheelchair is required to traverse obstacles such as, for example, curbs that are commonly present at sidewalks, driveways, and other paved surface interfaces. This degree of independence can also be limited if the vehicle is required to ascend inclines or descend declines.

[0003] Most wheelchairs have front and rear casters to stabilize the chair from tipping forward or backward and to ensure that the drive wheels are always in contact with the ground. The caster wheels are typically much smaller than the driving wheels and located both forward and rearward of the drive wheels. Though this configuration provides the wheelchair with greater stability, it can hamper the wheelchair's ability to climb over obstacles such as, for example, curbs or the like, because the size of the front casters limits the height of the obstacle that can be traversed.

SUMMARY

[0004] According to one embodiment, a suspension for a vehicle is provided. The suspension includes, for example, a frame, at least one drive assembly and at least one caster pivot arm. The at least one drive assembly and the at least one caster pivot arm

are coupled to enhance the vehicle's ability to traverse obstacles. As used herein, "coupled" refers to both direct coupling of two or more components or the indirect coupling of components such as through one or more intermediary components or structures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] In the accompanying drawings which are incorporated in and constitute a part of the specification, embodiments of the invention are illustrated, which together with a general description of the invention given above and the detailed description given below, serve to example the principles of this invention.

[0006] Figure 1 is a side view of an embodiment of a wheelchair suspension;

[0007] Figure 1A is a side view of a second configuration of the wheelchair suspension of Figure 1;

[0008] Figure 1B is a side view of a rear drive configuration of the wheelchair suspension of Figure 1;

[0009] Figure 1C illustrates components of a wheelchair suspension coupled by one embodiment of a shock absorber or resilient shock absorbing device;

[0010] Figure 1D illustrates components of a wheelchair suspension coupled by one embodiment of a spring or spring-type resilient device;

[0011] Figure 1E illustrates components of a wheelchair suspension coupled by one embodiment of a shock absorber with a spring return;

[0012] Figure 2 is a top view of the wheelchair suspension shown in Figure 1;

[0013] Figures 3A and 4A are side views of the wheelchair suspension of Figure 1 traversing a raised obstacle;

[0014] Figures 3B and 4B are side views of a wheelchair suspension having a variable length motion transfer member during traversal of a raised obstacle;

[0015] Figures 3C and 4C are side views of a wheelchair suspension having a variable length motion transfer member during traversal of a raised obstacle;

[0016] Figure 5 is a side view of another embodiment of a wheelchair suspension;

[0017] Figure 6 is a top view of the embodiment of the wheelchair suspension shown in Fig. 5;

[0018] Figure 7A is a side view of the wheelchair suspension of Figure 5 traversing a raised obstacle;

[0019] Figure 7B is a side view of a wheelchair suspension with a variable length motion transfer member traversing a raised obstacle;

[0020] Figure 7C is a side view of a wheelchair suspension with a variable length motion transfer member traversing a raised obstacle;

[0021] Figure 8A is a side view of the wheelchair suspension of Figure 5 traversing a raised obstacle;

[0022] Figure 8B is a side view of a wheelchair suspension with a variable length motion transfer member traversing a raised obstacle;

[0023] Figure 8C is a side view of a wheelchair suspension with a variable length motion transfer member traversing a lowered obstacle;

[0024] Figure 9 is a side view of an embodiment of a wheelchair suspension with a front caster pivot arm that comprises links of a four-bar linkage;

[0025] Figure 10 is a side view of a second configuration of the wheelchair suspension of Figure 9;

[0026] Figure 11 is a side view of a third configuration of the wheelchair suspension of Figure 9;

[0027] Figure 12 is a side view of the wheelchair suspension of Figure 9 traversing a raised obstacle;

[0028] Figure 13 is a side view of the wheelchair suspension of Figure 10 traversing a raised obstacle;

[0029] Figure 14 is a side view of the wheelchair suspension of Figure 11 traversing a raised obstacle;

[0030] Figure 15 is a side view of an embodiment of a wheelchair suspension;

[0031] Figure 16 is a side view of the wheelchair suspension of Figure 15 traversing a raised obstacle;

[0032] Figure 17 is a side view of an embodiment of a wheelchair suspension;

[0033] Figure 18 is a perspective view of the wheelchair suspension of Figure 17;

[0034] Figure 19 is a perspective view of a wheelchair;

[0035] Figure 20 is a second perspective view of the wheelchair of Figure 19;

[0036] Figure 21 is an enlarged side view of the wheelchair of Figure 19 showing suspension components of the wheelchair;

[0037] Figure 22 is a view similar to Figure 26 with a drive wheel shown transparently to more clearly illustrate operation of the suspension components; and

[0038] Figure 23 is an enlarged side view of the of the wheelchair of Figure 19 showing rear casters.

DETAILED DESCRIPTION

[0039] The present patent application specification and drawings provide multiple embodiments of a wheelchair and suspension that enhances the ability of the vehicle to traverse obstacles and or improve the ride quality of the wheelchair. Generally, the wheelchair suspension includes a frame, a drive assembly and a front caster pivot arm. The drive assembly and the front caster pivot arm are coupled to enhance the vehicle's ability to traverse obstacles. In one embodiment, the drive assembly is pivotally mounted to the frame at a location that is below an axis of rotation of a drive axle of the drive assembly. In another embodiment, the pivot arm of the drive assembly and the front caster pivot arm are coupled to the frame in a crossed configuration. In another embodiment, the drive assembly and the front caster pivot arm are coupled by a variable length motion transfer member such as, for example, a shock absorber, a

spring, or a shock absorber with a spring return or other resilient member or device. In another embodiment, the drive assembly and the front caster pivot arm are coupled by a damped and sprung suspension member.

[0040] Figures 1 and 2 illustrate a first embodiment of a wheelchair suspension 100. The wheelchair suspension 100 includes a frame 102, a drive assembly 104, a front caster pivot arm 106, and a rear caster 108. In this application, the term “frame” refers to any component or combination of components that are configured for mounting of a drive assembly and a caster pivot arm. The drive assembly 104 is pivotally mounted to the frame 102 at a drive assembly pivot axis 110. The drive assembly pivot axis 110 can be positioned at a wide variety of different locations on the frame 102. For example, the pivot axis 110 can be positioned at any position on the frame, including but not limited to, any of the positions shown or described with respect to this embodiment or the following embodiments. In the embodiment illustrated by Figures 1 and 2, the drive assembly pivot axis 110 of the drive assembly 104 is below an axis of rotation 112 of a drive axle 114 of the drive assembly 104.

[0041] In the embodiment illustrated by Figures 1 and 2, each drive assembly 104 includes a motor drive 130, a drive wheel 132, and a pivot arm 134. The motor drive 130 may comprise a motor/gear box combination, a brushless, gearless motor, or any other known arrangement for driving the drive wheel 132. The motor drive 130 drives the drive wheel 132 about the axis of rotation 112. The pivot arm 134 may be a substantially rigid member that is connected to the motor drive 130. In one embodiment, the pivot arm 134 is flexible to provide inherent shock absorbing properties in the pivot arm. The pivot arm 134 may be made from a wide variety of materials, including, but not limited to, metals and plastics. The pivot arm 134 is pivotally coupled to the frame at the drive assembly pivot axis 110. In the embodiment illustrated by Figures 1 and 2, the pivot arm 134 extends forward and downward from the motor drive to the drive assembly pivot axis 110. In this application, the terms “above” and “below” refer to the relative positions of the components when all of the wheels of the suspension are on a flat, level surface. In Figure 1, the pivot axis 110 of the drive assembly pivot arm 134 is below the drive wheel axis of rotation 112 and is above an axis 135 of an axle 137 that the front caster wheel rotates around. Figure 1A illustrates another configuration where the pivot axis 110 of the drive assembly pivot

arm 134 is below the drive wheel axis of rotation 112 and the axis 135 of the axle 137 that the front caster wheel rotates around.

[0042] Torque is applied by the drive assembly 104 to the drive wheel 132 to cause the wheelchair to accelerate or decelerate. If the pivot arm 134 were not pivotally connected to the frame 102, applying torque with the drive assembly 104 to the drive wheel 132 to accelerate the wheelchair in the direction indicated by arrow 115 would cause the pivot arm 134 to rotate upward, around the drive axis as indicated by arrow 117. The torque applied by the drive wheel(s) of the vehicle to accelerate the vehicle lifts the front wheel(s) of the vehicle off of the ground, if the torque is great enough. In the suspension 100 illustrated by Figures 1 and 2, the drive assembly 104 is pivotally connected to the frame 102 at the pivot axis. As a result, the torque applied by the drive assembly 104 to accelerate the wheelchair urges the drive assembly 104 to rotate with respect to the frame 102 about the pivot axis 110.

[0043] The front caster pivot arm 106 is pivotally mounted to the frame 102 at a pivot arm pivot axis 116. The pivot arm pivot axis 116 can be positioned at a wide variety of different locations on the frame 102. For example, the pivot arm pivot axis 116 can be positioned at any position on the frame, including but not limited to, any of the positions shown or described with respect to this embodiment or the following embodiments.

[0044] The front caster pivot arm 106 is coupled to the drive assembly 104. The front caster pivot arm 106 can be coupled to the drive assembly in a wide variety of different ways. For example, the front caster pivot arm 106 can be coupled to the drive assembly 104 in any manner that transfers motion of the drive assembly to the front caster pivot arm, including but not limited to, a fixed length link, a variable length link, a flexible link, a chain, a cord, a belt, a wire, a gear train, or any other known structure for transferring motion from one structure to another structure. In the embodiment illustrated by Figure 1, a link 118 is pivotally connected to the drive assembly 104 and the front caster pivot arm 106. The link 118 transfers motion of the drive assembly 104 to the front caster pivot arm 106. That is, the relative movement of the drive assembly 104 with respect to the frame 102 causes relative movement of the front caster pivot arm 106 with respect to the frame.

[0045] A front caster 120 is coupled to the caster pivot arm 106. Torque applied by the drive assembly 104 urges the front caster pivot arm 106 and the front caster 120 upward with respect to a support surface 119. In one embodiment, the torque applied by the drive assembly 104 lifts the front caster 120 off the support surface 119. In another embodiment, the torque applied by the drive assembly 104 urges the front caster 120 upward, but does not lift the front caster 120 up off of the support surface. In this embodiment, when an obstacle is encountered, the front caster 120 engages the obstacle and the torque of the drive assembly urges the caster upward to assist the caster over the obstacle.

[0046] The rear caster 108 is coupled to the frame. Any number of rear casters may be included. For example, one caster 108 may be included (shown in phantom in Figure 2) or two rear casters 108 may be included (shown in solid lines in Figure 2). In the Figure 1C embodiment, rear casters are omitted. The suspension illustrated by Figure 1C may be included as part of a rear drive wheelchair. Rear casters may be omitted from any of the embodiments disclosed herein. The rear casters 108 may be coupled to the frame 102 in a wide variety of different ways. For example, the rear casters 108 may be rigidly fixed to the frame, the rear casters may be individually pivotally coupled to the frame, or the rear casters may be mounted to a transverse beam that is pivotally coupled to the frame.

[0047] In the embodiment illustrated by Figure 2, one drive assembly 104 and one front caster pivot arm 106 are coupled to a first side 200 of the frame 102 and a second drive assembly 104 and a second front caster pivot arm are coupled to a second side 202 of the frame. The first side 200 includes any portion of the frame 102 that is above line 204 in Figure 2. The second side 202 includes any portion of the frame 102 that is below line 204 in Figure 2. Only one of the drive assembly and front caster pivot arm arrangements is described in detail, since the drive assembly and pivot arm arrangements may be mirror images of one another in the Figure 2 embodiment. In another embodiment, two different types of drive assemblies and front caster pivot arm arrangements may be on the sides of the frame.

[0048] The front caster 120 is coupled to the front caster pivot arm 106, such that the front caster can rotate about an axis 140. In one embodiment, a biasing member, such as a spring (not shown) may optionally be coupled between the frame and the front

caster pivot arm and/or the frame and the drive assembly to bias the front caster into engagement with the support surface 119. The front caster pivot arm 106 may be a substantially rigid member. In one embodiment, the front caster pivot arm 106 is flexible to provide inherent shock absorbing properties in the front caster pivot arm. The pivot arm 106 may be made from a wide variety of materials, including, but not limited to, metals and plastics. The front caster pivot arm 106 is pivotally mounted to the frame 102 at the pivot axis 116. The pivot axis 116 of the front caster pivot arm is forward of the drive assembly pivot axis 110 and may be below the axis of rotation 112 of the drive wheel in the embodiments illustrated by Figures 1 and 1A.

[0049] In the embodiment illustrated by Figures 1 and 2, the link 118 is connected to the drive assembly pivot arm 134 at a pivotal connection 150. The link 118 is connected to the front caster pivot arm 106 at a pivotal connection 152. The link 118 can take a wide variety of different forms. For example, the link may be rigid, flexible, or extendible in length. Any link 118 that transfers at least some portion of motion in at least one direction of the drive assembly 104 to the front caster pivot arm can be used.

[0050] Figures 1C, 1D, and 1E illustrate examples of variable length links. These and other variable length links can also be used in the embodiments illustrated by Figures 1, 1A and 1B and/or any of the embodiments described below. In Figure 1C, the link 118 is a shock absorber. Any shock absorbing member or assembly can be used. The shock absorber damps relative motion between the front caster pivot arm 106 and the drive assembly pivot arm 134. An example of one acceptable shock absorber is an all terrain bicycle shock absorber available from the Rock Shox division of SRAM Corporation. In Figure 1D, the link 118 is a spring. Any spring device or assembly can be used. The spring 172 may urge the front caster pivot arm 106 and the drive assembly pivot arm 134 apart, may urge the front caster pivot arm 106 and the drive assembly together or the spring may be a bidirectional spring. A bidirectional spring would bias the pivotal connections 150 and 152 to a predetermined spacing. In Figure 1E, the link 118 comprises a shock absorber 174 with a spring return 176. The shock absorber 174 damps relative motion between the front caster pivot arm 106 and the drive assembly pivot arm 134. The spring return 176 may urge the front caster pivot arm 106 and the drive assembly pivot arm 134 apart, may urge the front caster pivot arm 106 and the drive assembly together or the spring may be a bidirectional spring

An example of one acceptable shock absorber with a spring return is a Rock Shox MCR mountain bike shock.

[0051] Figure 3A is an elevational view of the suspension 100 traversing over an obstacle 300 by ascending the obstacle. This operating condition may be accomplished by accelerating the drive wheels 132 in the forward direction as described above. In this scenario, the moment arm generated by drive wheel 132 around the pivot axis 110 in the direction indicated by arrow 302 may be greater than the sum of all moment arms around pivot axis 110 in the opposite direction. When this occurs, the drive assembly 104 pivots as indicated by arrow 302 around pivot axis 110 with respect to the frame 102. The drive assembly pivot arm 134 pulls the link 118, which causes the front caster pivot arm 106 to pivot as indicated by arrow 304 around pivot axis 116. This causes front caster 120 to rise above obstacle 300 or urge the front caster upward to assist the front caster over the obstacle 300.

[0052] Figures 3B and 3C illustrate an embodiment of the suspension 100 traversing over the obstacle 300, where the link 118 is a variable length link, such as a spring, a shock absorber, or a shock absorber with a spring return. In this embodiment, the drive assembly pivot arm 134 pulls the link 118 to extend the link to its maximum length or a length where the front caster pivot arm 106 begins to pivot. Once extended, the link 118 pulls the front caster pivot arm 106 to pivot as indicated by arrow 304 around pivot axis 116. This causes front caster 120 to rise above obstacle 300 or urges the front caster upward to assist the front caster over the obstacle 300. Referring to Figure 3C, when the front caster 120 engages the obstacle 300, the front caster pivot arm 106 pivots as indicated by arrow 310 and the link 118 compresses to absorb shock or energy that results from the impact between the front caster and the obstacle.

[0053] Illustrated in Figure 4A is a side elevational view of the suspension 100 with the drive wheel 132 traversing the obstacle 300. When the drive wheel 132 comes into contact with the obstacle 300, drive assembly 104 pivots in the direction indicated by arrow 400 around pivot axis 110. The rotation of the drive assembly 104 is translated to the front caster pivot arm 106 to lower the caster 120 down onto the lower support surface elevation. When the link 118 is a rigid member, the drive assembly 104 and the front caster pivot arm 106 act in unison. One or more springs (not shown) may optionally be coupled to the drive assembly 104 and/or the front caster pivot arm 106 to

urge the front caster pivot arm 106 to rotate about pivot axis 116 in the direction indicated by arrow 402.

[0054] Figure 4B illustrates an embodiment of the suspension 100 with the drive wheel 132 traversing over the obstacle 300, where the link 118 is a variable length link. When the drive wheel 132 comes into contact with obstacle 300, the drive assembly 104 pivots in the direction indicated by arrow 400 around pivot axis 110 to soften the impact from obstacle 300 that is transferred to the frame 102. During such pivotal movement of the drive assembly 104, the link 118 compresses as indicated by arrows 410 to allow pivoting of the drive assembly 104 with respect to the front caster pivot arm. Compressing of the link 118 absorbs shock that results from the impact between the drive wheel 132 and the obstacle 300. When the front caster 120 comes into contact with the support surface 119, the pivot arm 106 pivots in the direction indicated by arrow 412 around pivot axis 116 to soften the impact support surface 119 that is transferred to the frame 102. During such pivotal movement of the pivot arm 106, the link 118 compresses to allow pivoting of the front caster pivot arm 106 with respect to the drive assembly. Compressing of the link 118 absorbs shock that results from the impact between the front caster 120 and the obstacle 300.

[0055] Figure 4C illustrates an embodiment of the suspension 100 with the drive wheel 132 descending from an elevated surface 420 with a step 422 to a lower surface 424, where the link 118 is a variable length link. When the front caster 120 reaches the step 422, the front caster 422 and the front caster pivot arm 106 begin to move downward. The weight of the front caster pivot arm 106 and front caster 120, in combination with any weight supported by the front caster 120, pulls the link 118 to extend the link to its maximum length or until the front caster 120 engages the lower surface 424. By allowing the front caster 120 to drop down and engage the lower surface 424 before the drive wheel reaches the step, the front caster 120 and the link 118 can absorb shock that results from the drive wheel 132 moving from the upper surface 420 to the lower surface 424.

[0056] Figures 5 and 6 illustrate another wheelchair suspension embodiment 500. The wheelchair suspension 500 includes a frame 502, a drive assembly 504, a front caster pivot arm 506, and a rear caster 508. The drive assembly 504 is pivotally mounted to the frame 502 at a drive assembly pivot axis 510. In the embodiment illustrated by

Figures 5 and 6, the drive assembly pivot axis 510 of the drive assembly 504 is below an axis of rotation 512 of a drive axle 514 of the drive assembly 504 and is in front of a pivot axis 116 of the front caster pivot arm 506. As such, a drive assembly pivot arm 534 and the front caster pivot arm 506 are in a crossed configuration when viewed from the side as shown in Figure 5. The front caster pivot arm 506 and the drive assembly pivot arm 534 may be laterally offset as shown in Figure 6, or may be bent to accommodate the crossed configuration. By arranging the front caster pivot arm 506 and the drive assembly pivot arm 534 in the crossed configuration, the length of the front caster pivot arm 506 and/or the drive assembly pivot arm 534 can be increased as compared to suspension where the front caster pivot arm and the drive assembly pivot arm do not cross.

[0057] The front caster pivot arm 506 is coupled to the drive assembly 504. The front caster pivot arm 506 and the drive assembly 504 can be coupled in any manner that transfers at least a portion of the motion of the drive assembly in at least one direction to the front caster pivot arm. In the embodiment illustrated by Figure 5, a link 518 is pivotally connected to the drive assembly 504 and the front caster pivot arm 506. The link 518 transfers motion of the drive assembly 504 to the front caster pivot arm. A front caster 520 is coupled to the caster pivot arm 506. Torque applied by the drive assembly 504 urges the front caster pivot arm 506 and the front caster 520 upward with respect to a support surface 119.

[0058] In the embodiment illustrated by Figures 5 and 6, each drive assembly 504 includes a motor drive 530, a drive wheel 532, and the pivot arm 534. The motor drive 530 drives the drive wheel 532 about the axis of rotation 512. In the embodiment illustrated by Figures 5 and 6, the pivot arm 534 extends forward and downward from the motor drive to the drive assembly pivot axis 510. In the configuration shown in Figure 5, the drive assembly pivot axis 510 is below the drive wheel axis of rotation 512 and below an axis of rotation 535 of a wheel of the front caster 520.

[0059] In one embodiment, a biasing member, such as a spring (not shown) may optionally be coupled between the frame and the front caster pivot arm or the frame and the drive assembly to bias the front caster into engagement with the support surface 119. The front caster pivot arm 506 may be a substantially rigid member. In one embodiment, the front caster pivot arm 506 is flexible to provide inherent shock

absorbing properties in the front caster pivot arm. The pivot arm 506 may be made from a wide variety of materials, including, but not limited to, metals and plastics. The front caster pivot arm 506 is pivotally mounted to the frame 502 at the pivot axis 516. The pivot axis 516 of the front caster pivot arm is rearward of the drive assembly pivot axis 510 and below the axis of rotation 512 of the drive wheel and below the axis of rotation 535 of the wheel of the front caster 520 in the embodiment illustrated by Figures 5 and 6.

[0060] In the embodiment illustrated by Figures 5 and 6, the link 518 is connected to the drive assembly pivot arm 534 at a pivotal connection 550. The link 518 is connected to the front caster pivot arm 506 at a pivotal connection 552. The link 518 can take a wide variety of different forms. For example, the link may be rigid, flexible, or extendible in length. Any link 518 that transfers at least some portion of motion in at least one direction of the drive assembly 504 to the front caster pivot arm can be used.

[0061] Figure 7A is an elevational view of the suspension 500 traversing over an obstacle 300 by ascending the obstacle. This operating condition may be accomplished by accelerating the drive wheels 532 in the forward direction. In this scenario, the moment arm generated by drive wheel 532 may be greater than opposite moment arms around pivot axis 510. When this occurs, the drive assembly 504 pivots as indicated by arrow 702 around pivot axis 510. The drive assembly pivot arm 534 pulls the link 518, which causes the front caster pivot arm 506 to pivot as indicated by arrow 704 around pivot axis 516. This causes front caster 520 to rise above obstacle 300 or urges the front caster upward to assist the front caster over the obstacle 300.

[0062] Figures 7B and 7C illustrate an embodiment of the suspension 500 traversing over the obstacle 300, where the link 518 is a variable length link. In this embodiment, the drive assembly pivot arm 534 pulls the link 518 to extend the link to its maximum length or a length where the front caster pivot arm 506 begins to pivot. Once extended, the link 518 pulls the front caster pivot arm 506 to pivot as indicated by arrow 704 around pivot axis 516. This causes front caster 520 to rise above obstacle 300 or urges the front caster upward to assist the front caster over the obstacle 300. Referring to Figure 7C, when the front caster 520 engages the obstacle 300, the front caster pivot

arm 506 pivots as indicated by arrow 710 and the link 518 compresses to absorb shock that results from the impact between the front caster 520 and the obstacle 300.

[0063] Illustrated in Figure 8A is a side elevational view of the suspension 500 with the drive wheel 532 traversing the obstacle 300. When the drive wheel 532 comes into contact with the obstacle 300, the drive assembly 504 pivots in the direction indicated by arrow 800 around pivot axis 510. The rotation of the drive assembly 504 is translated to the front caster pivot arm 506 to lower the caster 520 down onto the lower driving surface elevation. When the link 518 is a rigid member, the drive assembly 504 and the front caster pivot arm 506 act in unison. One or more springs (not shown) may optionally be included to bias the front caster pivot arm 506 in the direction indicated by arrow 802.

[0064] Figure 8B illustrates an embodiment of the suspension 500 with the drive wheel 532 traversing over the obstacle 300, where the link 518 is a variable length link. When the drive wheel 532 comes into contact with obstacle 300, the drive assembly 504 pivots in the direction indicated by arrow 810 around pivot axis 510 to soften the impact from the obstacle 300 that is transferred to the frame 502. During such pivotal movement of the drive assembly 504, the link 518 compresses to allow pivoting of the drive assembly 504 with respect to the front caster pivot arm. Compressing of the link 518 absorbs shock that results from the impact between the drive wheel 532 and the obstacle 300. When the front caster 520 comes into contact with the support surface 519, the pivot arm 506 pivots in the direction indicated by arrow 812 around pivot axis 516 to soften the impact with the support surface 119 that is transferred to the frame 502. During such pivotal movement of the pivot arm 506, the link 518 compresses to allow pivoting of the front caster pivot arm 506 with respect to the drive assembly. Compressing of the link 518 absorbs shock that results from the impact between the front caster 520 and the obstacle 300.

[0065] Figure 8C illustrates an embodiment of the suspension 500 with the drive wheel 532 descending from an elevated surface 820 with a step 822 to a lower surface 824, where the link 518 is a variable length link. When the front caster 520 reaches the step 822, the front caster 520 and the front caster pivot arm 506 begin to move downward. The weight of the front caster pivot arm 506 and front caster 520, in addition to any weight supported by the front caster 520, pulls the link 518 to extend the link to its

maximum length or until the front caster 520 engages the lower surface 824. By allowing the front caster 520 to drop down and/or engage the lower surface 824 before the drive wheel reaches the step, the front caster 520 and the link 518 can absorb shock that results from the drive wheel 532 moving from the upper surface 420 to the lower surface 424.

[0066] Figures 9, 10, and 11 illustrate embodiments of a wheelchair suspension 900 where a front caster pivot arm 906 comprises links of a four bar linkage. In the configurations illustrated by Figures 9 and 10, a drive assembly pivot arm 934 and the front caster pivot arm 906 are in a crossed configuration. In the configuration illustrated by Figure 11, the drive assembly pivot arm 934 and the front caster pivot arm 906 are not in a crossed configuration.

[0067] The wheelchair suspensions 900 illustrated by Figures 9, 10, and 11 each include a frame 902, a drive assembly 904, a front caster pivot arm 906, and a rear caster 908. The drive assembly 904 is pivotally mounted to the frame 902 at a drive assembly pivot axis 910. The front caster pivot arm 906 comprises an upper link 906a and a lower link 906b. The upper link 906a is pivotally coupled to a caster support member 911 at a pivotal connection 980 and is pivotally connected to the frame 902 at a pivotal connection 981. The lower link 906b is pivotally coupled to the caster support member 911 at a pivotal connection 982 and is pivotally connected to the frame 902 at a pivotal connection 983.

[0068] The caster support member 911 may be any structure that allows links 906a, 906b to be coupled to the caster 920. The links 906a, 906b, the frame 902, and the caster support member 911 form a four-bar linkage. The pivotal connections 980, 981, 982, 983 can be positioned at a wide variety of different locations on the frame 902 and the caster support member 911 and the length of the links 906 can be selected to define the motion of the caster 920 as the front caster pivot arm 906 is pivoted. In the example illustrated by Figure 9, the front caster pivot arm 906 retracts the front caster 920 or pivots the wheel of the front caster toward the frame as the pivot arm 906 is lifted and extends the front caster 920 or pivots the wheel of the front caster 920 away from the frame as the front caster pivot arm is lowered. In the example illustrated by Figures 10, the four-bar linkage defines a parallelogram. As such, the orientation of the front caster 920 does not change as the pivot arm pivots.

[0069] In the configurations illustrated by Figures 9 and 10, the drive assembly pivot axis 910 is below the pivotal connections 981, 983 of the front caster pivot arm links and a drive axle 914 and is in front of at least one of the pivotal connections 981, 983 of the front caster pivot arm 906. The drive assembly pivot arm 934 and the front caster pivot arm 906 are in a crossed configuration when viewed from the side. The front caster pivot arm 906 and the drive assembly pivot arm 934 may be laterally offset, or may be bent to accommodate the crossed configuration. By arranging the front caster pivot arm 906 and the drive assembly pivot arm 934 in the crossed configuration, the length of the front caster pivot arm 906 and/or the drive assembly pivot arm 934 can be increased. In the configuration illustrated by Figure 11, the drive assembly pivot axis 910 is above the pivotal connections 981, 983 of the front caster pivot arm links, but below the drive axle 914. The drive assembly pivot arm 934 and the front caster pivot arm 906 do not cross.

[0070] The drive assembly 904 and the front caster pivot arm 906 can be coupled in any manner that transfers at least a portion of motion of the drive assembly in at least one direction to the pivot arm 906. In the embodiments illustrated by Figure 9, 10, and 11, the front caster pivot arm 906 is coupled to the drive assembly 904 by a link 918 that is pivotally connected to the drive assembly 904 and the upper link 906a of the front caster pivot arm 906. The link could also be connected to the drive assembly 904 and the lower link 906b of the front caster pivot arm 106. The link 918 can be a fixed length link, a rigid link, a flexible link and/or may be a variable length link. The link 918 transfers motion of the drive assembly 904 to the front caster pivot arm. Torque applied by the drive assembly 904 urges the front caster pivot arm 906 and the front caster 920 upward with respect to a support surface 119.

[0071] Figures 12, 13, and 14 are elevational views of the suspensions 900 of Figures 9, 10 and 11 traversing over an obstacle 300 by ascending the obstacle. The drive assembly 904 pivots as indicated by arrow 902 around pivot axis 910. The drive assembly pivot arm 934 pulls the link 918, which pulls the front caster pivot arm 906. The front caster pivot arm 906 urges the front caster 920 upward and toward the frame 902. This causes front caster 920 to rise above obstacle 300 or urges the front caster upward and toward the frame 920 to assist the front caster over the obstacle 300.

[0072] Figure 15 illustrates an embodiment of a wheelchair suspension 1500 where a front caster pivot arm 1506 and a drive assembly pivot arm 1534 pivot about a common axis 1510. The wheelchair suspension 1500 illustrated by Figure 15 includes a frame 1502, a drive assembly 1504, a front caster pivot arm 1506, and a rear caster 1508. The drive assembly 1504 and the front caster pivot arm 1506 are pivotally mounted to the frame 1502 at the common pivot axis 1510. In the configuration illustrated by Figure 15, the common pivot axis 1510 is below both an axle 1535 of the caster and a drive axle 1514 of the drive assembly 1504. In another embodiment, the common pivot axis 1510 is above the caster axle 1535, but below the drive axle 1514.

[0073] The drive assembly 1504 and the front caster pivot arm 1506 can be coupled in any manner. In the embodiment illustrated by Figure 15, the front caster pivot arm 1506 is coupled to the drive assembly 1504 by a link 1518 that is pivotally connected to the drive assembly 1504 and the front caster pivot arm 1506. The link 1518 can be a fixed length link, a rigid link, a flexible link and/or may be a variable length link. The link 1518 transfers motion of the drive assembly 1504 to the front caster pivot arm. Torque applied by the drive assembly 1504 urges the front caster pivot arm 1506 and the front caster 1520 upward with respect to a support surface 119.

[0074] Figure 16 is an elevational view of the suspension 1500 traversing over an obstacle 300 by ascending the obstacle. The drive assembly 1504 pivots as indicated by arrow 1602 around pivot axis 1510. The drive assembly pivot arm 1534 pulls the link 1518, which pulls the front caster pivot arm 1506 to urge the front caster 1520 upward. This causes front caster 1520 to rise above obstacle 300 or urges the front caster upward to assist the front caster over the obstacle 300.

[0075] Figures 17 and 18 illustrate an embodiment of a wheelchair suspension 1700 where the a front caster pivot arm 1706 comprises links of a four bar linkage 1701 and a drive assembly 1704 and one of the links of front caster pivot arm 1706 pivot about a common axis 1710. The wheelchair suspension 1700 illustrated by Figures 17 and 18 includes a frame 1702, a drive assembly 1704, a front caster pivot arm 1706, and may include a rear caster (not shown). The drive assembly 1704 is pivotally mounted to the frame 1702 the common pivot axis. The front caster pivot arm 1706 comprises an upper link 1706a and a lower link 1706b. The upper link 1706a is pivotally coupled to a caster support member 1711 at a pivotal connection 1780 and is pivotally connected

to the frame 1702 at the drive assembly pivot axis 1710. The lower link 1706b is pivotally coupled to the caster support member 1711 at a pivotal connection 1782 and is pivotally connected to the frame 1702 at a pivotal connection 1783. The links 1706a, 1706b, the frame 1702, and the caster support member 1711 form a four-bar linkage. In the example illustrated by Figures 17 and 18, the front caster pivot arm 1706 retracts the front caster 1720 as the pivot arm 1706 is lifted and extends the front caster 1720 as the front caster pivot arm 1706 is lowered.

[0076] In the embodiment illustrated by Figures 17 and 18, the front caster pivot arm 1706 is coupled to the drive assembly 1704 by a link 1718 that is pivotally connected to the drive assembly 1704 and the upper link 1706a of the front caster pivot arm 1706. The illustrated link 1718 is a coil over shock arrangement that comprises a variable length shock absorber 1719 with a spring or coil 1721 disposed around the shock absorber. The shock absorber 1719 absorbs shock that results from impacts sustained by the front caster or the drive wheel. The coil 1721 biases the shock absorber to an extended position. The link 1718 transfers motion of the drive assembly 1704 to the front caster pivot arm. Torque applied by the drive assembly 1704 urges the front caster pivot arm 1706 and the front caster 1720 upward with respect to a support surface 119.

[0077] Figures 19 and 20 are perspective views of a wheelchair 1901 that includes a suspension 1900. The wheelchair 1901 is preferably a mid-wheel drive or rear-wheel drive wheelchair, but may be any type of wheelchair. As shown, the wheelchair 1901 has a chair 1992 having arm supports 1994. A control device such as, for example, a joystick controller 1998 (Figure 1A) is attached to the chair 1992 for controlling any power-related aspects of the wheelchair 1901. Projecting forward from the chair 1992 is a footrest 1997 for supporting the feet of the wheelchair's user.

[0078] The wheelchair 1901 may include the suspension illustrated in Figures 19-23, any of the suspension configurations described above, or any combination of the components of the suspension configurations described herein. Referring to Figures 21 and 22, the illustrated suspension 1900 includes a frame 1902, a drive assembly 1904, a front caster pivot arm 1906, and two rear casters 1908. The drive assembly 1904 is pivotally mounted to the frame 1902 at a drive assembly pivot axis 1910.

[0079] Each drive assembly 1904 includes a motor drive 1930, a drive wheel 1932, and a pivot arm 1934. The motor drive 1930 may comprise a motor/gear box combination, a brushless, gearless motor, or any other known arrangement for driving the drive wheel 1932. The motor drive 1930 is powered by one or more batteries 1935 (Figure 20) to drive the drive wheel 1932 about a the axis of rotation 1912. Referring to Figure 22, the illustrated pivot arm 1934 comprises a steel plate that is fixed to the motor drive 1930. The pivot arm 1934 is pivotally coupled to the frame at the drive assembly pivot axis 1910. Referring to Figure 22, the pivot arm 1934 extends forward and downward from the motor drive to the drive assembly pivot axis 110. The pivot axis 1910 of the drive assembly pivot arm 1934 is below the drive wheel axis of rotation 1912

[0080] Referring to Figure 22, the front caster pivot arm 1906 comprises an upper link 1906a and a lower link 1906b. The upper link 906a is pivotally coupled to a caster support member 1911 at a pivotal connection 1980 and is pivotally connected to the frame 1902 at a pivotal connection 1981. The lower link 1906b is pivotally coupled to the caster support member 1911 at a pivotal connection 1982 and is pivotally connected to the frame 1902 at a pivotal connection 1983. In the embodiment illustrated by Figures 21 and 22, the pivotal connection 1983 is at or near the lowest point of the frame 1902. The links 1906a, 1906b, the frame 1902, and the caster support member 1911 form a four-bar linkage 1985 (See Figure 22). In the configuration illustrated by Figures 21 and 22, the drive assembly pivot axis 1910 is at or near the lowest point of the frame 1902 and is in front of the pivotal connections 1981, 1983 of the front caster pivot arm 1906. The drive assembly pivot arm 1934 and the front caster pivot arm 1906 are in a crossed configuration.

[0081] In the embodiment illustrated by Figures 21 and 22, a shock absorber link 1918 is pivotally connected to the drive assembly 1904 and the front caster pivot arm 1906. The shock absorber link 1918 transfers motion of the drive assembly 1904 to the front caster pivot arm 1906. The shock absorber link 1918 is a variable length link, though it can also be a fixed length link. When the drive assembly 1904 is accelerated, the drive assembly pivot arm 1934 pulls the shock absorber link 1918 to extend the link to its maximum length or a length where it urges the front caster pivot arm 1906 to pivot. Once extended, the link 1918 pulls or urges the front caster pivot arm 1906 to pivot upward. This causes front caster 1920 to rise or urges the front caster 1920 upward. When the front caster 1920 engages an obstacle, the shock absorber link 1918

compresses to absorb shock from the impact between the front caster 1920 and the obstacle. When the drive wheel 1932 comes into contact with an obstacle, the shock absorber link 1918 compresses to absorb shock that results from the impact between the drive wheel and the obstacle.

[0082] Referring to Figure 23, first and second rear casters 1908 are independently, pivotally coupled to the frame 1902. Each rear caster 1908 is coupled to a pivot arm 2381 that is pivotally connected to the frame 1906 at a pivot axis 2383. A rear caster spring 2385 acts between the frame 1902 and the rear caster pivot arm 2381. The rear caster spring 2385 biases the rear caster 1908 into engagement with the ground.

[0083] While the present invention has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. For example, pivotal connections can be made of any number of structures including bearing assemblies, pins, nuts and bolts, and frictionless sleeve assemblies. Additionally, springs or shock absorbers can be added between pivoting and non-pivoting components to limit, dampen, or somewhat resist the pivotal motions of these components. Therefore, the invention, in its broader aspects, is not limited to the specific details, the representative apparatus, and illustrative examples shown and described. Accordingly, departures can be made from such details without departing from the spirit or scope of the applicant's general inventive concept.

What is claimed:

1. A wheelchair suspension comprising:
 - a frame;
 - a drive assembly pivotally mounted to the frame at a first pivot axis that is below an axis of rotation of a drive axle of the drive assembly;
 - at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;
 - a front caster coupled to the at least one caster pivot arm;
 - wherein torque applied by the drive assembly urges the front caster upward with respect to a support surface.
2. The wheelchair suspension of claim 1 further comprising at least one rear caster coupled to the frame.
3. The wheelchair suspension of claim 1 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.
4. The wheelchair suspension of claim 1 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the second pivot axis is below the axis of rotation of the drive axle of the drive assembly.
5. The wheelchair suspension of claim 1 wherein the drive assembly is pivotally mounted to the frame by a drive assembly pivot arm.
6. The wheelchair suspension of claim 5 wherein the drive assembly pivot arm and the at least one caster pivot arm are arranged in a crossing configuration.

7. The wheelchair suspension of claim 1 wherein the drive assembly and the at least one front caster pivot arm are coupled by a variable length motion transfer member.
8. The wheelchair suspension of claim 7 wherein the variable length motion transfer member has a maximum length and is compressible from the maximum length to a shorter length.
9. The wheelchair suspension of claim 8 wherein pulling of the variable length motion transfer member when the variable length motion transfer member is at the maximum length pulls the at least one front caster pivot arm to move the front caster away from the support surface.
10. The wheelchair suspension of claim 7 wherein variable length motion transfer member is a shock absorber.
11. The wheelchair suspension of claim 7 wherein the variable length motion transfer member comprises a spring.
12. The wheelchair suspension of claim 1 wherein the at least one front caster pivot arm comprises first a first caster pivot link pivotally coupled to the frame at a second pivot axis and second front caster pivot link pivotally coupled to the frame at a third pivot axis.
13. The wheelchair suspension of claim 12 wherein the first pivot axis is in front of the second pivot axis and the third pivot axis on the frame.

14. The wheelchair suspension of claim 1 wherein a caster pivot arm is pivotally connected to the frame at the first pivot axis.
15. A wheelchair suspension comprising:
- a frame;
 - a drive assembly pivot arm pivotally connected to the frame;
 - a drive assembly mounted to the drive assembly pivot arm;
 - at least one front caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;
 - a front caster coupled to the at least one front caster pivot arm;
- wherein the drive assembly pivot arm and the at least one front caster pivot arm are disposed in a crossed configuration and wherein torque applied by the drive assembly urges the front caster upward with respect to a support surface.
16. The wheelchair suspension of claim 15 further comprising at least one rear caster coupled to the frame.
17. The wheelchair suspension of claim 15 wherein the drive assembly pivot arm is pivotally mounted to the frame at a first pivot axis and at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.
18. The wheelchair suspension of claim 15 wherein the drive assembly and the at least one front caster pivot arm are coupled by a variable length motion transfer member.

19. The wheelchair suspension of claim 18 wherein the variable length motion transfer member has a maximum length and is compressible from the maximum length to a shorter length.
20. The wheelchair suspension of claim 19 wherein pulling of the variable length motion transfer member when the variable length motion transfer member is at the maximum length pulls the at least one front caster pivot arm to move the front caster away from the support surface.
21. The wheelchair suspension of claim 18 wherein variable length motion transfer member is a shock absorber.
22. The wheelchair suspension of claim 15 wherein the drive assembly and the at least one front caster pivot arm are coupled by a length of flexible material.
23. The wheelchair suspension of claim 18 wherein the variable length motion transfer member comprises a spring.
24. The wheelchair suspension of claim 15 wherein the drive assembly pivot arm is pivotally connected to the frame at a first pivot axis and the at least one front caster pivot arm comprises first a first caster pivot link pivotally coupled to the frame at a second pivot axis and second front caster pivot link pivotally coupled to the frame at a third pivot axis.
25. The wheelchair suspension of claim 24 wherein the first pivot axis is in front of the second pivot axis and the third pivot axis on the frame.

26. A wheelchair suspension comprising:

a frame;

a drive assembly pivotally mounted to the frame at a first pivot axis;

at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

a variable length motion transfer member coupled to the drive assembly and the at least one caster pivot arm such that motion of the drive assembly is transferred to the at least one caster pivot arm by the variable length motion transfer member;

a front caster coupled to the at least one caster pivot arm;

wherein torque applied by the drive assembly extends the variable length motion transfer member to a maximum length and urges the front caster upward with respect to a support surface.

27. The wheelchair suspension of claim 26 further comprising at least one rear caster coupled to the frame.

28. The wheelchair suspension of claim 26 wherein the drive assembly is pivotally connected to the frame at a pivot axis that is below an axis of rotation of a drive axle of the drive assembly.

29. The wheelchair suspension of claim 26 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.

30. The wheelchair suspension of claim 26 wherein the drive assembly is pivotally mounted to the frame by a drive assembly pivot arm.

31. The wheelchair suspension of claim 30 wherein the drive assembly pivot arm and the at least one caster pivot arm are arranged in a crossing configuration.
32. The wheelchair suspension of claim 26 wherein variable length motion transfer member is a shock absorber.
33. The wheelchair suspension of claim 26 wherein the variable length motion transfer member comprises a spring.
34. The wheelchair suspension of claim 26 wherein the drive assembly is mounted to a drive assembly pivot arm that is pivotally mounted to the frame at a first pivot axis and at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.
35. The wheelchair suspension of claim 26 wherein the drive assembly pivot arm is pivotally connected to the frame at a first pivot axis and the at least one front caster pivot arm comprises first a first caster pivot arm pivotally coupled to the frame at a second pivot axis and second front caster pivot arm pivotally coupled to the frame at a third pivot axis.
36. The wheelchair suspension of claim 24 wherein the first pivot axis is in front of the second pivot axis and the third pivot axis on the frame.
37. A wheelchair suspension comprising:
 - a frame;
 - a drive assembly pivotally mounted to the frame at a first pivot axis;

at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

a variable length motion transfer means for coupling to the drive assembly and the at least one caster pivot arm such that motion of the drive assembly is transferred to the at least one caster pivot arm;

a front caster coupled to the at least one caster pivot arm;

wherein torque applied by the drive assembly extends the variable length motion transfer means to a maximum length and urges the front caster upward with respect to a support surface.

38. A wheelchair comprising:

a frame;

a seat supported by the frame;

a pair of suspension assemblies mounted on opposite sides of the frame, each suspension assembly comprising:

a drive assembly pivotally mounted to the frame at a first pivot axis that is below an axis of rotation of a drive axle of the drive assembly;

at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

a front caster coupled to the at least one caster pivot arm;

wherein torque applied by the drive assembly urges the front caster upward with respect to a support surface.

39. The wheelchair of claim 38 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.

40. The wheelchair of claim 38 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the second pivot axis is below an axis of rotation of a drive axle of the drive assembly.
41. The wheelchair of claim 38 wherein the drive assembly is pivotally mounted to the frame by a drive assembly pivot arm.
42. The wheelchair of claim 38 wherein the drive assembly pivot arm and the at least one caster pivot arm are arranged in a crossing configuration.
43. The wheelchair of claim 38 wherein the drive assembly and the at least one front caster pivot arm are coupled by a variable length motion transfer member.
44. The wheelchair of claim 43 wherein the variable length motion transfer member has a maximum length and is compressible from the maximum length to a shorter length.
45. The wheelchair of claim 45 wherein pulling of the variable length motion transfer member when the variable length motion transfer member is at the maximum length pulls the at least one front caster pivot arm to move the front caster away from the support surface.
46. The wheelchair of claim 43 wherein variable length motion transfer member is a shock absorber.
47. The wheelchair of claim 43 wherein the variable length motion transfer member comprises a length of flexible material.

48. The wheelchair of claim 43 wherein the variable length motion transfer member comprises a spring.

49. The wheelchair of claim 38 wherein the at least one front caster pivot arm comprises first a first caster pivot arm pivotally coupled to the frame at a second pivot axis and second front caster pivot arm pivotally coupled to the frame at a third pivot axis.

50. The wheelchair of claim 49 wherein the first pivot axis is in front of the second pivot axis and the third pivot axis on the frame.

51. The wheelchair of claim 38 wherein a caster pivot arm is pivotally connected to the frame at the first pivot axis.

52. A wheelchair comprising:

a frame;

a seat supported by the frame;

a pair of suspension assemblies disposed on opposite sides of the frame, each suspension assembly comprising:

a drive assembly pivot arm pivotally connected to the frame;

a drive assembly mounted to the drive assembly pivot arm;

at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

a front caster coupled to the at least one front caster pivot arm;

wherein the drive assembly pivot arm and the at least one caster pivot arm are disposed in a crossed configuration and wherein torque applied by the drive assembly urges the front caster upward with respect to a support surface.

53. The wheelchair of claim 52 further comprising at least one rear caster coupled to the frame.

54. The wheelchair of claim 52 wherein the drive assembly pivot arm is pivotally mounted to the frame at a first pivot axis and at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.

55. The wheelchair of claim 52 wherein the drive assembly and the at least one front caster pivot arm are coupled by a variable length motion transfer member.

56. The wheelchair of claim 55 wherein the variable length motion transfer member has a maximum length and is compressible from the maximum length to a shorter length.

57. The wheelchair of claim 56 wherein pulling of the variable length motion transfer member when the variable length motion transfer member is at the maximum length pulls the at least one front caster pivot arm to move the front caster away from the support surface.

58. The wheelchair of claim 55 wherein variable length motion transfer member is a shock absorber.

59. The wheelchair of claim 52 wherein the drive assembly and the at least one front caster pivot arm are coupled by a length of flexible material.

60. The wheelchair of claim 55 wherein the variable length motion transfer member comprises a spring.

61. The wheelchair suspension of claim 55 wherein the drive assembly pivot arm is pivotally connected to the frame at a first pivot axis and the at least one front caster pivot arm comprises first a first caster pivot arm pivotally coupled to the frame at a second pivot axis and second front caster pivot arm pivotally coupled to the frame at a third pivot axis.

62. The wheelchair suspension of claim 61 wherein the first pivot axis is in front of the second pivot axis and the third pivot axis on the frame.

63. A wheelchair comprising:

a frame;

a seat supported by the frame;

a pair of suspension assemblies disposed on opposite sides of the frame, each support assembly comprising:

a drive assembly pivotally mounted to the frame at a first pivot axis;

at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

a variable length motion transfer member coupled to the drive assembly and the at least one caster pivot arm such that motion of the drive assembly is transferred to the at least one caster pivot arm;

a front caster coupled to the at least one caster pivot arm;

wherein torque applied by the drive assembly extends the variable length motion transfer member to a maximum length and urges the front caster upward with respect to a support surface.

64. The wheelchair of claim 63 wherein the drive assembly is pivotally connected to the frame at a pivot axis that is below an axis of rotation of a drive axle of the drive assembly.

65. The wheelchair of claim 63 further comprising at least one rear caster coupled to the frame.

66. The wheelchair of claim 63 wherein the at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.

67. The wheelchair of claim 63 wherein the drive assembly is pivotally mounted to the frame by a drive assembly pivot arm.

68. The wheelchair of claim 67 wherein the drive assembly pivot arm and the at least one caster pivot arm are arranged in a crossing configuration.

69. The wheelchair of claim 63 wherein variable length motion transfer member is a shock absorber.

70. The wheelchair of claim 63 wherein the variable length motion transfer member comprises a spring.

71. The wheelchair of claim 63 wherein the drive assembly is mounted to a drive assembly pivot arm that is pivotally mounted to the frame at the first pivot axis and at least one caster pivot arm is pivotally mounted to the frame at a second pivot axis and the first pivot axis is in front of the second pivot axis on the frame.

72. The wheelchair of claim 63 wherein the drive assembly pivot arm is pivotally connected to the frame at the first pivot axis and the at least one front caster pivot arm comprises first a first caster pivot arm pivotally coupled to the frame at a second pivot axis and second front caster pivot arm pivotally coupled to the frame at a third pivot axis.

73. A wheelchair suspension comprising:

- a frame;

- a seat supported by the frame;

- at least one rear caster coupled to the frame;

- a pair of suspension assemblies disposed on opposite sides of the frame, each suspension assembly comprising:

- a drive assembly pivotally mounted to the frame at a first pivot axis that is below the drive assembly;

- at least one caster pivot arm pivotally mounted to the frame and coupled to the drive assembly;

- a variable length motion transfer means for coupling to the drive assembly and the at least one caster pivot arm such that motion of the drive assembly is transferred to the at least one caster pivot arm by the variable length motion transfer means;

- a front caster coupled to the at least one caster pivot arm;

wherein torque applied by the drive assembly extends the variable length motion transfer means to a maximum length and urges the front caster upward with respect to a support surface.

74. A method of traversing an obstacle with a wheelchair comprising:

pivoting a drive assembly pivotally about a first pivot axis that is below an axis of rotation of a drive axle of the drive assembly;

transferring movement of the drive assembly with respect to a frame to a caster.

75. The method of claim 74 wherein torque applied by the drive assembly urges the front caster upward with respect to a support surface.

76. The method of claim 74 wherein the caster is moved by pivoting a caster pivot arm about a second pivot axis, wherein the first pivot axis is in front of the second pivot axis on the frame.

77. The method of claim 74 wherein the caster is moved by pivoting a caster pivot arm about a second pivot axis, wherein the second pivot axis is below the axis of rotation of the drive axle of the drive assembly.

78. The method of claim 74 wherein the drive assembly pulls the front caster away from the support surface.

79. A method of traversing an obstacle with a wheelchair comprising:

pivoting a drive assembly pivotally about a pivot axis;

transferring movement of the drive assembly with respect to a frame to a caster with a variable length motion transfer member.

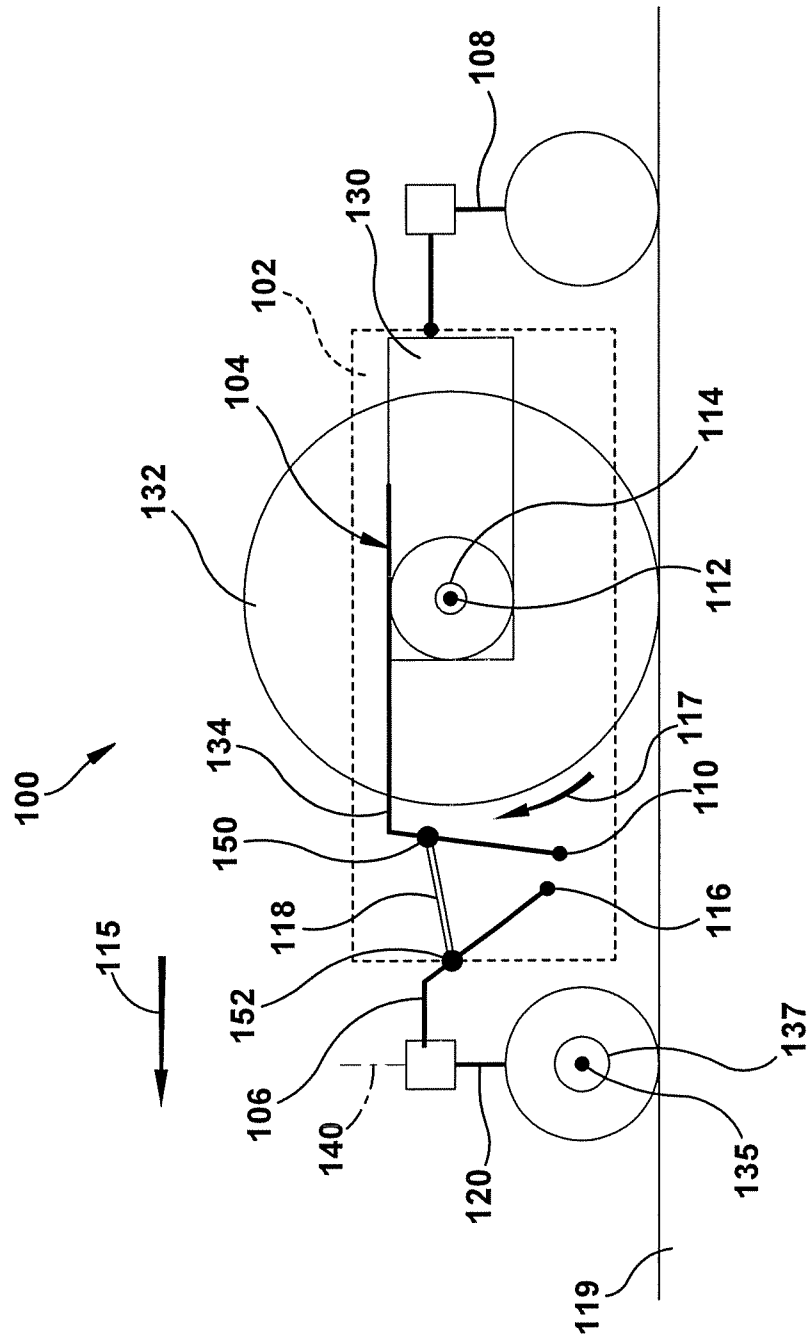


FIG. 1

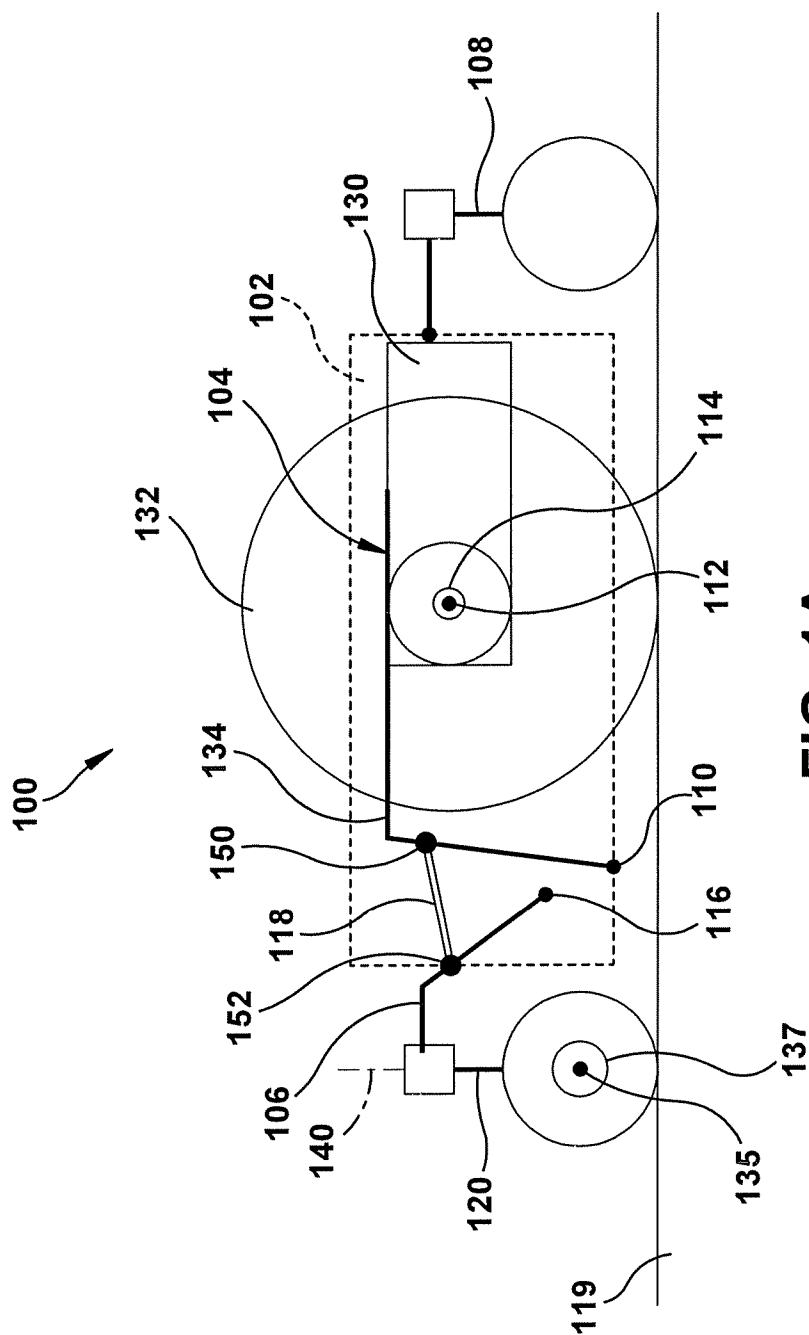
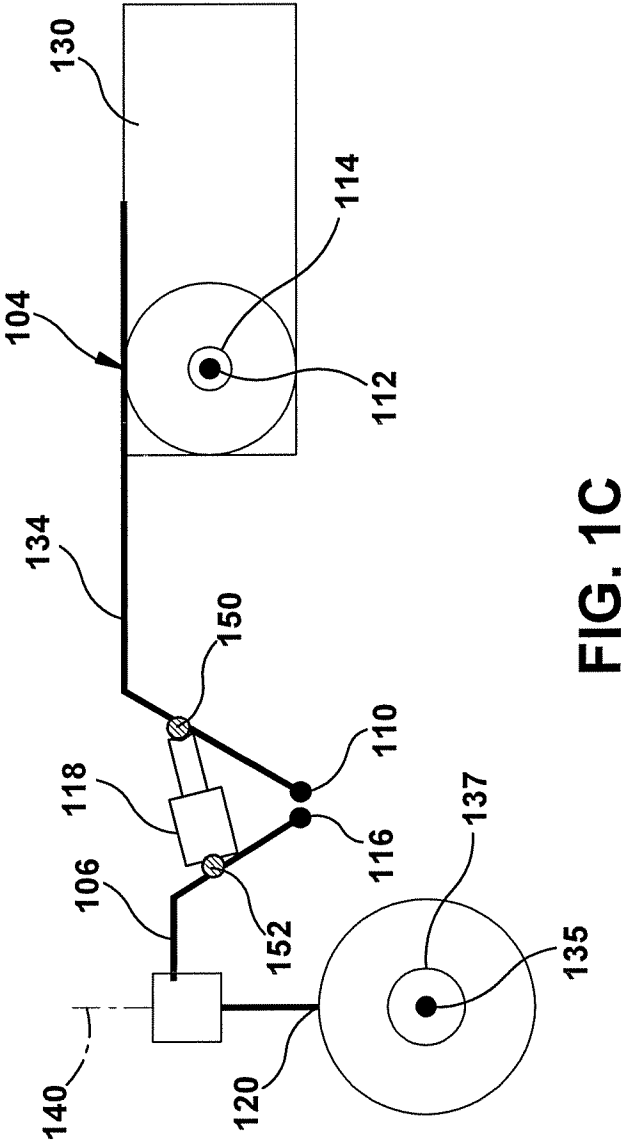
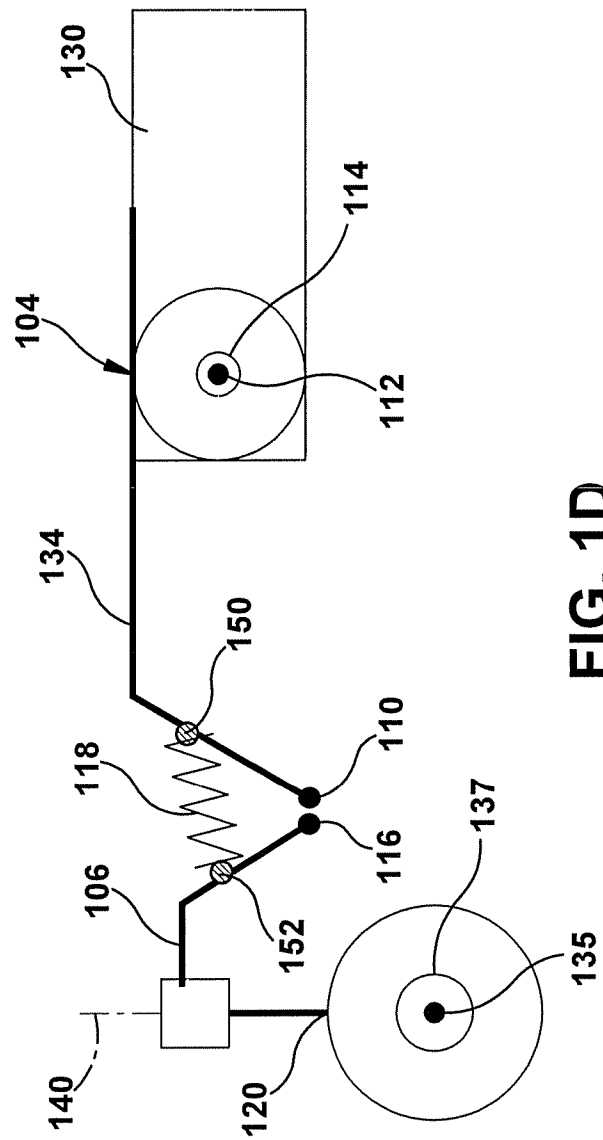


FIG. 1A





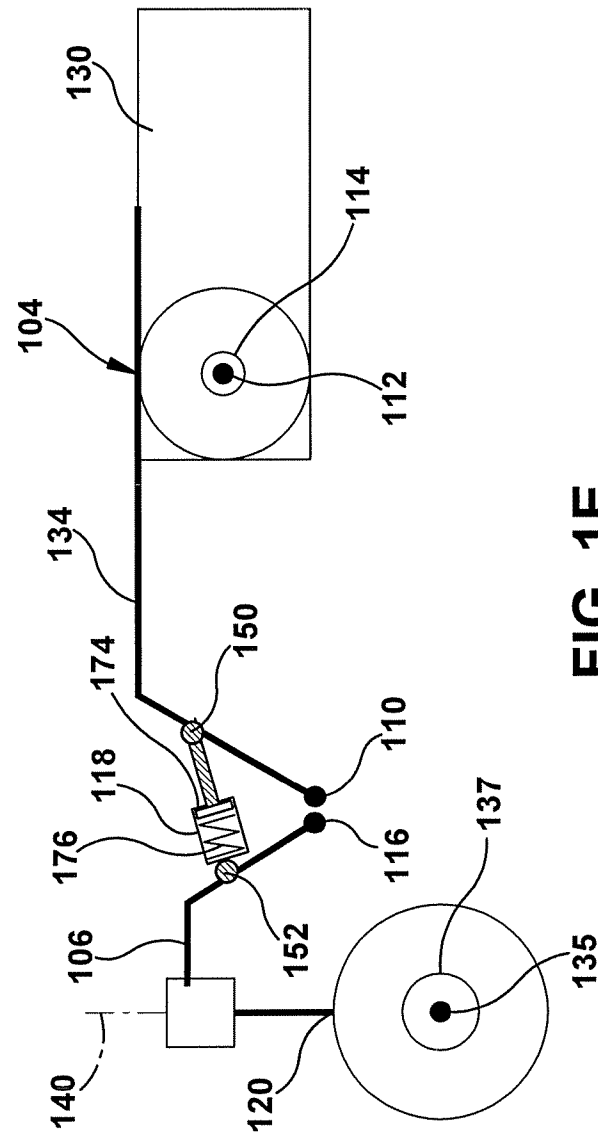


FIG. 1E

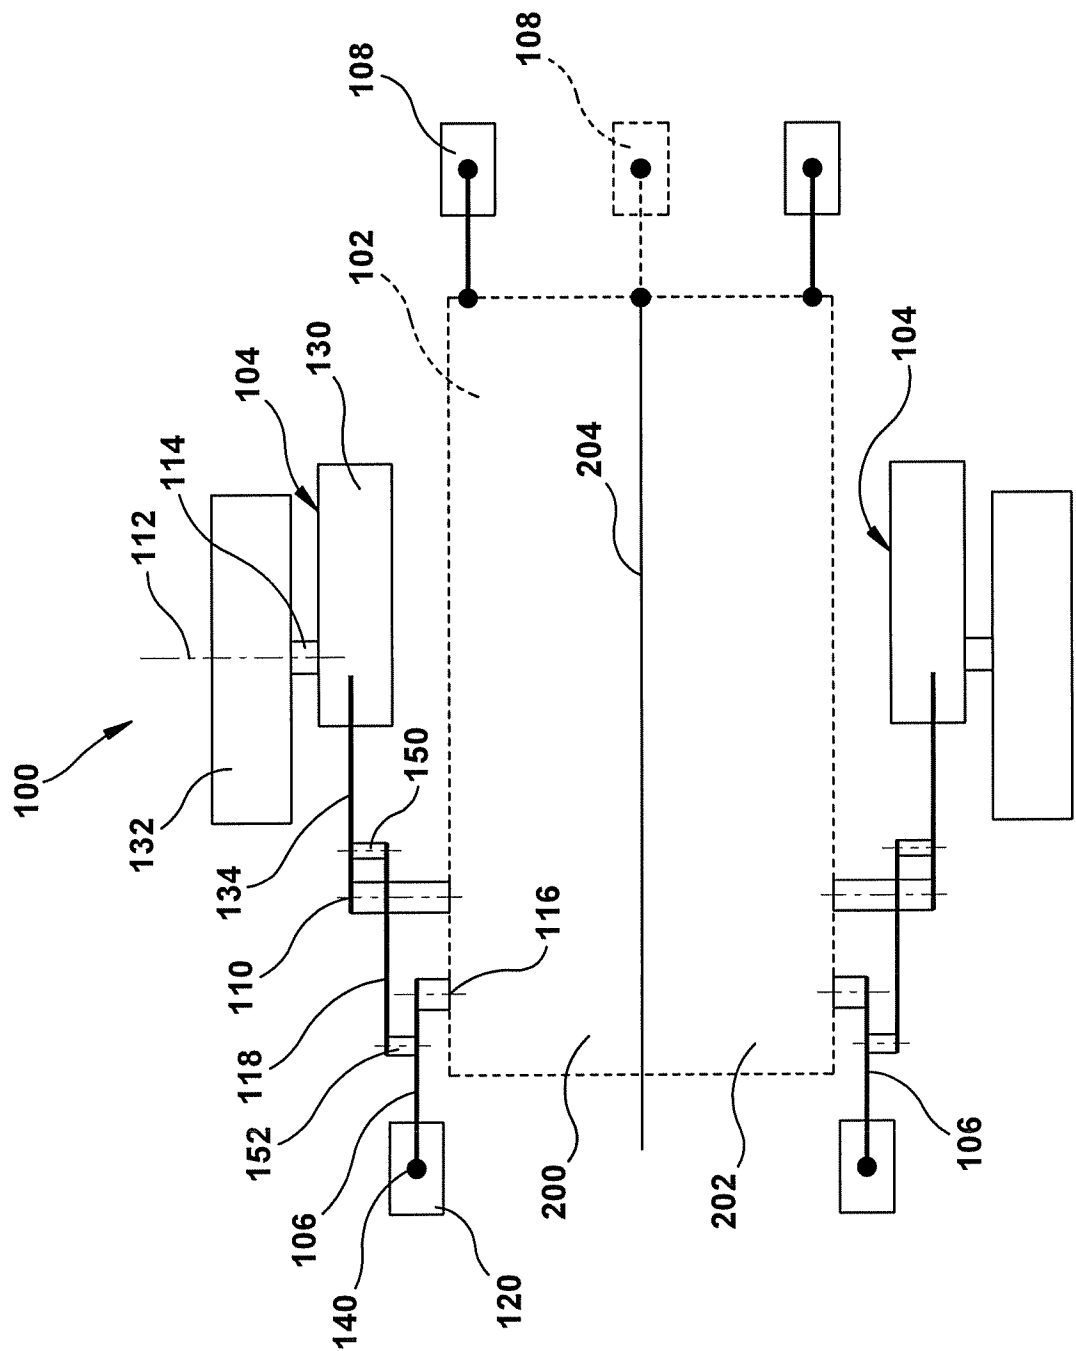


FIG. 2

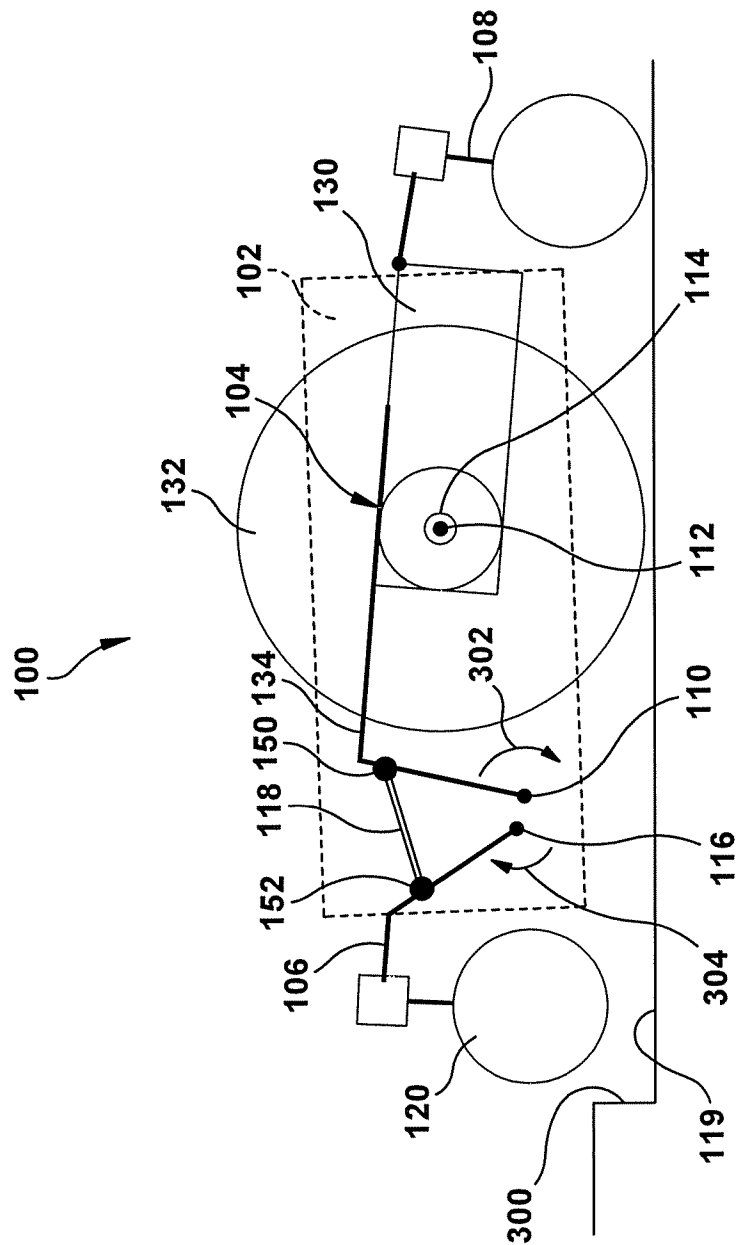


FIG. 3A

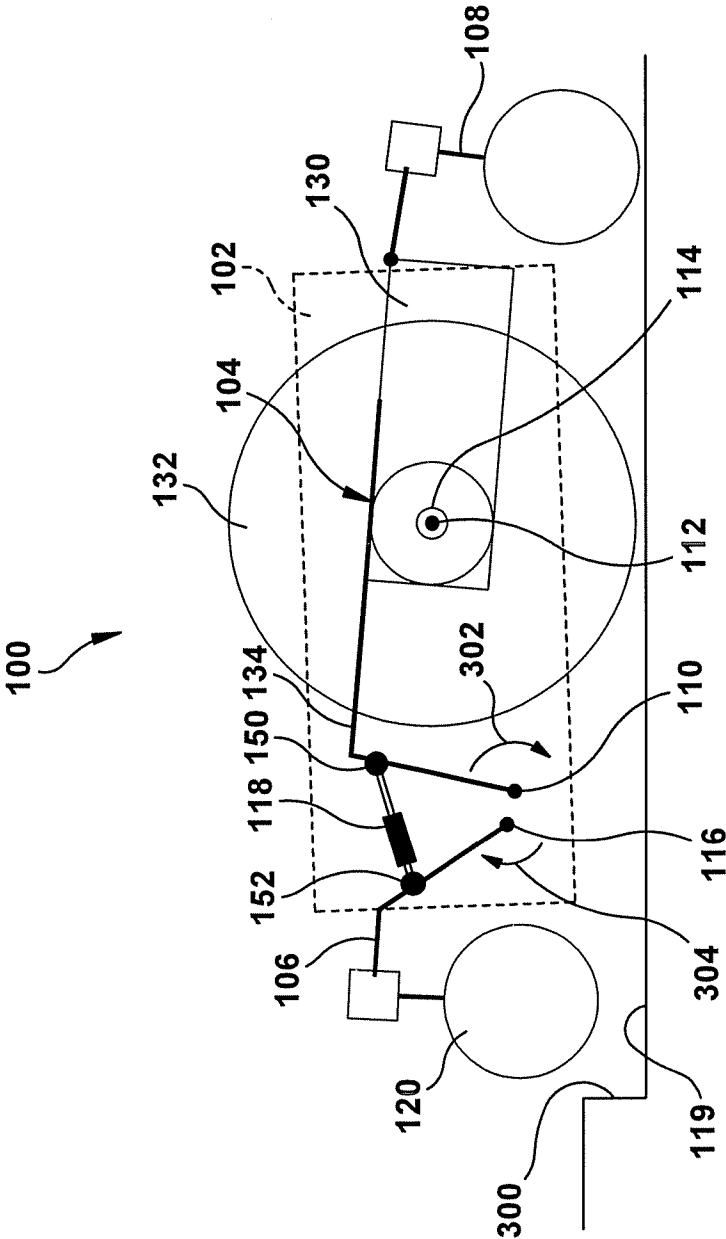


FIG. 3B

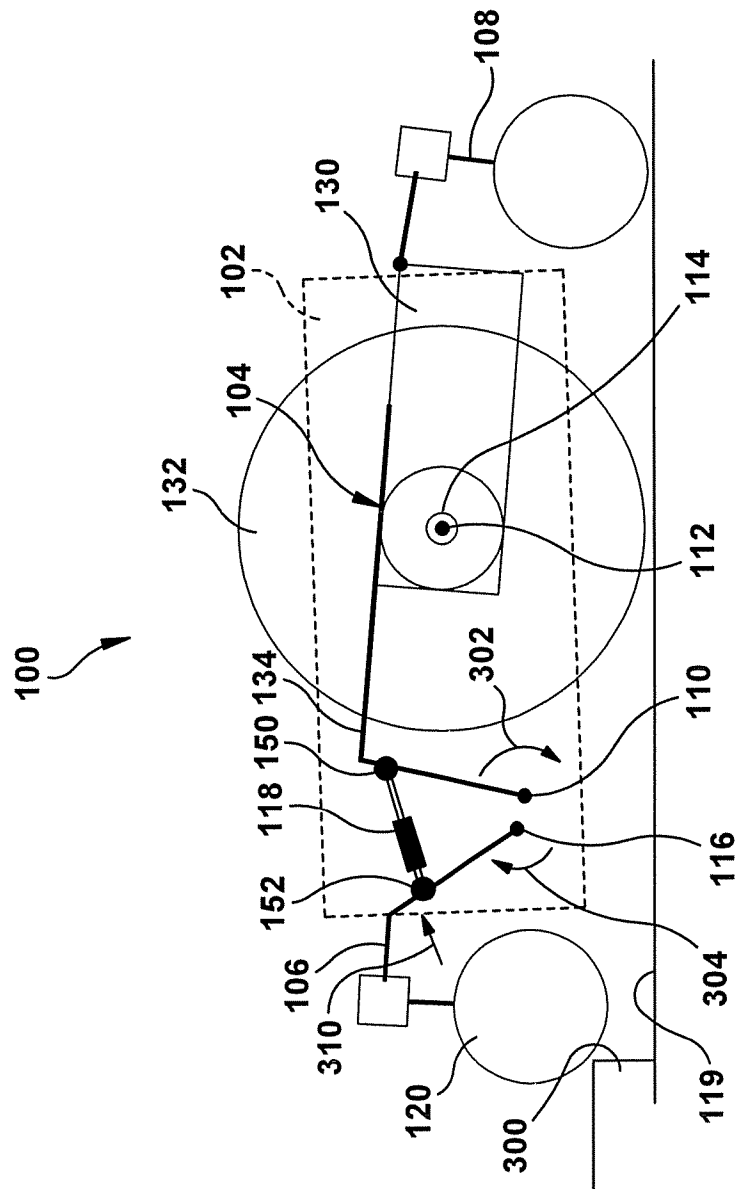


FIG. 3C

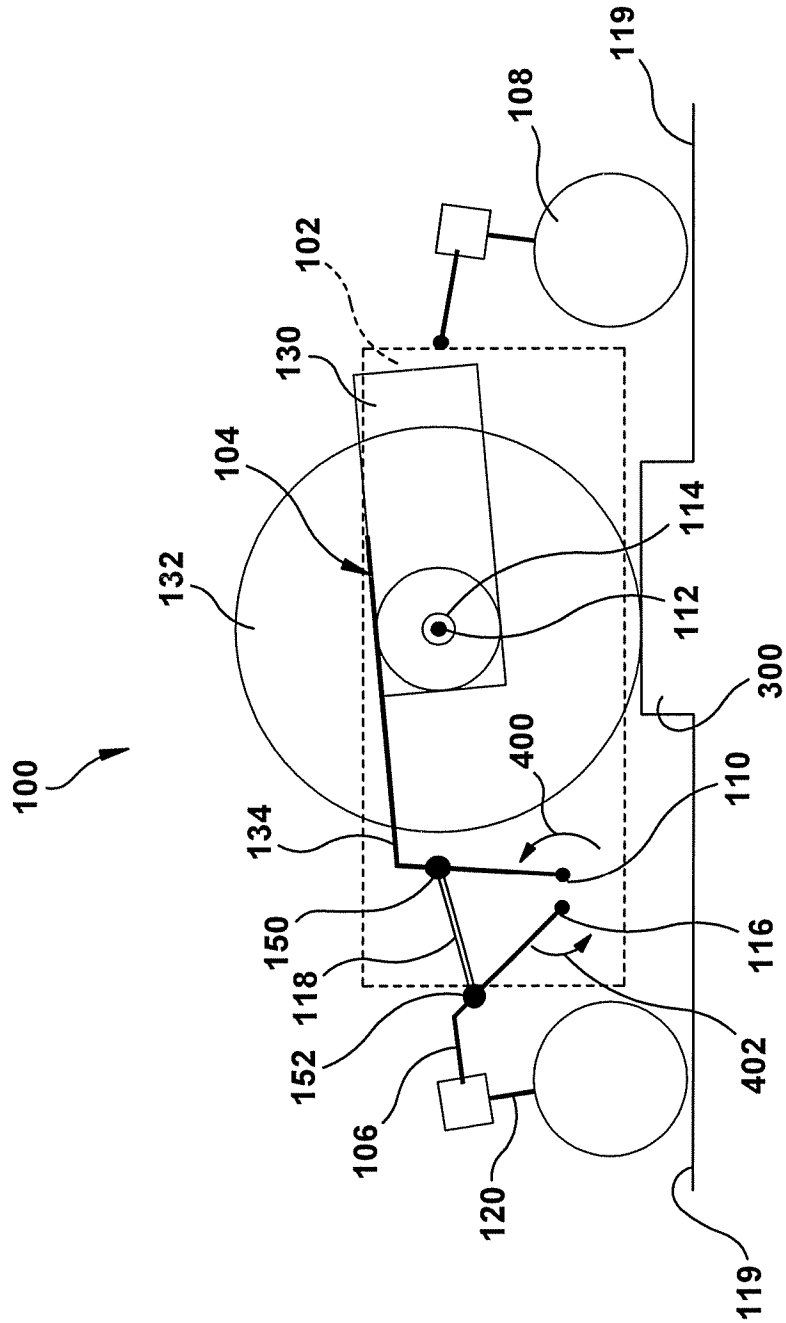


FIG. 4A

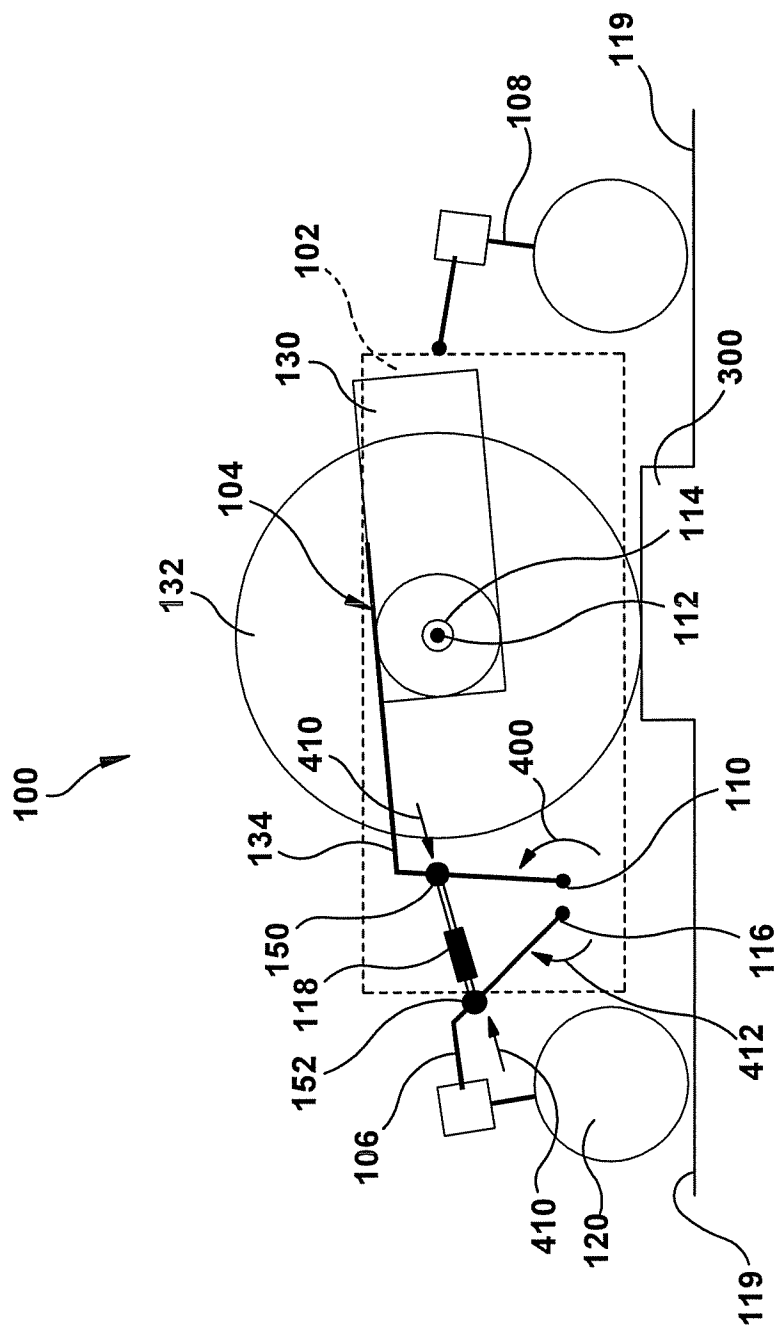


FIG. 4B

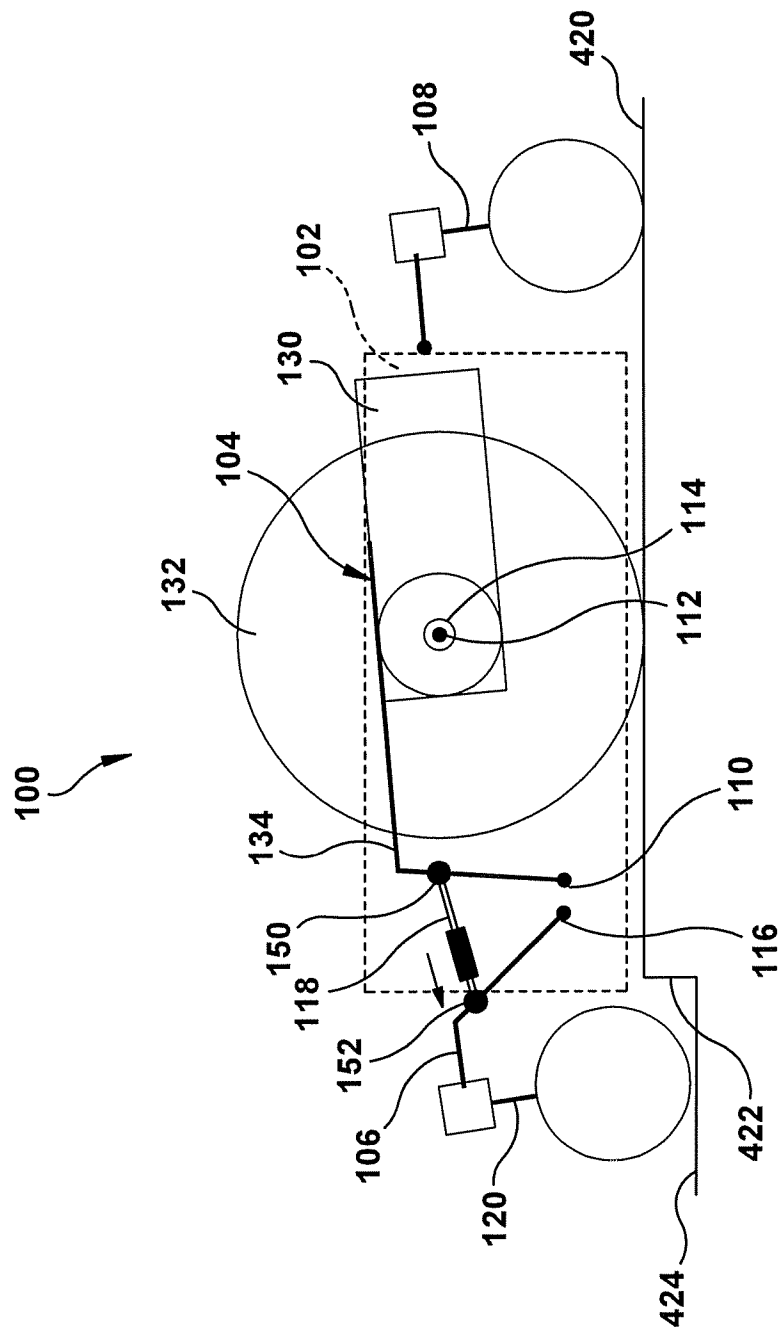


FIG. 4C

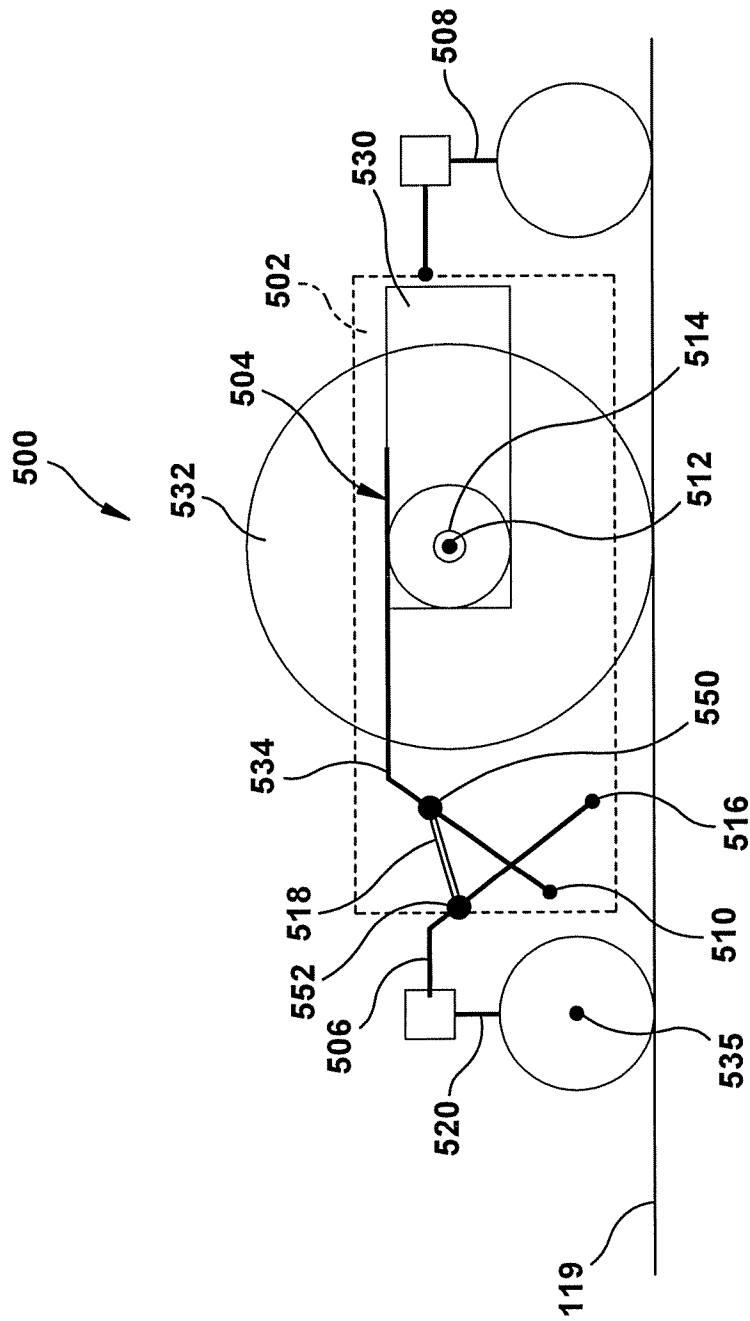
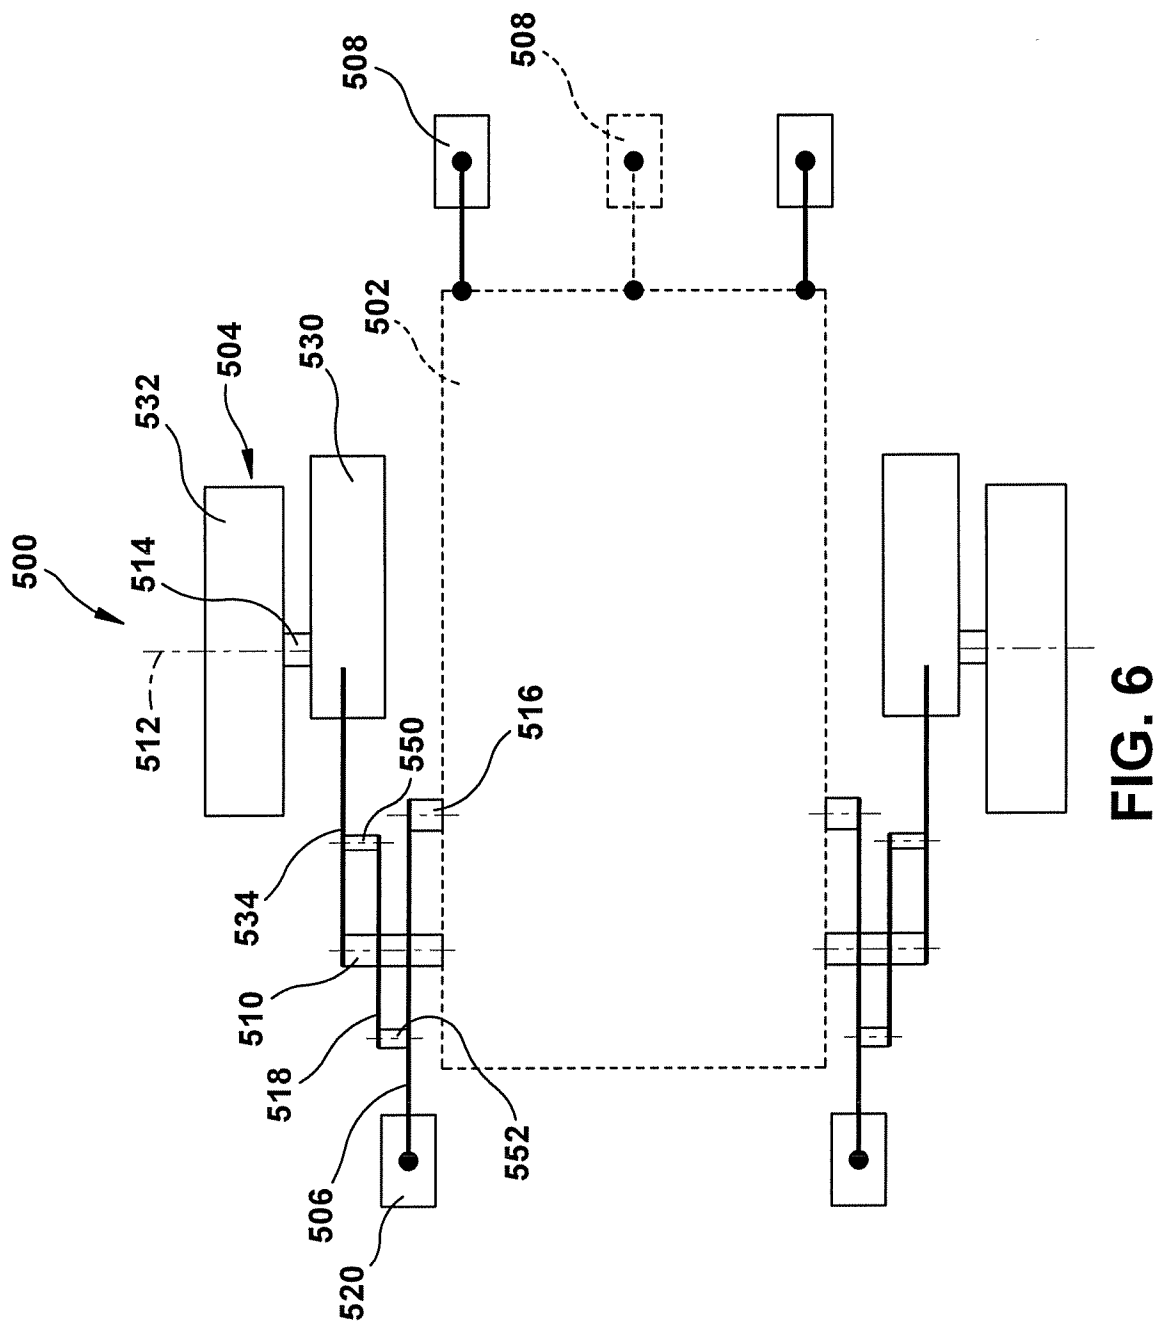


FIG. 5



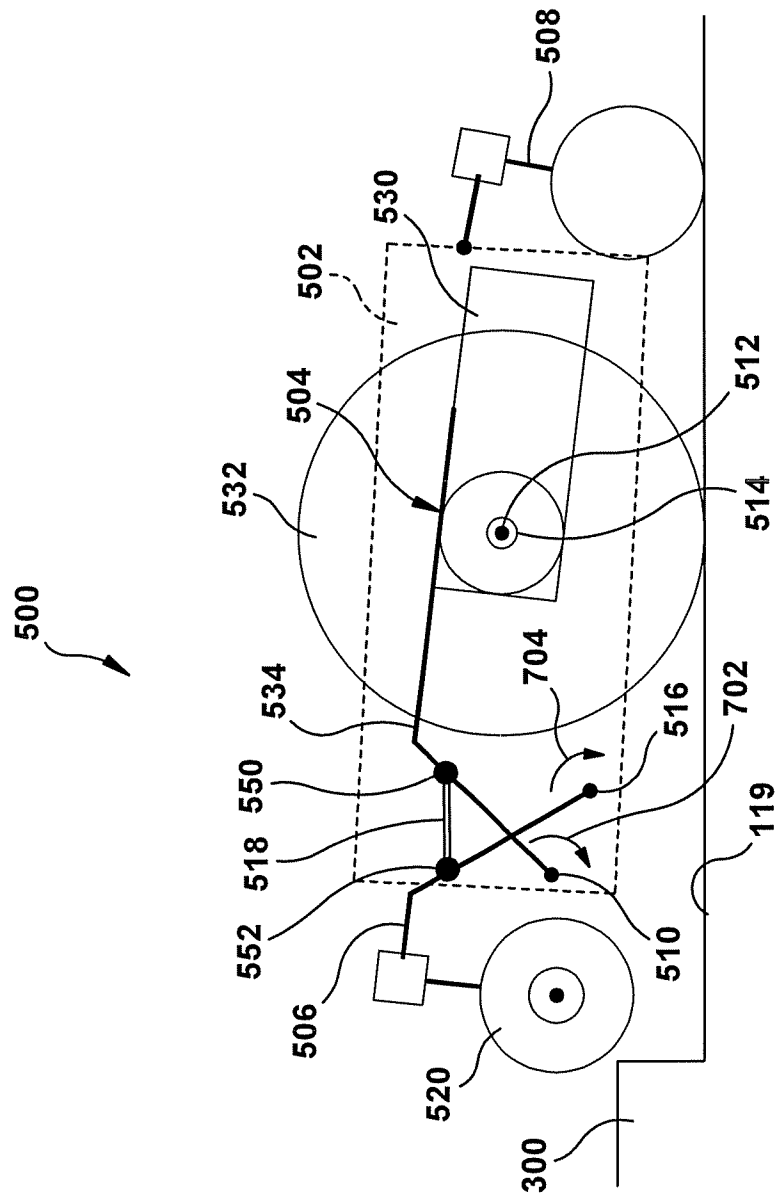


FIG. 7A

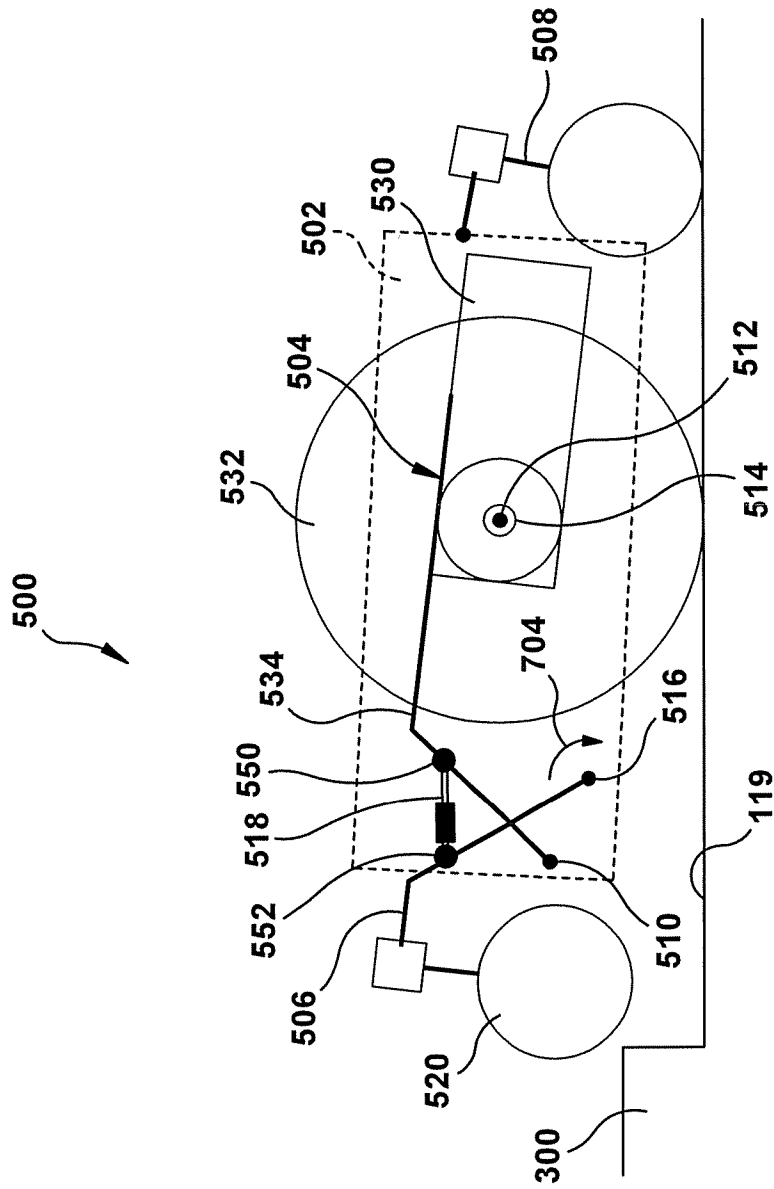


FIG. 7B

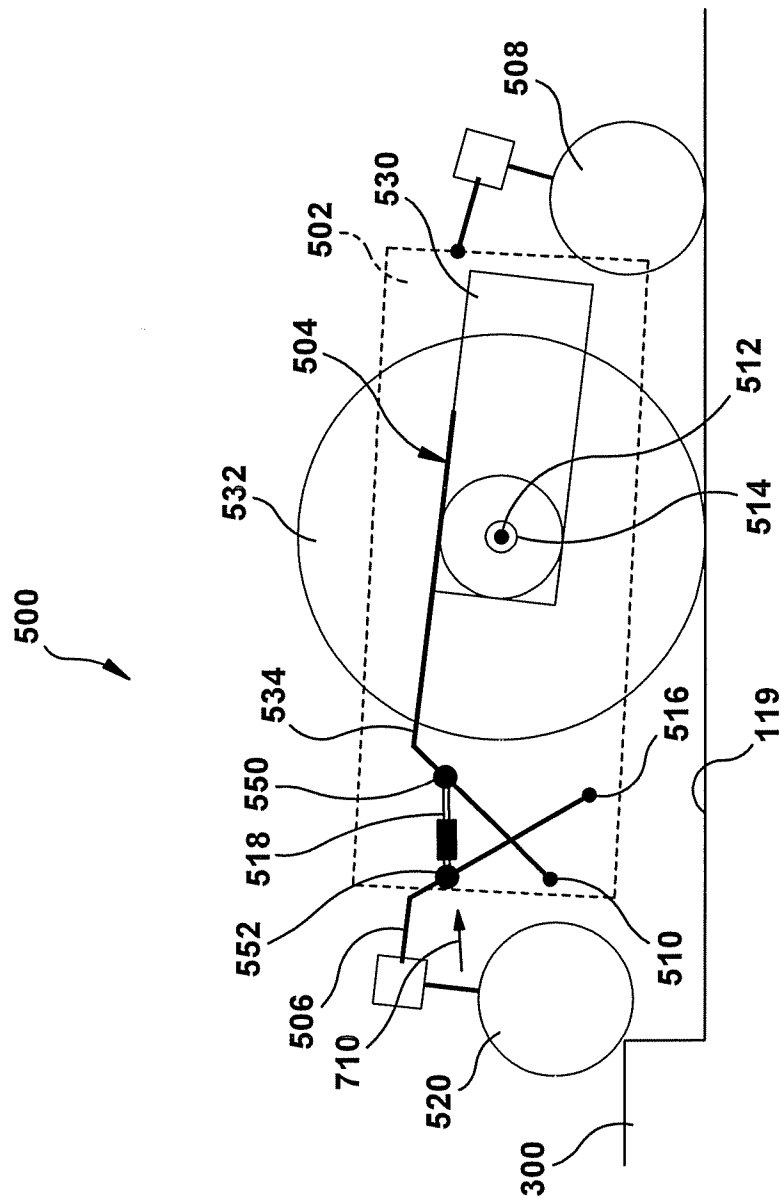


FIG. 7C

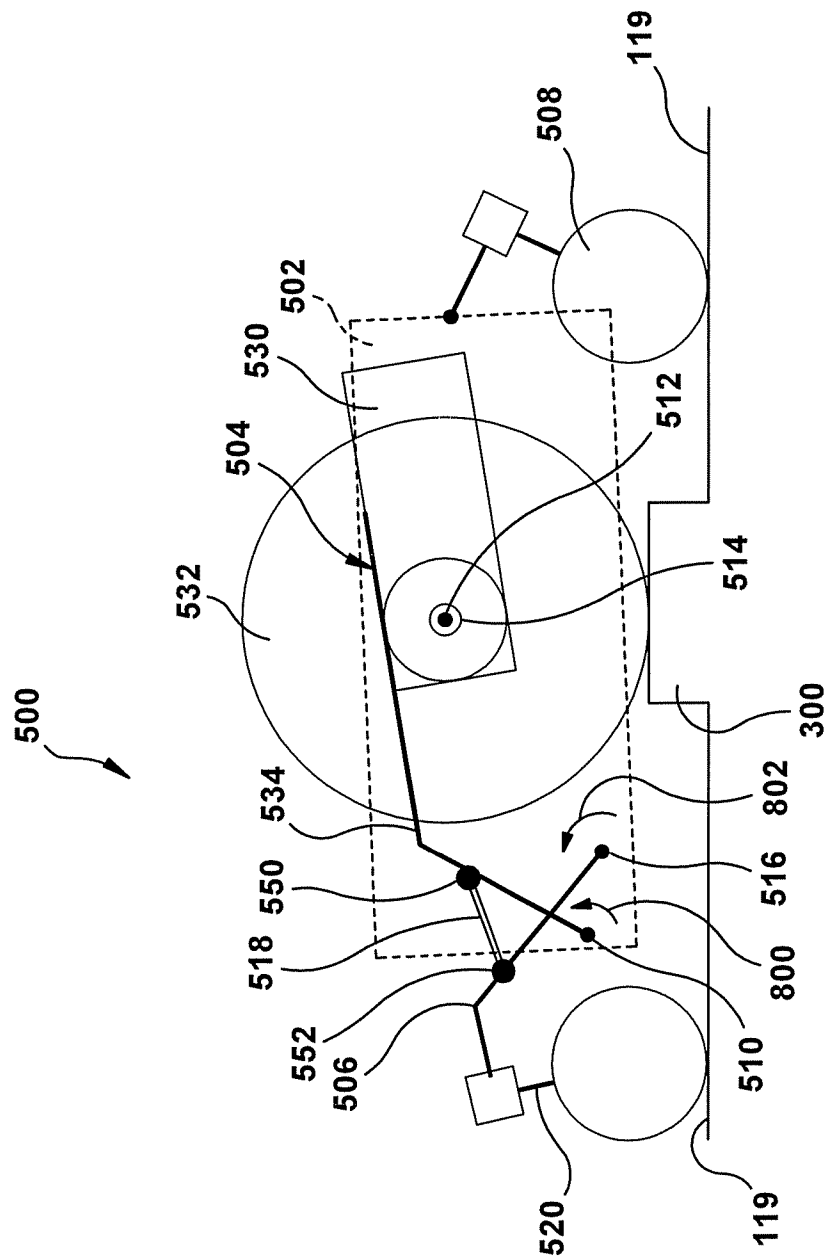


FIG. 8A

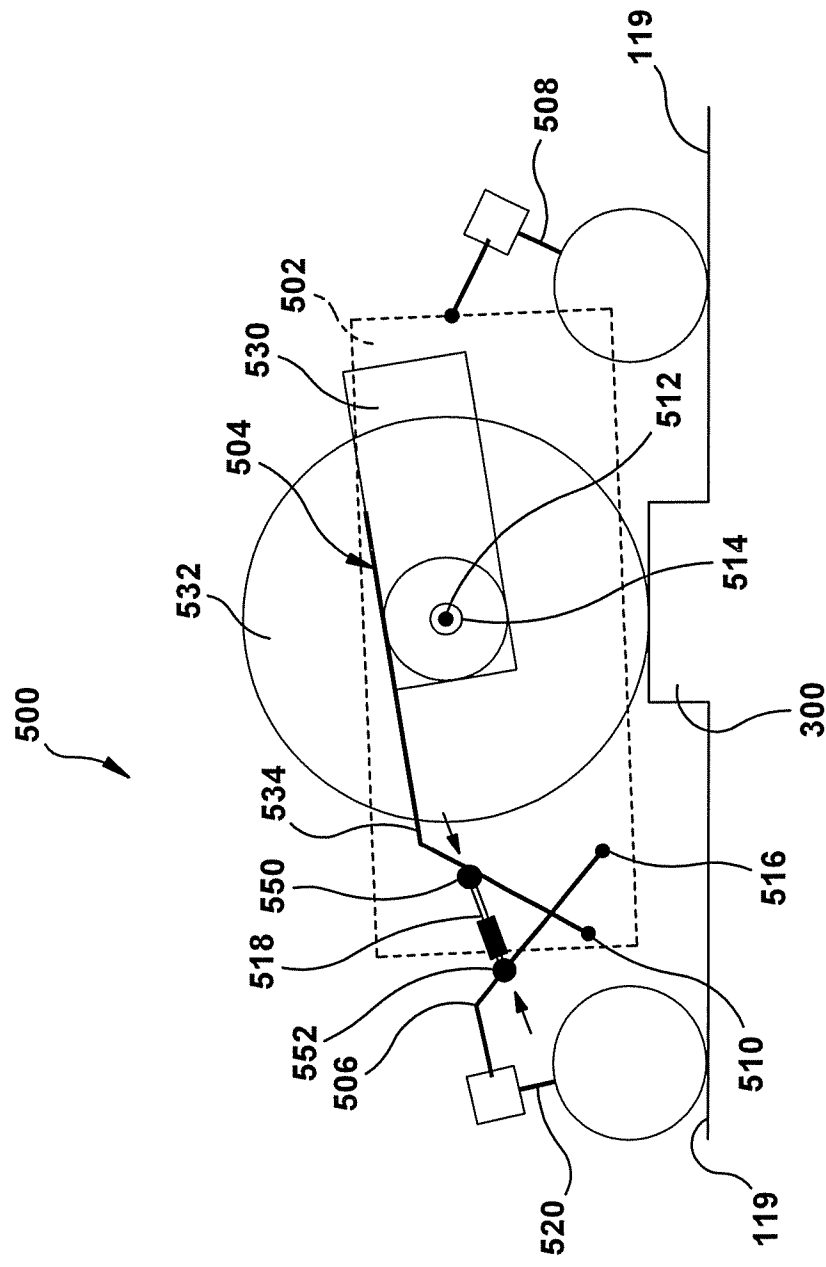


FIG. 8B

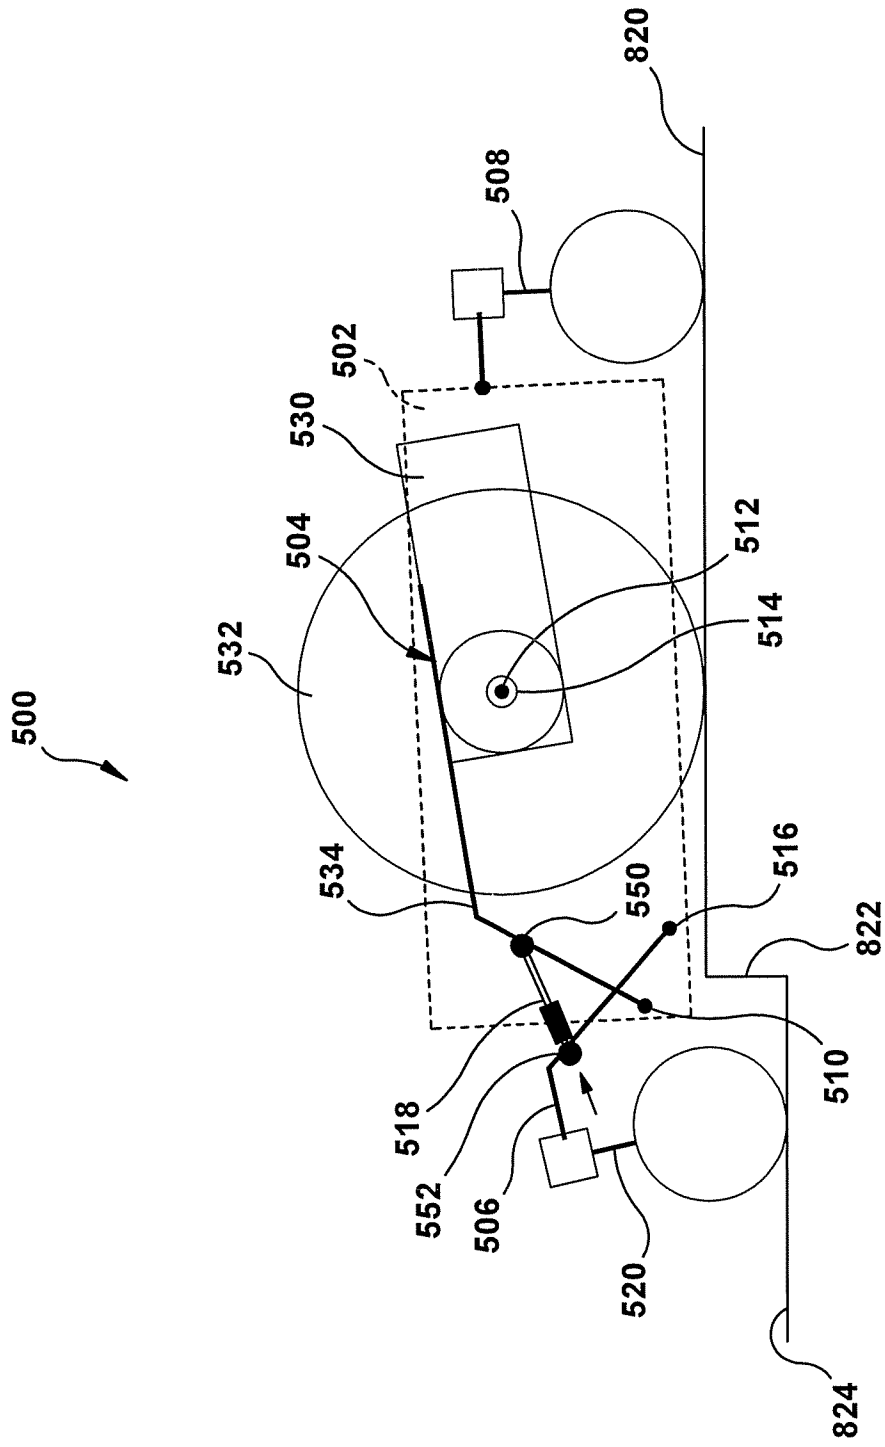


FIG. 8C

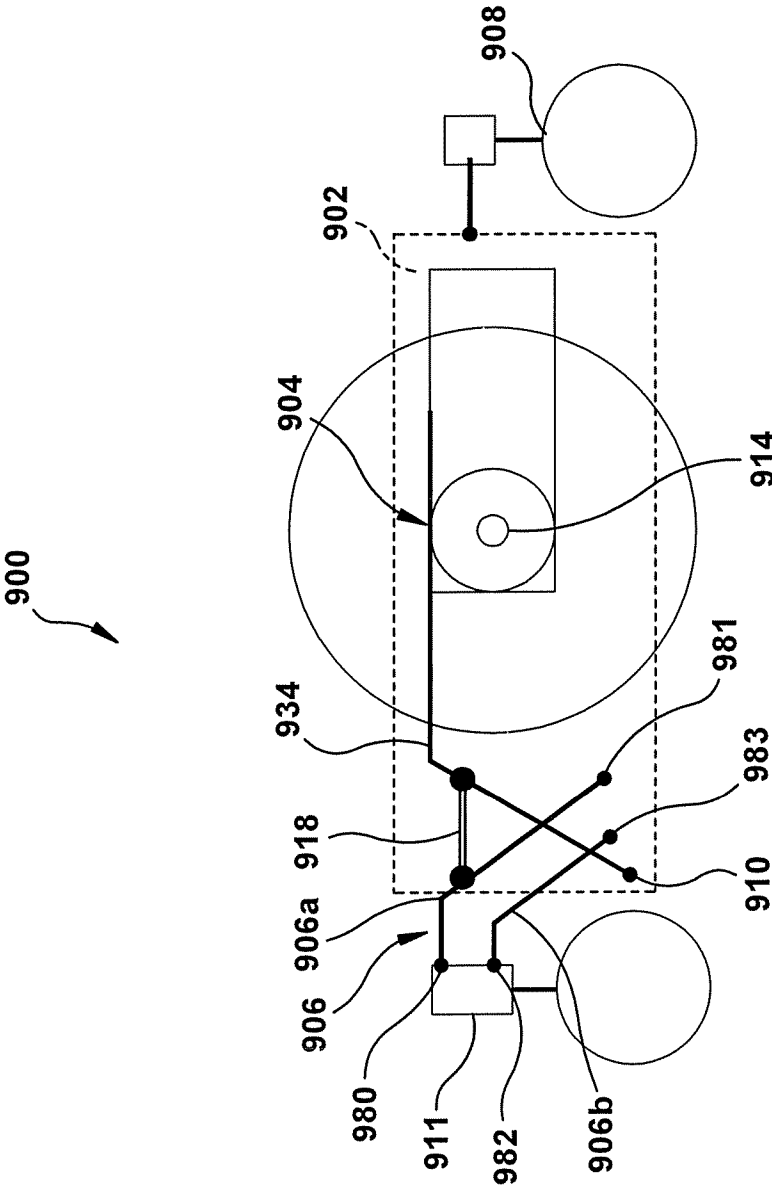


FIG. 9

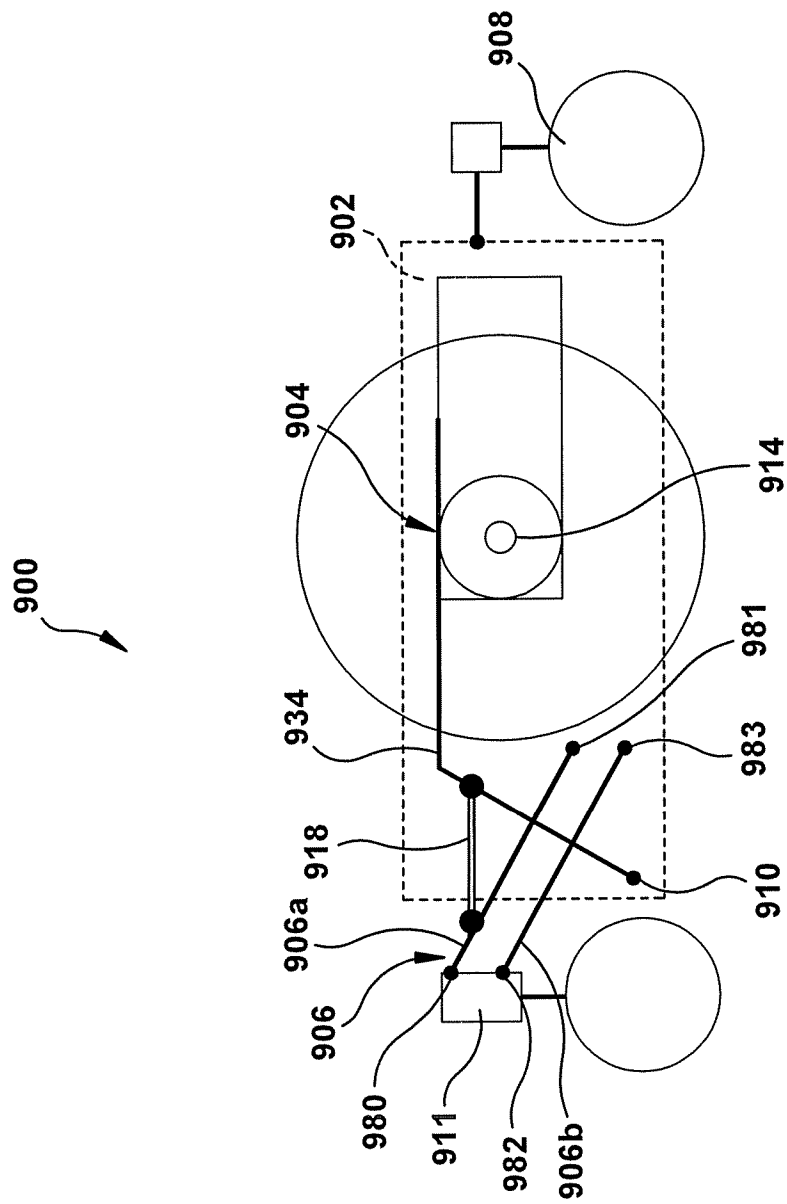


FIG. 10

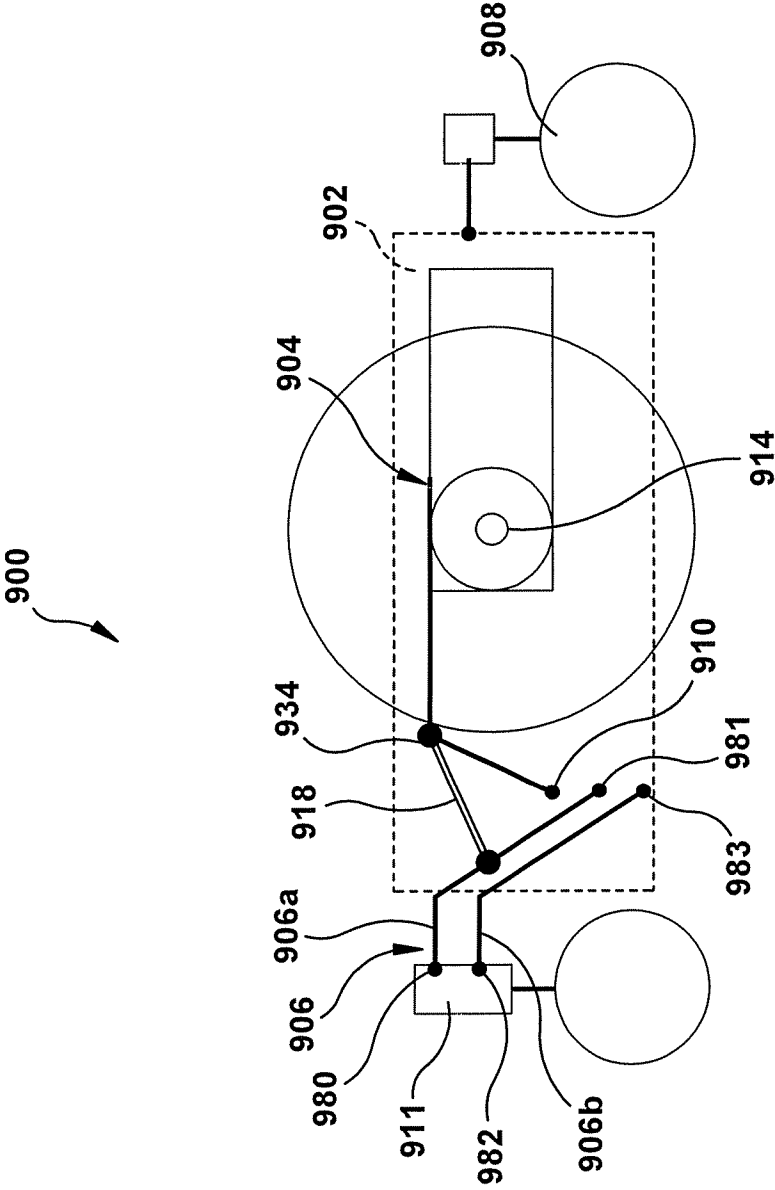


FIG. 11

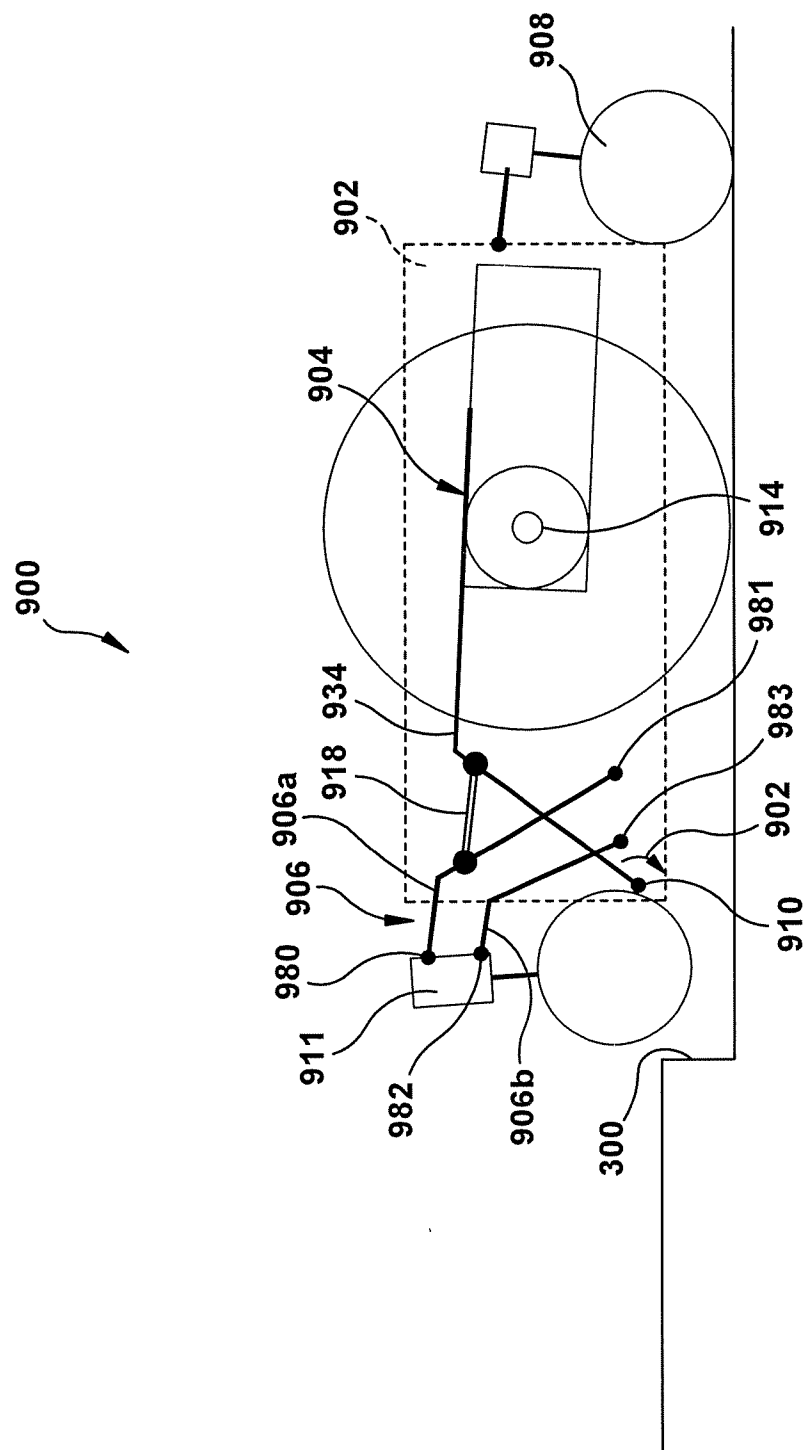


FIG. 12

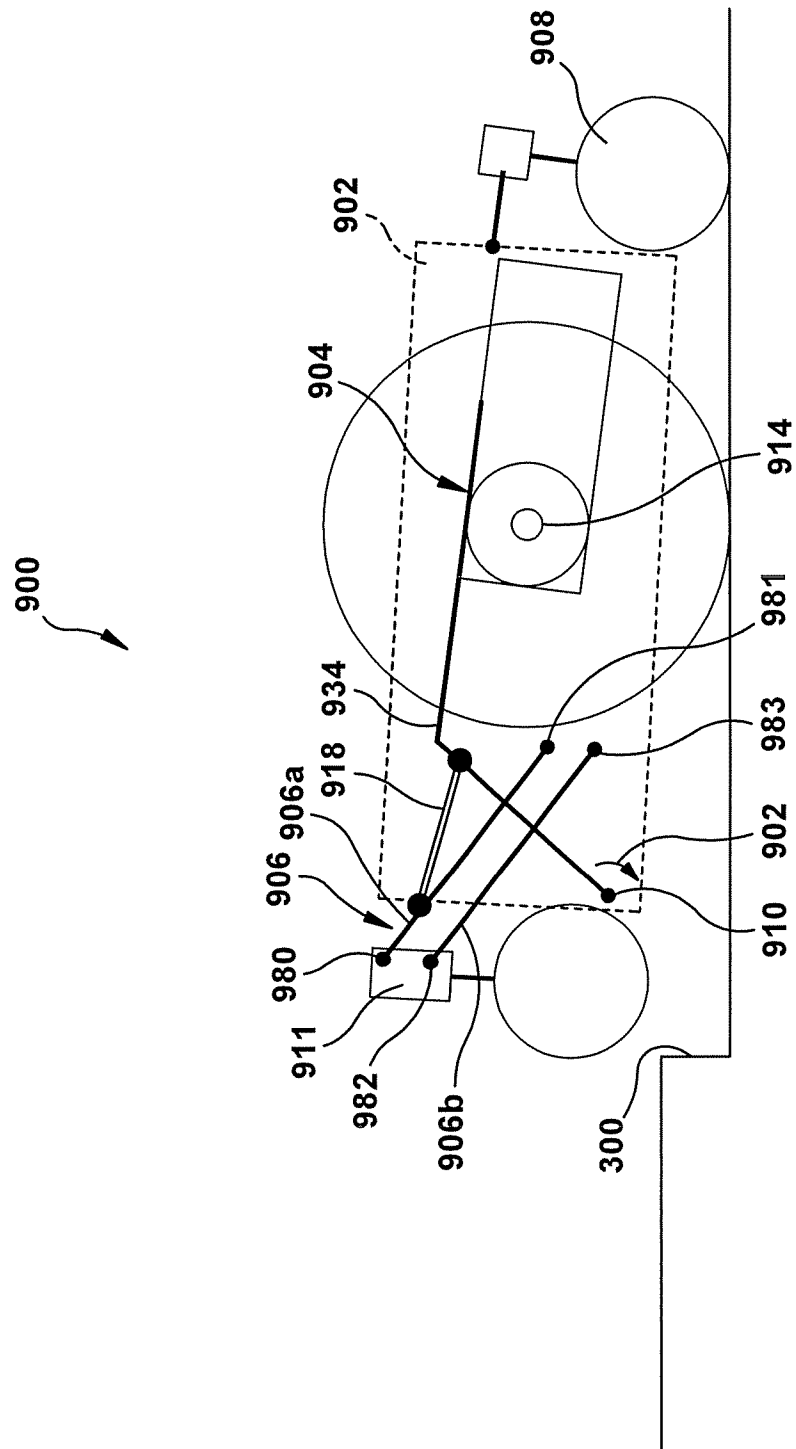


FIG. 13

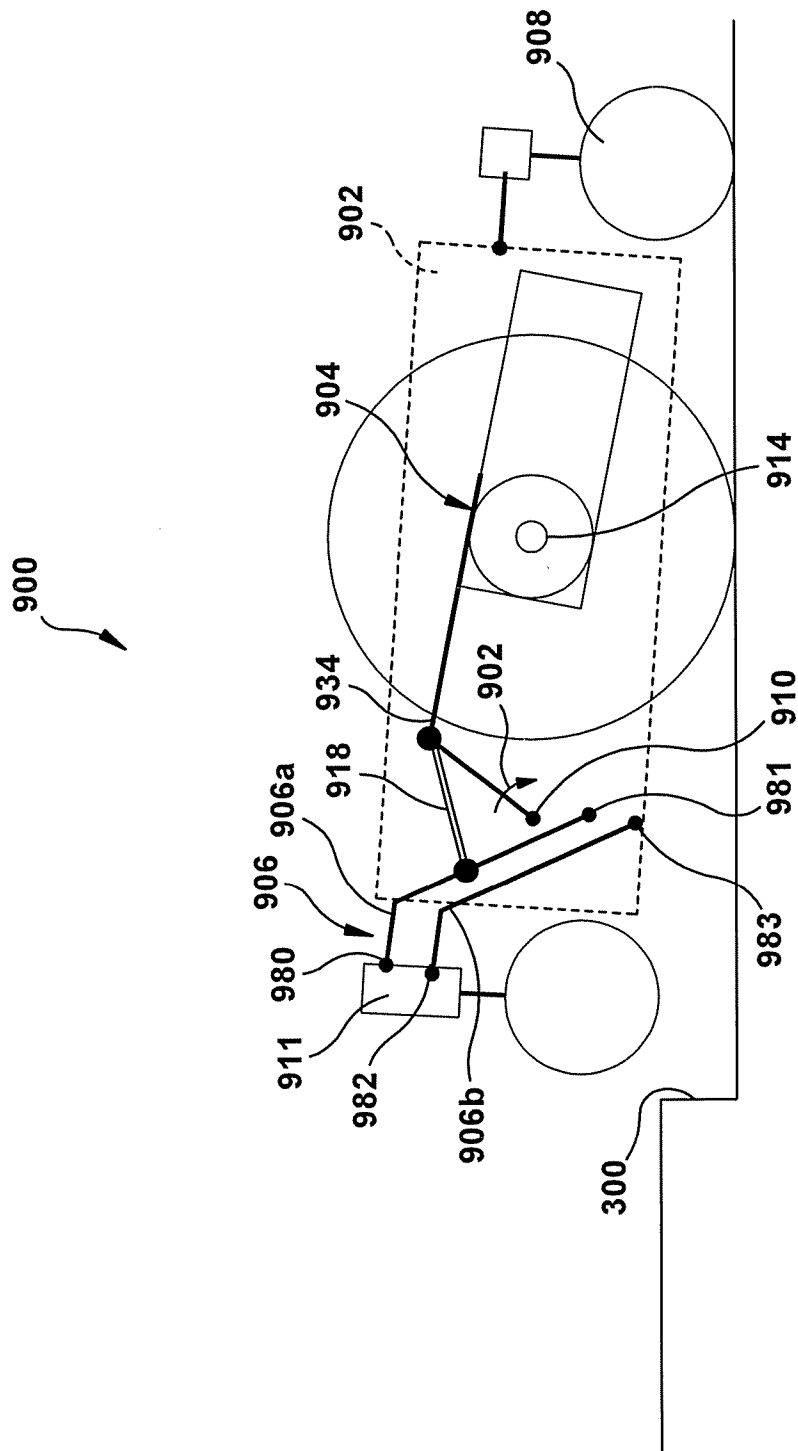


FIG. 14

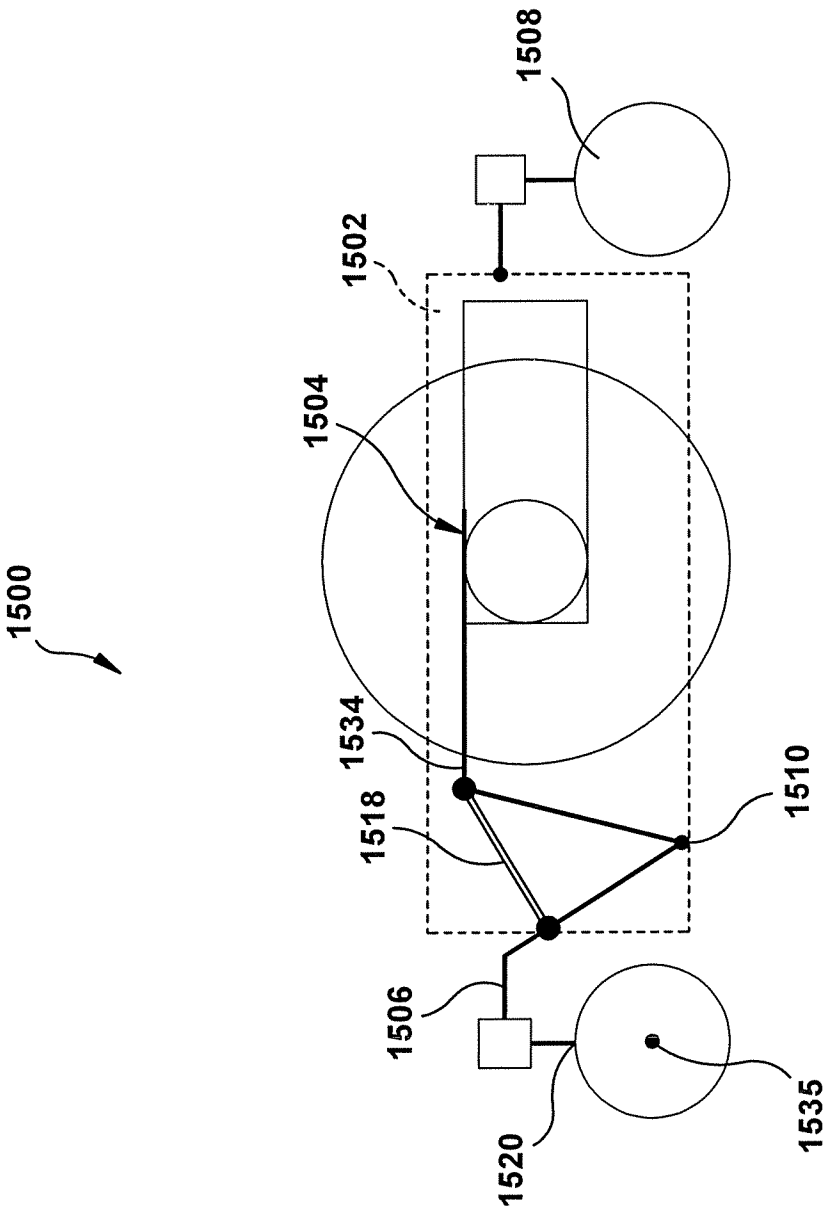


FIG. 15

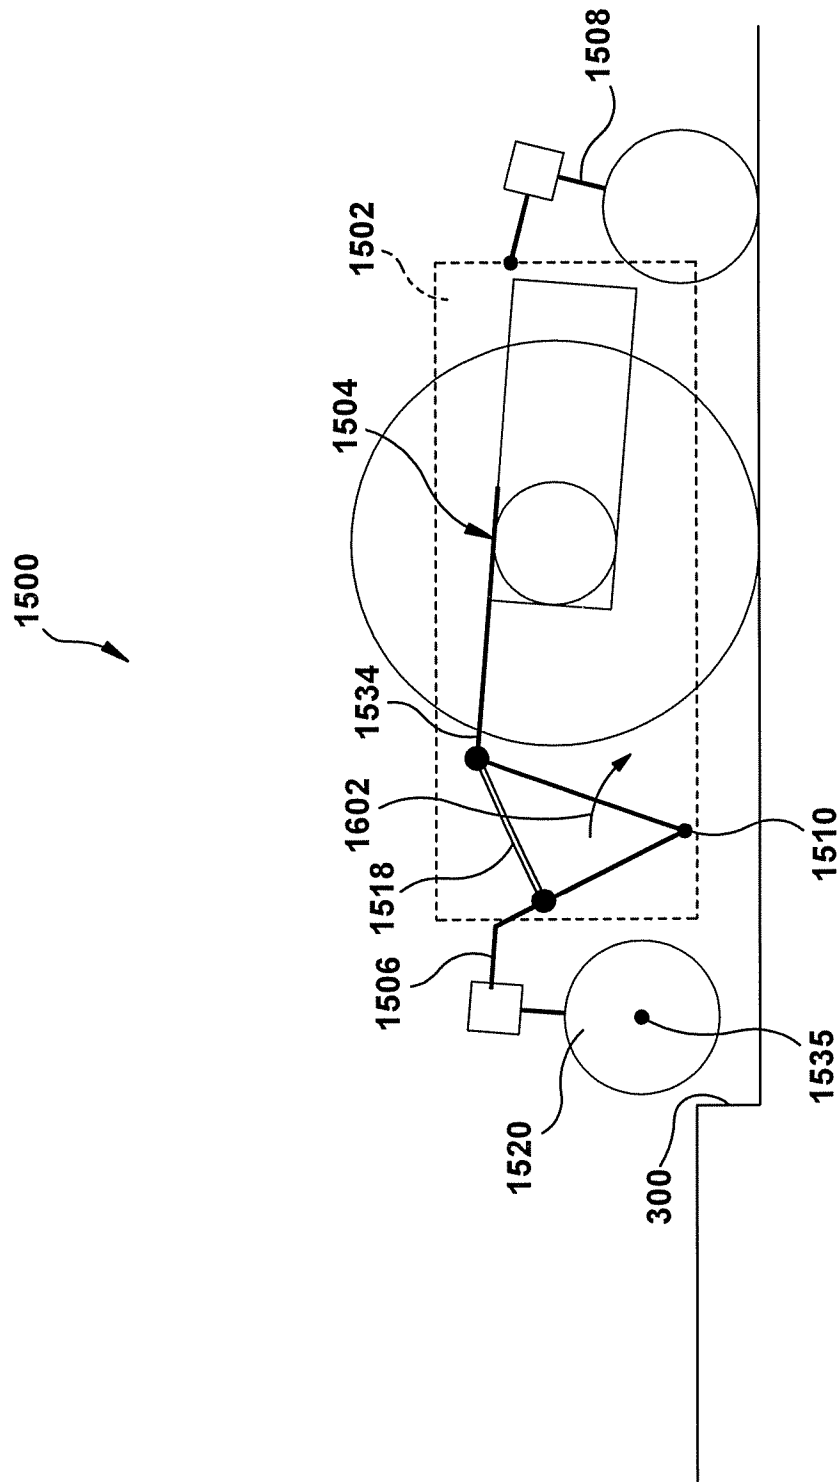


FIG. 16

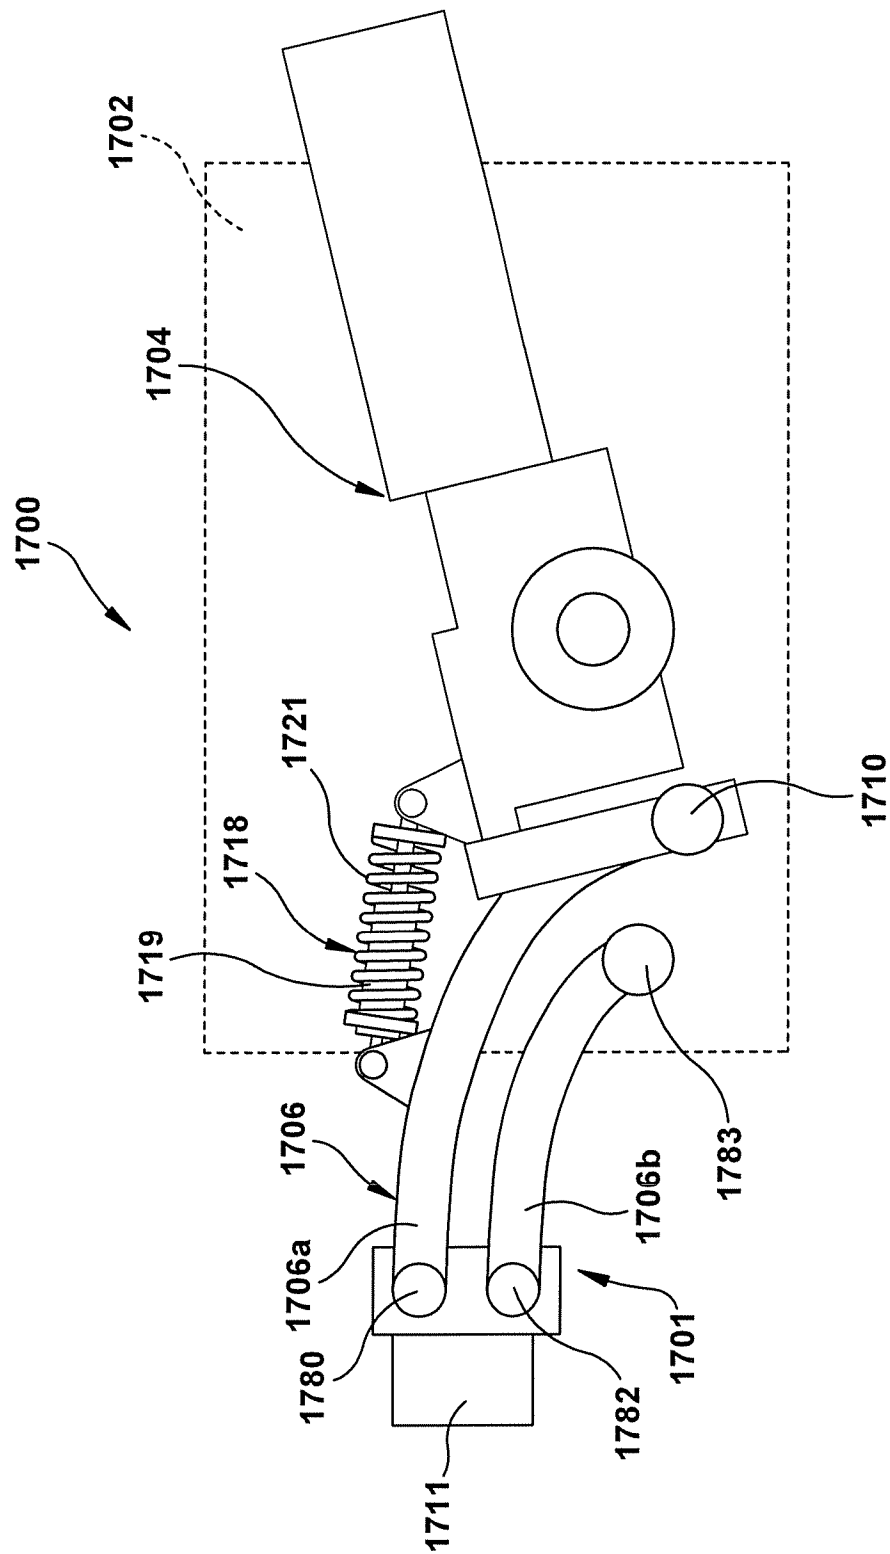


Fig. 17

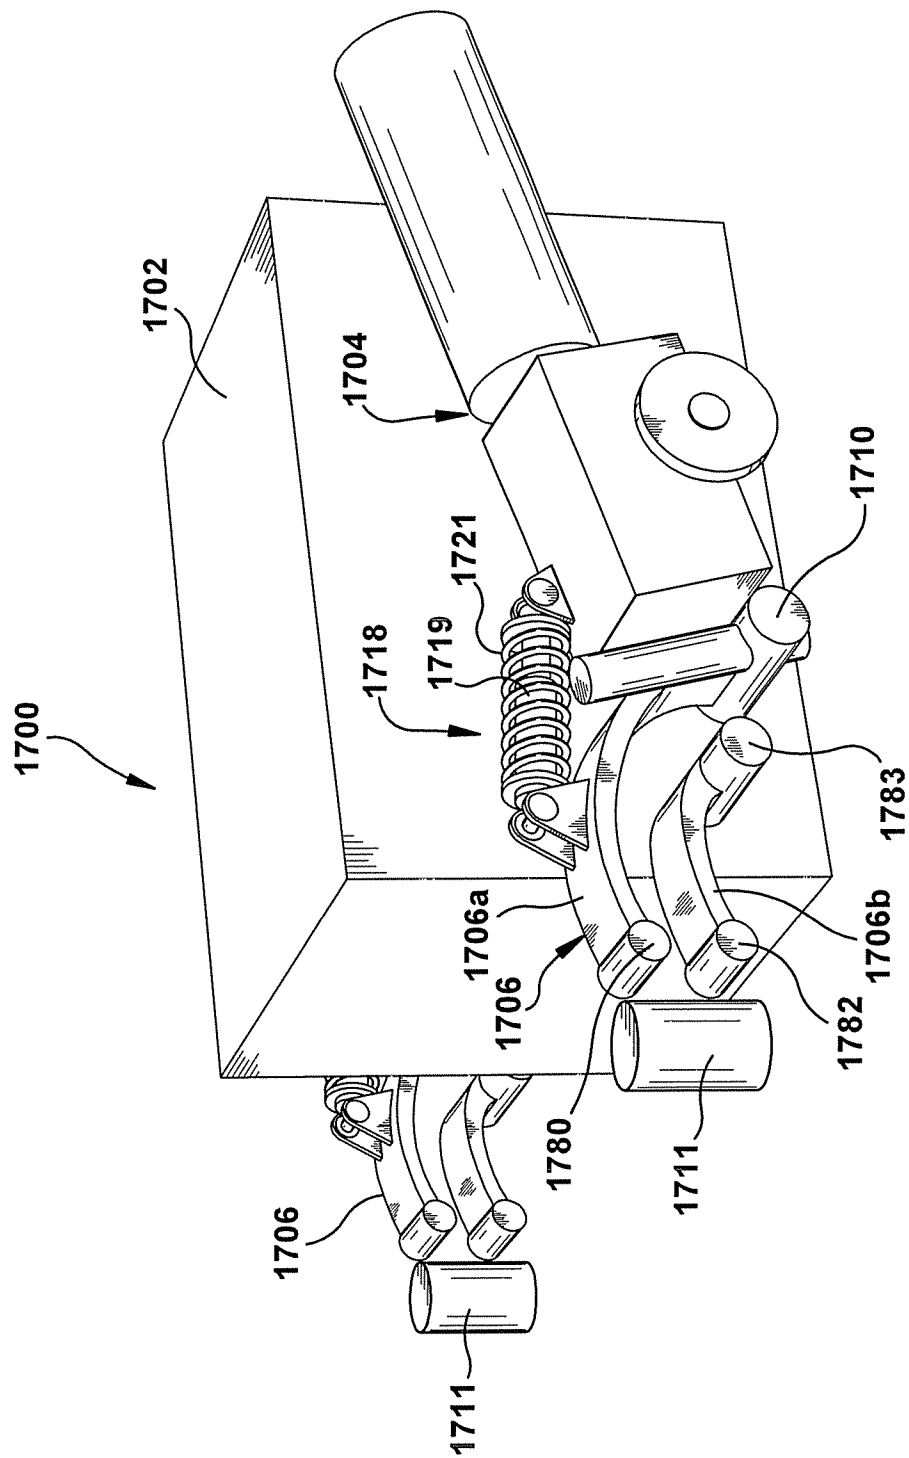


Fig. 18

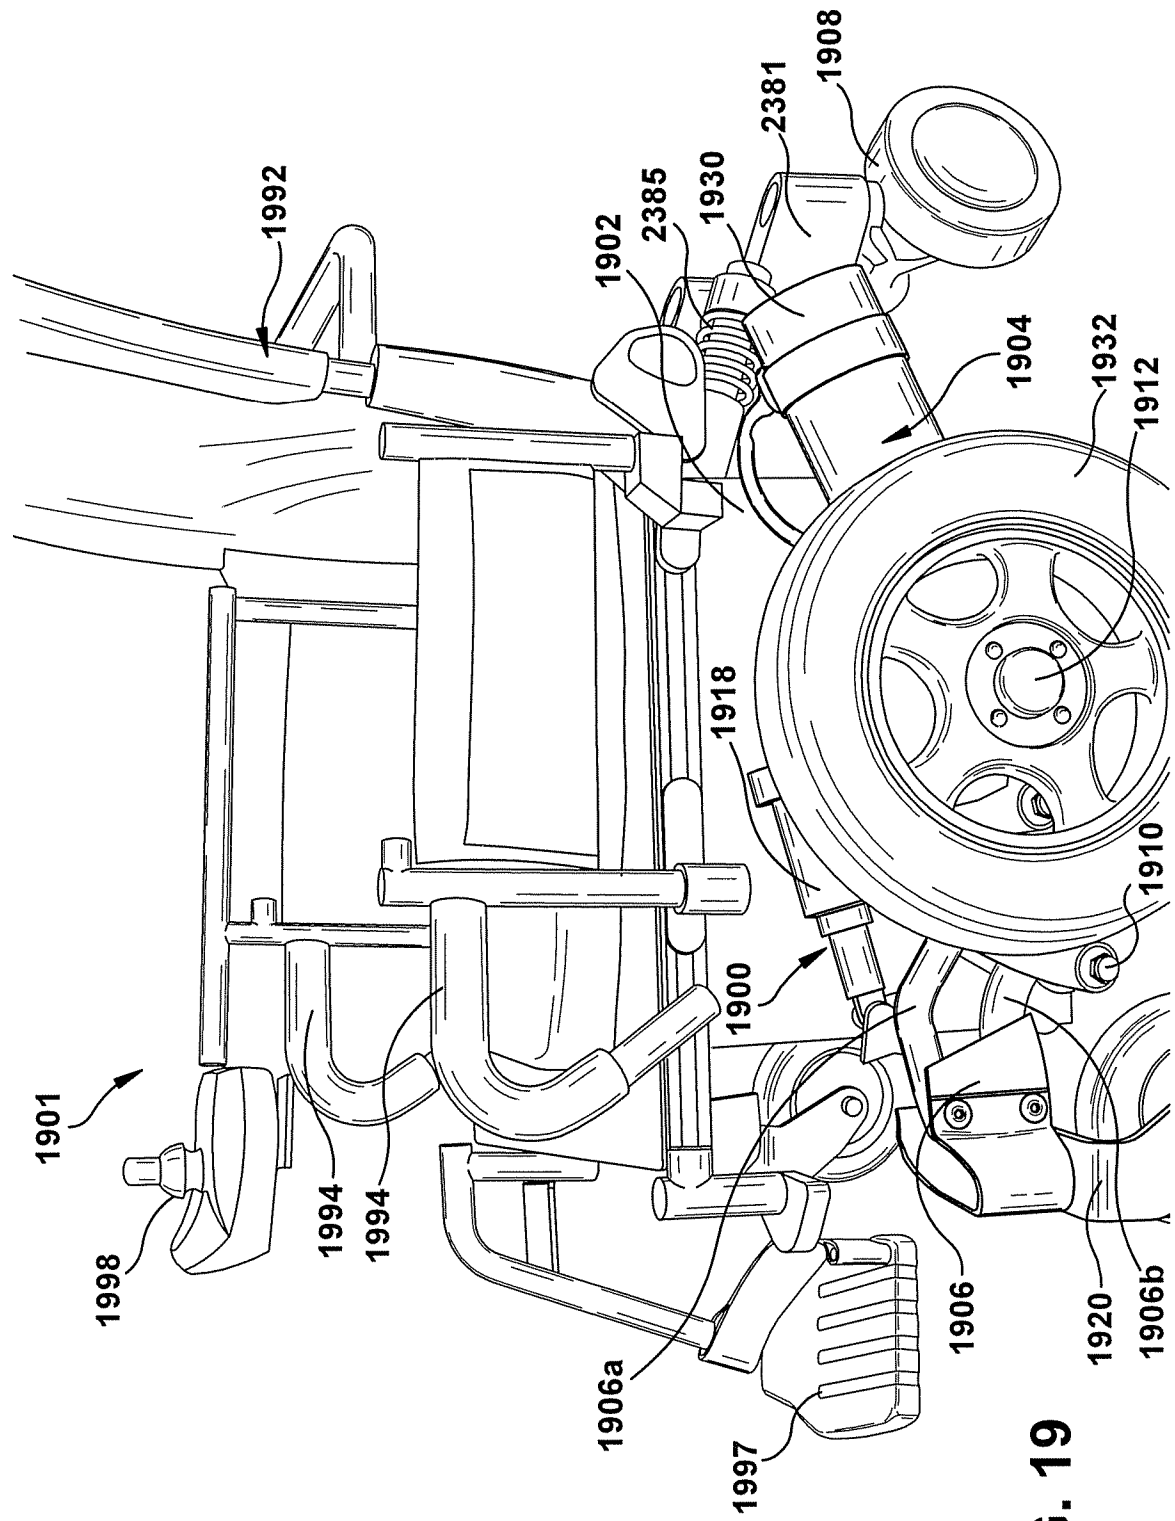


FIG. 19

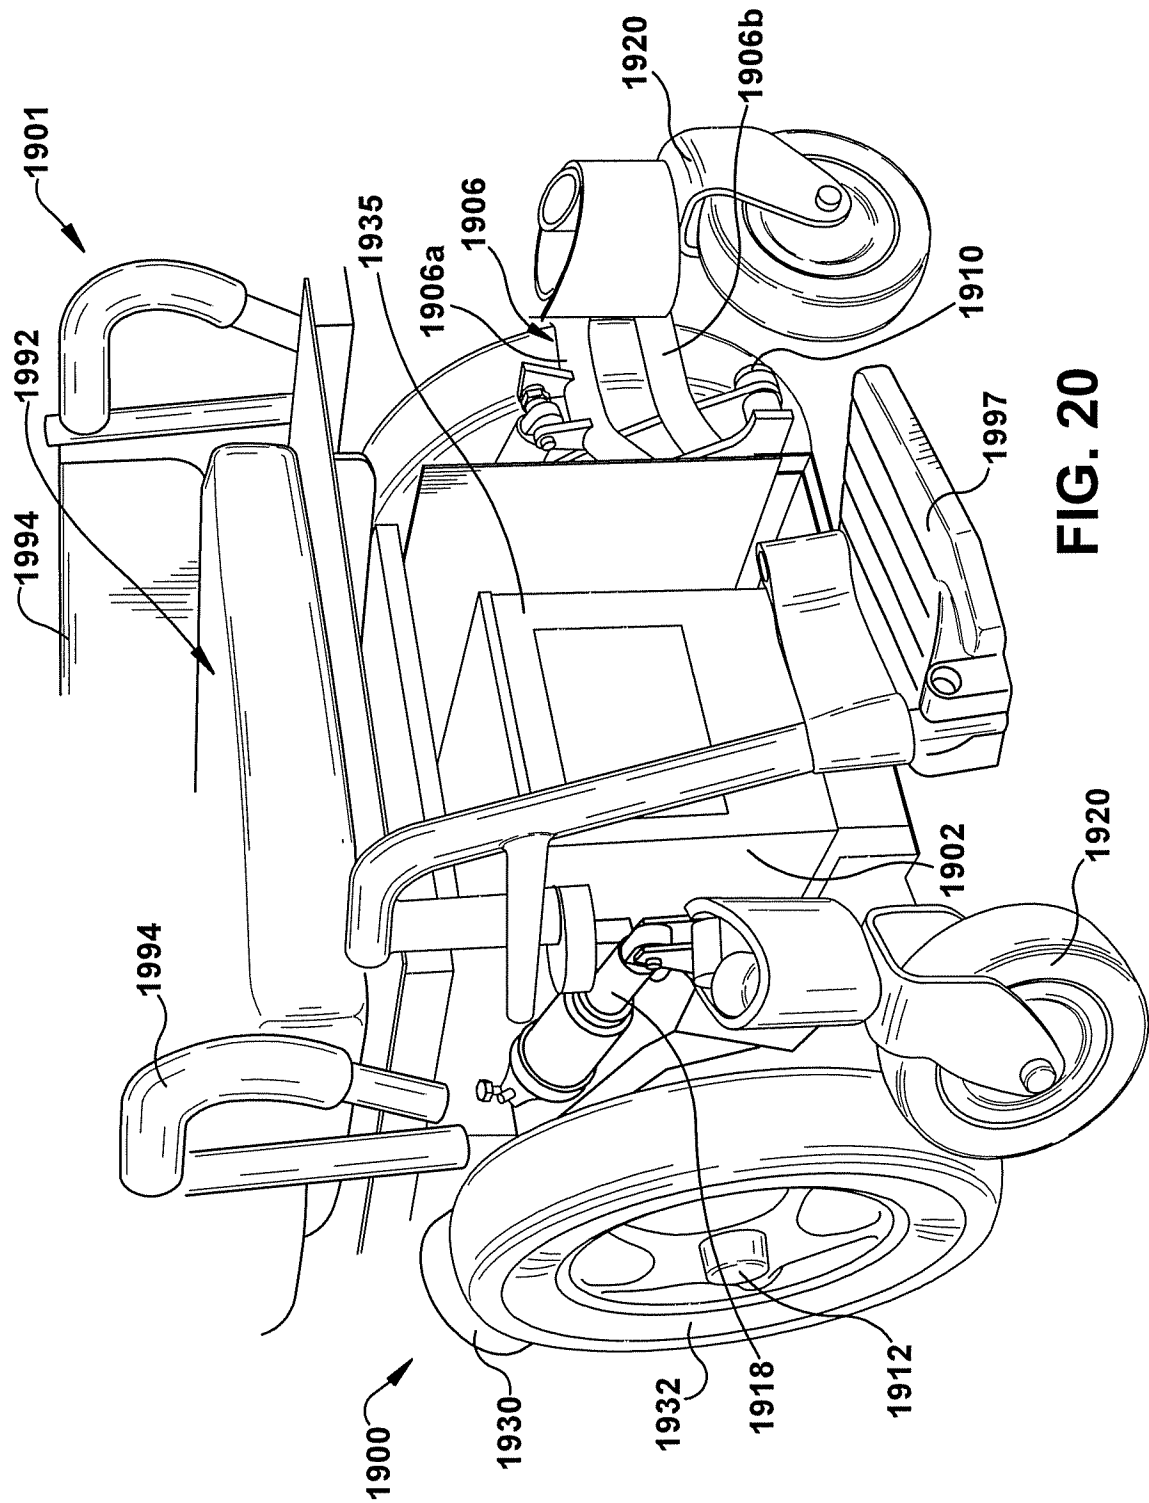


FIG. 20

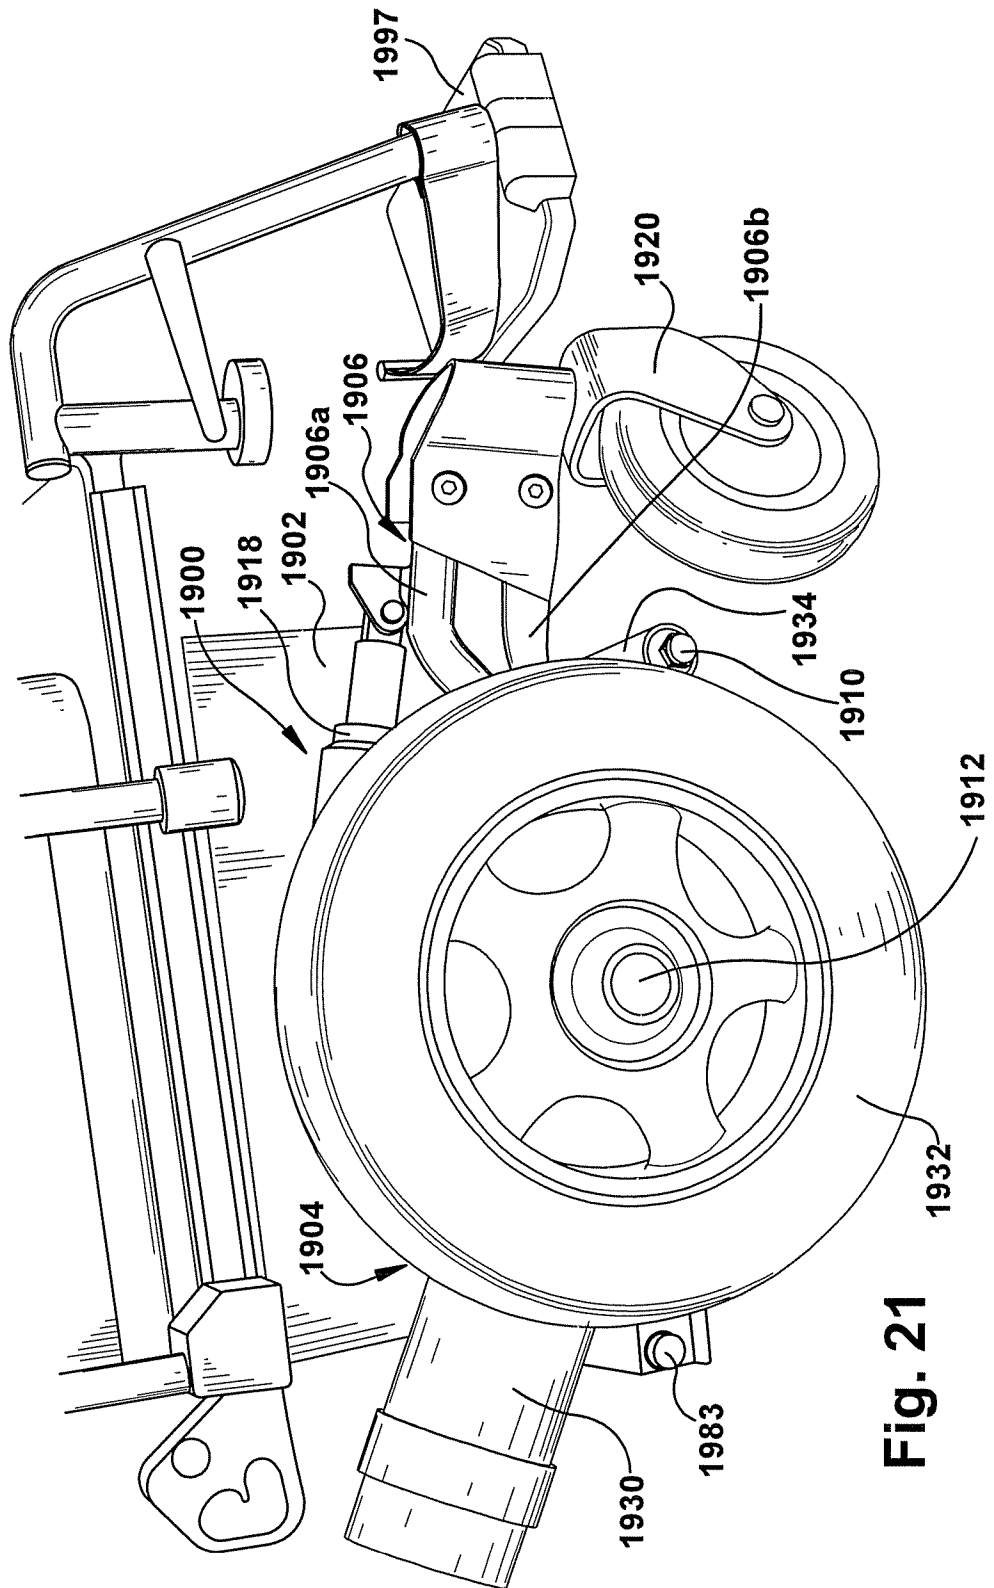


Fig. 21

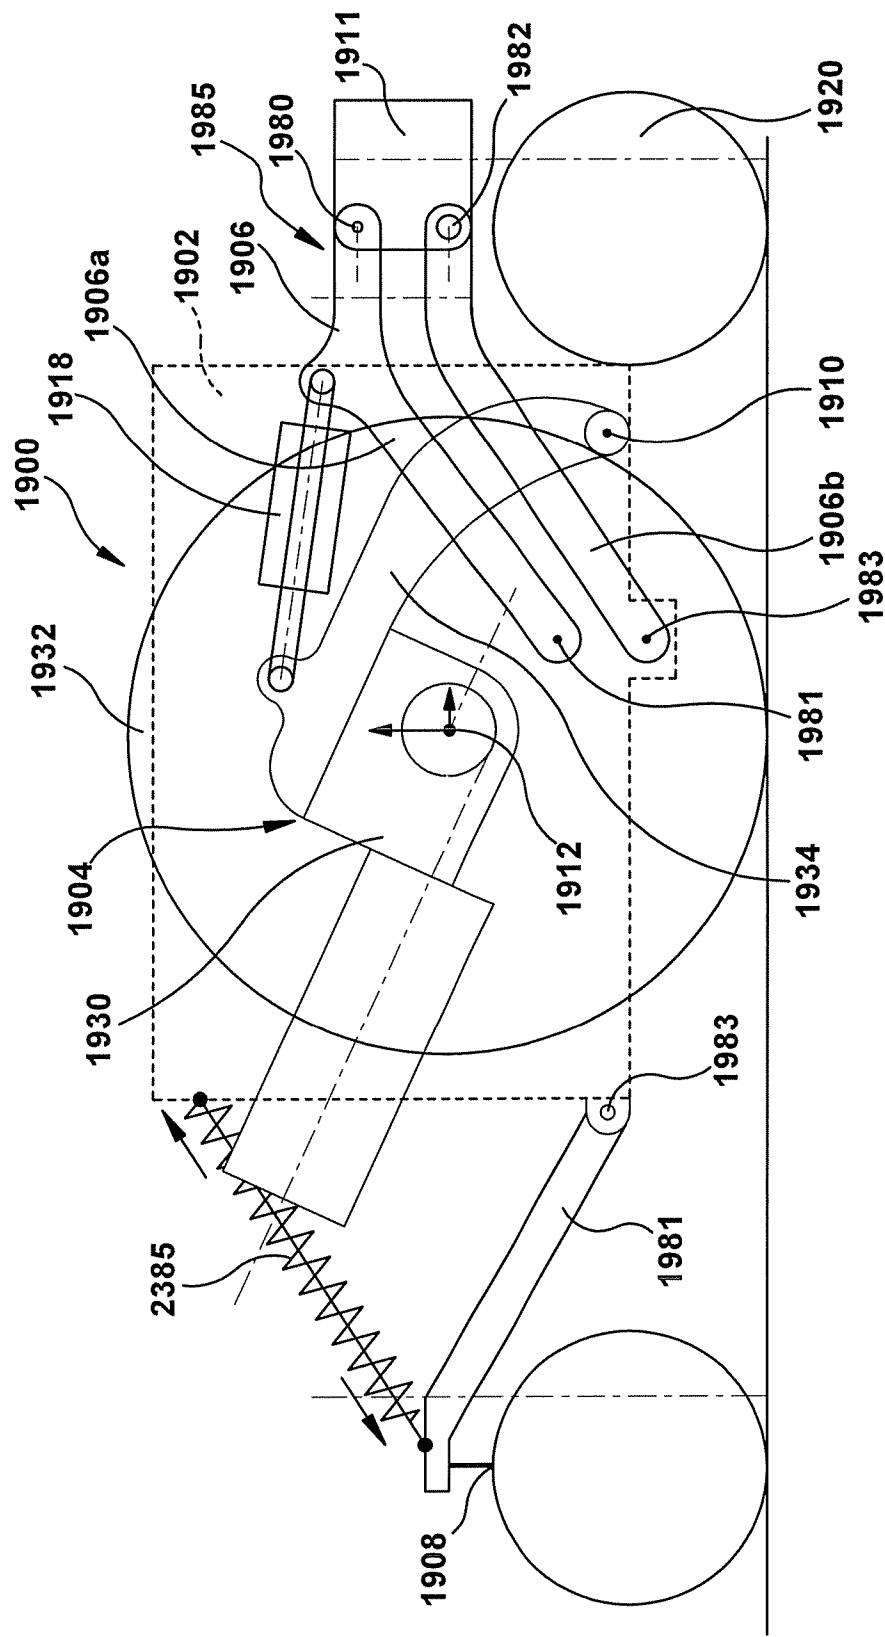
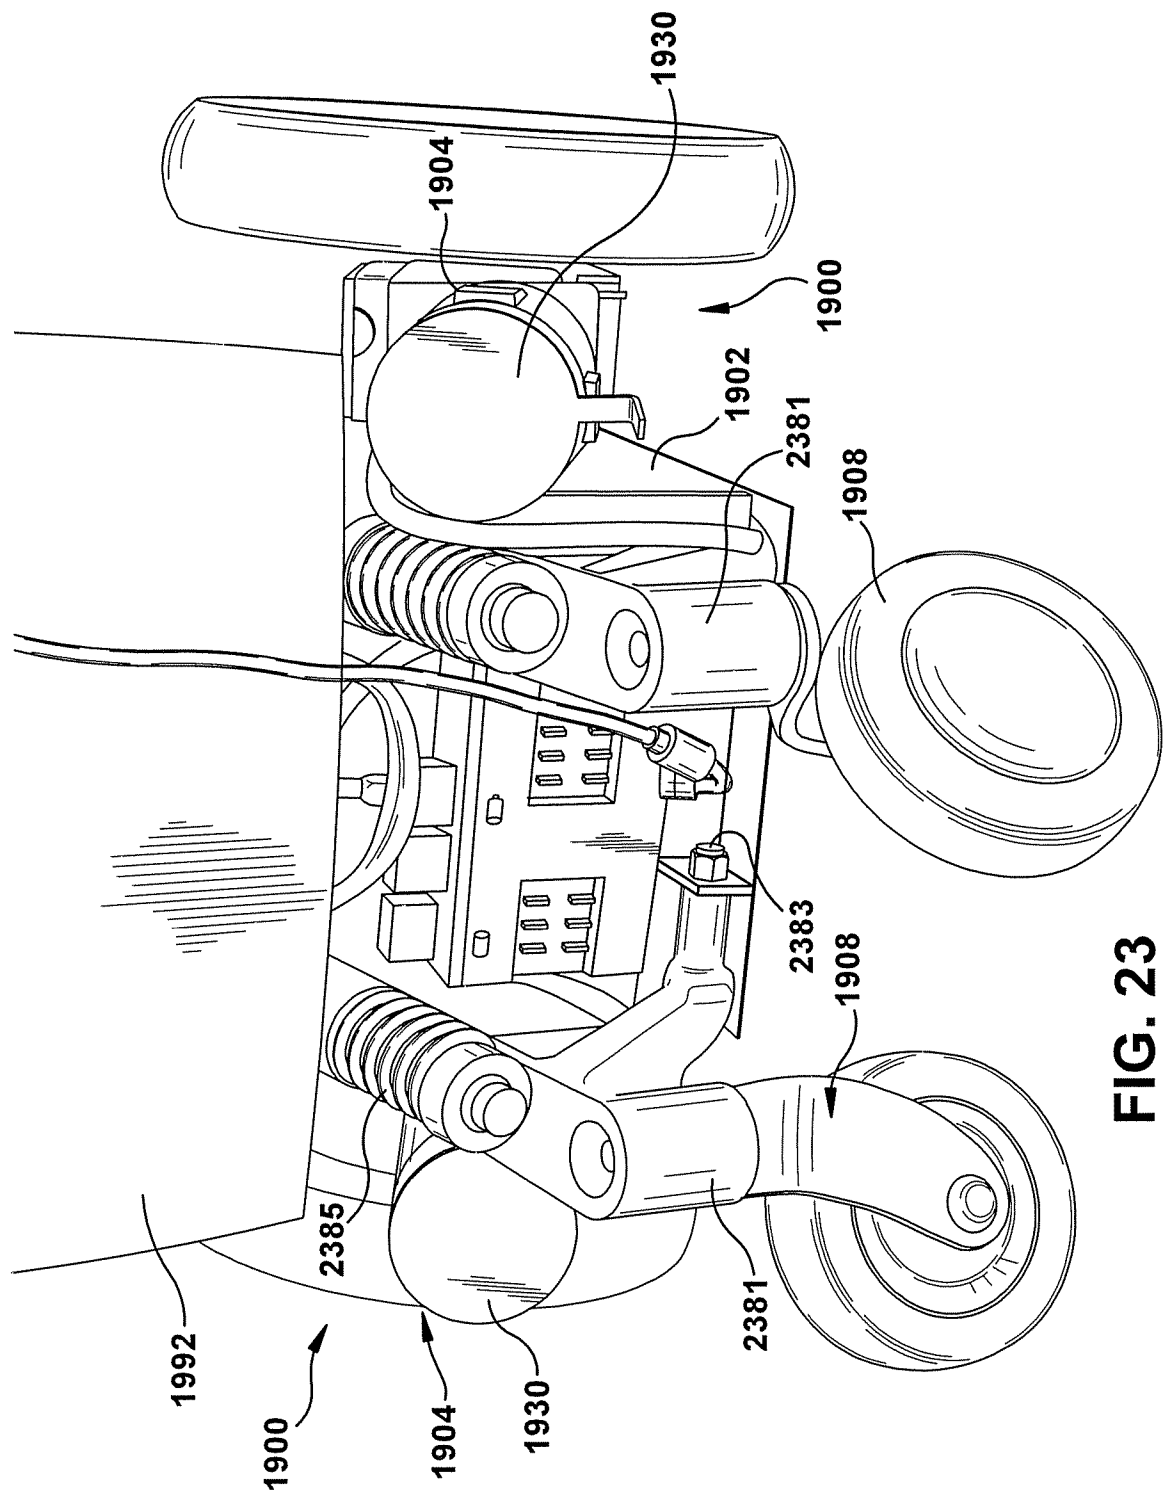


Fig. 22



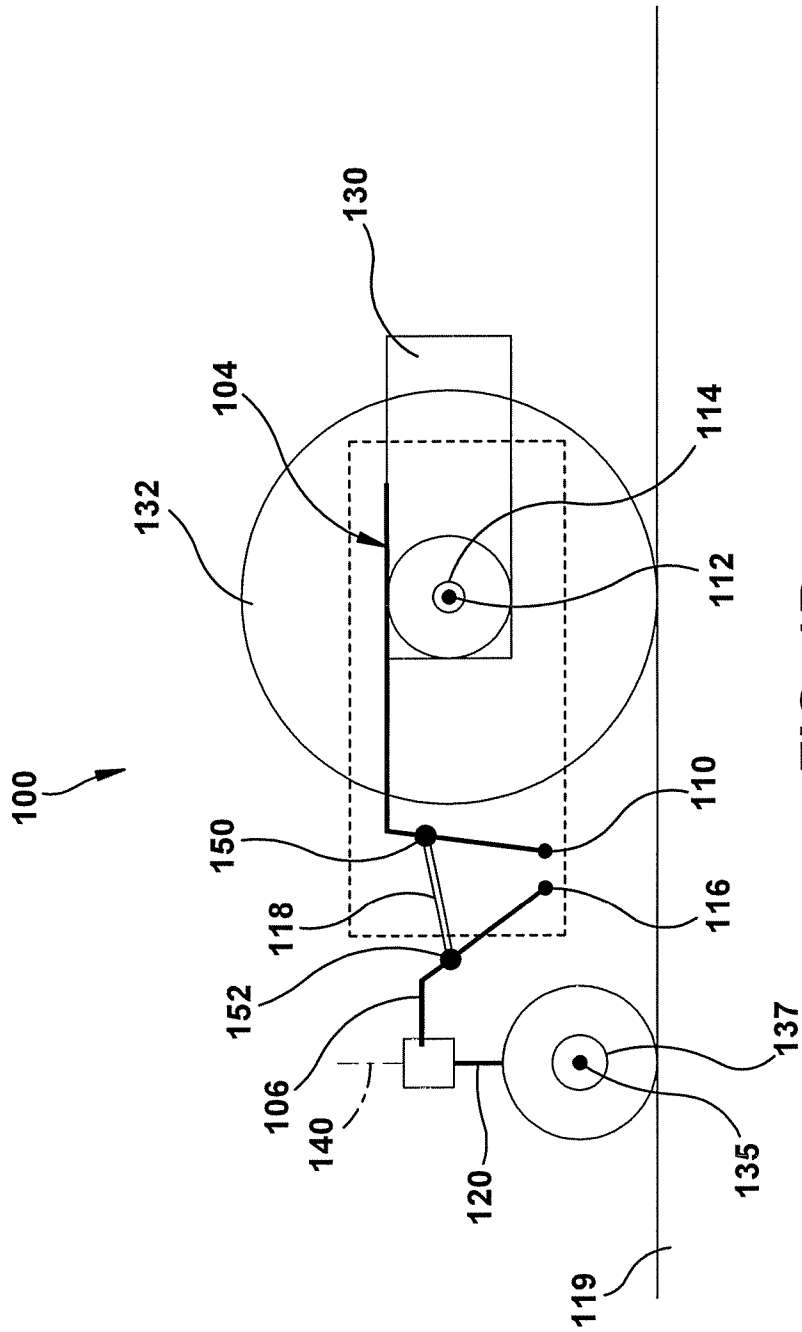


FIG. 1B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/052878

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61G5/06 A61G5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/076747 A1 (PAULS DARRYL R [US] ET AL) 13 April 2006 (2006-04-13) paragraphs [0004], [0007], [0015], [0017], [0021]; figures 1-4 ----- -/--	1-5, 7-14, 26-30, 32-41, 43-51, 63-67, 69-79

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *G* document member of the same patent family

Date of the actual completion of the international search

24 June 2008

Date of mailing of the international search report

03/07/2008

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bielsa, David

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/052878

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/077694 A1 (LEVI RONALD [US] ET AL) 14 April 2005 (2005-04-14) paragraphs [0026], [0033], [0034]; figures 1-3 -----	1-5, 7-14, 26-30, 32-41, 43-51, 63-67, 69-79
A	EP 1 522 295 A (PRIDE MOBILITY PRODUCTS CORP [US]) 13 April 2005 (2005-04-13) the whole document -----	1-79
A	US 2005/206149 A1 (MULHERN JAMES P [US] ET AL) 22 September 2005 (2005-09-22) the whole document -----	1-79

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/052878

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006076747 A1	13-04-2006	EP 1841611 A2 WO 2006042193 A2	10-10-2007 20-04-2006
US 2005077694 A1	14-04-2005	NONE	
EP 1522295 A	13-04-2005	CA 2484325 A1	08-04-2005
US 2005206149 A1	22-09-2005	NONE	