



(22) Date de dépôt/Filing Date: 1997/03/10

(41) Mise à la disp. pub./Open to Public Insp.: 1998/02/22

(45) Date de délivrance/Issue Date: 2001/08/14

(30) Priorité/Priority: 1996/08/22 (8-221235) JP

(51) Cl.Int.⁶/Int.Cl.⁶ H04L 29/04, H04L 12/56


(72) Inventeur/Inventor:
MURASE, Tutomu, JP

(73) Propriétaire/Owner:
NEC CORPORATION, JP

(74) Agent: G. RONALD BELL & ASSOCIATES

(54) Titre : UNITE UPC ET METHODE DE COMMANDE DE L'UPC

(54) Title: UPC UNIT AND UPC CONTROLLING METHOD

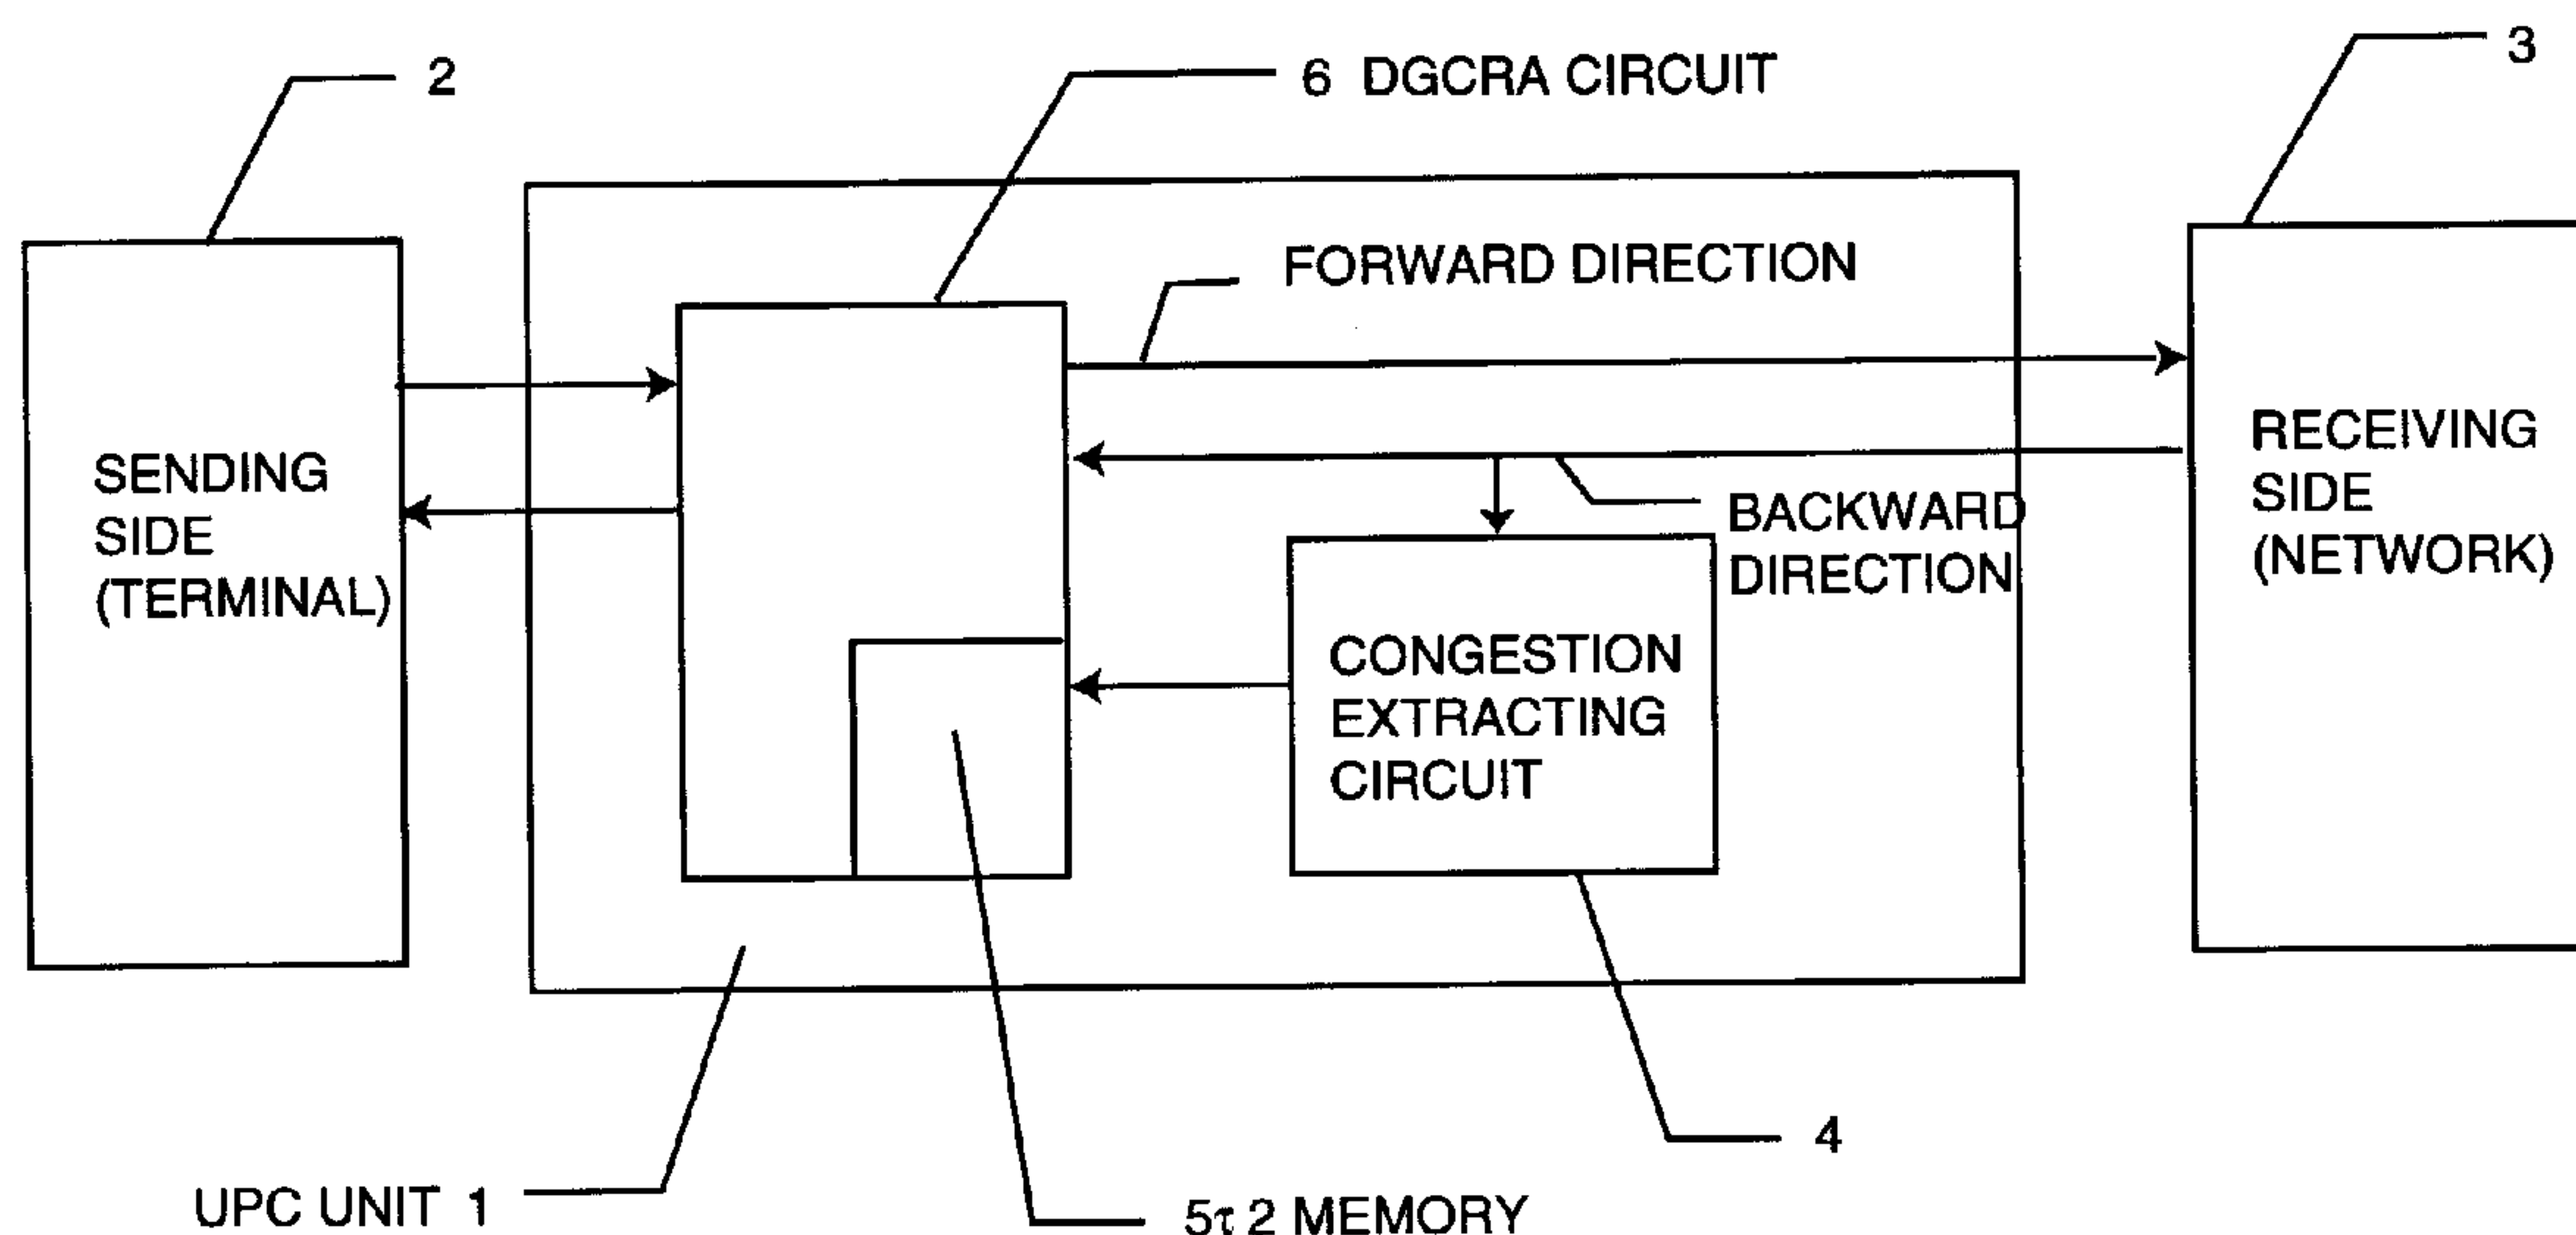

(57) Abrégé/Abstract:

A UPC unit 1 includes a congestion detecting circuit 4 for detecting a congesting status of a network 3 from a flow of cells in the backward direction and calculating or determining a parameter required for UPC based on the congestion status, a rewritable parameter memory 5 for storing the parameter, and a DGCRA circuit 6 for checking a conformance of cells in the forward direction on the basis of the information of the parameter memory 5 and the specified information.

ABSTRACT

A UPC unit 1 includes a congestion detecting circuit 4 for detecting a congesting status of a network 3 from a flow of cells in the backward direction and calculating or determining a parameter required for UPC based on the congestion status, a rewritable parameter memory 5 for storing the parameter, and a DGCRA circuit 6 for checking a conformance of cells in the forward direction on the basis of the information of the parameter memory 5 and the specified information.

UPC UNIT AND UPC CONTROLLING METHOD

5 The present invention relates to a communications network of a packet switching system, and more particularly to the technology of a UPC unit which is subject to a feedback limitation such as an ABR traffic.

10 As regulated in S.S. Sathays, "The ATM Forum Traffic Management Specification Version 4.0", ATM Forum/95-0013R13, April, 1996 (TM 4.0), the ABR service used in the ATM network is executed to report an allowable cell rate (ACR) from the network to a terminal so that the terminal can send out data at the ACR or lower rate. In general, the network for supporting the ABR service is operated to report a smaller ACR to the terminal if traffic congestion takes place in the network or a
15 larger ACR to the terminal if traffic congestion does not take place. This is because the reduction of traffic flow to the network leads to the overcoming congestion if the network is in congestion or the network may accept more traffic if the network is not in congestion.

20 The traffic direction from the network to the terminal is called the backward direction. The traffic direction from the terminal to the network is called the forward direction. The network operates to monitor the forward traffic by checking if the rate is at or below the ACR. If traffic is sent to the network at or above the ACR, the network is executed to impose
25 a penalty on traffic at or above the ACR (non-conformance cell) at the network gate. The penalty includes lowering the priority of the non-conformance cell or abandoning the cell itself.

30 This traffic monitoring and penalty handling are called a conformance check as described in TM 4.0. This conformance check is executed at the inlet of the unit called a UPC (simply called a UPC unit) based on the proper traffic parameter. Some of the UPC units treat a CBR or VBR. Herein, the description has been concerned with the UPC unit for treating the ABR. The
35 traffic is abandoned if the non-conformance cell is sent out, so the terminal cannot keep the communications quality. To avoid this, the terminal tries to keep the ACR.

On the other hand, the network guarantees the regulated communications quality of traffic at or below the ACR (conformance cell) in the forward direction.

5 The terminals termed herein contain a general terminal of an information source, a VSVD regulated in TM 4.0, and the other general sources viewed from the network such as a router and a LAN, which are all called a terminal. If the information source belongs to a network promoted by another mother body, the UPC function is called NPC. Since the NPC is substantially
10 identical to the UPC, herein, the NPC and the UPC are both called a UPC or UPC's.

The ACR in the backward direction from the network to the terminal is temporarily stored in the UPC when the ACR passes through the UPC. The stored ACR reaches the terminal,
15 where the ACR is effective as a monitoring rate for the UPC on the timing when the data reaches the UPC. The time taken in the process of UPC's receipt of the new ACR, passage of the ACR to the terminal, and arrival of the data at the ACR from the terminal to the UPC through the network is called τ_2 . For
20 example, it is assumed that the reciprocation of data between the UPC and the terminal has a delay of 2 msec, the ACR of the UPC is set as 10 Mbps, and the traffic sent from the terminal is monitored if it is 10 Mbps or lower. When receiving the new ACR = 5 Mbps from the network, the UPC operates to set the ACR
25 as 5 Mbps 2 msec later than the receipt and then monitor if the traffic from the terminal is 5 Mbps or lower.

In practice, however, the delay between the UPC and the terminal is not always constant. There may be a statistical queuing delay. For example, it is assumed that the statistical
30 delay minimum is τ_3 and the maximum is τ_5 . The adoption of τ_5 as τ_2 permits the UPC to let the non-conformance cell pass if the queuing delay is zero. Conversely, the adoption of τ_3 as τ_2 permits the UPC to erroneously treat the conformance cell if the cell suffers from the queuing delay on the way to the UPC.

35 The foregoing conventional UPC unit has a constant value of τ_2 set independently of the congestion. If τ_2 takes a large

value, therefore, the UPC unit lets the non-conformance cell pass to the network if the network is in congestion, thereby increasing the congestion and lowering the communications quality. Conversely, if τ_2 takes a small value, the UPC unit lets even the doubtful cells be forcibly abandoned if the network is in congestion, thereby lowering the communication quality.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a UPC unit and a method for controlling data through a UPC which solves the foregoing problems.

It is another object of the present invention to provide a UPC unit and a method for controlling data through a UPC which are arranged to prevent improper traffic flow to a network if the network is in congestion or prevent erroneous abandonment of doubtful cells if the network is not in congestion.

The objects of the present invention are achieved by a UPC unit for controlling traffic that is subject to feedback control, which comprises: congestion detecting means for detecting a congesting status of a network on flow of cells in the backward direction and calculating parameters for the UPC based on the detected congestion status; a rewritable parameter memory for storing the parameters; and checking means for checking a conformance of cells in the forward direction based on information in the parameter memory and traffic information.

The objects of the present invention are achieved by a method for controlling traffic that is subject to feedback control for a UPC, which comprises the steps of: detecting a congesting status of a network from the flow of cells in the backward direction and calculating a parameter for UPC control based on the detected congesting status; and checking a conformance of cells coming to a UPC unit in the forward direction, based on the calculated parameter.

According to an aspect of the invention, the UPC unit enables detection of the congestion status of the network and adjusts the value of τ_2 according to the congestion status. If

the network is in congestion, the UPC unit operates to prevent improper inflow of traffic to the network by inhibiting as many non-conformance cells as possible. Conversely, if the network is in congestion, the UPC unit operates to prevent erroneous abandonment of doubtful cells to the network by flowing the doubtful cells to the network.

It is preferable that the means for checking the conformance of cells utilizes the algorithm A contained in the DGCRA algorithm regulated in the appendix of TM 4.0.

The parameter is τ_2 , which indicates the time taken for the data sent at the ACR from the terminal to reach the UPC.

The congestion detecting circuit operates to extract ER (Explicit Rate) information from a BRM (Background Resource Management) cell. If the new ER value is lower than the immediately previous ER value, the congestion detecting circuit operates to lower τ_2 by a decrement. If the lowered result is smaller than the minimum value τ_3 , τ_2 is replaced with τ_3 . Conversely, if the new ER value is the same or greater than the immediately previous ER value, the congestion detecting circuit operates to increase τ_2 . If the increased result is larger than the maximum value τ_5 , τ_2 is replaced with τ_5 .

Further, the congestion detecting circuit operates to check if the operation regulations of the sending terminal regulated in TM 4.0 can trigger the action of decreasing or increasing the ACR. If the checking result reveals the change of the ACR, the new ACR is assumed as the extracted ER and is used for defining the value of τ_2 .

This and other objects, features and advantages of the present invention will become more apparent upon a reading of the following detailed description and drawings, in which:

Figure 1 is a block diagram showing a UPC unit according to an embodiment of the present invention.

The present invention as exemplified by a preferred embodiment will be described with reference to the appended drawing.

The present adaptive control UPC unit is installed in a UNI (User Network Interface) provided in a packet switching network as described in TM 4.0. If it is used as a NPC, it is installed in the NNI.

5 As shown in Figure 1, the UPC unit according to this embodiment is arranged to control the traffic that is subject to the feedback control like the ABR traffic as described in TM 4.0. The UPC unit 1 is connected to a sending terminal 2 and a network 3 and includes a congestion detecting circuit 4, a
10 parameter memory 5, and a DGCRA circuit 6. The congestion detecting circuit 4 operates to detect the congestion status of the network from the flow of cells in the backward direction and calculate or define parameters required for UPC control based on the detected congestion status. The parameter memory 5 is
15 rewritable and stores the parameters. The DGCRA circuit 6 operates to perform a conformance check for the cells coming to the UPC unit in the forward direction by using the information stored in the parameter memory 5 and the specified information.

Herein, the congestion status means a status presumed
20 from the value standing for the congestion information of the network such as ER, CI, and NI of a RM cell in the backward direction. When the arrival interval of the RM cells is long, the network is likely to be in congestion, while when the arrival interval is short, the network is less likely to be in
25 congestion. The arrival pattern of the RM cells may be a basis on which the congestion status is determined.

The determined or presumed congestion status is used for determining part of a parameter required for UPC control. Herein, the part of the required parameter means parameters such
30 as τ_2 changeable according to the congestion status of the network for improving the communications quality.

The DGCRA circuit 6 operates to monitor the traffic from the terminal 2 to the network 3 on the traffic parameters and detect or extract the congestion information and the rate
35 control information such as an arrival pattern or a cell type coming from the terminal 2 to the network 3 from the traffic or

the cell payload. Further, the network congestion detecting circuit 4 operates to determine a value of τ_2 from the congestion information and the rate control information and write it to a τ_2 memory 5. The parameter τ_2 is part of the regulated traffic parameters. The parameter τ_2 stored in the τ_2 memory 5 is changed by the network congesting detecting circuit 4.

In turn, the description will be oriented to the operation of each circuit. The DGCRA circuit 6 performs the conformance check regulated in TM 4.0. The UPC unit of this embodiment adopts an algorithm termed the algorithm A contained in the DGCRA algorithm regulated in the appendix of TM 4.0. Concretely, the DGCRA circuit 6 checks the cells coming from the sending terminal 2 to the UPC unit 1 one by one on the basis of the algorithm. This algorithm is executed to check if it is in conformance. The cell determined to be in conformance is sent to the network 3 as is. The cell determined to be in non-conformance is abandoned or may be sent to the network 3 after the priority of the cell is degraded. The algorithm is executed by using the traffic parameters as specified in TM 4.0, some of which parameters are dynamic ones and may be changed according to a time point, the occurrence of an event such as the arrival of cells from the terminal 2 to the network 3 or from the network 3 to the terminal 2, an occurrence interval, and an occurrence sequence. The TM 4.0, however, indicates that the parameter τ_2 is determined when a connection is made. In the prior art, the parameter τ_2 is not changed once the connection is made. In this embodiment, however, the UPC unit may define the maximum value τ_5 and the minimum value τ_3 and τ_2 may take any value between the maximum value τ_5 and the minimal value τ_3 . The parameter τ_2 may be any real value. Alternatively, the set values of τ_2 may be reduced in number and may be discrete values. For example, three values may be taken such as τ_3 , τ_5 , and τ_4 ($\tau_4 = (\tau_3 + \tau_5)/2$).

The network congestion detecting circuit 4 operates to extract the ER information from the BRM cell. If the newly

extracted ER value is lower than the immediately previous ER value by $f\%$ or more, τ_2 is made lower by a decrement $(1/s)$. If the value of τ_2 lowered by $1/s$ is made smaller than τ_3 , the ER value is taken as τ_3 . Conversely, if the newly extracted ER value is equal to or greater than the immediately previous ER value, the value of τ_2 is increased by delta τ . If the increased value is larger than τ_5 , the ER value is made to be τ_5 . In this embodiment, the delta $\tau = (\tau_5 - \tau_3) / 10$. However, the delta τ may be any other positive value or may be experimentally determined on a trial-and-error basis. In this embodiment, the newly extracted ER value is compared with the immediately previous ER. Alternatively, it may be compared with the ER values extracted in the past. Or, the reduction of the ER value may be determined to be statistically changed by the statistical method using the past average values and discrete values without considering the minute ER value fluctuation.

Further, the network congestion detecting circuit 4 operates to check if the following status or condition is established where an action of increasing or decreasing the ACR is triggered according to the operating regulations of the sending terminal regulated in TM 4.0 such as a long-time absence of a BRM cell coming to the UPC unit. The checked result indicates the change of the ACR. If the changed ACR is made to be a new ACR, the new ACR is assumed as the extracted ER value, on which the parameter τ_2 is determined by the foregoing method.

The congestion extracting circuit 4 operates to write the parameter τ_2 in the τ_2 memory 5 a time τ_s later than the start of the process for determining the parameter τ_2 . In this embodiment, if it is assumed that the process for determining τ_2 consumes a time of $\tau_6 = 100$ msec, $\tau_{set} = \tau_6$ is established. τ_{set} may be set as any value except τ_6 .

The UPC operation is executed at each connection unit. Hence, this description has been oriented to one connection. In actual, the physical transmission path is shared by plural connections (cell-multiplexed), so that two or more connections may be treated by one UPC unit at a time. If two or more

connections are treated at a time, the required number of the τ_2 memory 5 is equal to the number of corresponding connections and the other circuits such as the network congestion detecting circuit 4 are operated at each connection unit. The UPC unit for one connection as described above may be easily changed to the UPC unit for the network with plural connections by the persons skilled in the art.

As set forth above, according to the present invention, the UPC unit and the control method through the UPC are arranged to speed up the solving of congestion when the network is in congestion and reliably put the doubtful cells in the network when the network is not in congestion. Hence, the arrangements are effective in keeping the communication quality of the doubtful cells constant.

The ground for the above is as follows. When the network is in congestion, the traffic of the non-conformance cells that are not necessary and have an adverse effect on the network is inhibited to be flown into the network, thereby speeding up the solving of the congestion. In this case, the doubtful cells may be abandoned. However, if the doubtful cells are allowed to flow in the network, they are more likely to be abandoned in the network when the network is in congestion. Hence, the UPC unit operates to abandon the doubtful cells in advance, thereby lowering the load of the network and effectively solving the congestion of the network. On the other hand, when the network is not in congestion, the traffic of the non-conformance cells may flow into the network. If so, the traffic of the non-conformance cells is less likely to lower the communications quality of the network. Further, when the network is not in congestion, the doubtful cells are allowed to be positively put in the network, which does not lead to lowering the communications quality of the doubtful cells.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A UPC unit for controlling a traffic that is subject to feedback control, said UPC unit comprising:

congestion detecting means for detecting a congestion status of a network on flow of cells in a backward direction and calculating parameters for UPC based on said detected congestion status;

a rewritable parameter memory for storing said parameters; and

checking means for checking a conformance of cells in a forward direction based on information of said parameter memory and traffic information.

2. The UPC unit of claim 1, wherein a traffic service is an ABR service.

3. The UPC unit of claim 1 or 2, wherein said checking means comprises means for checking a conformance of cells based on an algorithm A contained in the DGCRA algorithm regulated in Appendix of TM 4.0.

4. The UPC unit of claim 1, 2 or 3, wherein said parameter indicates a time taken in passage of data at a new allowable cell rate from a terminal to said UPC unit after said UPC unit receives said new allowable cell rate.

5. The UPC unit of claim 4, wherein said congestion detecting means comprises means for decreasing a parameter by a decrement when the explicit rate information newly extracted from a backward resource management cell is lower than the immediately previous explicit rate value and for increasing said parameter by an increment when the explicit rate information newly extracted from the backward resource

management cell is the same as or greater than the immediately previous explicit rate value.

6. The UPC unit of claim 5, wherein said increasing/-decreasing means comprises means for setting said parameter to a predetermined minimum value Min when said decreased parameter is smaller than said predetermined minimum value Min and for setting said parameter to a predetermined maximum value Max when said increased parameter is larger than said maximum value Max.

7. The UPC unit of claim 4, wherein said congestion detecting means comprises means for checking when the status is a triggering action of decreasing/increasing the allowable cell rate specified in the operation regulations of the sending terminal regulated in TM 4.0, setting the new allowable cell rate to said extracted explicit rate when it is determined that the allowable cell rate is to be changed based on the checking result, and determining said parameter based on said new allowable cell rate.

8. The UPC unit of claim 5 or 6, wherein said congestion detecting means comprises means for increasing/decreasing said parameter based on an arrival pattern of said resource management cells.

9. A UPC unit dedicated to controlling an ABR traffic, comprising:

congestion detecting means for detecting a congestion status of a network based on flow of cells in a backward direction and changing a time τ_2 taken in passage of data at a new allowable cell rate through the network from a terminal to a UPC unit after said UPC unit receives said new allowable cell rate;

a rewritable parameter memory for storing said τ_2 ; and
DGCRA means for checking a conformance of cells in a forward direction based on said τ_2 information.

10. The UPC unit of claim 9, wherein said congestion detecting means comprises changing means for extracting explicit rate from a backward resource management cell, for decreasing a τ_2 when said extracted explicit rate is lower than the immediately previously extracted explicit rate, and for increasing said τ_2 when said extracted explicit rate is the same as or greater than said immediately previous extracted explicit rate.

11. The UPC unit of claim 10, wherein said changing means comprises means for setting said τ_2 to a predetermined minimum value Min when said lowered τ_2 is smaller than said minimum value Min and for setting said τ_2 to a predetermined maximum value Max when said increased τ_2 is greater than said maximum value Max.

12. The UPC unit of claim 10, wherein said congestion detecting means comprises means for checking when the status is a triggering action of decreasing/increasing an allowable cell rate specified by the operating regulations of the sending terminal regulated in TM 4.0, said new allowable cell rate to said extracted explicit rate, and changing said τ_2 on said new allowable cell rate based on said checking result.

13. The UPC unit of claim 10, wherein said congestion detecting means comprises means for changing said τ_2 based on an arrival pattern of resource management cells.

14. A UPC controlling method for controlling a traffic that is subject to feedback control for a UPC, comprising the steps of:

detecting a congestion status of a network from the flow of cells in a backward direction and calculating a parameter for UPC control based on said detected congestion status; and

checking a conformance of cells coming to a UPC unit in a forward direction based on said calculated parameter.

15. The UPC controlling method of claim 14, wherein a traffic service is an ABR service, and said parameter indicates a time τ_2 taken in passage of data at a new allowable cell rate from a terminal to a UPC through a network after said UPC receives said new allowable cell rate.

16. The UPC controlling method of claim 14, wherein said checking step comprises a step of checking a conformance of cells based on an algorithm A contained in a DGCRA algorithm regulated in Appendix of TM 4.0.

17. The UPC controlling method of claim 14, wherein said checking step comprises a step of extracting the explicit rate information from a backward resource management cell, decreasing said parameter when said explicit rate value is lower than the immediately extracted explicit rate value, and increasing said parameter when said explicit rate is the same as or greater than the immediately previous explicit rate.

18. The UPC controlling method of claim 17, wherein said step of increasing/decreasing said parameter comprises a step of setting said parameter to a predetermined minimum value Min when said lowered parameter is smaller than said minimum value Min and setting said parameter to a predetermined maximum value Max when said increased parameter is greater than said maximum value Max.

19. The UPC controlling method of claim 14, wherein the step of detecting the congestion comprises a step of checking when the status is a triggering action of decreasing/increasing the allowable cell rate specified in the operation regulations of the sending terminal regulated in TM 4.0, when it is determined that the allowable cell rate is to be changed based on said checking result, setting the new allowable cell rate to the extracted explicit rate, and determining said parameter based on said new allowable cell rate.

20. The UPC controlling method of claim 14, wherein said step of detecting the congestion comprises a step of increasing/decreasing said parameter on said arrival pattern of resource management cells.

FIG.1

