



(22) Date de dépôt/Filing Date: 2012/05/04

(41) Mise à la disp. pub./Open to Public Insp.: 2012/11/06

(30) Priorité/Priority: 2011/05/06 (EP11165132)

(51) Cl.Int./Int.Cl. *F03D 11/00* (2006.01),
F03D 1/00 (2006.01)


(71) Demandeur/Applicant:
SIEMENS AKTIENGESELLSCHAFT, DE

(72) Inventeurs/Inventors:
MUNK-HANSEN, THORKIL, DK;
NIELSEN, JACOB BLACH, DK

(74) Agent: SMART & BIGGAR

(54) Titre : SYSTÈME DE REFROIDISSEMENT D'UNE EOLIENNE

(54) Title: COOLING ARRANGEMENT OF A WIND TURBINE

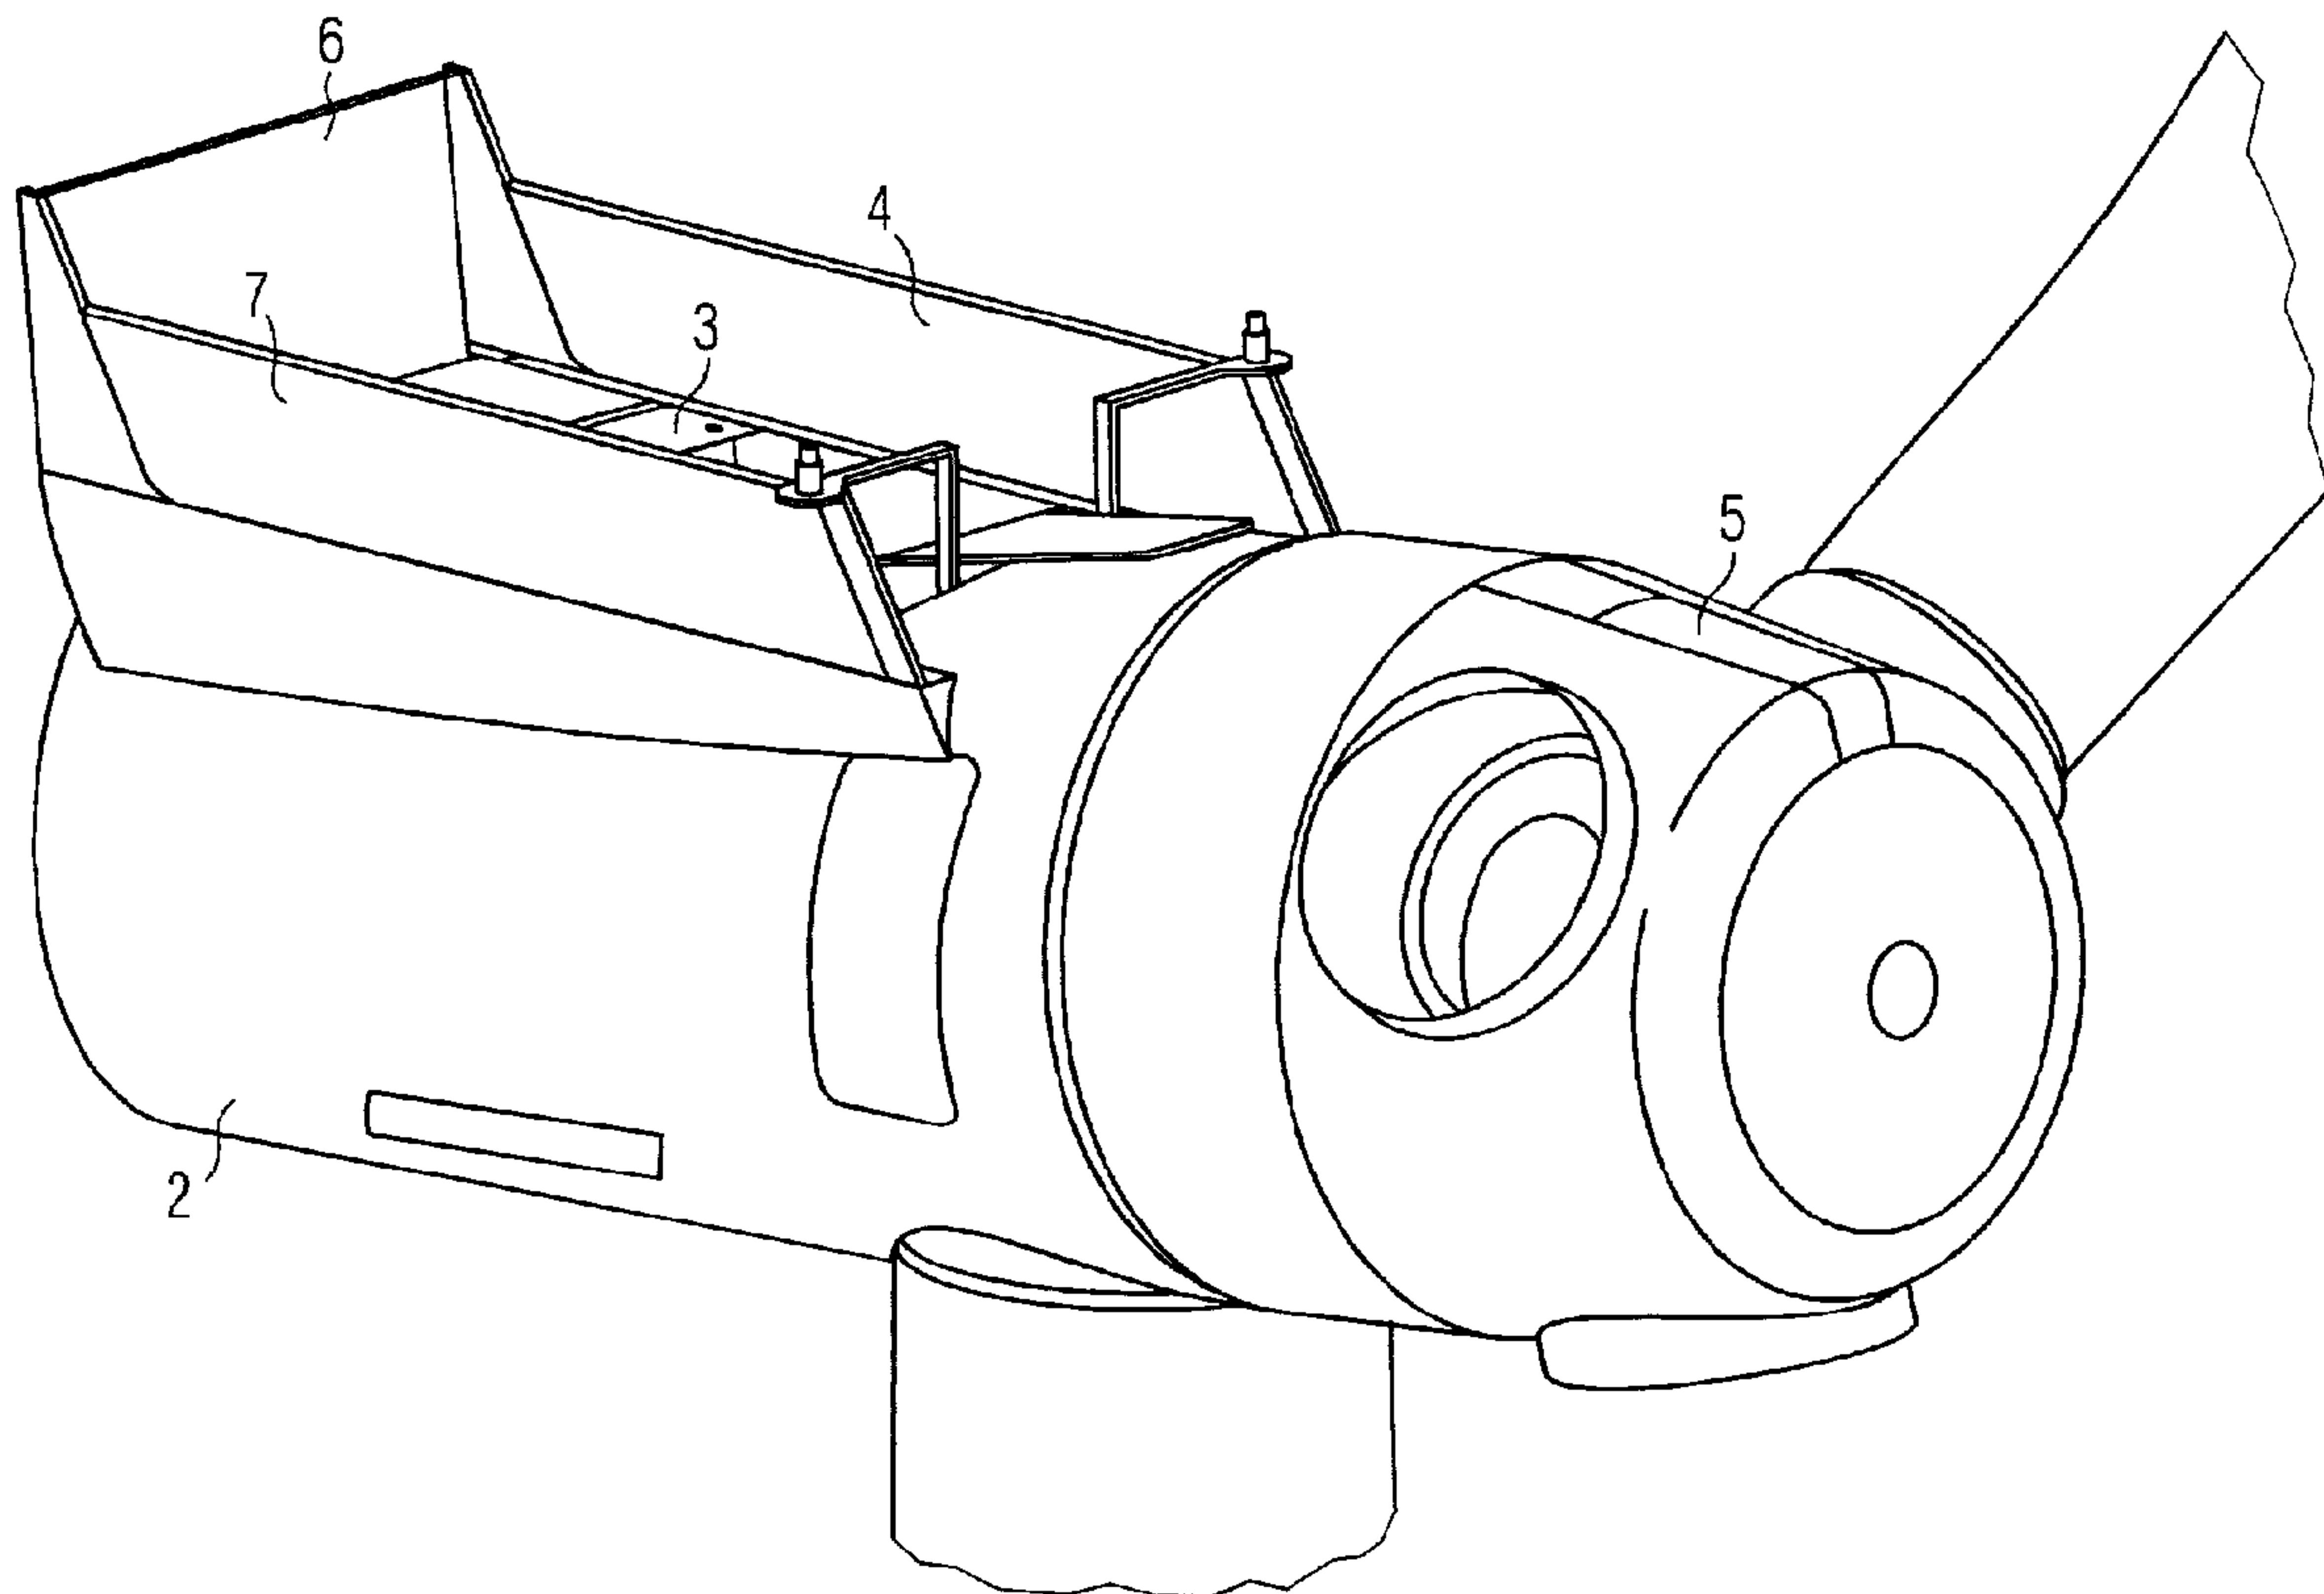

(57) Abrégé/Abstract:

A cooling arrangement is provided for a wind turbine. The wind turbine has a nacelle. The cooling arrangement includes a cooling device and a platform. The cooling device is arranged on top of the nacelle and which is configured to remove heat of the wind turbine to the ambient air. The platform is located on top of the nacelle and which is configured to be approached by a helicopter. The platform includes a barrier, which surrounds at least a part of the platform. The barrier includes at least a part of the cooling device.

54106-1046

ABSTRACT

A cooling arrangement is provided for a wind turbine. The wind turbine has a nacelle. The cooling arrangement includes a cooling device and a platform. The cooling device is arranged on top of the nacelle and which is configured to
5 remove heat of the wind turbine to the ambient air. The platform is located on top of the nacelle and which is configured to be approached by a helicopter. The platform includes a barrier, which surrounds at least a part of the platform. The barrier includes at least a part of the cooling device.

54106-1046

COOLING ARRANGEMENT OF A WIND TURBINE

FIELD OF INVENTION

The invention relates to a cooling arrangement of a wind turbine.

BACKGROUND OF INVENTION

5 Electrical machinery produces heat and often needs a cooling system to remove the heat. The cooling system often comprises a cooling fluid that circulates in ducts or pipes. The cooling system further comprises a cooling arrangement as a heat sink. The cooling arrangement comprises a radiator and a support arrangement. The cooling fluid is then cooled by air flowing through the radiator. The
10 radiator is therefore mounted in a way that the surrounding air can flow through the radiator.

 In the case of e.g. a wind turbine, the cooling system removes the heat from the generator or a bearing. The cooling fluid is cooled in the radiator. The radiator is mounted outside of the nacelle so that the surrounding air can move
15 through the radiator.

 Wind turbines are often installed offshore or close to the coast and are surrounded by salty air. One aim of the installation is to keep salty air out of the nacelle, as salty air will damage the installation in the nacelle. For this the radiator of the cooling system is mounted outside of the nacelle, so no salty air has to be guided
20 through the nacelle.

SUMMARY OF INVENTION

 To ensure a reliable cooling by the surrounding air moving through the radiator, the radiator is mounted in a way that the surrounding air can easily flow through the radiator. The radiator is mounted mainly in the right angle of the direction
25 of the air flow when the turbine is in operation. The radiator is mounted on top of the

54106-1046

nacelle to use the maximum of the air flow and to provide a good access for maintenance.

The same aspects apply for other arrangements where cooling systems are used. A radiator of a cooling system is often installed in a higher area of a
5 building or construction, e.g. on a roof.

As e.g. wind turbines are often installed offshore they are equipped with a heli-pad, a heli-drop-zone or a heli-hoist platform. These platforms are used with a helicopter to land on the platform or to drop or pick up persons or parts by the help of a hoist. It is also possible to use the platform with a crane to hoist or lower gear like
10 technical equipment to the platform by a rope. This is to provide an easy way to deliver or pick up parts or persons, for service or repair reasons.

The platform is located on top of the nacelle at the rear end of the nacelle. The rear end of the nacelle is the end pointing away from the hub and the rotor, to avoid interference with the rotor.

15 A free space of a certain size is needed to deliver or pick up persons or equipment at a platform. Thus accidents and damages are avoided. A barrier is arranged around the platform to avoid that persons or equipment slip from the edge of the platform.

20 A hatch is arranged in the nacelle at the front end of the platform, to allow an easy access from the platform into the nacelle and from the nacelle to the platform. The front end of the platform is the end that points towards the hub of the wind turbine.

This has the disadvantage that the radiator of the cooling system and the platform take up the same area on top of the wind turbine. The radiator is
25 diminishing the space needed for the platform. At the same time the barrier (e.g. a rail) around the platform is diminishing the area of free air to move through the radiator.

54106-1046

The aim of this invention is to provide a cooling arrangement that provides a reliable cooling and is not limiting the possibilities to use a platform.

The aim is reached by the features of the independent claim. Preferred embodiments of the invention are described in the dependent claims.

5 According to the invention a cooling arrangement of a wind turbine is provided. The wind turbine comprises a nacelle and a cooling device, which is arranged on top of the nacelle. The cooling device is prepared to remove heat of the wind turbine to the ambient air.

10 A platform is located on top of the nacelle. It is prepared to be approached by a helicopter. The platform comprises a barrier, which surrounds at least a part of the platform. The barrier comprises at least a part of the cooling device.

15 Thus the cooling device is a part of the barrier. Thus no separate barrier and separate cooling device is needed while extra material is avoided. Thus the weight, the costs and working time to prepare and install the separate barrier and the separate cooling device are saved.

20 Preferably the cooling device comprises a radiator segment and a support structure to support the radiator segment. Thus the radiator is mounted via a support structure to the nacelle or to the barrier. Thus the radiator can be exchanged easily in case of a fault.

 Preferably at least a part of the radiator of the wind turbine is an integral part of the barrier.

25 Preferably an internal cooling system of the wind turbine is connected with the cooling device or radiator. Thus at least two coupled cooling circuits are used to remove heat out of the nacelle or wind turbine. Each cooling circuit might use a specific cooling fluid like water, oil and/or air. Thus there is no need to use salty air from the outside of the nacelle for internal cooling purposes.

54106-1046

Preferably the barrier is arranged at three sides of the platform. A remaining fourth side is left free to provide access from a hatch to the platform.

Preferably the radiator is arranged at the rear part of the platform as barrier. Thus the wind, which moves along the nacelle to cool the radiator when the turbine is in operation, moves easily along the platform and reaches the cooling device. Thus the surface of the cooling device is arranged frontal to the direction of the ambient air when the wind turbine is in operation.

Preferably the radiator is arranged at the front part of the platform as barrier. Thus the wind can easily flow through the rotor and directly to the cooling device when the turbine is in operation. Thus the wind is not blocked before it reaches the radiator.

Preferably the support structure comprises a triangular shaped side support, which is prepared to absorb the wind load of the ambient air passing through the radiator. Thus forces, being generated by the wind load, are transferred from the radiator over the support structure to the nacelle of the wind turbine. In addition the use of material and the weight is optimized.

Preferably the cooling device is arranged with a certain spacing to the nacelle. Thus air is allowed to move between the cooling device and the nacelle. Thus low turbulence airflow is provided. The airflow of the ambient air around the radiator is optimized and a congestion of the airflow is avoided.

Preferably the cooling device is partially arranged in a groove of the nacelle to achieve a predefined distance between the level of the platform and the top edge of the cooling device. Thus a limitation of the maximum height of the barrier in respect to the platform is observed. In addition a large radiator area can be provided while mandatory constructional dimensions are kept.

In another embodiment the platform is elevated in respect to the cooling device to achieve a predefined distance between the level of the platform and the top

54106-1046

edge of the cooling device. Thus a limitation of the maximum height of the barrier in respect to the platform is observed. In addition a large radiator area can be provided while mandatory constructional dimensions are kept.

5 Preferably the barrier comprises a metal grid. Thus the air of a hovering helicopter can move through the barrier. Thus congestion of the air is prevented. Thus complex turbulent airflow and ground effects are prevented for the helicopter.

10 Preferably the metal grid comprises openings of a certain size, which prevents that a grounding hook or a grounding conductor of a helicopter, which is hovering over the platform, is entangled or gets entangled. Thus the hook gets not entangled and moves freely. Dangerous situations for the helicopter are avoided.

Preferably a floor of the platform comprises a hole to drain water. Thus the danger of slipping of persons or equipment on the wet surface is minimized.

15 Preferably a grid is prepared as floor of the platform. Thus friction of equipment and shoes of persons is higher then on a plane metal surface. Thus sliding and slipping of equipment and persons is minimized.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is shown in more detail by help of figures.

20 The figures show preferred configurations and do not limit the scope of the invention.

FIG 1 shows a nacelle of a wind turbine according to the invention,

FIG 2 shows a wind turbine according to the invention,

FIG 3 shows a platform according to the invention in a first view,

FIG 4 shows the platform of FIG 3 in a second view,

54106-1046

FIG 5 shows another embodiment of the solution invented,

FIG 6 shows a detail of the solution invented.

DETAILED DESCRIPTION OF INVENTION

FIG 1 shows a nacelle 2 of a wind turbine according to the invention.

5 The nacelle 2 comprises a platform 3 that is surrounded by a barrier 4. The rear end of the platform is the part pointing away from the hub 5.

A cooling device 6 is provided on to of the nacelle 2. This cooling device 6 is an integral part of the rear part of the barrier 4. The barrier 4 surrounds the platform 3 at three sides. At the right and left side the barrier comprises a metal
10 grid 7, so that the air flow of a hovering helicopter can move through the barrier 4.

FIG 2 shows a wind turbine 1 according to the invention. The wind turbine 1 is equipped with a platform 3 on top of the nacelle 2. The platform 3 is surrounded by a barrier 4.

The platform 3 can be approached by a helicopter. The platform 3 can
15 be prepared to land on it with the helicopter. Or it is prepared to be used as a heli-drop zone or a heli-hoist platform to deliver or pick up equipment and personal to and from the platform.

A cooling device 6 is provided at the rear end farthest away from the hub 5 of the wind turbine 1. This cooling device 6 is integrated in the barrier 4 and
20 forming a part of the barrier 4.

FIG 3 shows a platform 3 according to the invention in a first view. The nacelle 2 is equipped with a platform 3. Around the platform 3 is a barrier 4.

At the rear part of the barrier 4 a cooling device 6 is arranged as a part of the barrier 4. The cooling device 6 comprises a radiator 8 and a support
25 structure 9. The radiator 8 can be constructed of several radiator elements.

54106-1046

The barrier 4 comprises metal grids 7. The metal grids 7 allow air to flow and thus avoids a congestion of air e.g. from a helicopter hovering above the platform 3.

5 The barrier 4 is surrounding the platform 3 at three sides. The side in the direction of the hub, the front side, is just equipped with a railing. Thus personal and equipment can easily reach the platform 3 through the hatch 10.

The cooling device 6 is equipped with a triangular shaped side support 9. This side support 9 is taking in the wind load of the ambient air moving through the radiator 8 and is leading the forces into the nacelle 2.

10 FIG 4 shows the platform of FIG 3 in a second view. A Cooling device 6 is arranged on top of a nacelle 2 of a wind turbine. The cooling device 6 comprises a support structure 9 and a radiator 8. The cooling device 6 is a part of the barrier 4 that surrounds the platform 3.

15 The barrier 4 surrounds the platform 3 at three sides. Thus the wind, that cools the radiator when the turbine is in operation, can blow through the rotor along the nacelle 2 over the platform 3 and through the radiator 6 without being disturbed by a barrier in front on the platform 3.

20 Also personal can easily reach the platform 3 through the hatch 10 and handle equipment in and out of the nacelle 2. At the side of the hatch 10 the platform 3 is equipped with a railing. On top of this railing additional equipment is installed.

The barrier 4 comprises a metal grid 7 that allows the air to flow through it. Thus the congestion of the air is minimized and complex turbulent air flow and ground effects are prevented for the helicopter hovering above the platform 3.

25 The metal grid has openings that are small enough so that the grounding hook or the grounding conductor of the helicopter can not get entangled in the grid.

54106-1046

FIG 5 shows another embodiment of the solution invented. On top of the nacelle 2 of a wind turbine 1 a platform 3 is installed to be used with a helicopter. The platform is surrounded by a barrier 4. At the front end of the platform, at the end that is pointing towards the hub 5, the barrier 4 is connected to a cooling device 6.

- 5 Thus the cooling device 6 is a part of the barrier 4 at the front end of the platform. The cooling device is equipped with a triangular shaped support structure 9.

In this embodiment the cooling device 6 is mounted in the front end of the platform 3. When the wind turbine 1 is in operation, the wind can easily flow through the rotor and along the nacelle 2 to the cooling device 6 that comprises the
10 radiator 8. The radiator 8 is arranged mainly frontal to the wind. So the wind provides an optimized cooling effect.

FIG 6 shows a detail of the solution invented. The figure shows a radiator 8 of the cooling device in a side view. Between the radiator 8 and the nacelle 2 is a certain spacing that leads to an air gap 12. This air gap allows the air flow 13
15 to flow between the radiator 8 and the nacelle 2. Thus the air flow 13 is not blocked in front of the radiator 8. Thus a congestion of air is prevented and the cooling effect is optimized.

The radiator 8 is arranged in a certain level on top of the nacelle 2. In this case the platform 3 is arranged in a higher level on the nacelle 2. The platform 2
20 is elevated in respect to the cooling device 6. Thus the distance between the upper end of the cooling device 6 and the level of the platform floor can be arranged to have a predetermined maximum distance. Thus requirements regarding the height of the barrier 4 surrounding the platform 3 can be met.

54106-1046

CLAIMS:

1. A cooling arrangement of a wind turbine, the wind turbine including a nacelle, the cooling arrangement comprising:

a cooling device, which is arranged on top of the nacelle and which is
5 configured to remove heat of the wind turbine to the ambient air,

a platform, which is located on top of the nacelle and which is
configured to be approached by a helicopter,

wherein the platform comprises a barrier, which surrounds at least a
part of the platform, and

10 wherein the barrier comprises at least a part of the cooling device.

2. The cooling arrangement according to claim 1, wherein the cooling
device comprises a radiator segment and a support structure to support the radiator
segment.

3. The cooling arrangement according to claim 1, wherein at least a part of
15 the radiator of the wind turbine is an integral part of the barrier.

4. The cooling arrangement according to claim 2, wherein an internal
cooling system of the wind turbine is connected with the cooling device or radiator.

5. The cooling arrangement according to claim 1, wherein the barrier is
arranged at three sides of the platform.

20 6. The cooling arrangement according to claim 1, wherein the radiator is
arranged at the rear part of the platform as barrier.

7. The cooling arrangement according to claim 1, wherein the radiator is
arranged at the front part of the platform as barrier.

54106-1046

8. The cooling arrangement according to claim 1, wherein the support structure comprises a triangular shaped side support, which is prepared to absorb the wind load of the ambient air passing through the radiator.

9. The cooling arrangement according to claim 1, wherein the cooling device is arranged with a certain spacing to the nacelle thus air is allowed to move between the cooling device and the nacelle.

10. The cooling arrangement according to claim 1, wherein the cooling device is partially arranged in a groove of the nacelle to achieve a predefined distance between the level of the platform and the top edge of the cooling device, or

the platform is elevated in respect to the cooling device to achieve a predefined distance between the level of the platform and the top edge of the cooling device.

11. The cooling arrangement according to claim 1, wherein the barrier comprises a metal grid.


12. The cooling arrangement according to claim 11, wherein the metal grid comprises openings of a certain size, which prevents that a grounding hook or a grounding conductor of a helicopter, which is hovering over the platform, is or gets entangled.

13. The cooling arrangement according to claim 1, wherein a floor of the platform comprises a hole to drain water.

14. The cooling arrangement according to claim 1, wherein a grid is prepared as floor of the platform.

201109216


1/5

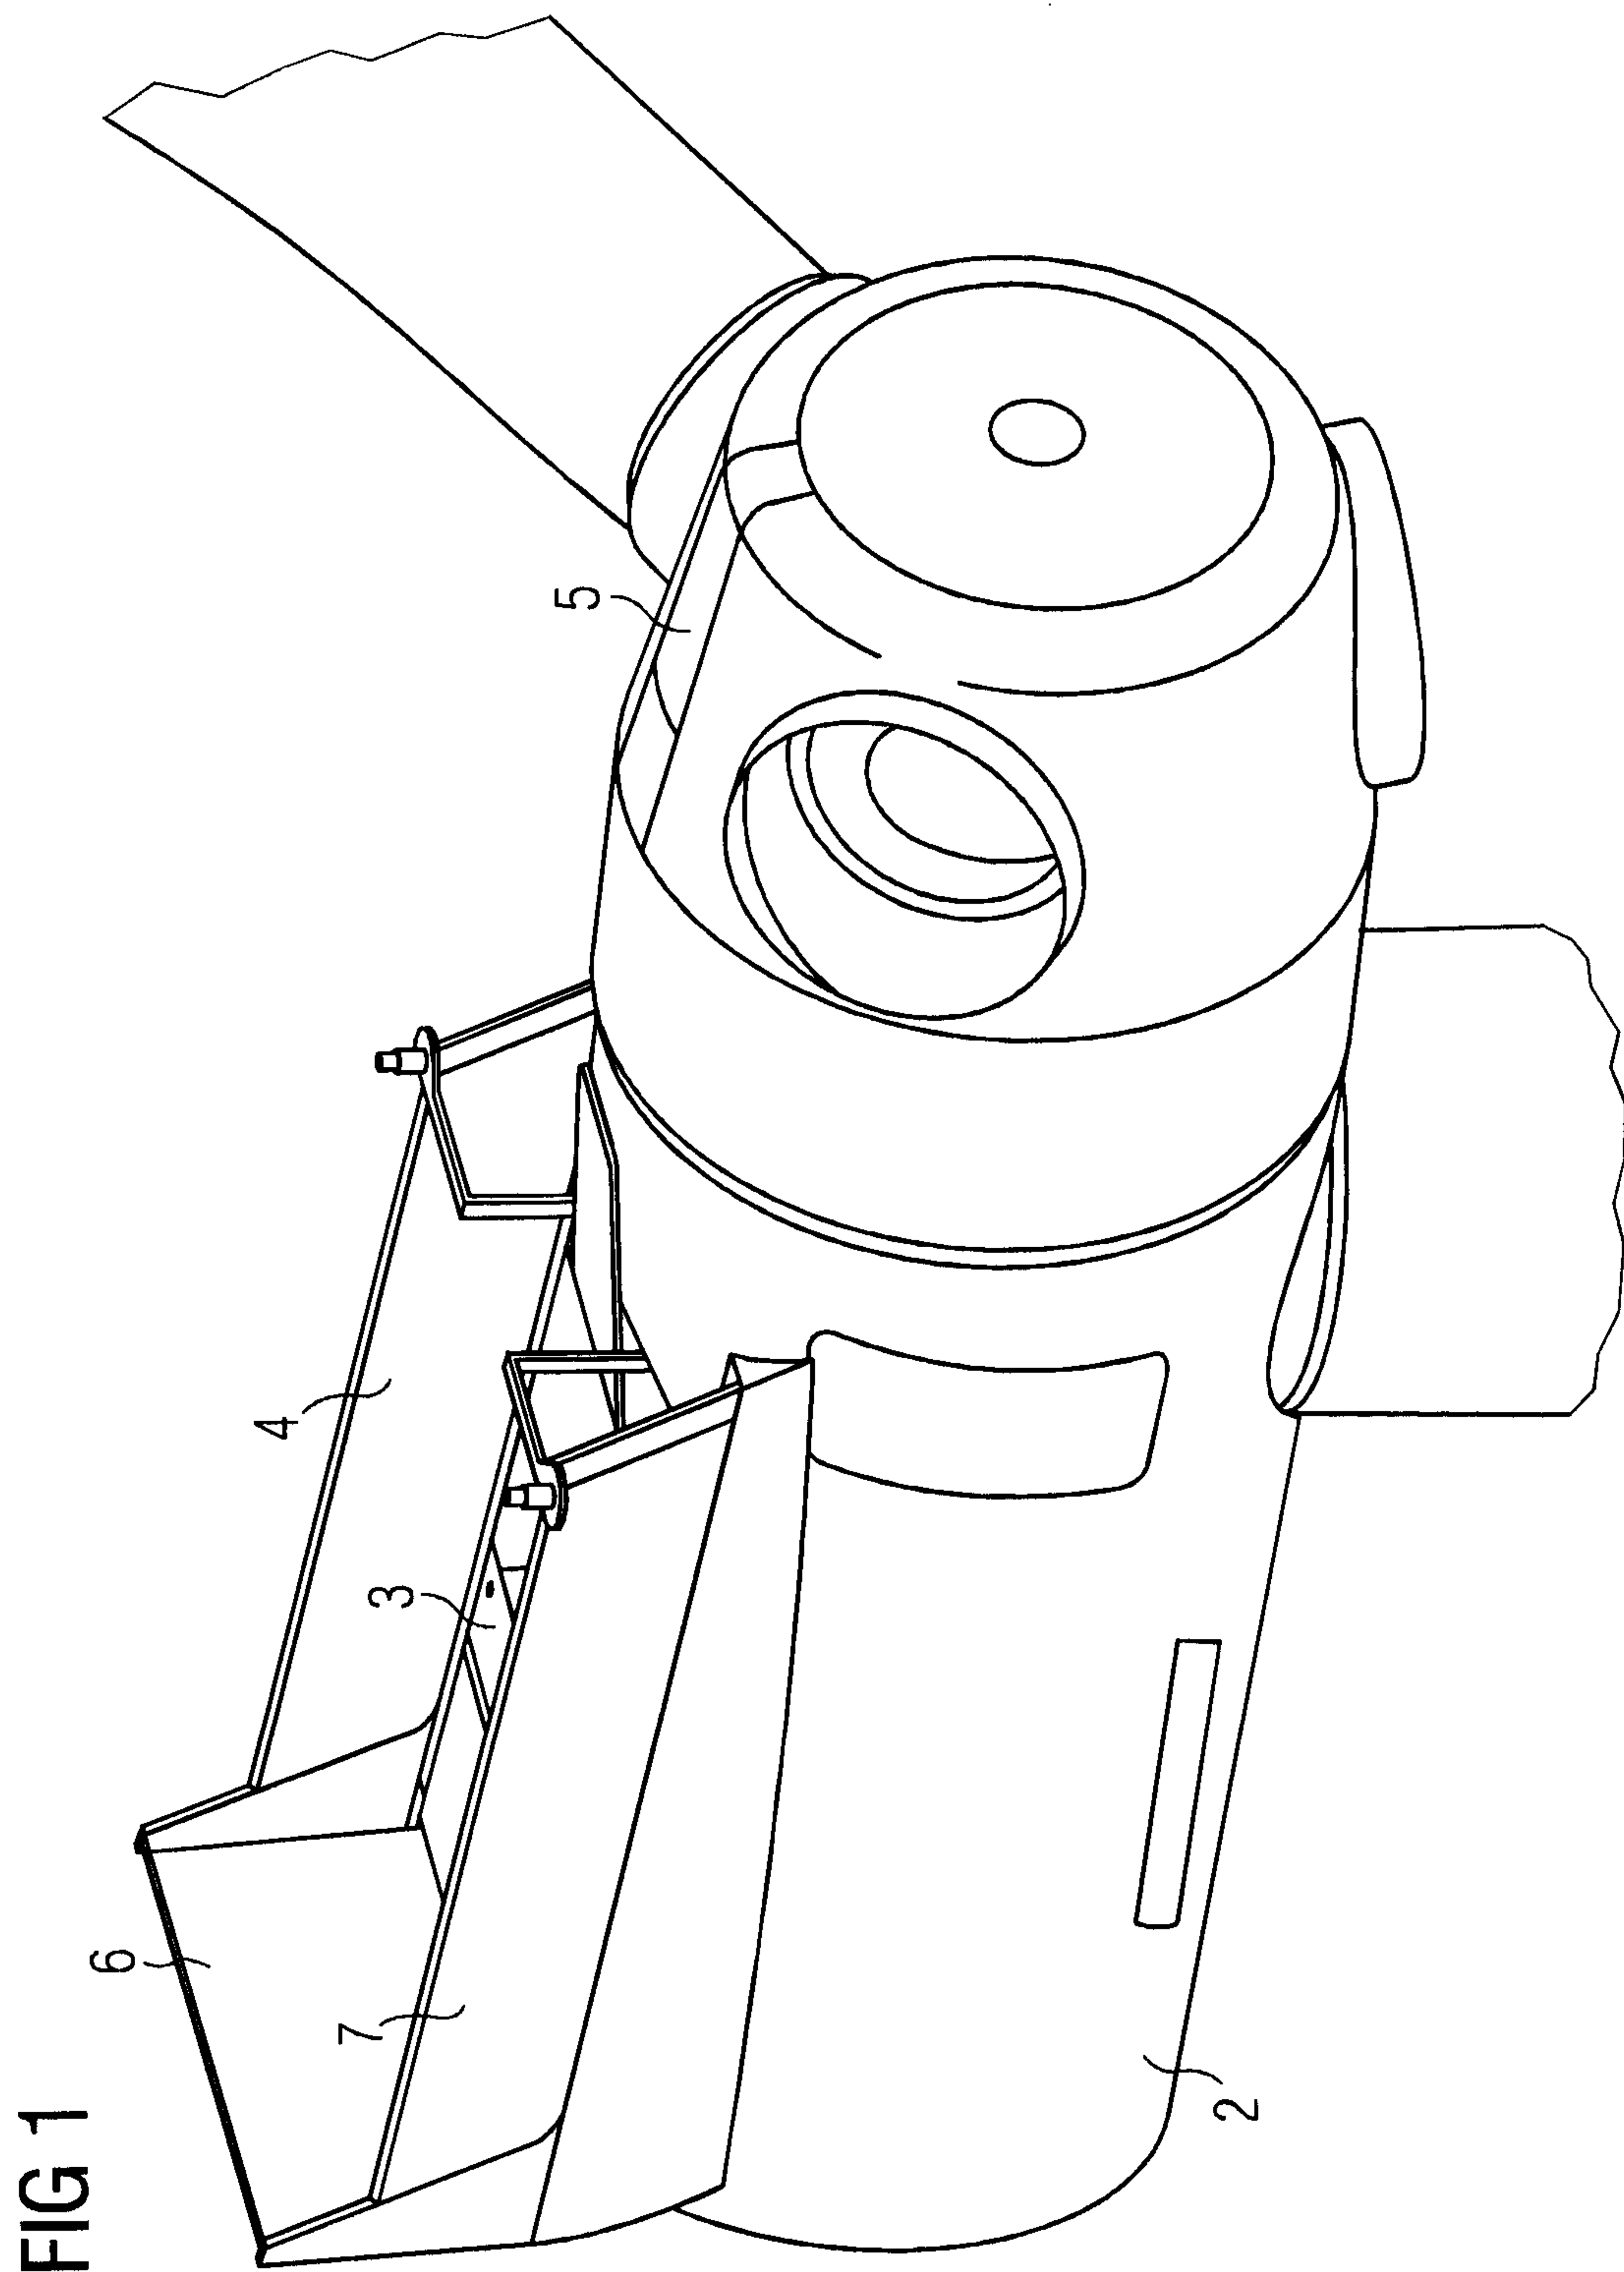

201109216


2/5

FIG 2

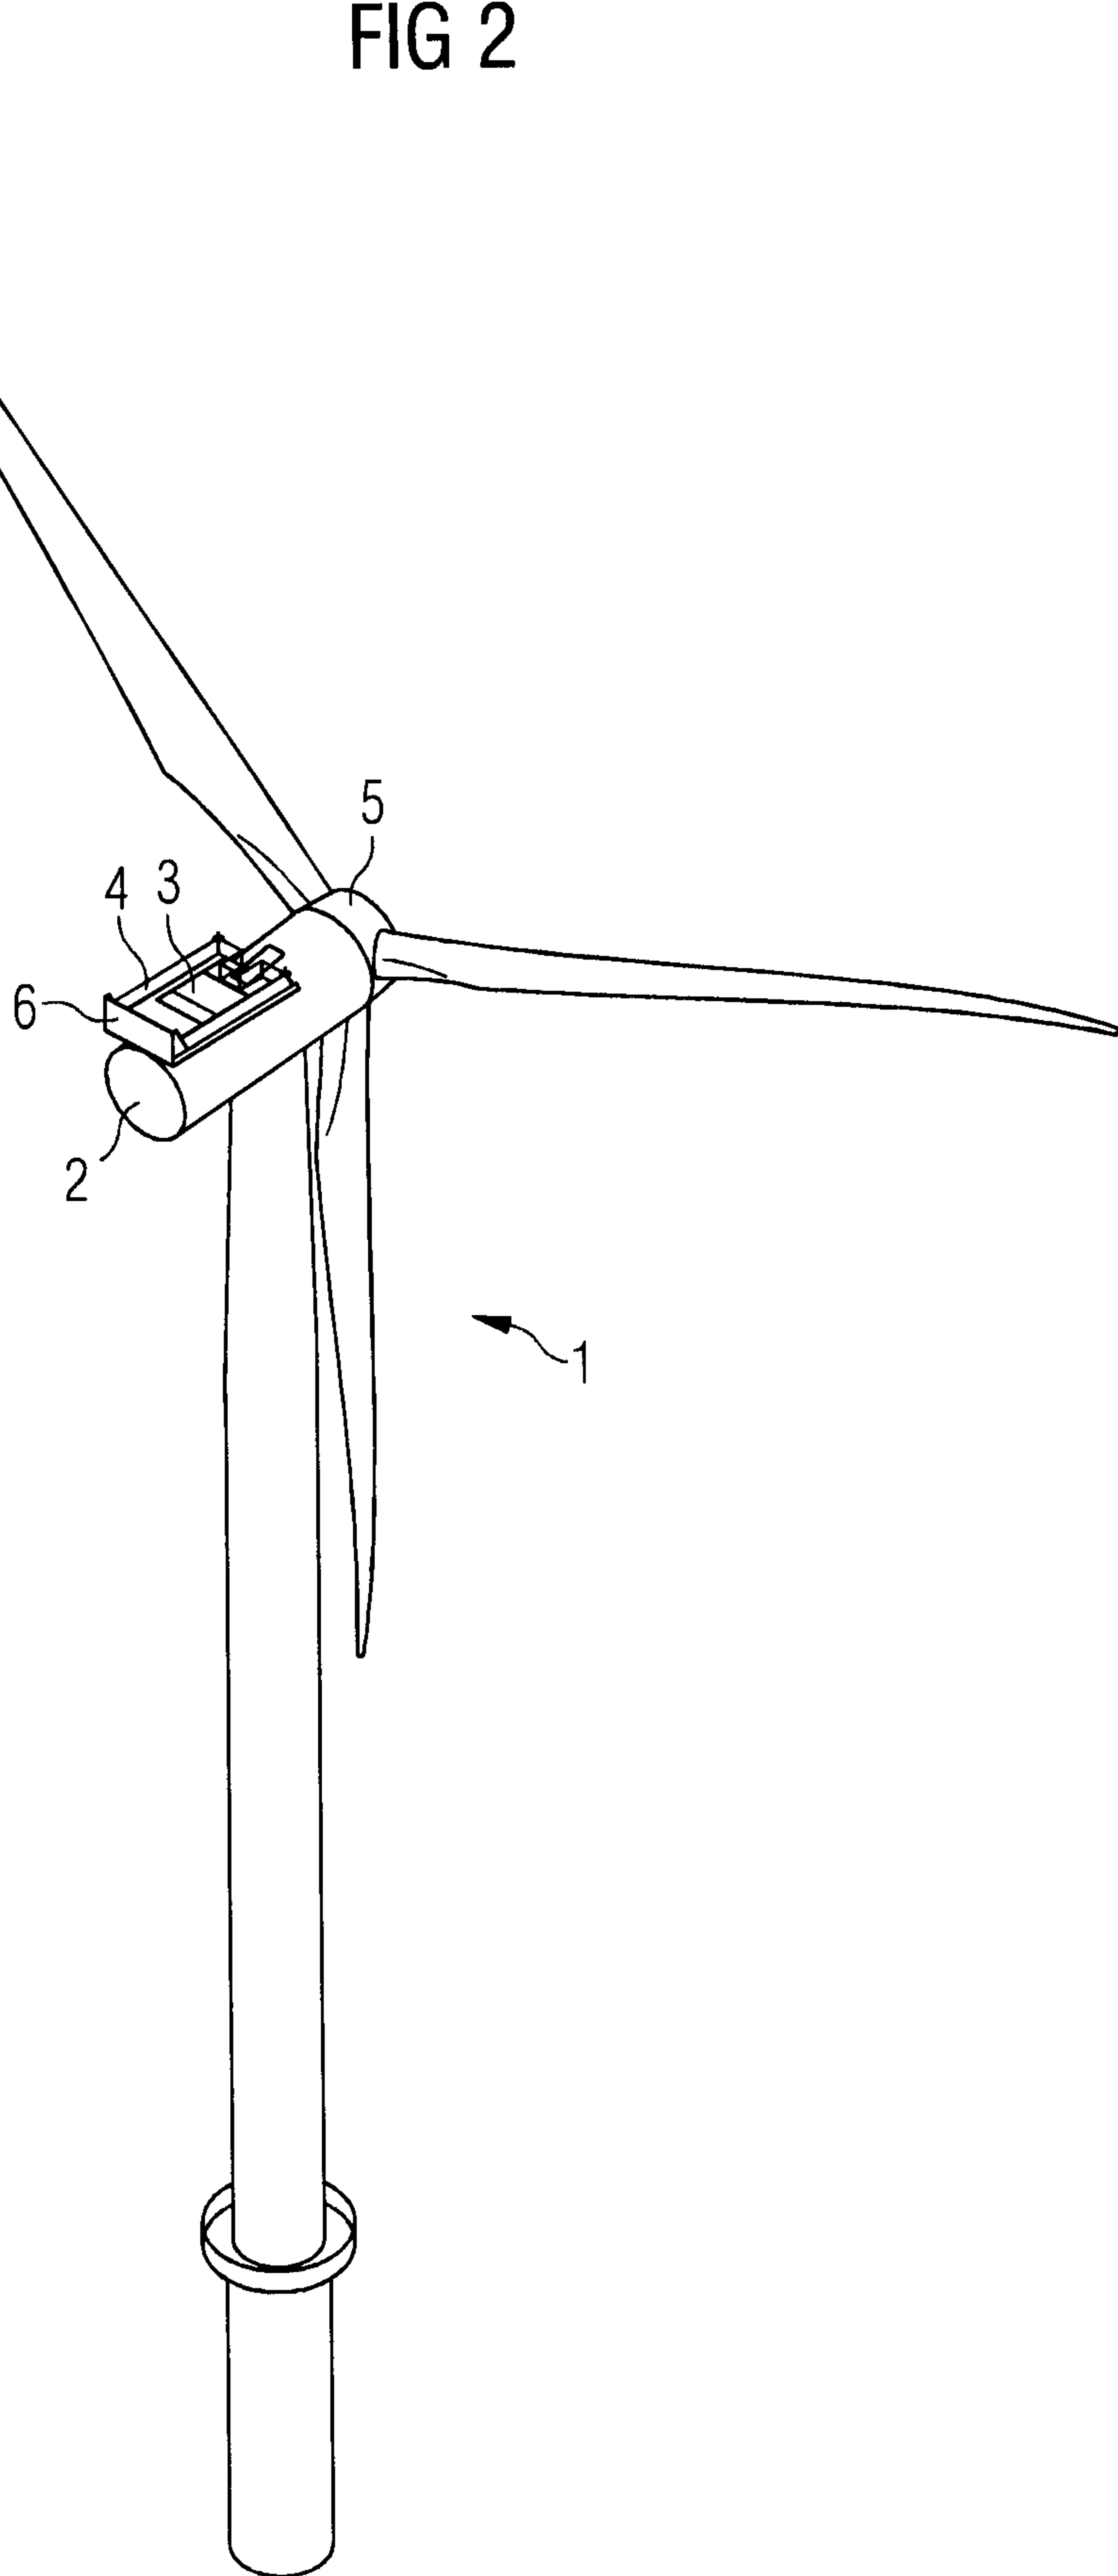

201109216


3/5

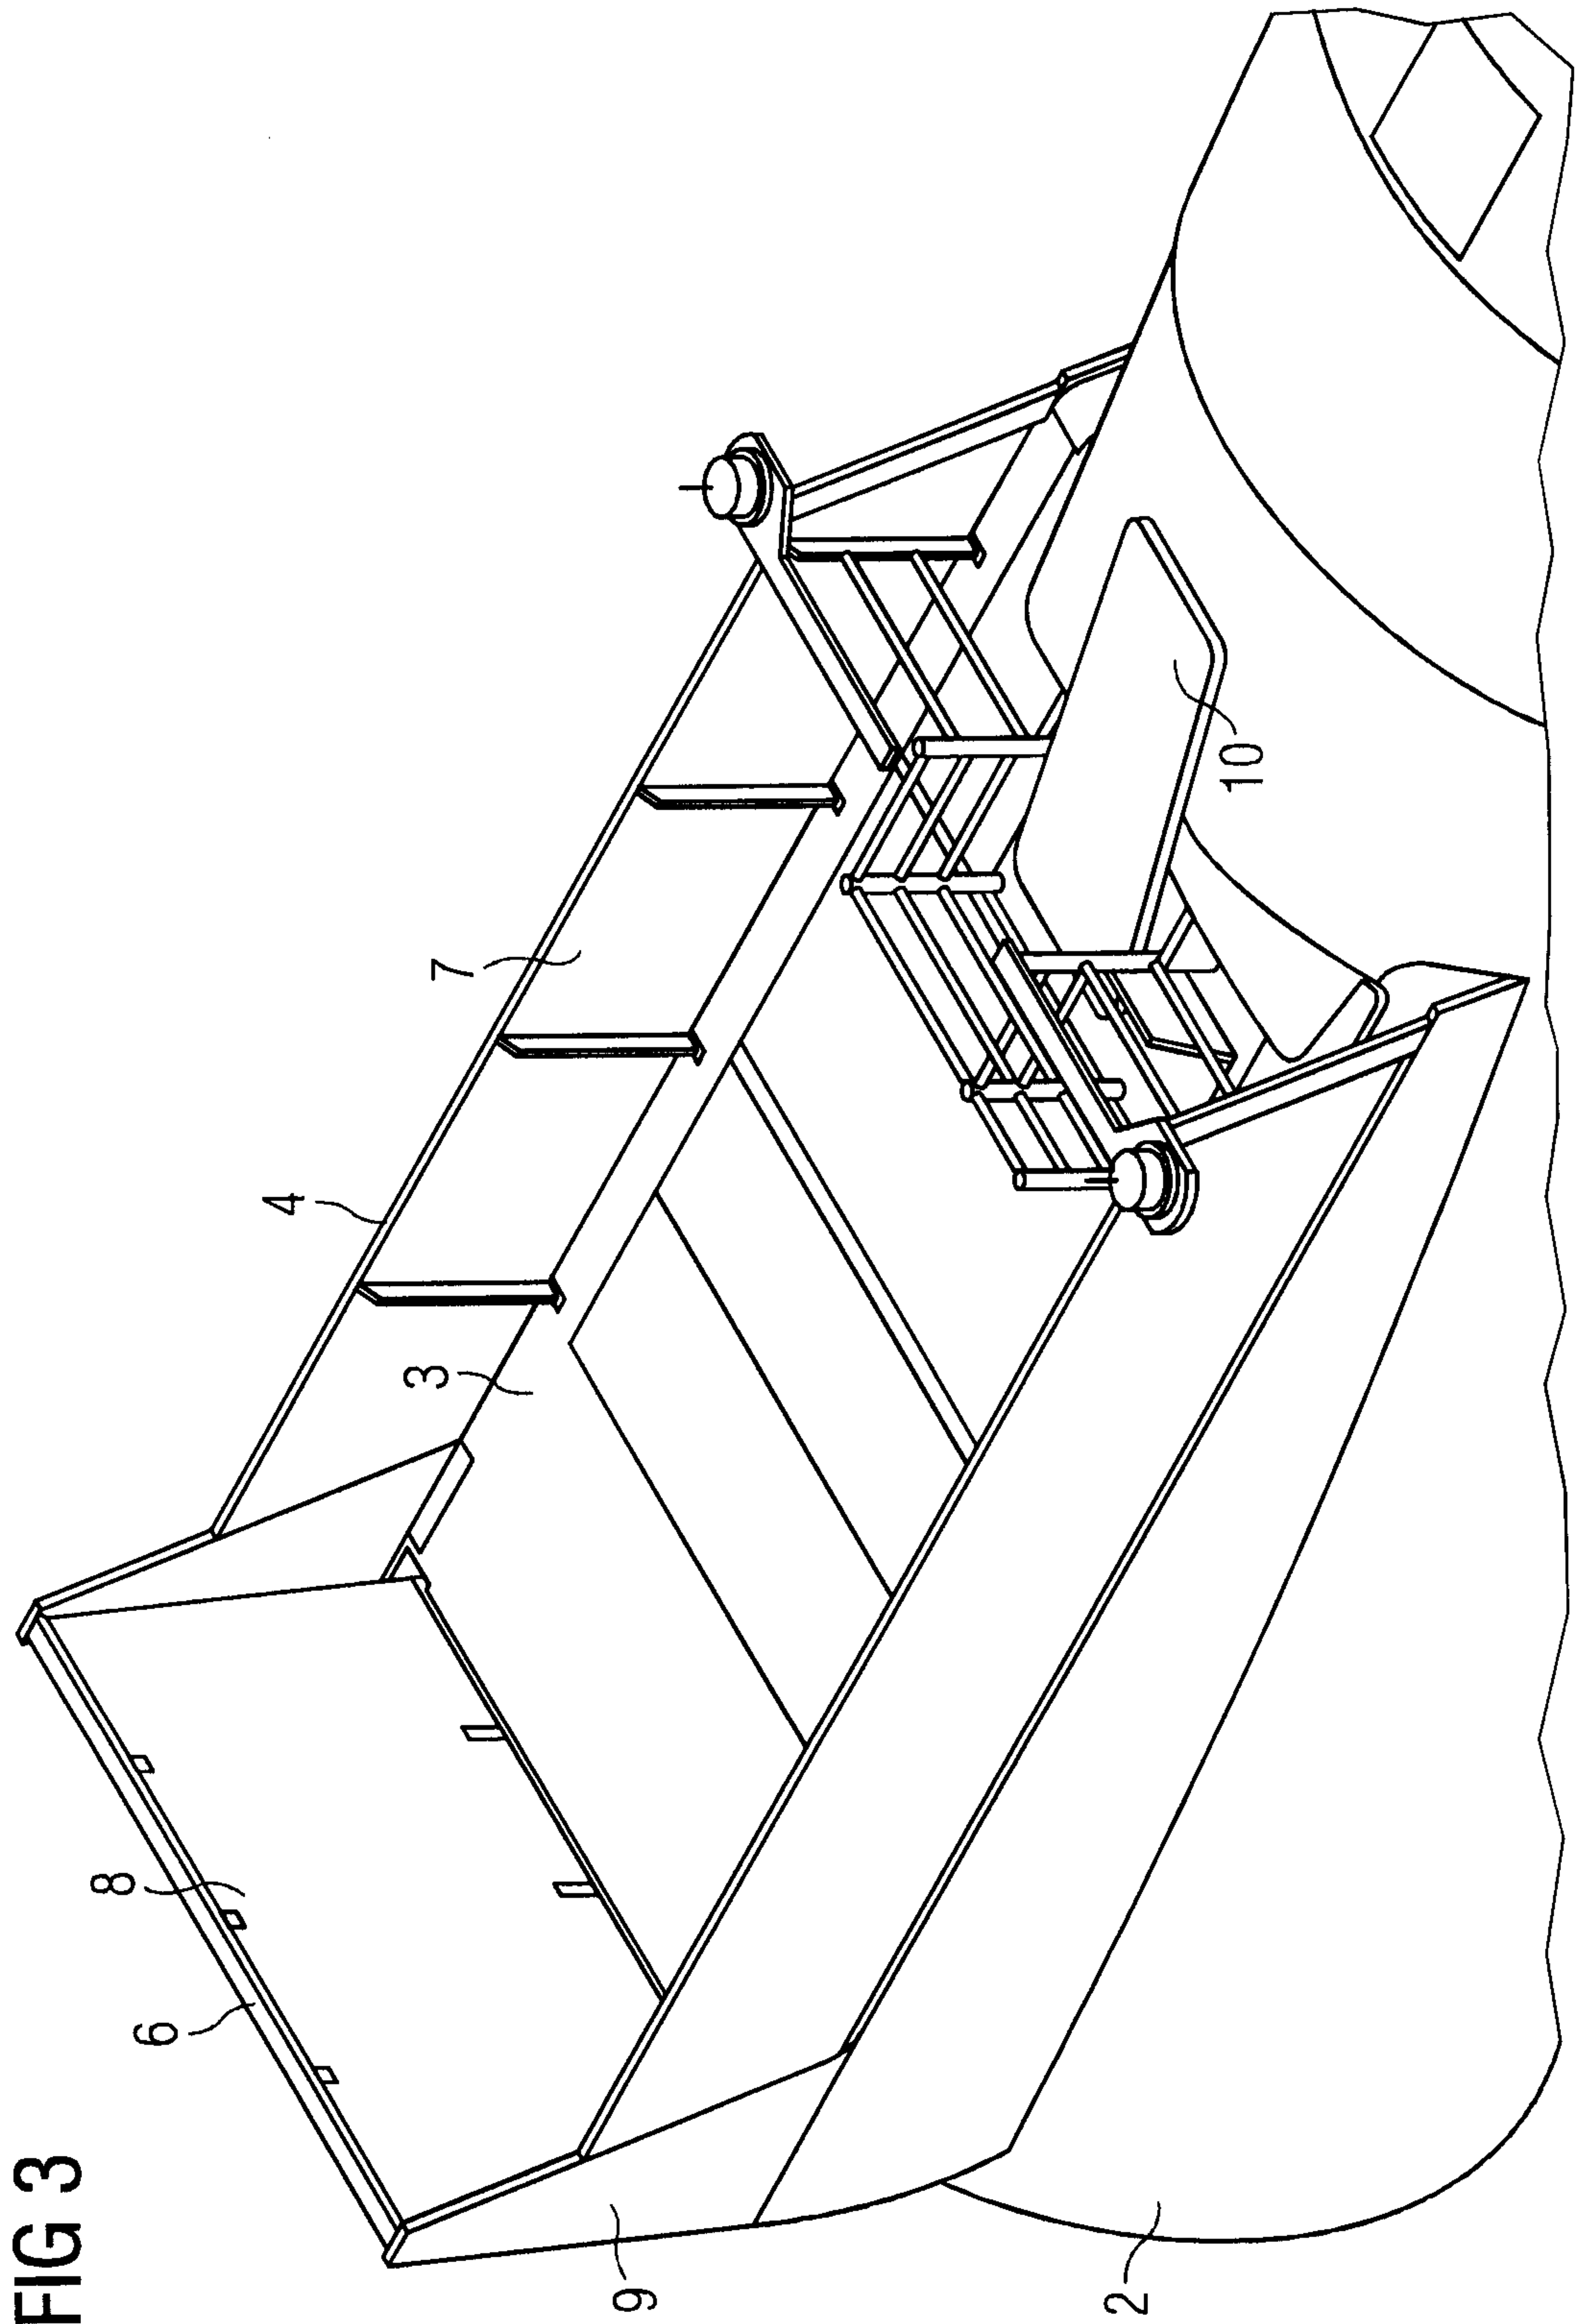

201109216

4/5

FIG 4

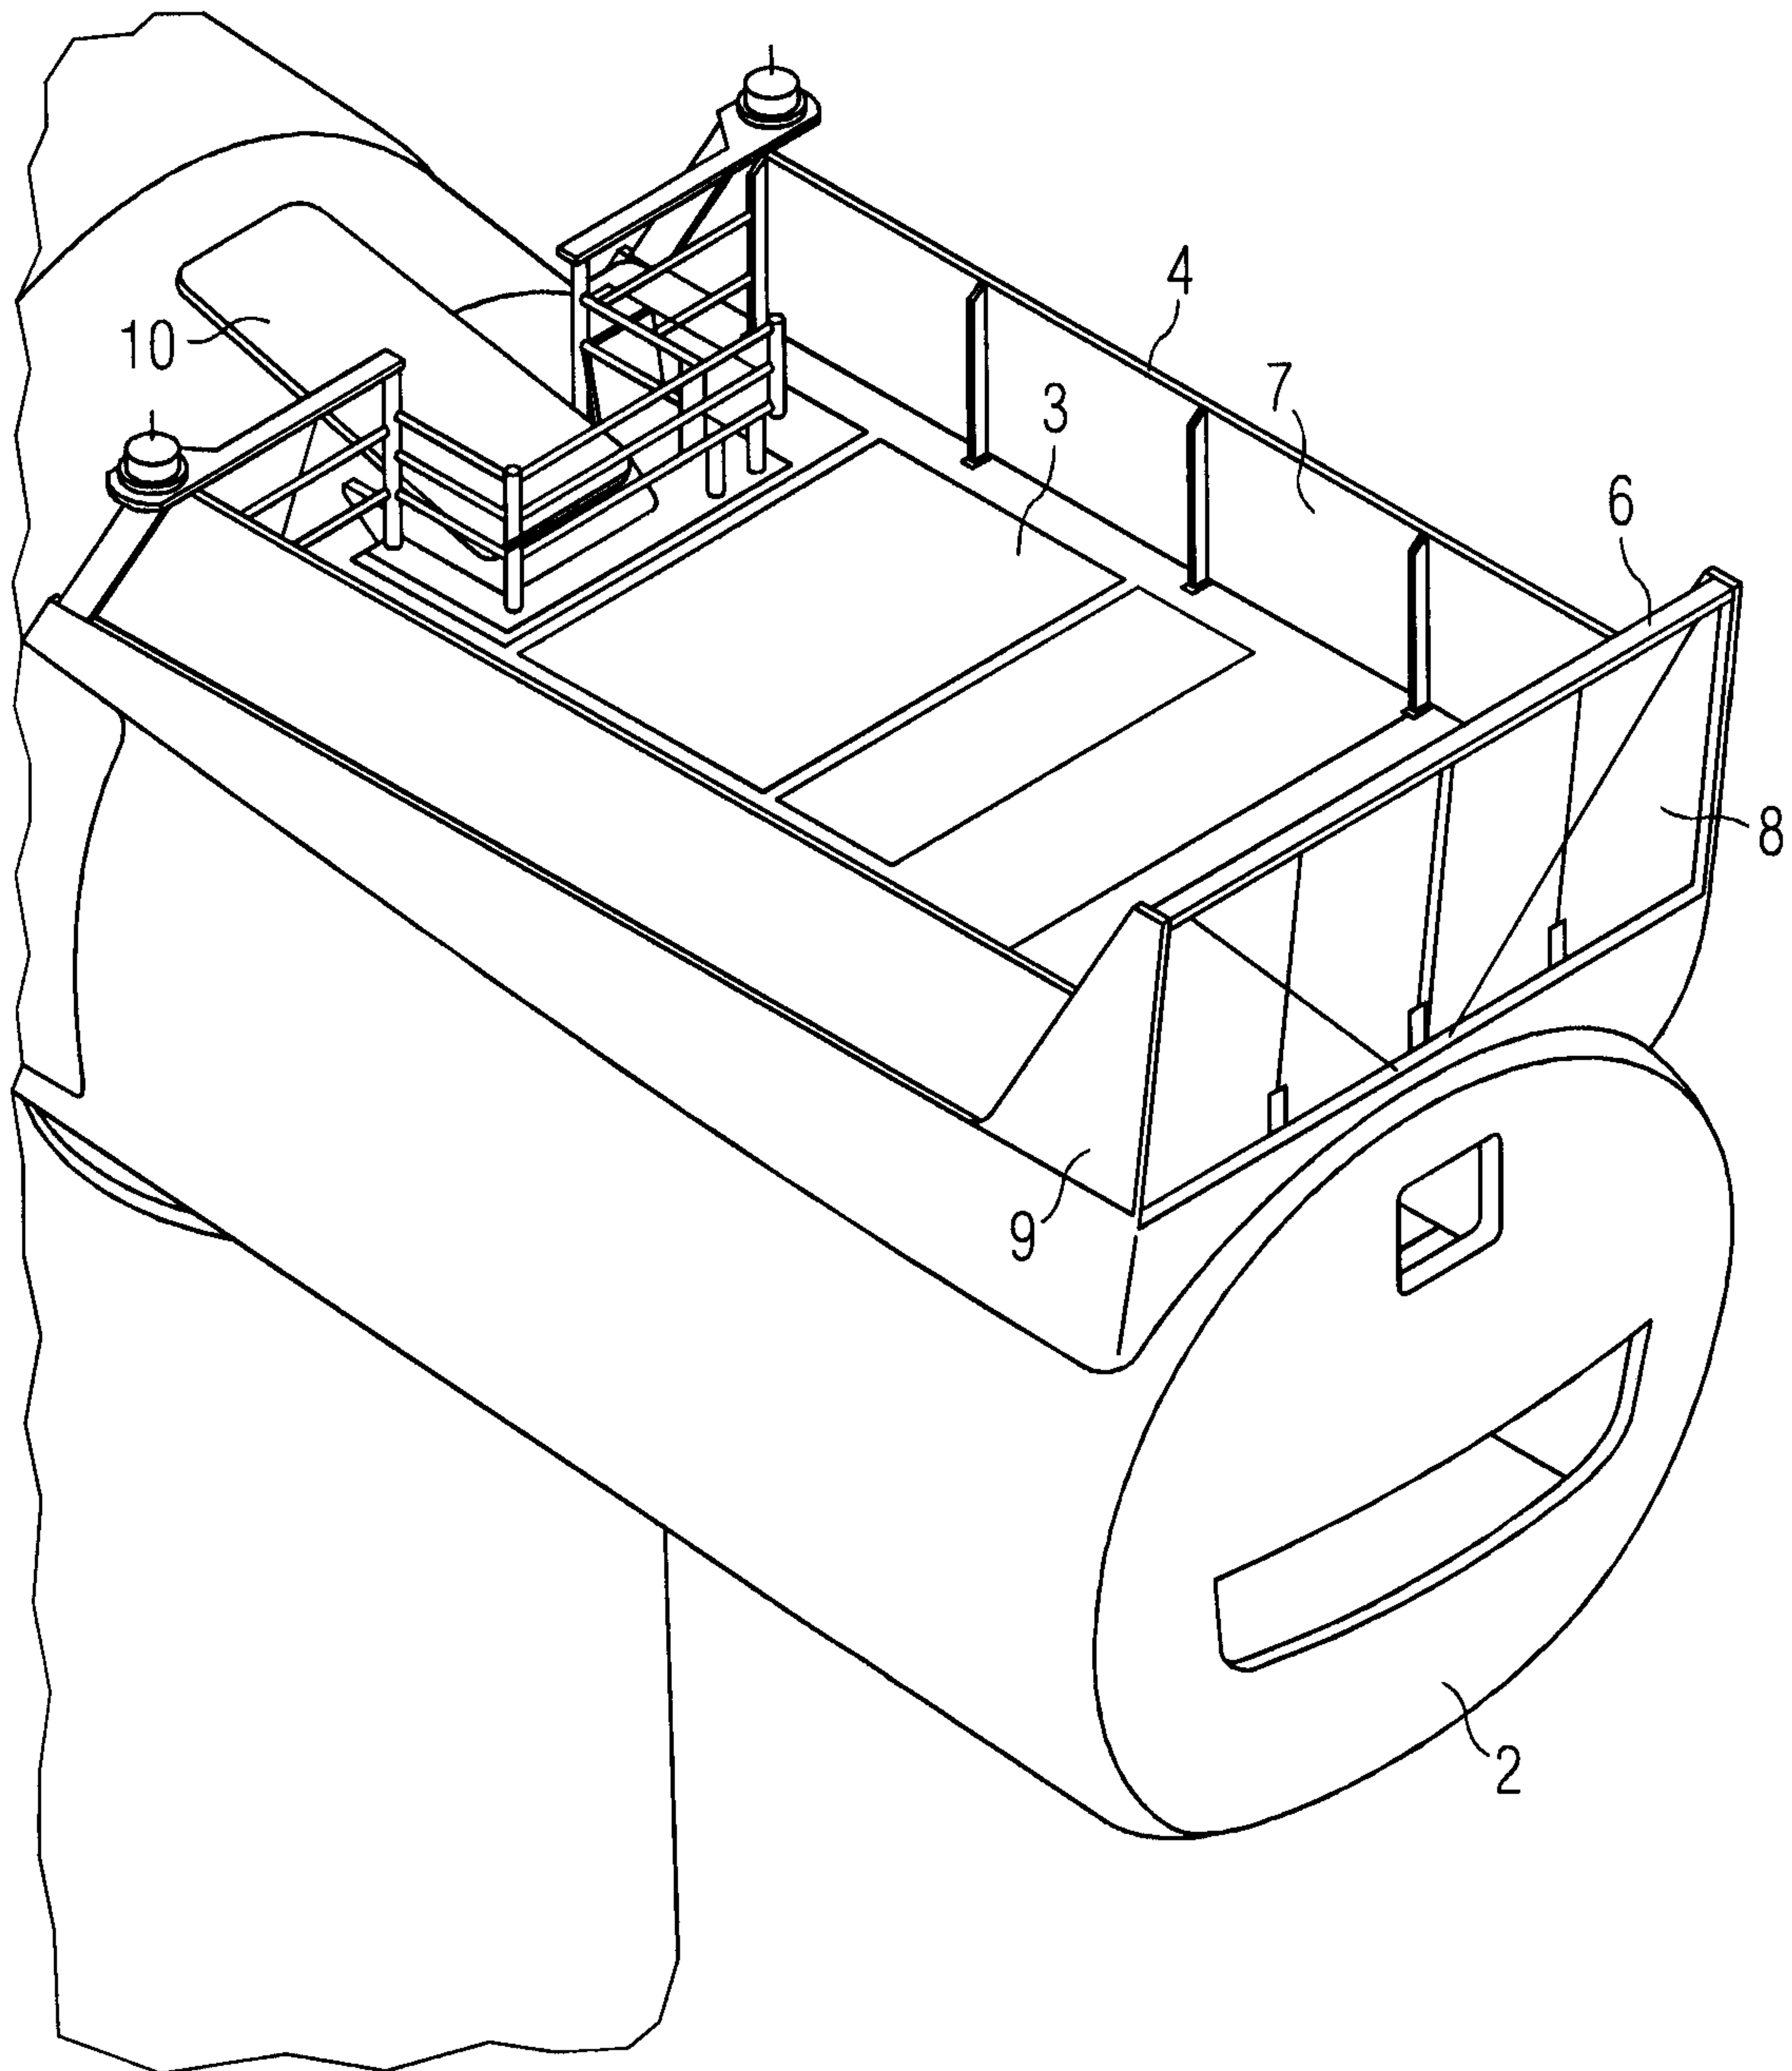

201109216

5/5

FIG 5

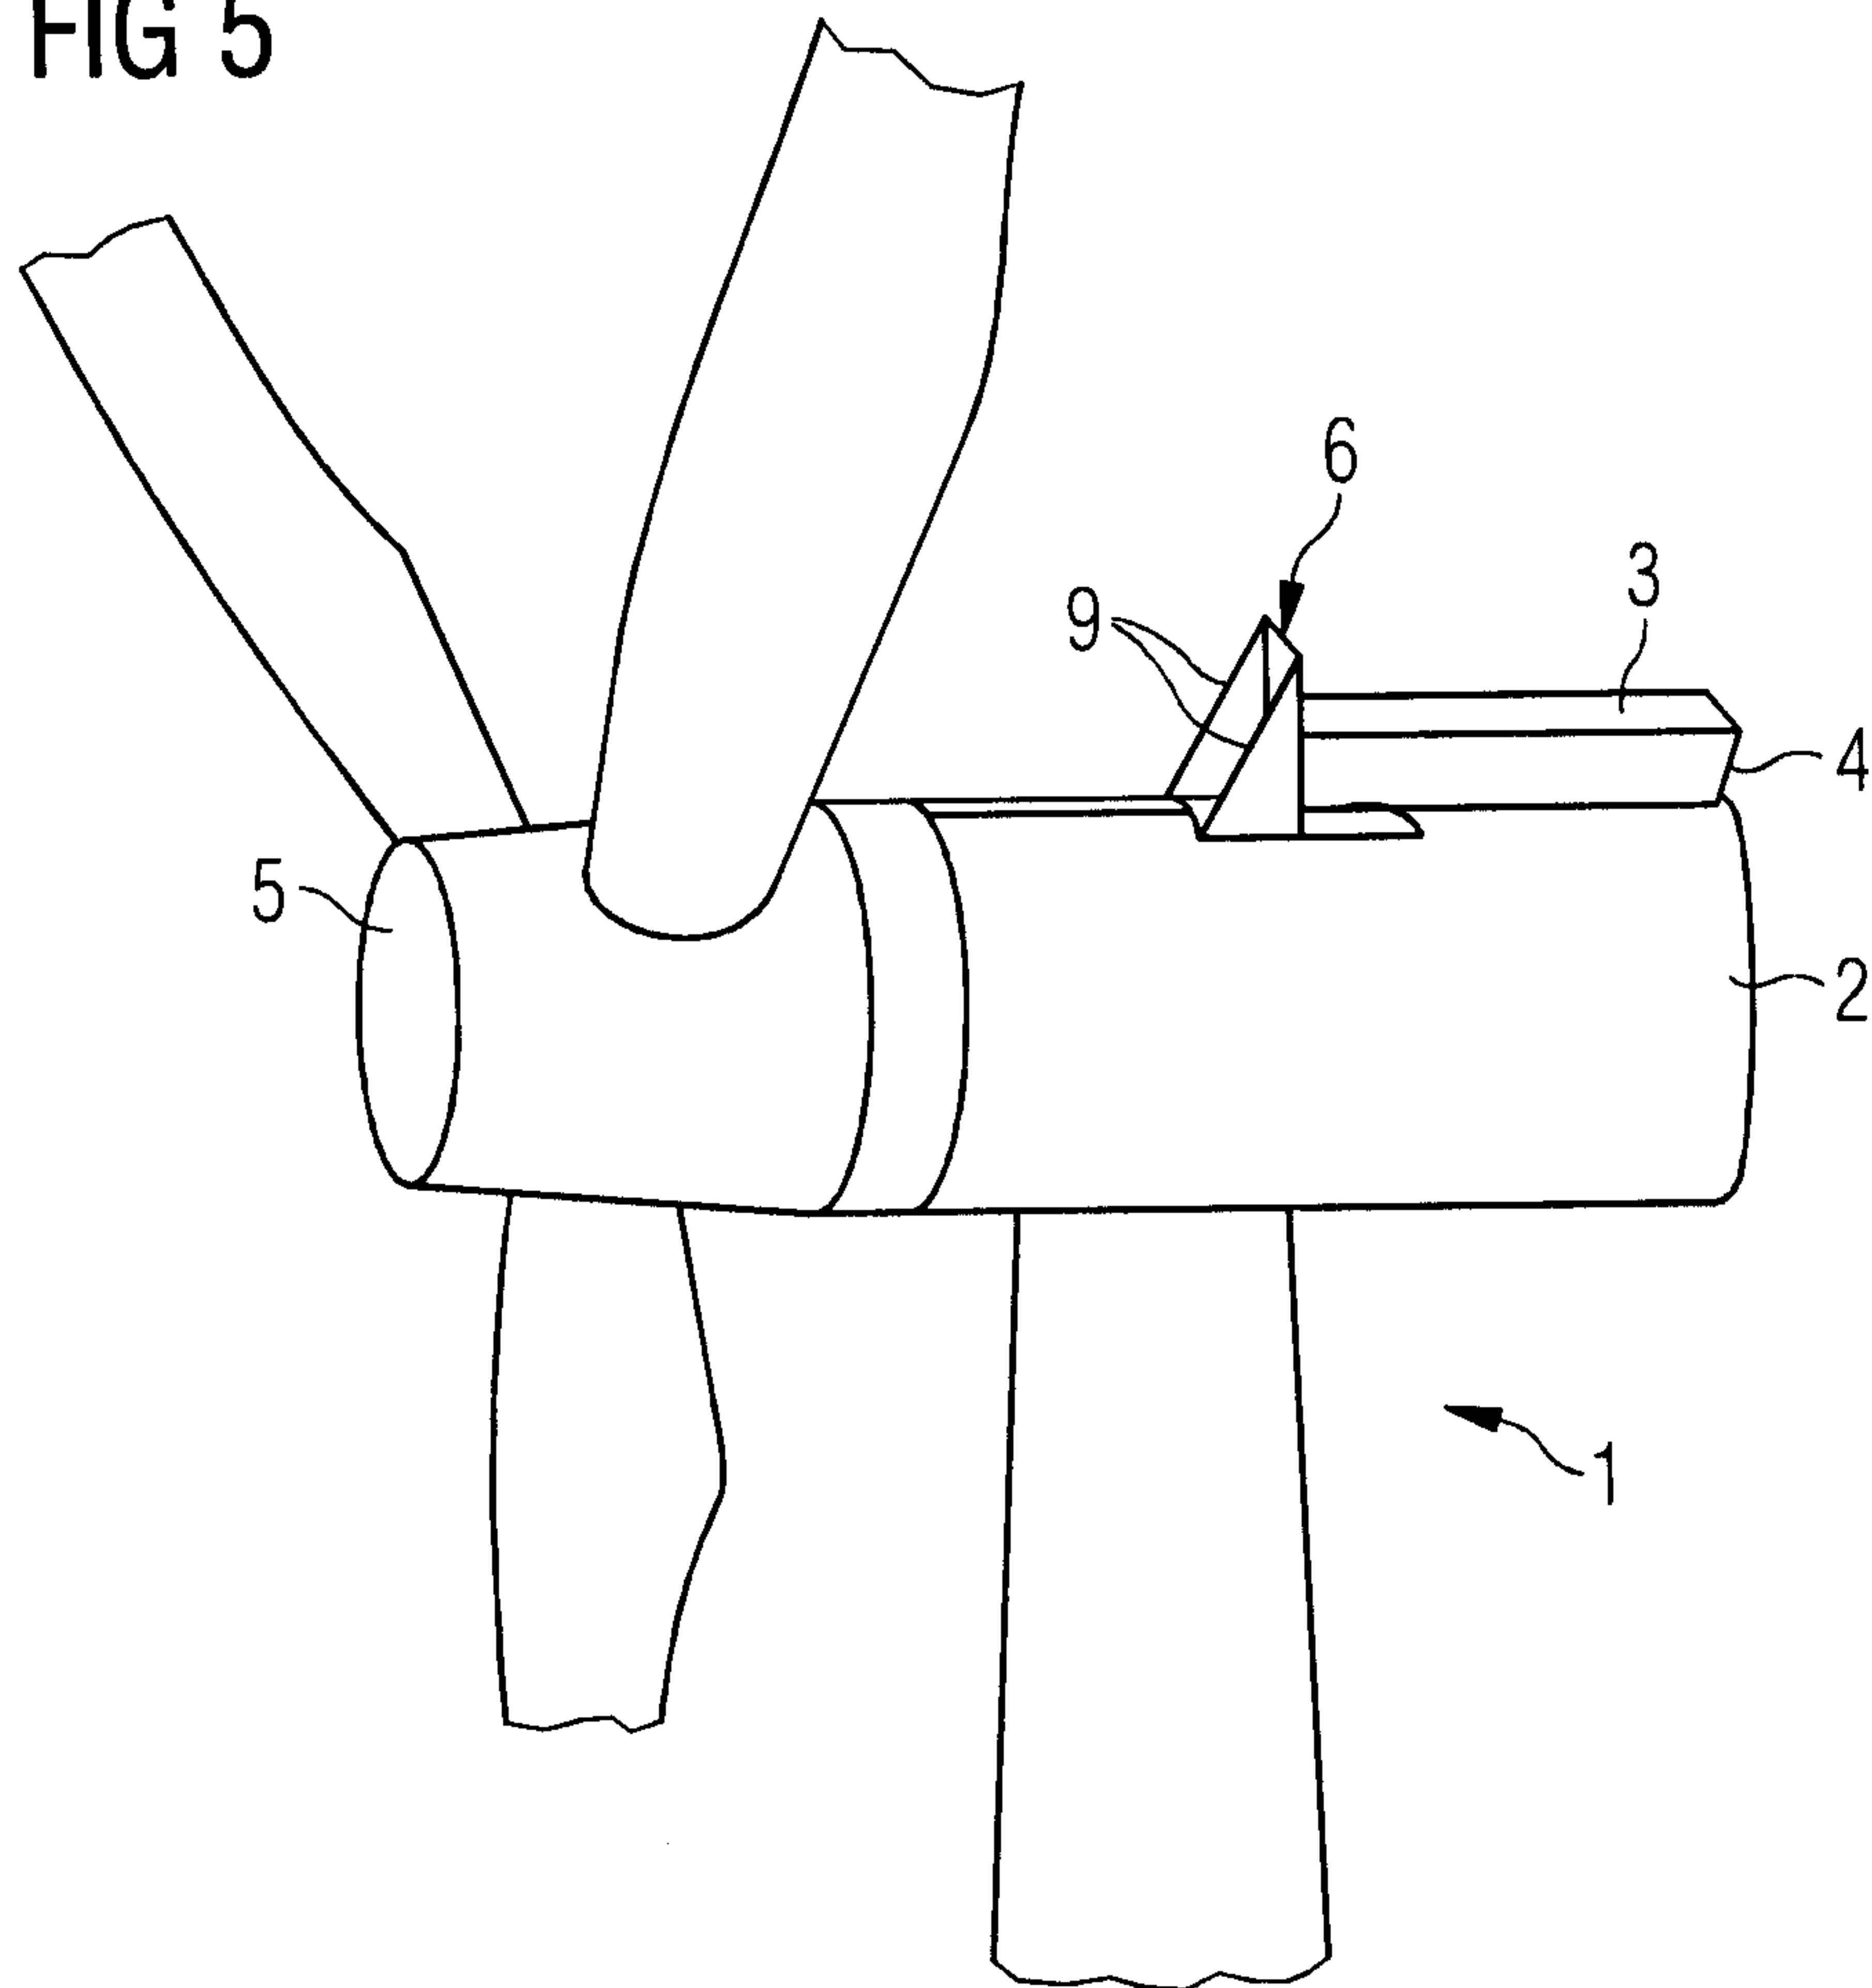


FIG 6

