



(86) Date de dépôt PCT/PCT Filing Date: 2004/09/02
(87) Date publication PCT/PCT Publication Date: 2005/06/23
(45) Date de délivrance/Issue Date: 2010/11/23
(85) Entrée phase nationale/National Entry: 2006/03/03
(86) N° demande PCT/PCT Application No.: US 2004/028549
(87) N° publication PCT/PCT Publication No.: 2005/056383
(30) Priorité/Priority: 2003/09/04 (US10/655,257)

(51) Cl.Int./Int.Cl. *B64C 1/12* (2006.01),
B29C 70/08 (2006.01), *B29C 70/34* (2006.01),
B29C 70/88 (2006.01), *B32B 15/14* (2006.01),
B64C 1/14 (2006.01)


(72) Inventeurs/Inventors:
ALBERS, ROBERT G., US;
NORDMAN, PAUL S., US

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SIM & MCBURNEY

(54) Titre : PANNEAU DE REVETEMENT TRANSPARENT IMPREGNE DE RESINE ET PROCEDE PERMETTANT DE
PRODUIRE CE PANNEAU

(54) Title: A RESIN INFUSED TRANSPARENT SKIN PANEL AND METHOD OF MAKING SAME

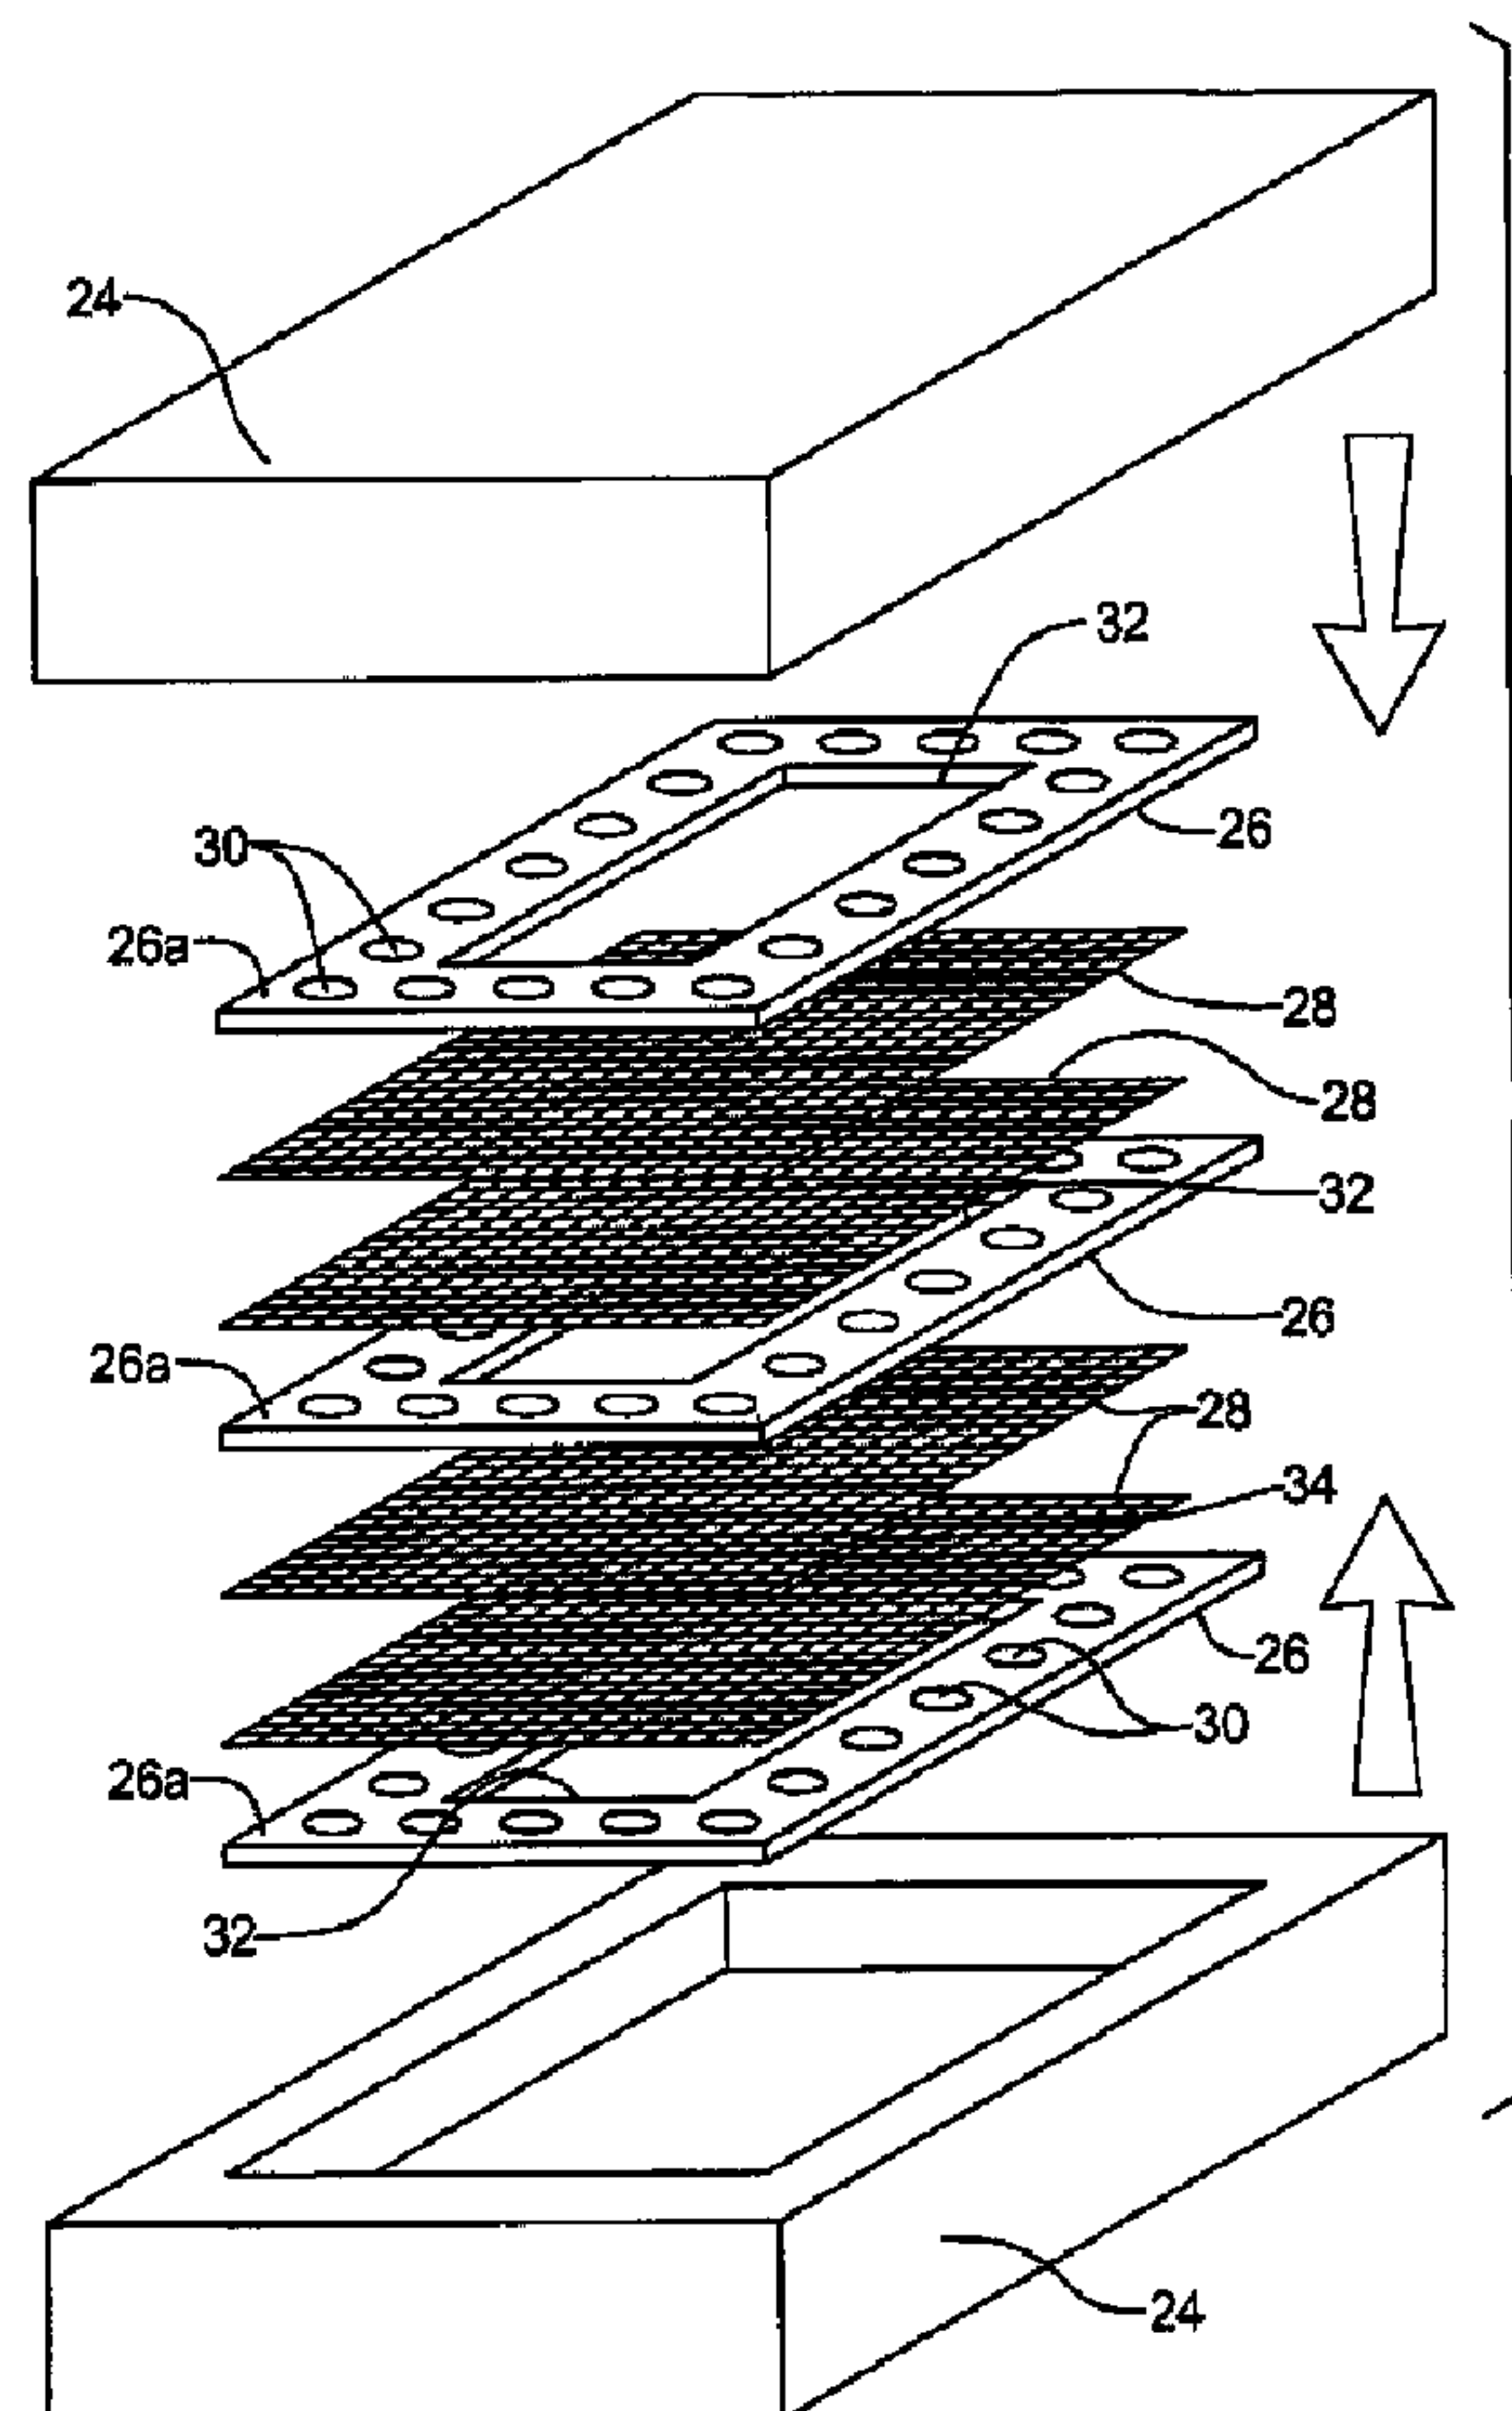

(57) Abrégé/Abstract:

A transparent skin panel for use in a mobile platform having a plurality of metal sheets (26). A fiber reinforced resin (36) at least partially surrounds the plurality of metal sheets (26). The fiber reinforced resin (36) is transparent. A cutout (32) is formed within

(57) **Abrégé(suite)/Abstract(continued):**

each of the plurality of metal sheets (26), which is filled by the transparent resin (36) during the manufacturing process. The cutout (32) corresponds to a window (16) in the transparent skin panel (10). The transparent skin panel thus eliminates the need for a bulky and heavy frame structure that has traditionally been employed on aircraft, and which has heretofore limited the size of windows used on an aircraft. The present invention thus enables larger windows to be incorporated on aircraft without increasing the weight or cost associated with such windows.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/056383 A3

(51) International Patent Classification⁷: **B64C 1/12**, 1/14,
B32B 15/14, B29C 70/08, 70/34, 70/88

G. [US/US]; 27432 146th Ave. S.E., Kent, WA 98042
(US). **NORDMAN, Paul, S.** [US/US]; 13530 SE 183rd
Place, Renton, WA 98058 (US).

(21) International Application Number:
PCT/US2004/028549

(74) Agent: **GALBRAITH, Ann, K.**; The Boeing Company,
P.O. Box 3707, M/S 11-XT, Seattle, WA 98124-2207 (US).

(22) International Filing Date:
2 September 2004 (02.09.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/655,257 4 September 2003 (04.09.2003) US

(71) Applicant (for all designated States except US): **THE
BOEING COMPANY** [US/US]; P.O. Box 3707, M/S
11-XT, Seattle, WA 98124-2207 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALBERS, Robert,**

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A RESIN INFUSED TRANSPARENT SKIN PANEL AND METHOD OF MAKING SAME

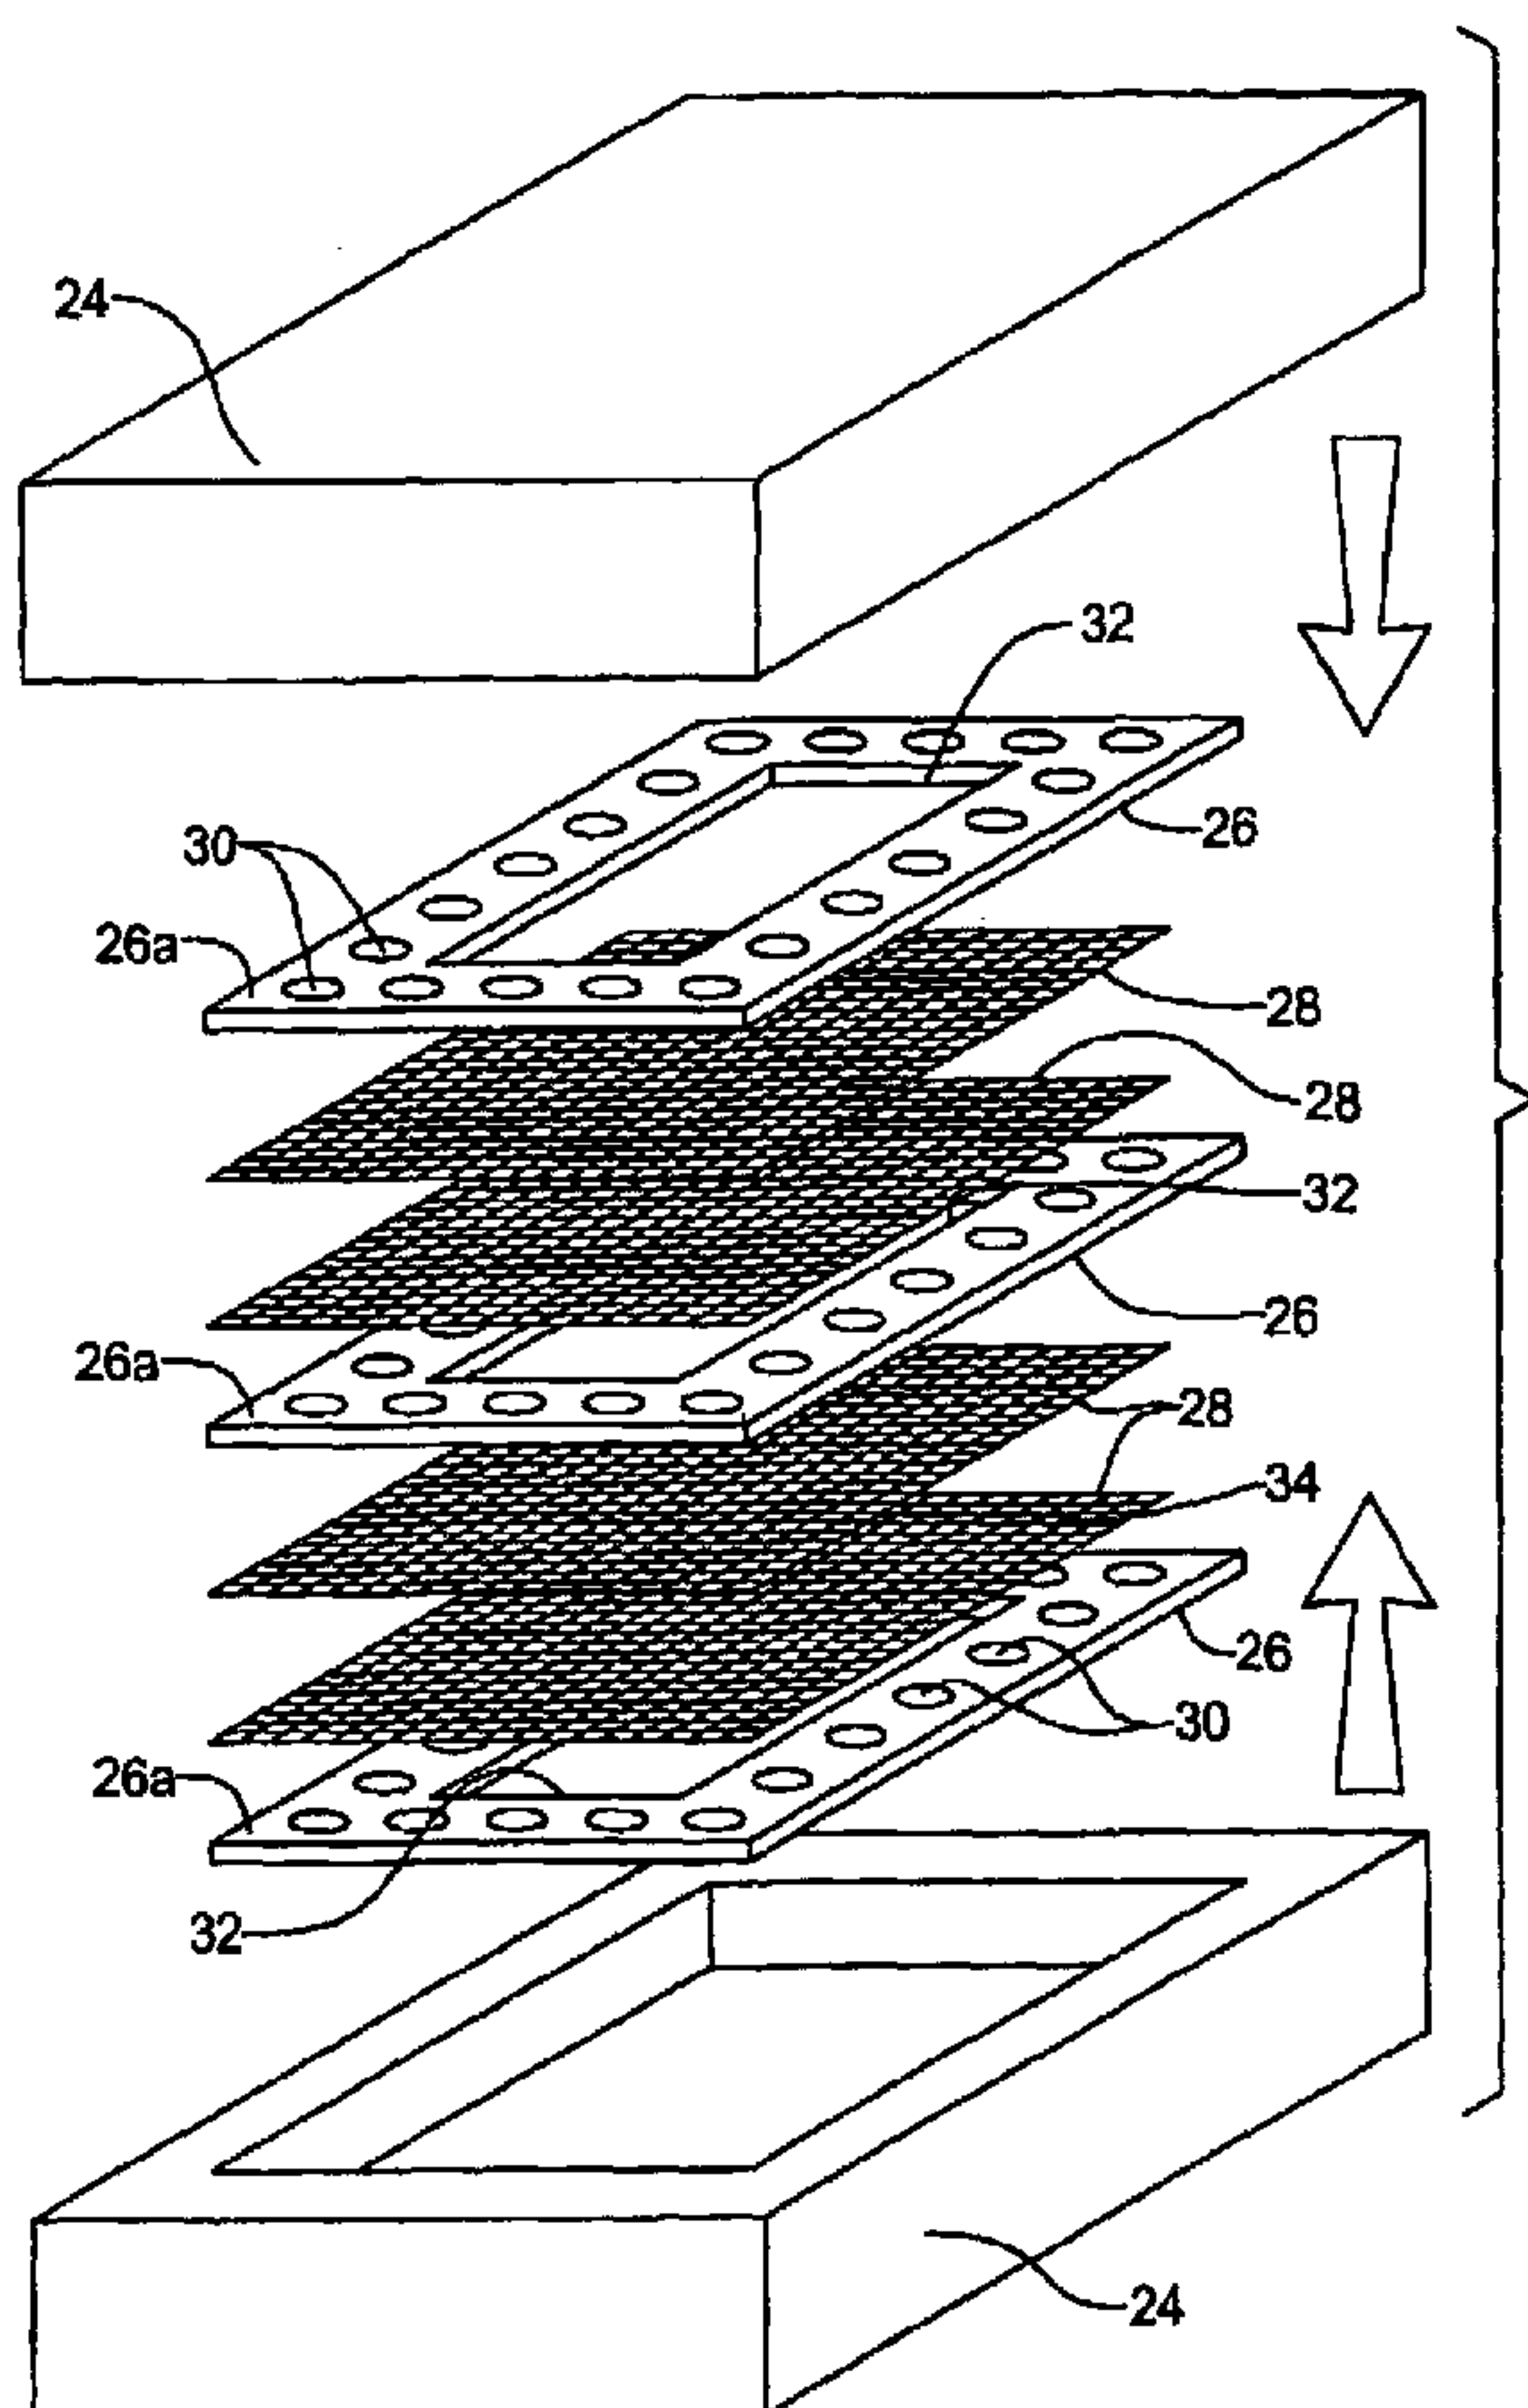

(57) Abstract: A transparent skin panel for use in a mobile platform having a plurality of metal sheets (26). A fiber reinforced resin (36) at least partially surrounds the plurality of metal sheets (26). The fiber reinforced resin (36) is transparent. A cutout (32) is formed within each of the plurality of metal sheets (26), which is filled by the transparent resin (36) during the manufacturing process. The cutout (32) corresponds to a window (16) in the transparent skin panel (10). The transparent skin panel thus eliminates the need for a bulky and heavy frame structure that has traditionally been employed on aircraft, and which has heretofore limited the size of windows used on an aircraft. The present invention thus enables larger windows to be incorporated on aircraft without increasing the weight or cost associated with such windows.

WO 2005/056383 A3

WO 2005/056383 A3



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) **Date of publication of the international search report:**
8 December 2005

(15) **Information about Correction:**

Previous Correction:

see PCT Gazette No. 32/2005 of 11 August 2005, Section II

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A RESIN INFUSED TRANSPARENT SKIN PANEL AND METHOD OF MAKING SAME

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to transparent aircraft skin panels and more particularly to a resin infused transparent skin panel and method of making same particularly well adapted for use in aircraft and aerospace applications.

10 BACKGROUND OF THE INVENTION

[0002] Passenger windows in most commercial aircraft are relatively small in size. This is due, in part, to the limited capabilities of current transparent window materials and also due to the heavy and complex support structure needed to support these windows within the frame of the aircraft.

15 **[0003]** Typically, these transparent window materials consist of a transparent polymer. While very successful and exhibiting such useful qualities as high durability and easy formation of complex shapes, these polymer windows do have a limited strength capability.

[0004] Windows require the heavy support structure in order to support
20 the window within the structural skin of the aircraft. This support structure generally includes window forgings, and stringers. Each component is designed to strengthen the skin panel which surrounds and supports the window. However, each component added in turn increases the cost and weight of the completed window assembly, thereby providing an incentive to keep passenger
25 windows relatively small.

[0005] Accordingly, it would be highly desirable to either decrease the weight of current passenger window assemblies in modern aircraft and to alternatively provide larger passenger windows.

[0006] Accordingly, it is an object of the present invention to provide a
30 method of making a transparent skin panel for use with an aircraft that provides an integrally formed transparent window panel that is both stronger and lighter than current passenger windows.

SUMMARY OF THE INVENTION

- [0007]** According to one aspect there is provided a transparent skin panel forming a single pane window assembly for use in a mobile platform, comprising: at least one metal sheet having a cutout portion and a perimeter portion having a plurality of spaced apart perforations; a fiber reinforced preform disposed against the at least one metal sheet, the fiber reinforced preform being transparent; and an optically transparent resin filling the cutout portion saturating the preform, and filling the perforations to form a single pane window assembly having a transparent skin panel portion.
- [0007a]** According to another aspect there is provided a method of forming a structural panel suitable for use as a single pane window, comprising: using at least one metal sheet to form a frame structure, wherein the frame structure defines an opening and has a perimeter portion having a plurality of spaced apart perforations; applying a generally transparent, fiber preform against the metal sheet to cover the metal sheet and fill the opening; and infusing the metal sheet and fiber preform with a generally optically transparent resin to saturate the preform and the perforations in the metal sheet and fill the opening to form an integrally constructed, single pane window assembly.
- [0007b]** According to yet another aspect there is provided a single pane window panel sufficiently strong to be used in forming a structural portion of an aircraft fuselage, the window panel comprising: a single window pane having at least one layer of optically clear, fiber reinforced material for providing an optically transparent area of the window panel; and at least one layer of metallic material disposed against a peripheral portion of the window pane to further reinforce the peripheral portion of the window pane without occluding the optically transparent area, and enabling securing of the window panel within an opening in a portion of the aircraft fuselage to form an integral portion of the fuselage.
- [0007c]** According to still yet another aspect there is provided a transparent skin panel forming a window assembly for use in a mobile platform and having sufficient structural strength to form a structural portion of

a fuselage of the mobile platform, comprising: at least one metal sheet having a cutout portion and a perimeter portion that bounds the cutout portion; and an optically transparent fiber preform disposed against the one metal sheet, the fiber preform having an optically transparent resin so that the fiber preform
 5 forms an optically transparent and structurally rigid portion of the transparent skin panel.

[0007d] According to still yet another aspect there is provided a light weight aircraft fuselage skin panel having an array of integrated optically clear single pane window assemblies, the skin panel comprising: one metal sheet
 10 having a central cutout portion and a perimeter portion having a plurality of spaced apart perforations; a fiber reinforced preform disposed against the one metal sheet, the fiber reinforced preform extending continuously across one dimension of the metal sheet such that fibers of the fiber reinforced preform reinforce the skin panel along a periphery of the central cutout portion; a
 15 portion of the metal sheet at least partially covering the preform and forming a portion of an outer surface of at least one of the window assemblies; and a resin filling the cutout portion saturating the preform and filling the perforations in the metal sheet to form an unitary optically clear fiber reinforced window assembly having an optically transparent skin panel portion exhibiting a resin
 20 bonded integrated structure that substantially reduces a weight of said optically clear, fiber reinforced window assembly.

[0007e] According to still yet another aspect there is provided a light weight aircraft fuselage skin panel having an array of integrated, optically clear single pane window assemblies, the skin panel comprising: a first metal
 25 sheet having a plurality of central cutout portions, each said cutout portion having a perimeter portion; each said perimeter portion having a plurality of spaced apart perforations spaced circumferentially therearound; a fiber reinforced preform disposed against the first metal sheet, the fiber reinforced preform extending continuously across one dimension of the first metal sheet
 30 such that fibers of the fiber reinforced preform reinforce the skin panel along each said perimeter portion of each said central cutout portion; a portion of the first metal sheet at least partially covering the fiber reinforced preform and

forming a portion of an outer surface of each said window assembly; and an optically transparent resin filling each of the central cutout portions and saturating the fiber reinforced preform, and filling the perforations in each said perimeter portion of the first metal sheet, to form an integrated, unitary skin panel having a plurality of optically clear, fiber reinforced window assemblies longitudinally spaced apart from one another that substantially reduces a weight of said skin panel while providing a needed level of structural strength.

5 [0008] Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

15 [0009] The present invention will become more fully understood from the detailed description and the accompanying drawings, wherein:

[0010] Figure 1 is a partial view of a front of an aircraft having a transparent skin panel constructed according to the principles of the present invention;

20 [0011] Figure 2 is a side cross sectional view of the transparent skin panel taken in the direction of arrow 2-2 in Figure 1;

[0012] Figure 3 is an exploded perspective view of the materials used to construct the transparent skin panel of Figure 2; and

[0013] Figure 4 is a cross sectional view of a portion of the transparent skin panel of Figure 2 illustrating the layering and resin flow during the construction of the transparent skin panel.

5 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

[0014] The following description of the preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[0015] Referring to Figure 1, there is illustrated a transparent skin panel
10 10 constructed according to the principles of the present invention shown mounted to an aircraft 12. The transparent skin panel 10 includes a skin portion 14 and a window portion 16. While in the particular example provided the transparent skin panel 10 is illustrated as including a side window of the aircraft 12, it is to be understood that the transparent skin panel 10 may be used in any
15 portion of the aircraft 12 and may include a cockpit window, a side window, a door, or an unbroken surface.

[0016] With reference to Figure 2, the transparent skin panel 10 is coupled to the structural frame component (not shown) of the aircraft 12. Skin portion 14 includes a plurality of metal sheets 20 and a fiber reinforced resin 22.
20 The metal sheets 20 are suspended within the fiber reinforced resin 22. In the particular example provided, three metal sheets 20 are illustrated. It is to be understood, however, that a greater or lesser number of metal sheets 20 may be used as are desired. Moreover, while the metal sheets 20 are illustrated as spaced on each side of the fiber reinforced resin 22 and within the fiber
25 reinforced resin 22, the metal sheets 20 may be located anywhere within the fiber reinforced resin 22, as will be described in greater detail below.

[0017] The window portion 16 is preferably comprised solely of the fiber reinforced resin 22. The fiber reinforced resin 22 is transparent for allowing viewing therethrough as will be described in greater detail below.

30 **[0018]** Turning now to Figure 3, the method of constructing the transparent skin panel 10 will now be described. A mold 24 is provided, illustrated schematically in Figure 3, capable of receiving the components of the transparent skin panel 10. The mold 24 has a cavity (not shown) shaped to form

the outer surface of the transparent skin panel 10. This shape, while illustrated as essentially rectangular and flat in Figures 1 and 2, may be any shape as required by the contour of the aircraft 12, for example round and curved.

5 **[0019]** A plurality of metal sheets 26 and a plurality of fiber preforms 28 are then provided. The metal sheets 26 include a plurality of perforations 30 formed therethrough. The perforations 30 are illustrated as circular although any size or shape may be employed. Each metal sheet 26 includes a cutout 32 in the center thereof. The cutout 32 in each metal sheet 26 corresponds to the window portion 16 of the assembled transparent skin panel 10. Again, while the cutout
10 32 is illustrated as circular, it may be of any shape including for example oval or rectangular. The metal sheets 26 are preferably made of aluminum due to its light weight and high strength, although various other metals may be employed including, for example, titanium.

15 **[0020]** The fiber preforms 28 each include a plurality of fibers 34 woven together to form a fiber mesh. The orientation of the plies is based on the desired directional strength of the resulting structure and may have unidirectional or bi-directional strength (e.g. the fibers 34 may run either in one direction (not shown) or two directions).

20 **[0021]** The metal sheets 26 and fiber preforms 28 are then inserted into the mold 24 in an order corresponding to the desired order of sheets in the transparent skin panel 10. In the particular example provided, the metal sheets 26 alternate with double layers of the fiber preforms 28.

25 **[0022]** The mold 24 is then either closed, or a vacuum bag is applied and a resin is infused into the mold using a process such as Controlled Atmospheric Pressure Resin Infusion (CAPRI), Seemann Composite Resin Infusion Molding Process (SCRIMPTM), Vacuum Assisted Resin Transfer Molding (VARTM), Resin Transfer Molding (RTM), or Resin Film Infusion (RFI). Other suitable methods of infusing resin into the mold 24 not listed herein may also be employed.

30 **[0023]** As best seen in Figure 4, the resin, indicated by reference numeral 36, flows in the direction of the arrows through the perforations 30. The resin 36 moves through the fiber preforms 28, thereby fully wetting (e.g. fully covering and saturating) the fibers 34. The transparent skin panel 10 is then

cured over a period of time until the resin 36 hardens. The mold 24 is then opened and the transparent skin panel 10 removed. The metal sheets 26 correspond to the metal sheets 20 (Figure 2) and the resin 36 and fiber preforms 28 correspond to the fiber reinforced resin 22 (Figure 2).

5 **[0024]** Preferably the resin is an aliphatic epoxy which is resistant to ultraviolet degradation. However, other alternate resin materials may be employed. To impart transparency, the resin 36 is transparent and the fibers 34 substantially transparent within the transparent skin panel 10. The index of refraction of the fibers 34 is matched to the index of refraction of the resin 36. In
10 this way, the transparent skin panel 10 is fully transparent in the areas of the cutouts 32 in the metal sheets 26.

[0025] By integrally forming the transparent reinforced resin 22 with the metal sheets 20, a solid and high strength transparent skin panel 10 is provided. Simultaneously, the heavy support structure typically used to frame aircraft
15 windows is substantially eliminated, thus reducing the weight of the aircraft. This in turn allows for larger windows to be employed, if desired, without increasing the cost and weight of the aircraft.

[0026] While the present invention has been described in connection with aircraft windows, it will be appreciated that the invention can be incorporated
20 on other forms of mobile platforms such as buses, trains, ships, etc., where composite panels may be employed, or even on fixed structures where lightweight windows are needed.

[0027] The description of the invention is merely exemplary in nature and, thus, variations that do not depart from the gist of the invention are intended
25 to be within the scope of the invention. Such variations are not to be regarded as a departure from the spirit and scope of the invention.

What is claimed is:

1. A transparent skin panel forming a single pane window assembly for use in a mobile platform, comprising:
 - at least one metal sheet having a cutout portion and a perimeter portion having a plurality of spaced apart perforations;
 - a fiber reinforced preform disposed against the at least one metal sheet, the fiber reinforced preform being transparent; and
 - an optically transparent resin filling the cutout portion saturating the preform, and filling the perforations to form a single pane window assembly having a transparent skin panel portion.
2. The transparent skin panel of claim 1, wherein the metal sheet is comprised of aluminum.
3. The transparent skin panel of claim 1, wherein the metal sheet is comprised of titanium.
4. The transparent skin panel of claim 1, wherein the fiber reinforced preform fully covers the at least one metal sheet.
5. The transparent skin panel of claim 1, wherein the fiber reinforced preform includes a plurality of fiber mesh sheets one atop the other.
6. A method of forming a structural panel suitable for use as a single pane window, comprising:
 - using at least one metal sheet to form a frame structure, wherein the frame structure defines an opening and has a perimeter portion having a plurality of spaced apart perforations;
 - applying a generally transparent, fiber preform against the metal sheet to cover the metal sheet and fill the opening; and
 - infusing the metal sheet and fiber preform with a generally optically

transparent resin to saturate the preform and the perforations in the metal sheet and fill the opening to form an integrally constructed, single pane window assembly.

7. The method of claim 6, wherein applying the generally transparent, fiber reinforced resin includes applying an aliphatic epoxy resin.

8. The method of claim 6, wherein using at least one metal sheet comprises using an aluminum sheet.

9. The method of claim 6, wherein applying a generally transparent, fiber reinforced resin comprises applying an aliphatic epoxy resin having a weave of fibers, wherein the fibers have an index of refraction matching an index of refraction of the resin.

10. The method of claim 6, wherein applying a generally transparent, fiber reinforced resin comprises applying an aliphatic epoxy resin.

11. A single pane window panel sufficiently strong to be used in forming a structural portion of an aircraft fuselage, the window panel comprising:

a single window pane having at least one layer of optically clear, fiber reinforced material for providing an optically transparent area of the window panel; and

at least one layer of metallic material disposed against a peripheral portion of the window pane to further reinforce the peripheral portion of the window pane without occluding the optically transparent area, and enabling securing of the window panel within an opening in a portion of the aircraft fuselage to form an integral portion of the fuselage.

12. The window panel of claim 11, wherein the layer of fiber reinforced material and the layer of metallic material are integrally formed to form the single window pane.

13. The window panel of claim 11, wherein the window panel is structurally integrated with the fuselage to form an integral, load bearing portion of the fuselage.

14. The window panel of claim 11, wherein the window pane forms a high strength window pane.

15. The window panel of claim 11, the window pane having a first side and a second side, the first side being exposed to cabin air within a cabin of the aircraft, and the second side being exposed to ambient air outside the aircraft.

16. A transparent skin panel forming a window assembly for use in a mobile platform and having sufficient structural strength to form a structural portion of a fuselage of the mobile platform, comprising:

at least one metal sheet having a cutout portion and a perimeter portion that bounds the cutout portion; and

an optically transparent fiber preform disposed against the one metal sheet, the fiber preform having an optically transparent resin so that the fiber preform forms an optically transparent and structurally rigid portion of the transparent skin panel.

17. The transparent skin panel of claim 16, the one metal sheet being integrally formed with the optically transparent fiber preform to form a single piece, integrated assembly.

18. A light weight aircraft fuselage skin panel having an array of integrated optically clear single pane window assemblies, the skin panel comprising:

one metal sheet having a central cutout portion and a perimeter portion having a plurality of spaced apart perforations;

a fiber reinforced preform disposed against the one metal sheet, the fiber reinforced preform extending continuously across one dimension of the

metal sheet such that fibers of the fiber reinforced preform reinforce the skin panel along a periphery of the central cutout portion;

a portion of the metal sheet at least partially covering the preform and forming a portion of an outer surface of at least one of the window assemblies; and

a resin filling the cutout portion saturating the preform and filling the perforations in the metal sheet to form an unitary optically clear fiber reinforced window assembly having an optically transparent skin panel portion exhibiting a resin bonded integrated structure that substantially reduces a weight of said optically clear, fiber reinforced window assembly.

19. The skin panel of claim 18, further comprising:

a second metal sheet covering the opposite side of the preform forming a portion of the outer surface of the at least one window assembly having an integrated metal/preform-metal cross section construction.

20. The skin panel of claim 19, further comprising:

a second fiber reinforced preform disposed against a second metal sheet; and

a third metal sheet disposed between the first and second metal sheets and forming a portion of the at least one window assembly having an integrated metal-preform-metal-preform-metal cross section.

21. The skin panel of claim 18, further comprising:

at least two window panes longitudinally spaced apart.

22. A light weight aircraft fuselage skin panel having an array of integrated, optically clear single pane window assemblies, the skin panel comprising:

a first metal sheet having a plurality of central cutout portions, each said cutout portion having a perimeter portion;

each said perimeter portion having a plurality of spaced apart perforations spaced circumferentially therearound;

a fiber reinforced preform disposed against the first metal sheet, the fiber reinforced preform extending continuously across one dimension of the first metal sheet such that fibers of the fiber reinforced preform reinforce the skin panel along each said perimeter portion of each said central cutout portion;

a portion of the first metal sheet at least partially covering the fiber reinforced preform and forming a portion of an outer surface of each said window assembly; and

an optically transparent resin filling each of the central cutout portions and saturating the fiber reinforced preform, and filling the perforations in each said perimeter portion of the first metal sheet, to form an integrated, unitary skin panel having a plurality of optically clear, fiber reinforced window assemblies longitudinally spaced apart from one another that substantially reduces a weight of said skin panel while providing a needed level of structural strength.

FIG 1


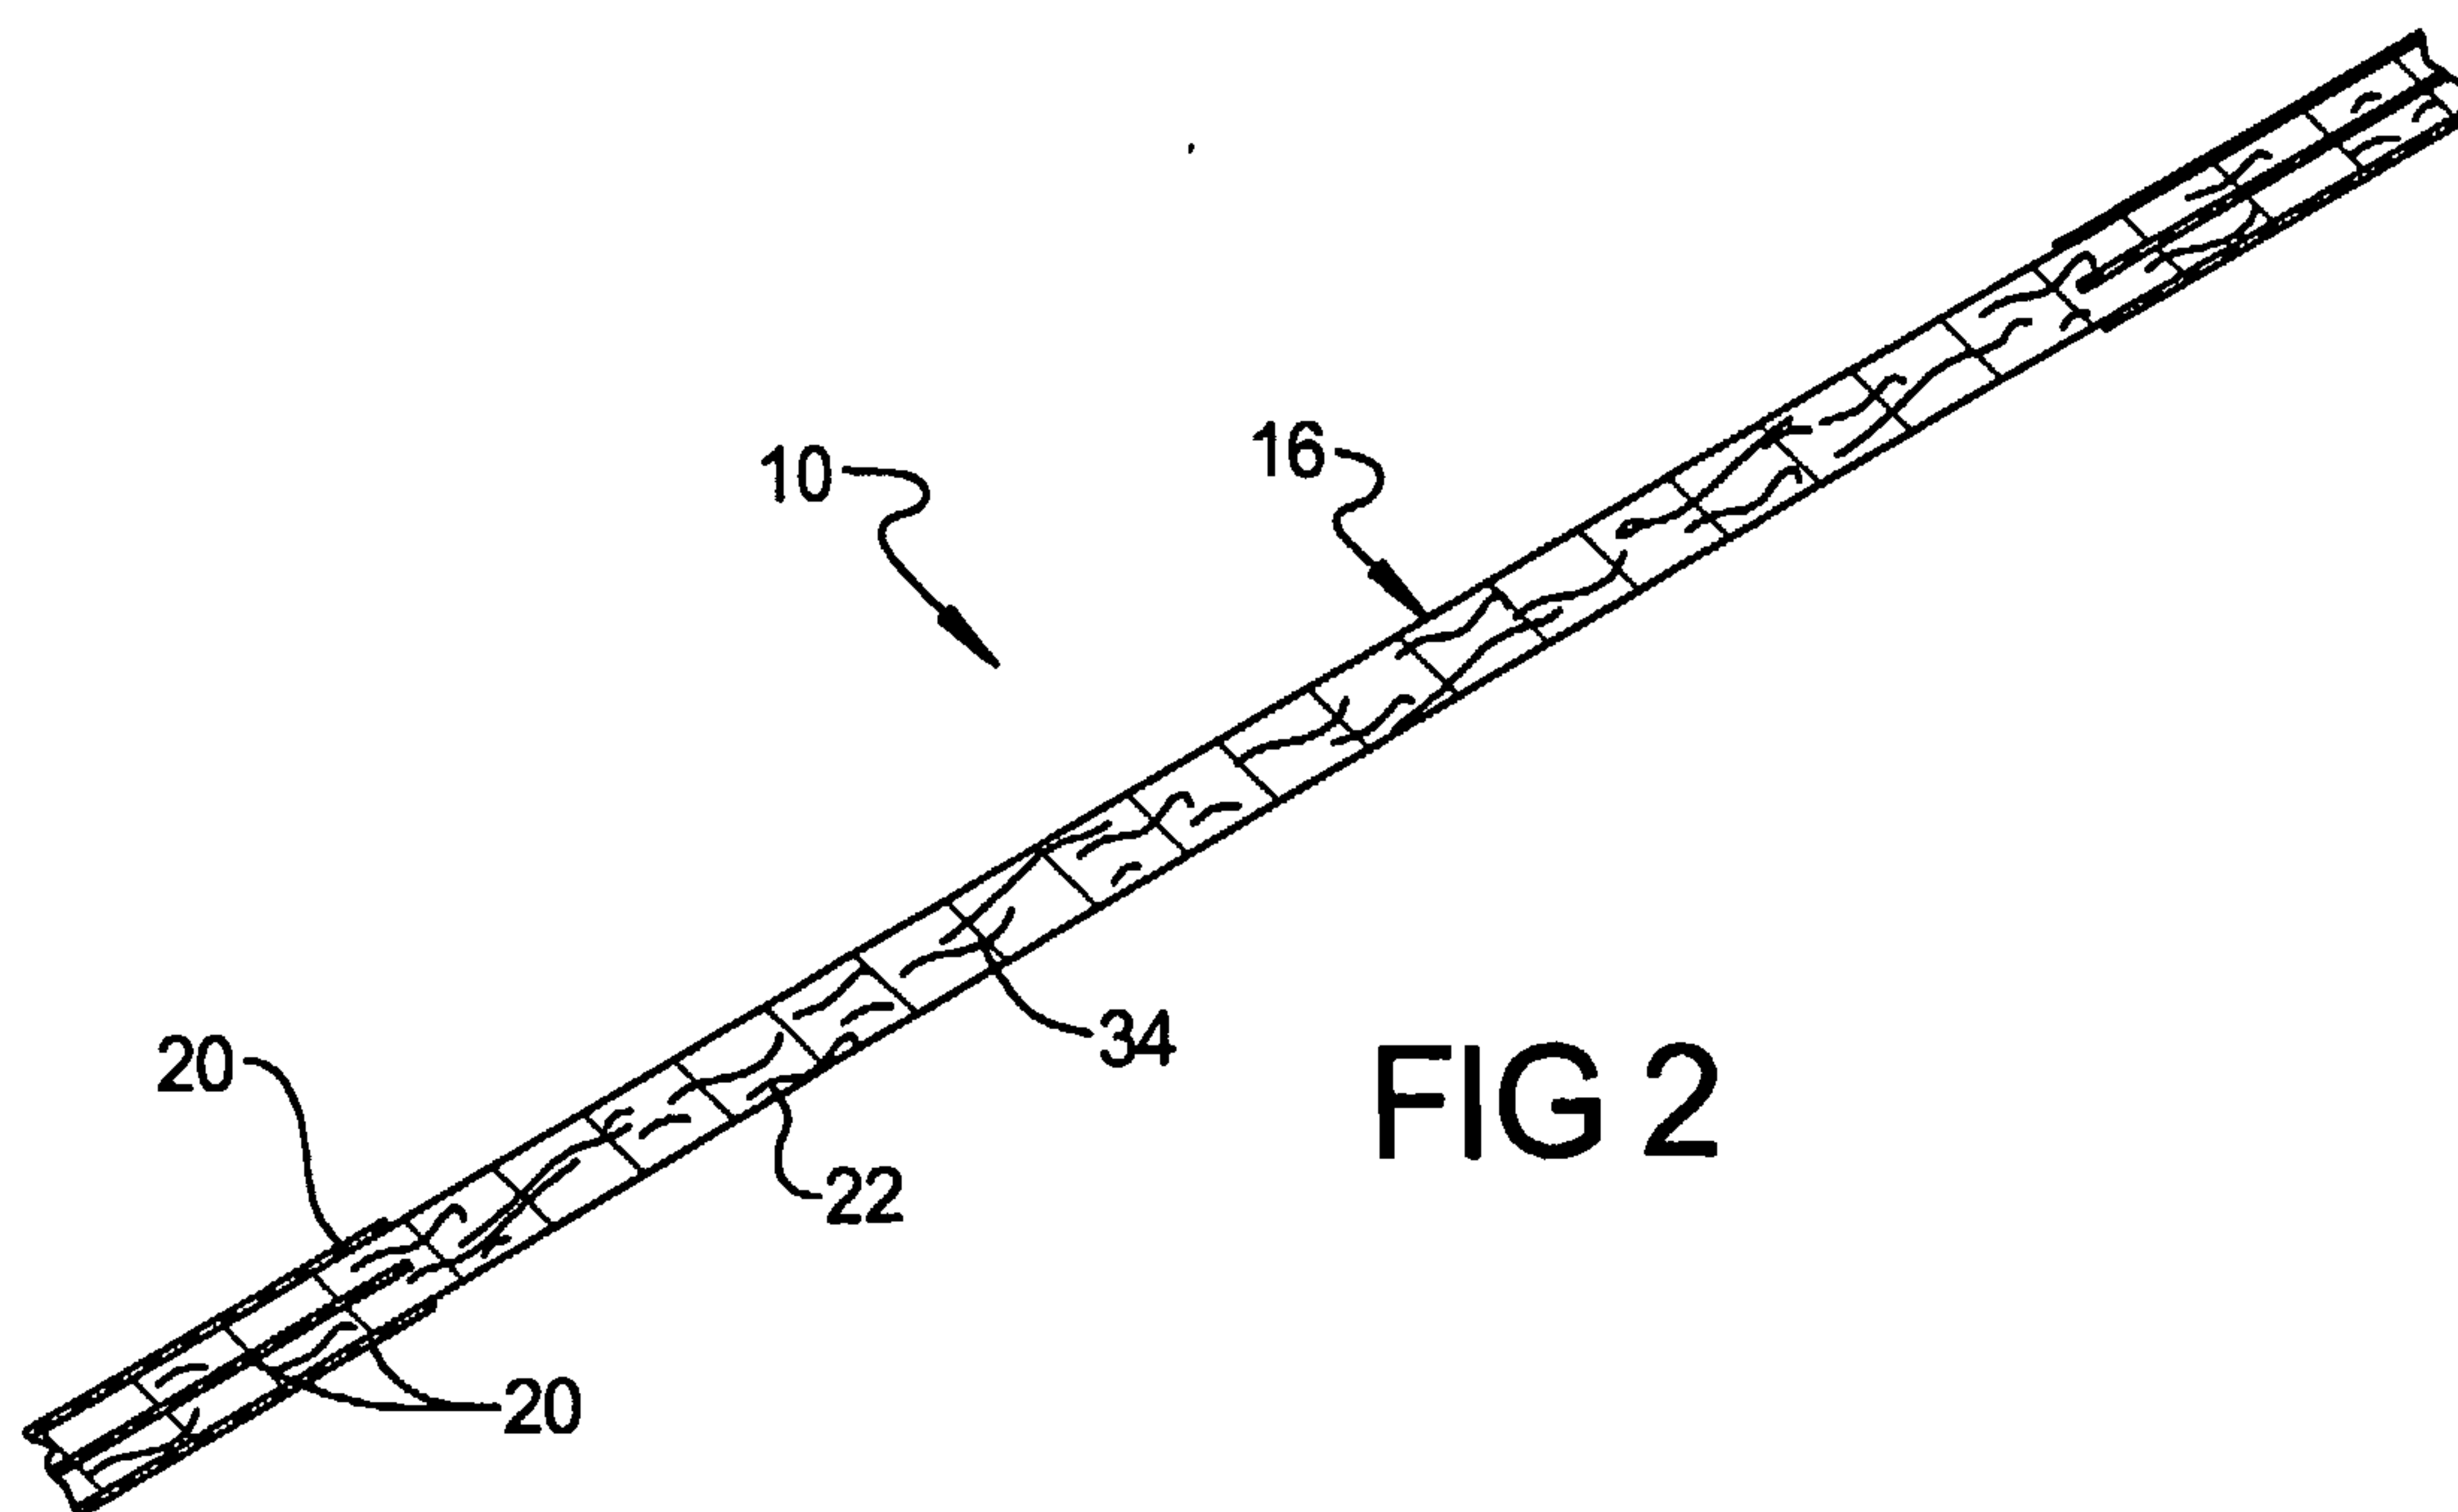


FIG 2

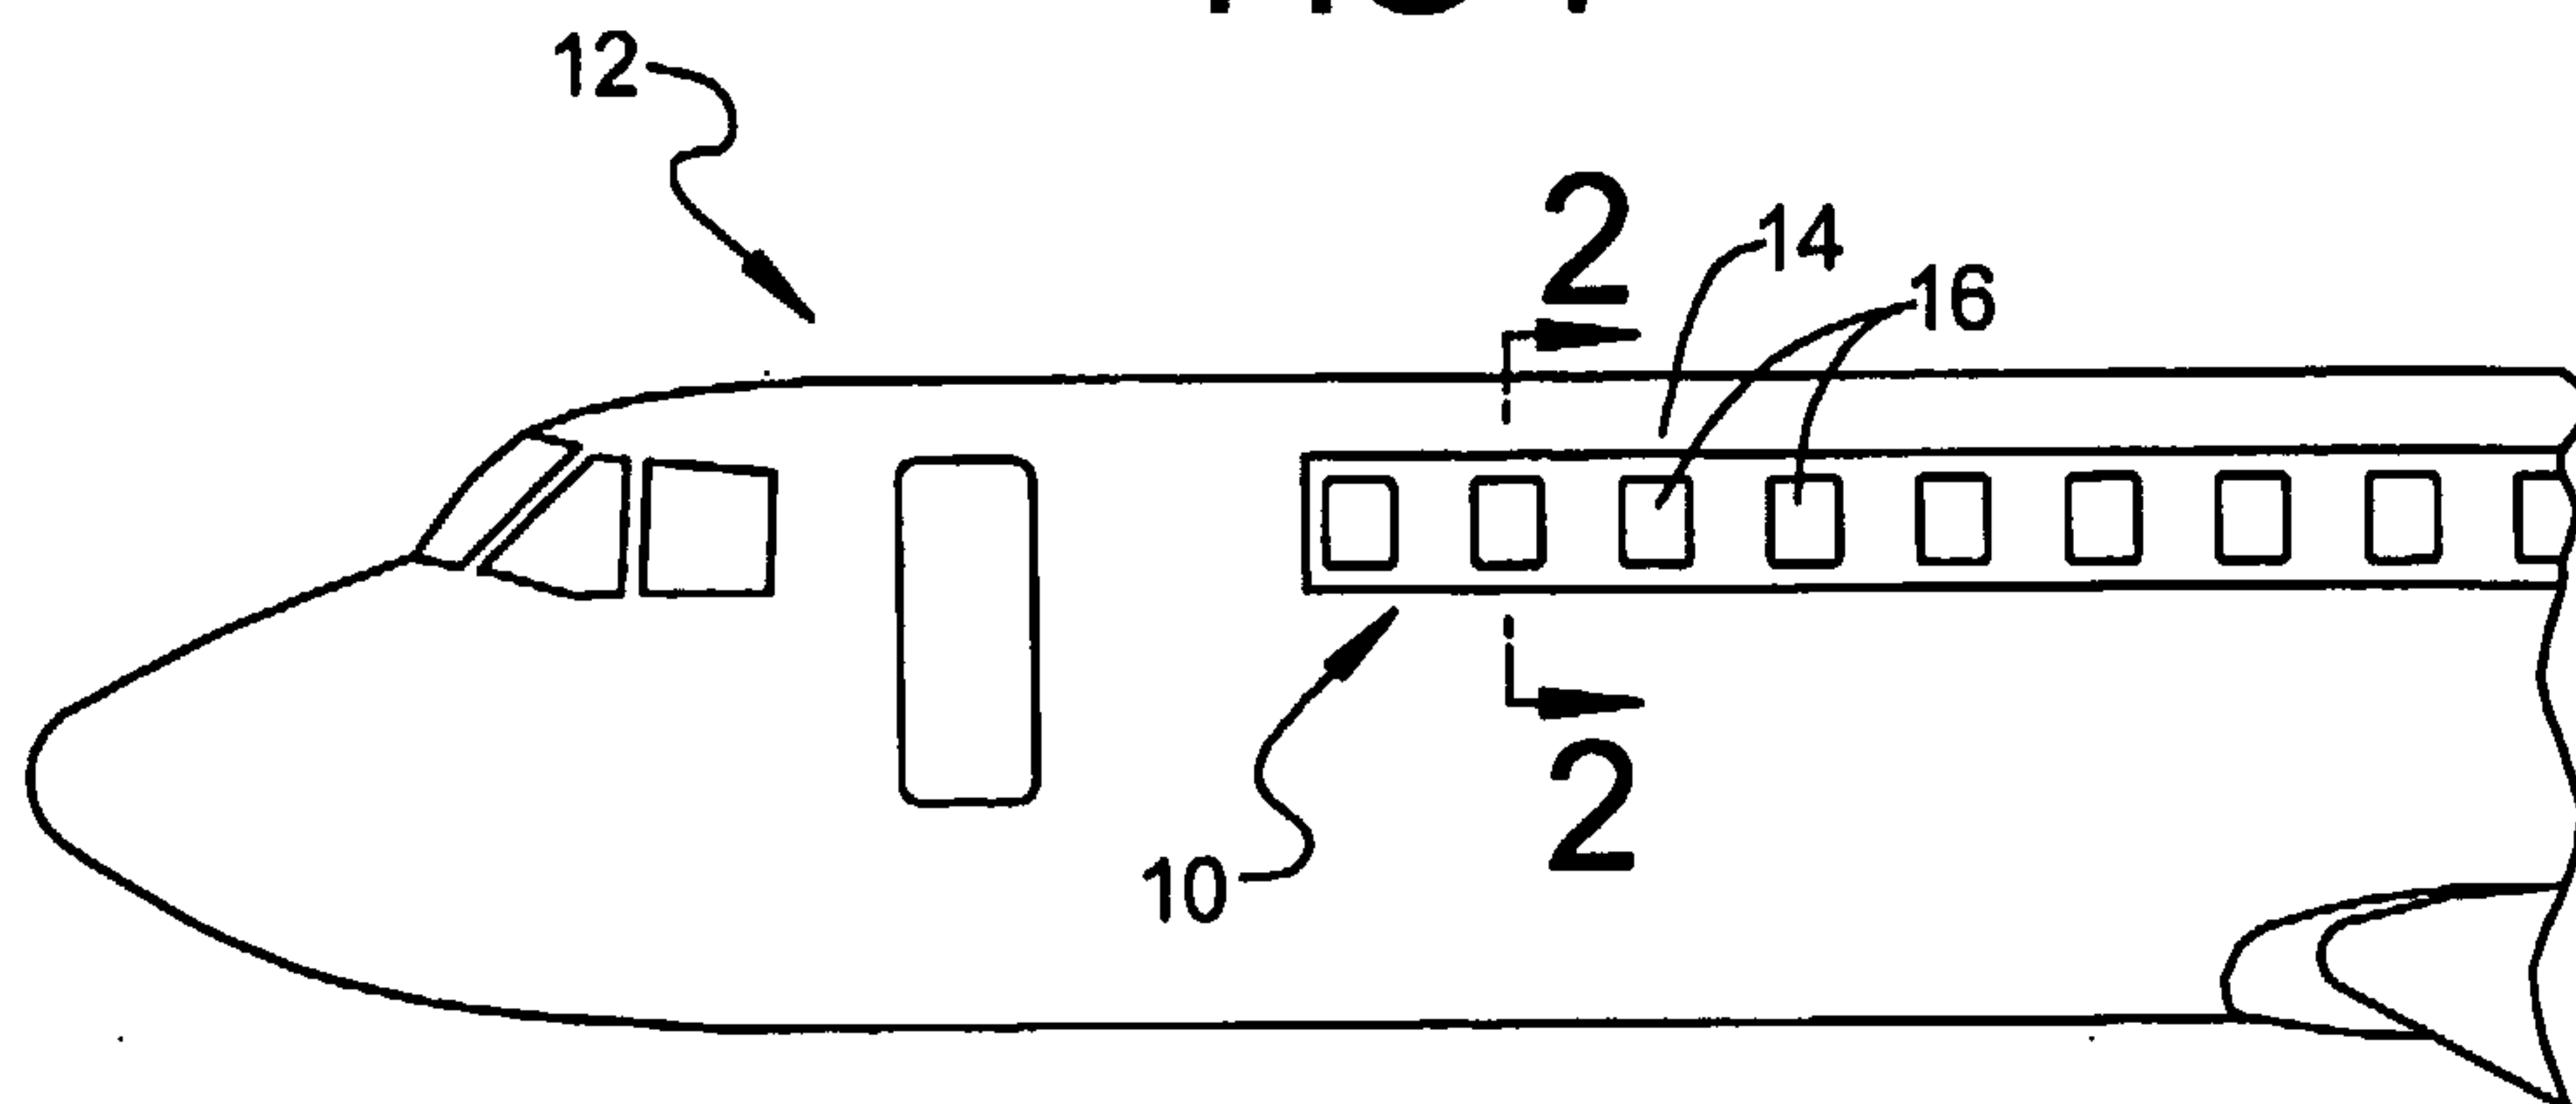