

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 November 2006 (02.11.2006)

PCT

(10) International Publication Number
WO 2006/116371 A1

(51) International Patent Classification:
C09K 5/04 (2006.01) *C11D 7/50* (2006.01)

(74) Agent: **HAMBY, Jane, O.**; E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).

(21) International Application Number:
PCT/US2006/015580

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 25 April 2006 (25.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/674,825 26 April 2005 (26.04.2005) US
11/410,559 25 April 2006 (25.04.2006) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NAPPA, Mario, Joseph** [US/US]; 3 Oakridge Court, Newark, Delaware 19711 (US). **MINOR, Barbara, Haviland** [US/US]; 233 Greenhaven Drive, Elkton, Maryland 21921 (US). **SIEVERT, Allen, C.** [US/US]; 215 Rhett Lane, Elkton, Maryland 21921 (US). **RAO, Velliyur, Nott, Mallikarjuna** [US/US]; 1 Georgetown Avenue, Wilmington, Delaware 19809 (US).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HEAT TRANSFER AND REFRIGERANT COMPOSITIONS COMPRISING 3,3,4,4,5,5,6,6,6-NONAFLUORO-1-HEXENE AND A HYDROFLUOROCARBON

(57) Abstract: The present invention relates to Disclosed herein are 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene compositions for use in refrigeration and air conditioning systems, particularly in centrifugal compressor systems. Also disclosed are 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene in combination with hydrofluorocarbons, which are azeotropic or near azeotropic.

WO 2006/116371 A1

TITLE OF INVENTION

HEAT TRANSFER AND REFRIGERANT COMPOSITIONS COMPRISING
3,3,4,4,5,5,6,6,6-NONAFLUORO-1-HEXENE AND A
HYDROFLUOROCARBON

CROSS REFERENCE(S) TO RELATED APPLICATION(S)

5 This application claims the benefit of priority of U.S. Provisional
Application 60/674,825, filed April 26, 2005.

BACKGROUND OF THE INVENTION

1. Field of the Invention.

10 The present invention relates to compositions for use in heat
transfer, refrigeration and air-conditioning systems comprising
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene (PFBE) and at least one
hydrofluorocarbon, including refrigeration and air-conditioning systems
employing a centrifugal compressor. The compositions of the present
15 invention may be azeotropic or near-azeotropic. These compositions are
also useful in cleaning applications as a defluxing agent and for removing
oils or residues from a surface.

2. Description of Related Art.

20 The refrigeration industry has been working for the past few
decades to find replacement refrigerants for the ozone depleting
chlorofluorocarbons (CFCs) and hydrochlorofluorocarbons (HCFCs) being
phased out as a result of the Montreal Protocol. The solution for most
refrigerant producers has been the commercialization of
hydrofluorocarbon (HFC) refrigerants. The new HFC refrigerants, HFC-
25 134a being the most widely used at this time, have zero ozone depletion
potential and thus are not affected by the current regulatory phase-out as
a result of the Montreal Protocol.

30 Further, environmental regulations may ultimately cause global
phase-out of certain HFC refrigerants. Currently, the automobile industry
is facing regulations relating to global warming potential (GWP) for
refrigerants used in mobile air-conditioning. Therefore, there is a great
current need to identify new refrigerants with reduced GWP for the

automobile air-conditioning market. Should the regulations be more broadly applied in the future, an even greater need will be felt for low GWP refrigerants that can be used in all areas of the refrigeration and air-conditioning industry.

5 Currently proposed replacement refrigerants for HFC-134a include HFC-152a, pure hydrocarbons such as butane or propane, or "natural" refrigerants such as CO₂ or ammonia. Many of these suggested replacements are toxic, flammable, and/or have low energy efficiency. Therefore, new alternatives are constantly being sought.

10 The present invention provides refrigerant compositions and heat transfer fluids having unique characteristics to meet the demands of low or zero ozone depletion potential, and lower GWP.

 The present invention also provides azeotropic and azeotrope-like compositions useful in semiconductor chip and circuit board cleaning, defluxing, and degreasing processes. The present compositions are non-flammable, and as they do not fractionate during use, they will not produce flammable compositions during use. Additionally, the used azeotropic solvent mixtures may be re-distilled and re-used without composition change.

20 **BRIEF SUMMARY OF THE INVENTION**

 In one embodiment, the present invention relates to refrigerant or heat transfer fluid compositions comprising 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene (PFBE) and at least one hydrofluorocarbon compound selected from the group consisting of:

- 25 1,1,3-trifluoropropane;
 1,3-difluoropropane;
 1,2-difluorobutane;
 1,3-difluorobutane;
 1,4-difluorobutane;
30 1,3-difluoro-2-methylpropane;
 2,3-difluorobutane;
 1,1,1-trifluoropentane;

- 1,1,1-trifluoro-3-methylbutane;
1,1-difluoropentane;
1,2-difluoropentane;
2,2-difluoropentane;
5 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
1,1,1-trifluorohexane;
1,1,2,2-tetrafluorocyclobutane; and
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

In another embodiment, the present invention relates to the
10 above listed compositions specifically for use in refrigeration or air-
conditioning systems employing a centrifugal compressor.

In yet another embodiment, the present invention relates to the
above listed compositions specifically for use in refrigeration or air-
conditioning systems employing a two-stage centrifugal compressor.

15 In yet another embodiment, the present invention relates to the
above listed compositions specifically for use in refrigeration or air-
conditioning systems employing a single pass/single slab heat exchanger.

In yet another embodiment, the present invention relates to
azeotropic or near azeotropic compositions that are useful in heat transfer,
20 refrigeration or air-conditioning systems. The compositions are also useful
in refrigeration or air-conditioning systems employing a centrifugal
compressor.

In yet another embodiment, the present invention relates to
refrigerant or heat transfer fluid compositions containing ultra-violet
25 fluorescent dye for leak detection.

In yet another embodiment, the present invention relates to
processes for producing refrigeration, heat, and transfer of heat from a
heat source to a heat sink using the present inventive compositions.

In yet another embodiment, the present invention relates to
30 processes for cleaning surfaces and for removing residue from surfaces,
such as integrated circuit devices.

DETAILED DESCRIPTION OF THE INVENTION

In this specification, when an amount, concentration, or other value or parameter is given as either a range, preferred range, or a list of upper preferable values and lower preferable values, this is to be understood as specifically disclosing all ranges formed from any pair of
 5 any upper range limit or preferred value and any lower range limit or preferred value, regardless of whether ranges are separately disclosed. Where a range of numerical values is recited herein, unless otherwise stated, the range is intended to include the endpoints thereof, and all integers and fractions within the range. It is not intended that the scope of
 10 the invention be limited to the specific values recited when defining a range.

The refrigerant or heat transfer fluid compositions of the present invention comprise 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene (PFBE) and at least one hydrofluorocarbon compound.

15 PFBE is a hydrofluorocarbon compound with CAS registry number [19430-93-4]. It is commercially available from E. I. du Pont de Nemours and Company, Wilmington, Delaware.

The hydrofluorocarbons of the present invention comprise compounds containing hydrogen, fluorine and carbon. Representative
 20 hydrofluorocarbons are listed in Table 1 below.

TABLE 1

<u>Compound</u>	<u>Chemical Formula</u>	<u>CAS Reg. No.</u>
Hydrofluorocarbons		
1,1,3-trifluoropropane	CHF ₂ CH ₂ CH ₂ F	24270-67-5
1,3-difluoropropane	CH ₂ FCH ₂ CH ₂ F	462-39-5
1,2-difluorobutane	CH ₂ FCHFCH ₂ CH ₃	686-65-7
1,3-difluorobutane	CH ₂ FCH ₂ CHFCH ₃	691-42-9
1,4-difluorobutane	CH ₂ FCH ₂ CH ₂ CH ₂ F	372-90-7
1,3-difluoro-2-methylpropane	(CH ₂ F) ₂ CHCH ₃	62126-93-6
2,3-difluorobutane	CH ₃ CHFCHFCH ₃	666-21-7
1,1,1-trifluoropentane	CF ₃ (CH ₂) ₃ CH ₃	402-82-6
1,1,1-trifluoro-3-methylbutane	CF ₃ CH ₂ CH(CH ₃) ₂	406-49-5
1,1-difluoropentane	CHF ₂ (CH ₂) ₃ CH ₃	62127-40-6

1,2-difluoropentane	$\text{CH}_2\text{FCHF}(\text{CH}_2)_2\text{CH}_3$	62126-94-7
2,2-difluoropentane	$\text{CH}_3\text{CF}_2\text{CH}_2\text{CH}_2\text{CH}_3$	371-65-3
1,1,1,2,2,3,4,5,5,5-decafluoropentane	$\text{CF}_3\text{CHFCHF}_2\text{CF}_3$	138495-42-8
1,1,1-trifluorohexane	$\text{CF}_3(\text{CH}_2)_4\text{CH}_3$	17337-12-1
1,1,2,2-tetrafluorocyclobutane	c- $\text{CF}_2\text{CF}_2\text{CH}_2\text{CH}_2$ -	374-12-9
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene	$(\text{CF}_3)_2\text{C}=\text{C}(\text{CF}_3)_2$	360-57-6

The compounds listed in Table 1 can be made readily made by those skilled in the art, and are available from many chemical supply houses.

5 The compositions of the present invention may be prepared by any convenient method to combine the desired amounts of the individual components. A preferred method is to weigh the desired component amounts and thereafter combine the components in an appropriate vessel. Agitation may be used, if desired.

10 The refrigerant or heat transfer fluid compositions of the present invention include PFBE with at least one compound selected from the group consisting of:

- 1,1,3-trifluoropropane;
- 1,3-difluoropropane;
- 15 1,2-difluorobutane;
- 1,3-difluorobutane;
- 1,4-difluorobutane;
- 1,3-difluoro-2-methylpropane;
- 2,3-difluorobutane;
- 20 1,1,1-trifluoropentane;
- 1,1,1-trifluoro-3-methylbutane;
- 1,1-difluoropentane;
- 1,2-difluoropentane;
- 2,2-difluoropentane;
- 25 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
- 1,1,1-trifluorohexane;

1,1,2,2-tetrafluorocyclobutane; and
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

The refrigerant or heat transfer fluid compositions of the present invention may be azeotropic or near azeotropic compositions. By
5 azeotropic composition is meant a constant-boiling mixture of two or more substances that behaves as a single substance. One way to characterize an azeotropic composition is that the vapor produced by partial evaporation or distillation of the liquid has the same composition as the liquid from which it is evaporated or distilled, i.e., the mixture
10 distills/refluxes without compositional change. Constant-boiling compositions are characterized as azeotropic because they exhibit either a maximum or minimum boiling point, as compared with that of the non-azeotropic mixture of the same components. An azeotropic composition will not fractionate within the refrigeration or air-conditioning system during
15 operation, thus maintaining the efficiency of the system. Additionally, an azeotropic composition will not fractionate upon leakage from the refrigeration or air-conditioning system. In the situation where one component of a mixture is flammable, fractionation during leakage could lead to a flammable composition either within the system or outside of the
20 system.

A "near-azeotropic composition," sometimes referred to as an "azeotropic-like composition," is a substantially constant boiling liquid admixture of two or more substances that behaves essentially as a single substance. One way to characterize a near azeotropic composition is that
25 the vapor produced by partial evaporation or distillation of the liquid has substantially the same composition as the liquid from which it was evaporated or distilled, that is, the admixture distills/refluxes without substantial composition change. Another way to characterize a near azeotropic composition is that the bubble point vapor pressure and the
30 dew point vapor pressure of the composition at a particular temperature are substantially the same. Herein, a composition is near azeotropic if, after 50 weight percent of the composition is removed, such as by

evaporation or boiling off, the difference in vapor pressure between the original composition and the composition remaining after 50 weight percent of the original composition has been removed is less than about 10 percent.

- 5 The azeotropic PFBE refrigerant or heat transfer fluid compositions of the present invention are listed in Table 2.

TABLE 2

<u>Component A</u>	<u>Component B</u>	<u>Azeotrope Point Composition</u>		<u>Azeotrope Boiling Point (°C)</u>
		<u>wt% (A)</u>	<u>wt% (B)</u>	
PFBE	1,1,3-trifluoropropane	42.4	57.6	41.7
PFBE	1,3-difluoropropane	43.3	56.7	37.8
PFBE	1,2-difluorobutane	42.0	58.0	48.5
PFBE	1,3-difluorobutane	67.8	32.2	53.5
PFBE	1,4-difluorobutane	88.3	11.7	57.6
PFBE	1,3-difluoro-2-methylpropane	72.9	27.1	54.6
PFBE	2,3-difluorobutane	30.1	69.9	46.3
PFBE	2,2-difluoropentane	69.7	30.3	57.5
PFBE	1,1,2,2-tetrafluorocyclobutane	39.6	60.4	46.8

10

The near azeotropic refrigerant and heat transfer fluid compositions and concentration ranges of the present invention are listed in Table 3.

15

TABLE 3

Near Azeotropic Ranges

PFBE plus B:

wt% PFBE/wt% B

Hydrofluorocarbons

1,1,3-trifluoropropane	1-77/23-99
1,3-difluoropropane	1-76/24-99
1,2-difluorobutane	1-99/1-99

1,3-difluorobutane	1-99/1-99
1,4-difluorobutane	56-99/1-44
1,3-difluoro-2-methylpropane	1-99/1-99
2,3-difluorobutane	1-99/1-99
1,1,1-trifluoropentane	1-99/1-99
1,1,1-trifluoro-3-methylbutane	1-99/1-99
1,1-difluoropentane	1-99/1-99
1,2-difluoropentane	1-99/1-99
2,2-difluoropentane	1-99/1-99
1,1,1,2,2,3,4,5,5-decafluoropentane	1-99/1-99
1,1,1-trifluorohexane	1-99/1-99
1,1,2,2-tetrafluorocyclobutane	1-99/1-99
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)- 2-butene	1-99/1-99

In another embodiment of the invention, near azeotropic refrigerant and heat transfer compositions and concentration ranges of the present invention which have reduced flammability are listed in Table 4.

5

TABLE 4**Near Azeotropic Ranges****PFBE plus B:****wt% PFBE/wt% B****Hydrofluorocarbons**

1,1,3-trifluoropropane	20-77/23-80
1,3-difluoropropane	20-76/24-80
1,2-difluorobutane	20-99/1-80
1,3-difluorobutane	40-99/1-60
1,4-difluorobutane	60-99/1-40
1,3-difluoro-2-methylpropane	40-99/1-60
2,3-difluorobutane	20-99/1-80
1,1,1-trifluoropentane	20-99/1-80
1,1,1-trifluoro-3-methylbutane	20-99/1-80
1,1-difluoropentane	20-99/1-80
1,2-difluoropentane	20-99/1-80
2,2-difluoropentane	40-99/1-60
1,1,1,2,2,3,4,5,5-decafluoropentane	20-99/1-80
1,1,1-trifluorohexane	20-99/1-80
1,1,2,2-tetrafluorocyclobutane	20-99/1-80
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)- 2-butene	20-99/1-80

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a stabilizer, free radical scavenger or antioxidant. Such additives include
5 but are not limited to, nitromethane, hindered phenols, hydroxylamines, thiols, phosphites, or lactones. Single additives or combinations may be used.

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a water
10 scavenger (drying compound). Such water scavengers may comprise ortho esters such as trimethyl-, triethyl-, or tripropylorthoformate.

The compositions of the present invention may further comprise an ultra-violet (UV) dye and optionally a solubilizing agent. The UV dye is a useful component for detecting leaks of the refrigerant and
15 heat transfer fluid compositions by permitting one to observe the fluorescence of the dye in the refrigerant or heat transfer fluid compositions at a leak point or in the vicinity of refrigeration or air-conditioning apparatus. One may observe the fluorescence of the dye under an ultra-violet light. Solubilizing agents may be needed to increase
20 solubility of such UV dyes in some of the refrigerants and heat transfer fluids compositions disclosed herein.

By "ultra-violet" dye is meant a UV fluorescent composition that absorbs light in the ultra-violet or "near" ultra-violet region of the electromagnetic spectrum. The fluorescence produced by the UV
25 fluorescent dye under illumination by a UV light that emits radiation with wavelength anywhere from 10 nanometer to 750 nanometer may be detected. Therefore, if refrigerant or heat transfer fluid containing such a UV fluorescent dye is leaking from a given point in a refrigeration or air-conditioning apparatus, the fluorescence can be detected at the leak point.
30 Such UV fluorescent dyes include but are not limited to naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, and derivatives or

combinations thereof. Solubilizing agents of the present invention comprise at least one compound selected from the group consisting of hydrocarbons, hydrocarbon ethers, polyoxyalkylene glycol ethers, amides, nitriles, ketones, chlorocarbons, esters, lactones, aryl ethers, fluoroethers
5 and 1,1,1-trifluoroalkanes.

Hydrocarbon solubilizing agents of the present invention comprise hydrocarbons including straight chained, branched chain or cyclic alkanes or alkenes containing 16 or fewer carbon atoms and only hydrogen with no other functional groups. Representative hydrocarbon
10 solubilizing agents comprise propane, propylene, cyclopropane, n-butane, isobutane, n-pentane, octane, decane, and hexadecane. It should be noted that if the refrigerant is a hydrocarbon, then the solubilizing agent may not be the same hydrocarbon.

Hydrocarbon ether solubilizing agents of the present invention
15 comprise ethers containing only carbon, hydrogen and oxygen, such as dimethyl ether (DME).

Polyoxyalkylene glycol ether solubilizing agents of the present invention are represented by the formula $R^1[(OR^2)_xOR^3]_y$, wherein x is an integer from 1-3; y is an integer from 1-4; R^1 is selected from hydrogen
20 and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from hydrogen, and aliphatic and alicyclic hydrocarbon radicals having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radical; and wherein
25 said polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units. As used herein, bonding sites mean radical sites available to form covalent bonds with other radicals.

Hydrocarbylene radicals mean divalent hydrocarbon radicals.

In the present invention, preferable polyoxyalkylene glycol
30 ether solubilizing agents are represented by $R^1[(OR^2)_xOR^3]_y$ wherein x is preferably 1-2; y is preferably 1; R^1 and R^3 are preferably independently selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 4

carbon atoms; R² is preferably selected from aliphatic hydrocarbylene radicals having from 2 or 3 carbon atoms, most preferably 3 carbon atoms; the polyoxyalkylene glycol ether molecular weight is preferably from about 100 to about 250 atomic mass units, most preferably from about 125 to about 250 atomic mass units. The R¹ and R³ hydrocarbon radicals having 1 to 6 carbon atoms may be linear, branched or cyclic. Representative R¹ and R³ hydrocarbon radicals include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, and cyclohexyl. Where free hydroxyl radicals on the present polyoxyalkylene glycol ether solubilizing agents may be incompatible with certain compression refrigeration apparatus materials of construction (e.g. Mylar®), R¹ and R³ are preferably aliphatic hydrocarbon radicals having 1 to 4 carbon atoms, most preferably 1 carbon atom. The R² aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms form repeating oxyalkylene radicals - (OR²)_x - that include oxyethylene radicals, oxypropylene radicals, and oxybutylene radicals. The oxyalkylene radical comprising R² in one polyoxyalkylene glycol ether solubilizing agent molecule may be the same, or one molecule may contain different R² oxyalkylene groups. The present polyoxyalkylene glycol ether solubilizing agents preferably comprise at least one oxypropylene radical. Where R¹ is an aliphatic or alicyclic hydrocarbon radical having 1 to 6 carbon atoms and y bonding sites, the radical may be linear, branched or cyclic. Representative R¹ aliphatic hydrocarbon radicals having two bonding sites include, for example, an ethylene radical, a propylene radical, a butylene radical, a pentylene radical, a hexylene radical, a cyclopentylene radical and a cyclohexylene radical. Representative R¹ aliphatic hydrocarbon radicals having three or four bonding sites include residues derived from polyalcohols, such as trimethylolpropane, glycerin, pentaerythritol, 1,2,3-trihydroxycyclohexane and 1,3,5-trihydroxycyclohexane, by removing their hydroxyl radicals.

Representative polyoxyalkylene glycol ether solubilizing agents include but are not limited to: CH₃OCH₂CH(CH₃)O(H or CH₃) (propylene

- glycol methyl (or dimethyl) ether), $\text{CH}_3\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or CH}_3)$
 (dipropylene glycol methyl (or dimethyl) ether), $\text{CH}_3\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or CH}_3)$ (tripropylene glycol methyl (or dimethyl) ether),
 $\text{C}_2\text{H}_5\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}(\text{H or C}_2\text{H}_5)$ (propylene glycol ethyl (or diethyl) ether),
 5 $\text{C}_2\text{H}_5\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_2\text{H}_5)$ (dipropylene glycol ethyl (or diethyl) ether), $\text{C}_2\text{H}_5\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_2\text{H}_5)$ (tripropylene glycol ethyl (or diethyl) ether), $\text{C}_3\text{H}_7\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}(\text{H or C}_3\text{H}_7)$ (propylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_3\text{H}_7\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_3\text{H}_7)$ (dipropylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_3\text{H}_7\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_3\text{H}_7)$
 10 (tripropylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}(\text{CH}_3)\text{OH}$ (propylene glycol n-butyl ether), $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_4\text{H}_9)$ (dipropylene glycol n-butyl (or di-n-butyl) ether), $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_4\text{H}_9)$ (tripropylene glycol n-butyl (or di-n-butyl) ether),
 (CH₃)₃COCH₂CH(CH₃)OH (propylene glycol t-butyl ether),
 15 (CH₃)₃CO[CH₂CH(CH₃)O]₂(H or (CH₃)₃) (dipropylene glycol t-butyl (or di-t-butyl) ether), (CH₃)₃CO[CH₂CH(CH₃)O]₃(H or (CH₃)₃) (tripropylene glycol t-butyl (or di-t-butyl) ether), $\text{C}_5\text{H}_{11}\text{OCH}_2\text{CH}(\text{CH}_3)\text{OH}$ (propylene glycol n-pentyl ether), $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}(\text{C}_2\text{H}_5)\text{OH}$ (butylene glycol n-butyl ether),
 $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{C}_2\text{H}_5)\text{O}]_2\text{H}$ (dibutylene glycol n-butyl ether),
 20 trimethylolpropane tri-n-butyl ether ($\text{C}_2\text{H}_5\text{C}(\text{CH}_2\text{O}(\text{CH}_2)_3\text{CH}_3)_3$) and trimethylolpropane di-n-butyl ether ($\text{C}_2\text{H}_5\text{C}(\text{CH}_2\text{OC}(\text{CH}_2)_3\text{CH}_3)_2\text{CH}_2\text{OH}$).

Amide solubilizing agents of the present invention comprise those represented by the formulae $\text{R}^1\text{C}(\text{O})\text{NR}^2\text{R}^3$ and cyclo-[$\text{R}^4\text{C}(\text{O})\text{N}(\text{R}^5)$], wherein R^1 , R^2 , R^3 and R^5 are independently selected from aliphatic and
 25 alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; R^4 is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon atoms; and wherein said amides have a molecular weight of from about 100 to about 300 atomic mass units. The molecular weight of said amides is preferably from about 160 to about 250 atomic mass units. R^1 , R^2 , R^3
 30 and R^5 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 , R^2 , R^3 and R^5

may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and

5 heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^{1-3} , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Preferred amide solubilizing agents consist of carbon, hydrogen, nitrogen and oxygen. Representative

10 R^1 , R^2 , R^3 and R^5 aliphatic and alicyclic hydrocarbon radicals include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers. A preferred embodiment of amide solubilizing agents are those wherein R^4

15 in the aforementioned formula cyclo- $[R^4C(O)N(R^5)-]$ may be represented by the hydrocarbylene radical $(CR^6R^7)_n$, in other words, the formula cyclo- $[(CR^6R^7)_nC(O)N(R^5)-]$ wherein the previously-stated values for molecular weight apply; n is an integer from 3 to 5; R^5 is a saturated hydrocarbon radical containing 1 to 12 carbon atoms; R^6 and R^7 are independently

20 selected (for each n) by the rules previously offered defining R^{1-3} . In the lactams represented by the formula: cyclo- $[(CR^6R^7)_nC(O)N(R^5)-]$, all R^6 and R^7 are preferably hydrogen, or contain a single saturated hydrocarbon radical among the n methylene units, and R^5 is a saturated hydrocarbon radical containing 3 to 12 carbon atoms. For example, 1-(saturated

25 hydrocarbon radical)-5-methylpyrrolidin-2-ones.

Representative amide solubilizing agents include but are not limited to: 1-octylpyrrolidin-2-one, 1-decylpyrrolidin-2-one, 1-octyl-5-methylpyrrolidin-2-one, 1-butylcaprolactam, 1-cyclohexylpyrrolidin-2-one, 1-butyl-5-methylpiperid-2-one, 1-pentyl-5-methylpiperid-2-one, 1-

30 hexylcaprolactam, 1-hexyl-5-methylpyrrolidin-2-one, 5-methyl-1-pentylpiperid-2-one, 1,3-dimethylpiperid-2-one, 1-methylcaprolactam, 1-butyl-pyrrolidin-2-one, 1,5-dimethylpiperid-2-one, 1-decyl-5-

methylpyrrolidin-2-one, 1-dodecylpyrrolid-2-one, N,N-dibutylformamide and N,N-diisopropylacetamide.

Ketone solubilizing agents of the present invention comprise ketones represented by the formula $R^1C(O)R^2$, wherein R^1 and R^2 are
5 independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and wherein said ketones have a molecular weight of from about 70 to about 300 atomic mass units. R^1 and R^2 in said ketones are preferably independently selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 9 carbon atoms.
10 The molecular weight of said ketones is preferably from about 100 to 200 atomic mass units. R^1 and R^2 may together form a hydrocarbylene radical connected and forming a five, six, or seven-membered ring cyclic ketone, for example, cyclopentanone, cyclohexanone, and cycloheptanone. R^1 and R^2 may optionally include substituted hydrocarbon radicals, that is,
15 radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 and R^2 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In
20 general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 and R^2 , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 and
25 R^2 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula $R^1C(O)R^2$ include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and
30 phenethyl.

Representative ketone solubilizing agents include but are not limited to: 2-butanone, 2-pentanone, acetophenone, butyrophenone,

hexanophenone, cyclohexanone, cycloheptanone, 2-heptanone, 3-heptanone, 5-methyl-2-hexanone, 2-octanone, 3-octanone, diisobutyl ketone, 4-ethylcyclohexanone, 2-nonanone, 5-nonanone, 2-decanone, 4-decanone, 2-decalone, 2-tridecanone, dihexyl ketone and dicyclohexyl ketone.

Nitrile solubilizing agents of the present invention comprise nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic mass units. R^1 in said nitrile solubilizing agents is preferably selected from aliphatic and alicyclic hydrocarbon radicals having 8 to 10 carbon atoms. The molecular weight of said nitrile solubilizing agents is preferably from about 120 to about 140 atomic mass units. R^1 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula R^1CN include pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and phenethyl.

Representative nitrile solubilizing agents include but are not limited to: 1-cyanopentane, 2,2-dimethyl-4-cyanopentane, 1-cyanoheptane, 1-cyanoheptane, 1-cyanooctane, 2-cyanooctane, 1-cyanononane, 1-cyanodecane, 2-cyanodecane, 1-cyanoundecane and 1-cyanododecane.

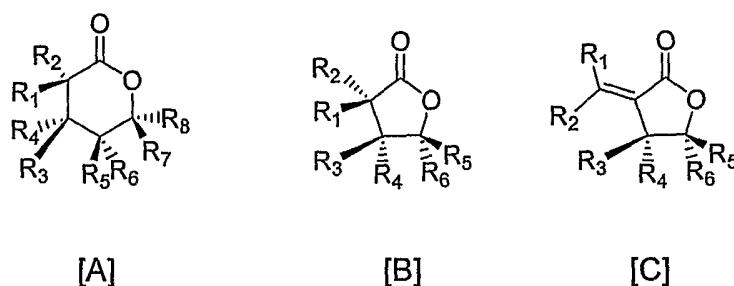
Chlorocarbon solubilizing agents of the present invention comprise chlorocarbons represented by the formula RCl_x , wherein x is 1 or 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to about 200 atomic mass units. The molecular weight of said chlorocarbon solubilizing agents is preferably from about 120 to 150 atomic mass units. Representative R aliphatic and alicyclic hydrocarbon radicals in the general formula RCl_x include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers.

Representative chlorocarbon solubilizing agents include but are not limited to: 3-(chloromethyl)pentane, 3-chloro-3-methylpentane, 1-chlorohexane, 1,6-dichlorohexane, 1-chloroheptane, 1-chlorooctane, 1-chlorononane, 1-chlorodecane, and 1,1,1-trichlorodecane.

Ester solubilizing agents of the present invention comprise esters represented by the general formula $\text{R}^1\text{C}(\text{O})\text{OR}^2$, wherein R^1 and R^2 are independently selected from linear and cyclic, saturated and unsaturated, alkyl and aryl radicals. Preferred esters consist essentially of the elements C, H and O, have a molecular weight of from about 80 to about 550 atomic mass units.

Representative esters include but are not limited to: $(\text{CH}_3)_2\text{CHCH}_2\text{O}(\text{O})\text{C}(\text{CH}_2)_{2-4}(\text{O})\text{COCH}_2\text{CH}(\text{CH}_3)_2$ (diisobutyl dibasic ester), ethyl hexanoate, ethyl heptanoate, *n*-butyl propionate, *n*-propyl propionate, ethyl benzoate, di-*n*-propyl phthalate, benzoic acid ethoxyethyl ester, dipropyl carbonate, "Exxate 700" (a commercial C_7 alkyl acetate), "Exxate 800" (a commercial C_8 alkyl acetate), dibutyl phthalate, and *tert*-butyl acetate.

Lactone solubilizing agents of the present invention comprise lactones represented by structures [A], [B], and [C]:



- 5 These lactones contain the functional group $-C(O)O-$ in a ring of six (A), or preferably five atoms (B), wherein for structures [A] and [B], R₁ through R₈ are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals. Each R₁ through R₈ may be connected forming a ring with another R₁ through R₈. The lactone may have an exocyclic alkylidene group as in structure [C], wherein R₁ through R₆ are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals. Each R₁ through R₆ may be connected forming a ring with another R₁ through R₆. The lactone solubilizing agents have a
- 10 molecular weight range of from about 80 to about 300 atomic mass units, preferred from about 80 to about 200 atomic mass units.














Representative lactone solubilizing agents include but are not limited to the compounds listed in Table 5.


20

TABLE 5

Additive	Molecular Structure	Molecular Formula	Molecular Weight (amu)
(E,Z)-3-ethylidene-5-methyl-dihydro-furan-2-one		C ₇ H ₁₀ O ₂	126
(E,Z)-3-propylidene-5-methyl-dihydro-furan-2-one		C ₈ H ₁₂ O ₂	140
(E,Z)-3-butylidene-5-methyl-dihydro-furan-2-one		C ₉ H ₁₄ O ₂	154

(E,Z)-3-pentylidene-5-methyl-dihydro-furan-2-one		$C_{10}H_{16}O_2$	168
(E,Z)-3-Hexylidene-5-methyl-dihydro-furan-2-one		$C_{11}H_{18}O_2$	182
(E,Z)-3-Heptylidene-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
(E,Z)-3-octylidene-5-methyl-dihydro-furan-2-one		$C_{13}H_{22}O_2$	210
(E,Z)-3-nonylidene-5-methyl-dihydro-furan-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-decylidene-5-methyl-dihydro-furan-2-one		$C_{15}H_{26}O_2$	238
(E,Z)-3-(3,5,5-trimethylhexylidene)-5-methyl-dihydrofuran-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-cyclohexylmethylidene-5-methyl-dihydrofuran-2-one		$C_{12}H_{18}O_2$	194
gamma-octalactone		$C_8H_{14}O_2$	142
gamma-nonalactone		$C_9H_{16}O_2$	156
gamma-decalactone		$C_{10}H_{18}O_2$	170
gamma-undecalactone		$C_{11}H_{20}O_2$	184
gamma-dodecalactone		$C_{12}H_{22}O_2$	198
3-hexyldihydro-furan-2-one		$C_{10}H_{18}O_2$	170
3-heptyldihydro-furan-2-one		$C_{11}H_{20}O_2$	184
cis-3-ethyl-5-methyl-dihydro-furan-2-one		$C_7H_{12}O_2$	128
cis-(3-propyl-5-methyl)-dihydro-furan-2-one		$C_8H_{14}O_2$	142

<i>cis</i> -(3-butyl-5-methyl)-dihydro-furan-2-one		$C_9H_{16}O_2$	156
<i>cis</i> -(3-pentyl-5-methyl)-dihydro-furan-2-one		$C_{10}H_{18}O_2$	170
<i>cis</i> -3-hexyl-5-methyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
<i>cis</i> -3-heptyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{22}O_2$	198
<i>cis</i> -3-octyl-5-methyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212
<i>cis</i> -3-(3,5,5-trimethylhexyl)-5-methyl-dihydro-furan-2-one		$C_{14}H_{26}O_2$	226
<i>cis</i> -3-cyclohexylmethyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
5-methyl-5-hexyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
5-methyl-5-octyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212
Hexahydro-isobenzofuran-1-one		$C_8H_{12}O_2$	140
<i>delta</i> -decalactone		$C_{10}H_{18}O_2$	170
<i>delta</i> -undecalactone		$C_{11}H_{20}O_2$	184
<i>delta</i> -dodecalactone		$C_{12}H_{22}O_2$	198

mixture of 4-hexyl-dihydrofuran-2-one and 3-hexyl-dihydro-furan-2-one		C ₁₀ H ₁₈ O ₂	170
---	---	--	-----

Lactone solubilizing agents generally have a kinematic viscosity of less than about 7 centistokes at 40°C. For instance, gamma-undecalactone has kinematic viscosity of 5.4 centistokes and cis-(3-hexyl-5-methyl)dihydrofuran-2-one has viscosity of 4.5 centistokes, both at 40°C. Lactone solubilizing agents may be available commercially or prepared by methods as described in published U. S. patent application 20060030719, which is herein incorporated by reference in its entirety.

Aryl ether solubilizing agents of the present invention comprise aryl ethers represented by the formula R¹OR², wherein: R¹ is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R² is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl ethers have a molecular weight of from about 100 to about 150 atomic mass units. Representative R¹ aryl radicals in the general formula R¹OR² include phenyl, biphenyl, cumenyl, mesityl, tolyl, xylyl, naphthyl and pyridyl. Representative R² aliphatic hydrocarbon radicals in the general formula R¹OR² include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl and *tert*-butyl. Representative aromatic ether solubilizing agents include but are not limited to: methyl phenyl ether (anisole), 1,3-dimethoxybenzene, ethyl phenyl ether and butyl phenyl ether.

Fluoroether solubilizing agents of the present invention comprise those represented by the general formula R¹OCF₂CF₂H, wherein R¹ is selected from aliphatic, alicyclic, and aromatic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated, alkyl radicals. Representative fluoroether solubilizing agents include but are not limited to: C₈H₁₇OCF₂CF₂H and C₆H₁₃OCF₂CF₂H. It

should be noted that if the refrigerant is a fluoroether, then the solubilizing agent may not be the same fluoroether.

Fluoroether solubilizing agents may further comprise ethers derived from fluoro-olefins and polyols. The fluoro-olefins may be of the type $CF_2=CXY$, wherein X is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 . Representative fluoro-olefins are tetrafluoroethylene, chlorotrifluoroethylene, hexafluoropropylene, and perfluoromethylvinyl ether. The polyols may be linear or branched. Linear polyols may be of the type $HOCH_2(CHOH)_x(CRR')_yCH_2OH$, wherein R and R' are hydrogen, or CH_3 , or C_2H_5 and wherein x is an integer from 0-4, and y is an integer from 0-4. Branched polyols may be of the type $C(OH)_t(R)_u(CH_2OH)_v[(CH_2)_mCH_2OH]_w$, wherein R may be hydrogen, CH_3 or C_2H_5 , m may be an integer from 0 to 3, t and u may be 0 or 1, v and w are integers from 0 to 4, and also wherein $t + u + v + w = 4$. Representative polyols are trimethylol propane, pentaerythritol, butanediol, and ethylene glycol.

1,1,1-Trifluoroalkane solubilizing agents of the present invention comprise 1,1,1-trifluoroalkanes represented by the general formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated alkyl radicals. Representative 1,1,1-trifluoroalkane solubilizing agents include but are not limited to: 1,1,1-trifluorohexane and 1,1,1-trifluorododecane.

Solubilizing agents of the present invention may be present as a single compound, or may be present as a mixture of more than one solubilizing agent. Mixtures of solubilizing agents may contain two solubilizing agents from the same class of compounds, as for example two lactones, or two solubilizing agents from two different classes, as for example a lactone and a polyoxyalkylene glycol ether.

In the present compositions comprising refrigerant and a UV fluorescent dye, or comprising heat transfer fluid and a UV fluorescent

dye, from about 0.001 weight percent to about 1.0 weight percent of the compositions is a UV dye, preferably from about 0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to about 0.25 weight percent.

5 Solubility of these UV fluorescent dyes in refrigerants and heat transfer fluids may be poor. Therefore, methods for introducing these dyes into the refrigeration or air-conditioning apparatus have been awkward, costly and time consuming. US patent no. RE 36,951 describes a method, which utilizes a dye powder, solid pellet or slurry of dye that
10 may be inserted into a component of the refrigeration or air-conditioning apparatus. As refrigerant and lubricant are circulated through the apparatus, the dye is dissolved or dispersed and carried throughout the apparatus. Numerous other methods for introducing dye into a refrigeration or air-conditioning apparatus are described in the literature.

15 Ideally, the UV fluorescent dye could be dissolved in the refrigerant itself thereby not requiring any specialized method for introduction to the refrigeration or air-conditioning apparatus. The present invention relates to compositions including UV fluorescent dye, which may be introduced into the system in the refrigerant. The inventive
20 compositions will allow the storage and transport of dye-containing refrigerant and heat transfer fluid even at low temperatures while maintaining the dye in solution.

In the present compositions comprising refrigerant, UV fluorescent dye and solubilizing agent, or comprising heat transfer fluid,
25 UV fluorescent dye and solubilizing agent, from about 1 to about 50 weight percent, preferably from about 2 to about 25 weight percent, and most preferably from about 5 to about 15 weight percent of the combined composition is solubilizing agent in the refrigerant or heat transfer fluid. In the compositions of the present invention the UV fluorescent dye is
30 present in a concentration from about 0.001 weight percent to about 1.0 weight percent in the refrigerant or heat transfer fluid, preferably from

0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to about 0.25 weight percent.

Optionally, commonly used refrigeration or air-conditioning system additives may be added, as desired, to compositions of the present invention in order to enhance performance and system stability. These additives are known in the field of refrigeration and air-conditioning, and include, but are not limited to, anti wear agents, extreme pressure lubricants, corrosion and oxidation inhibitors, metal surface deactivators, free radical scavengers, and foam control agents. In general, these additives are present in the inventive compositions in small amounts relative to the overall composition. Typically concentrations of from less than about 0.1 weight percent to as much as about 3 weight percent of each additive are used. These additives are selected on the basis of the individual system requirements. These additives include members of the triaryl phosphate family of EP (extreme pressure) lubricity additives, such as butylated triphenyl phosphates (BTPP), or other alkylated triaryl phosphate esters, e.g. Syn-0-Ad 8478 from Akzo Chemicals, tricresyl phosphates and related compounds. Additionally, the metal dialkyl dithiophosphates (e.g. zinc dialkyl dithiophosphate (or ZDDP), Lubrizol 1375 and other members of this family of chemicals may be used in compositions of the present invention. Other antiwear additives include natural product oils and asymmetrical polyhydroxyl lubrication additives, such as Synergol TMS (International Lubricants). Similarly, stabilizers such as anti oxidants, free radical scavengers, and water scavengers may be employed. Compounds in this category can include, but are not limited to, butylated hydroxy toluene (BHT) and epoxides.

Solubilizing agents such as ketones may have an objectionable odor, which can be masked by addition of an odor masking agent or fragrance. Typical examples of odor masking agents or fragrances may include Evergreen, Fresh Lemon, Cherry, Cinnamon, Peppermint, Floral or Orange Peel, all commercially available, as well as d-limonene and pinene. Such odor masking agents may be used at concentrations of from

about 0.001% to as much as about 15% by weight based on the combined weight of odor masking agent and solubilizing agent.

The present invention further relates to a method of using the refrigerant or heat transfer fluid compositions further comprising ultraviolet
5 fluorescent dye, and optionally, solubilizing agent, in refrigeration or air-conditioning apparatus. The method comprises introducing the refrigerant or heat transfer fluid composition into the refrigeration or air-conditioning apparatus. This may be done by dissolving the UV fluorescent dye in the refrigerant or heat transfer fluid composition in the presence of a
10 solubilizing agent and introducing the combination into the apparatus. Alternatively, this may be done by combining a solubilizing agent and a UV fluorescent dye and introducing said combination into refrigeration or air-conditioning apparatus containing refrigerant and/or heat transfer fluid. The resulting composition may be used in the refrigeration or air-
15 conditioning apparatus.

The present invention further relates to a method of using the refrigerant or heat transfer fluid compositions comprising ultraviolet fluorescent dye to detect leaks. The presence of the dye in the compositions allows for detection of leaking refrigerant in the refrigeration
20 or air-conditioning apparatus. Leak detection helps to address, resolve or prevent inefficient operation of the apparatus or system or equipment failure. Leak detection also helps one contain chemicals used in the operation of the apparatus.

The method comprises providing the composition comprising
25 refrigerant and ultra-violet fluorescent dye, or comprising heat transfer fluid and ultra-violet fluorescent dye as described herein, and optionally, a solubilizing agent as described herein, to refrigeration and air-conditioning apparatus and employing a suitable means for detecting the UV fluorescent dye-containing refrigerant. Suitable means for detecting the
30 dye include, but are not limited to, an ultra-violet lamp, often referred to as a "black light" or "blue light". Such ultra-violet lamps are commercially available from numerous sources specifically designed for this purpose.

Once the ultra-violet fluorescent dye containing composition has been introduced to the refrigeration or air-conditioning apparatus and has been allowed to circulate throughout the system, a leak can be found by shining said ultra-violet lamp on the apparatus and observing the fluorescence of the dye in the vicinity of any leak point.

The present invention further relates to a method of using the compositions of the present invention for producing refrigeration or heat, wherein the method comprises producing refrigeration by evaporating said composition in the vicinity of a body to be cooled and thereafter condensing said composition; or producing heat by condensing said composition in the vicinity of the body to be heated and thereafter evaporating said composition. Where the refrigeration or heat transfer fluid composition of the present invention comprises an ultra-violet fluorescent dye, and/or a solubilizing agent, the refrigerant or heat transfer fluid component of the composition is evaporated and thereafter condensed to produce refrigeration, or condensed and thereafter evaporated to produce heat.

Mechanical refrigeration is primarily an application of thermodynamics wherein a cooling medium, such as a refrigerant, goes through a cycle so that it can be recovered for reuse. Commonly used cycles include vapor-compression, absorption, steam-jet or steam-ejector, and air.

Vapor-compression refrigeration systems include an evaporator, a compressor, a condenser, and an expansion device. A vapor-compression cycle re-uses refrigerant in multiple steps producing a cooling effect in one step and a heating effect in a different step. The cycle can be described simply as follows. Liquid refrigerant enters an evaporator through an expansion device, and the liquid refrigerant boils in the evaporator at a low temperature to form a gas and produce cooling. The low-pressure gas enters a compressor where the gas is compressed to raise its pressure and temperature. The higher-pressure (compressed) gaseous refrigerant then enters the condenser in which the refrigerant

condenses and discharges its heat to the environment. The refrigerant returns to the expansion device through which the liquid expands from the higher-pressure level in the condenser to the low-pressure level in the evaporator, thus repeating the cycle.

5 There are various types of compressors that may be used in refrigeration applications. Compressors can be generally classified as reciprocating, rotary, jet, centrifugal, scroll, screw or axial-flow, depending on the mechanical means to compress the fluid, or as positive-
10 displacement (e.g., reciprocating, scroll or screw) or dynamic (e.g., centrifugal or jet), depending on how the mechanical elements act on the fluid to be compressed.

 Either positive displacement or dynamic compressors may be used in the present inventive process. A centrifugal type compressor is the preferred equipment for the present refrigerant compositions.

15 A centrifugal compressor uses rotating elements to accelerate the refrigerant radially, and typically includes an impeller and diffuser housed in a casing. Centrifugal compressors usually take fluid in at an impeller eye, or central inlet of a circulating impeller, and accelerate it radially outward. Some static pressure rise occurs in the impeller, but
20 most of the pressure rise occurs in the diffuser section of the casing, where velocity is converted to static pressure. Each impeller-diffuser set is a stage of the compressor. Centrifugal compressors are built with from 1 to 12 or more stages, depending on the final pressure desired and the volume of refrigerant to be handled.

25 The pressure ratio, or compression ratio, of a compressor is the ratio of absolute discharge pressure to the absolute inlet pressure. Pressure delivered by a centrifugal compressor is practically constant over a relatively wide range of capacities.

 Positive displacement compressors draw vapor into a chamber,
30 and the chamber decreases in volume to compress the vapor. After being compressed, the vapor is forced from the chamber by further decreasing the volume of the chamber to zero or nearly zero. A positive displacement

compressor can build up a pressure, which is limited only by the volumetric efficiency and the strength of the parts to withstand the pressure.

5 Unlike a positive displacement compressor, a centrifugal compressor depends entirely on the centrifugal force of the high-speed impeller to compress the vapor passing through the impeller. There is no positive displacement, but rather what is called dynamic-compression.

10 The pressure a centrifugal compressor can develop depends on the tip speed of the impeller. Tip speed is the speed of the impeller measured at its tip and is related to the diameter of the impeller and its revolutions per minute. The capacity of the centrifugal compressor is determined by the size of the passages through the impeller. This makes the size of the compressor more dependent on the pressure required than the capacity.

15 Because of its high-speed operation, a centrifugal compressor is fundamentally a high volume, low-pressure machine. A centrifugal compressor works best with a low-pressure refrigerant, such as trichlorofluoromethane (CFC-11) or 1,2,2-trichlorotrifluoroethane (CFC-113).

20 Large centrifugal compressors typically operate at 3000 to 7000 revolutions per minute (rpm). Small turbine centrifugal compressors are designed for high speeds, from about 40,000 to about 70,000 (rpm), and have small impeller sizes, typically less than 0.15 meters.

25 A multi-stage impeller may be used in a centrifugal compressor to improve compressor efficiency thus requiring less power in use. For a two-stage system, in operation, the discharge of the first stage impeller goes to the suction intake of a second impeller. Both impellers may operate by use of a single shaft (or axle). Each stage can build up a compression ratio of about 4 to 1; that is, the absolute discharge pressure
30 can be four times the absolute suction pressure. An example of a two-stage centrifugal compressor system, in this case for automotive

applications, is described in U. S. Patent No. 5,065,990, incorporated herein by reference.

The compositions of the present invention suitable for use in a refrigeration or air-conditioning systems employing a centrifugal

5 compressor comprise at least one of:

- PFBE and 1,1,3-trifluoropropane;
- PFBE and 1,3-difluoropropane;
- PFBE and 1,2-difluorobutane;
- PFBE and 1,3-difluorobutane;
- 10 PFBE and 1,4-difluorobutane;
- PFBE and 1,3-difluoro-2-methylpropane;
- PFBE and 2,3-difluorobutane;
- PFBE and 1,1,1-trifluoropentane;
- PFBE and 1,1,1-trifluoro-3-methylbutane;
- 15 PFBE and 1,1-difluoropentane;
- PFBE and 1,2-difluoropentane;
- PFBE and 2,2-difluoropentane;
- PFBE and 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
- PFBE and 1,1,1-trifluorohexane;
- 20 PFBE and 1,1,2,2-tetrafluorocyclobutane; and
- PFBE and 1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

These above-listed compositions are also suitable for use in a multi-stage centrifugal compressor, preferably a two-stage centrifugal compressor apparatus.

25 The compositions of the present invention may be used in stationary air-conditioning, heat pumps or mobile air-conditioning and refrigeration systems. Stationary air-conditioning and heat pump applications include window, ductless, ducted, packaged terminal, chillers and commercial, including packaged rooftop. Refrigeration applications
30 include domestic or home refrigerators and freezers, ice machines, self-contained coolers and freezers, walk-in coolers and freezers and transport refrigeration systems.

The compositions of the present invention may additionally be used in air-conditioning, heating and refrigeration systems that employ fin and tube heat exchangers, microchannel heat exchangers and vertical or horizontal single pass tube or plate type heat exchangers.

5 Conventional microchannel heat exchangers may not be ideal for the low pressure refrigerant compositions of the present invention. The low operating pressure and density result in high flow velocities and high frictional losses in all components. In these cases, the evaporator design may be modified. Rather than several microchannel slabs connected in
10 series (with respect to the refrigerant path) a single slab/single pass heat exchanger arrangement may be used. Therefore, a preferred heat exchanger for the low pressure refrigerants of the present invention is a single slab/single pass heat exchanger.

 In addition to two-stage or other multi-stage centrifugal compressor
15 apparatus, the following compositions of the present invention are suitable for use in refrigeration or air-conditioning apparatus employing a single slab/single pass heat exchanger:

 PFBE and 1,1,3-trifluoropropane;
 PFBE and 1,3-difluoropropane;
20 PFBE and 1,2-difluorobutane;
 PFBE and 1,3-difluorobutane;
 PFBE and 1,4-difluorobutane;
 PFBE and 1,3-difluoro-2-methylpropane;
 PFBE and 2,3-difluorobutane;
25 PFBE and 1,1,1-trifluoropentane;
 PFBE and 1,1,1-trifluoro-3-methylbutane;
 PFBE and 1,1-difluoropentane;
 PFBE and 1,2-difluoropentane;
 PFBE and 2,2-difluoropentane;
30 PFBE and 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
 PFBE and 1,1,1-trifluorohexane;
 PFBE and 1,1,2,2-tetrafluorocyclobutane; and

PFBE and 1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

The compositions of the present invention are particularly useful in small turbine centrifugal compressors (mini-centrifugal compressors), which can be used in auto and window air-conditioning, heat pumps, or transport refrigeration, as well as other applications. These high efficiency mini-centrifugal compressors may be driven by an electric motor and can therefore be operated independently of the engine speed. A constant compressor speed allows the system to provide a relatively constant cooling capacity at all engine speeds. This provides an opportunity for efficiency improvements especially at higher engine speeds as compared to a conventional R-134a automobile air-conditioning system. When the cycling operation of conventional systems at high driving speeds is taken into account, the advantage of these low pressure systems becomes even greater.

Alternatively, rather than use electrical power, the mini-centrifugal compressor may be powered by an engine exhaust gas driven turbine or a ratioed gear drive assembly with ratioed belt drive. The electrical power available in current automobile design is about 14 volts, but the new mini-centrifugal compressor requires electrical power of about 50 volts. Therefore, use of an alternative power source would be advantageous. A refrigeration or air-conditioning apparatus powered by an engine exhaust gas driven turbine is described in detail in U.S. patent application no. 11/367,517, filed March 2, 2006, incorporated herein by reference. A refrigeration or air-conditioning apparatus powered by a ratioed gear drive assembly is described in detail in U.S. patent application no. 11/378,832, filed March 17, 2006, incorporated herein by reference.

Some of the low pressure refrigerant fluids of the present invention may be suitable as drop-in replacements for CFC-113 in existing centrifugal equipment.

In cleaning apparatus, such as vapor degreasers or defluxers, compositions may be lost during operation through leaks in shaft seals, hose connections, soldered joints and broken lines. In addition, the

working composition may be released to the atmosphere during maintenance procedures on equipment. If the composition is not a pure compound or azeotropic or azeotrope-like composition, the composition may change when leaked or discharged to the atmosphere from the equipment, which may cause the composition remaining in the equipment to become flammable or to exhibit unacceptable performance.

Accordingly, it is desirable to use as a cleaning composition a single fluorinated hydrocarbon or an azeotropic or azeotrope-like composition that fractionates to a negligible degree upon leak or boil-off.

10 In one embodiment, the present invention relates to a process for producing refrigeration comprising evaporating the compositions of the present invention in the vicinity of a body to be cooled, and thereafter condensing said compositions.

15 In another embodiment, the present invention relates to a process for producing heat comprising condensing the compositions of the present invention in the vicinity of a body to be heated, and thereafter evaporating said compositions.

20 In yet another embodiment, the present invention relates to a process for transfer of heat from a heat source to a heat sink wherein the compositions of the present invention serve as heat transfer fluids. Said process for heat transfer comprises transferring the compositions of the present invention from a heat source to a heat sink.

25 Heat transfer fluids are utilized to transfer, move or remove heat from one space, location, object or body to a different space, location, object or body by radiation, conduction, or convection. A heat transfer fluid may function as a secondary coolant by providing means of transfer for cooling (or heating) from a remote refrigeration (or heating) system. In some systems, the heat transfer fluid may remain in a constant state throughout the transfer process (i.e., not evaporate or condense).

30 Alternatively, evaporative cooling processes may utilize heat transfer fluids as well.

A heat source may be defined as any space, location, object or body from which it is desirable to transfer, move or remove heat.

Examples of heat sources may be spaces (open or enclosed) requiring refrigeration or cooling, such as refrigerator or freezer cases in a supermarket, building spaces requiring air-conditioning, or the passenger compartment of an automobile requiring air-conditioning. A heat sink may be defined as any space, location, object or body capable of absorbing heat. A vapor compression refrigeration system is one example of such a heat sink.

10 In another embodiment, the present invention relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by an engine exhaust gas driven turbine; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

15 In yet another embodiment, the present invention relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by a ratioed gear drive assembly with a ratioed belt drive; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

20 In an embodiment of the invention, the present inventive azeotropic compositions are effective cleaning agents, defluxers and degreasers. In particular, the present inventive azeotropic compositions are useful when de-fluxing circuit boards with components such as Flip chip, μ BGA (ball grid array), and Chip scale or other advanced high-density packaging components. Flip chips, μ BGA, and Chip scale are terms that describe high density packaging components used in the semiconductor industry and are well understood by those working in the field.

30 In another embodiment the present invention relates to a process for removing residue from a surface or substrate, comprising: contacting the surface or substrate with a composition of the present invention and recovering the surface or substrate from the composition.

In a process embodiment of the invention, the surface or substrate may be an integrated circuit device, in which case, the residue comprises rosin flux or oil. The integrated circuit device may be a circuit board with various types of components, such as Flip chips, μ BGAs, or
5 Chip scale packaging components. The surface or substrate may additionally be a metal surface such as stainless steel. The rosin flux may be any type commonly used in the soldering of integrated circuit devices, including but not limited to RMA (rosin mildly activated), RA (rosin activated), WS (water soluble), and OA (organic acid). Oil residues
10 include but are not limited to mineral oils, motor oils, and silicone oils.

In the inventive process the means for contacting the surface or substrate is not critical and may be accomplished by immersion of the device in a bath containing the composition, spraying the device with the composition or wiping the device with a substrate that has been wet with
15 the composition. Alternatively, the composition may also be used in a vapor degreasing or defluxing apparatus designed for such residue removal. Such vapor degreasing or defluxing equipment is available from various suppliers such as Forward Technology (a subsidiary of the Crest Group, Trenton, NJ), Trek Industries (Azusa, CA), and Ultronix, Inc.
20 (Hatfield, PA) among others.

An effective composition for removing residue from a surface would be one that had a Kauri-Butanol value (Kb) of at least about 10 , preferably about 40, and even more preferably about 100. The Kauri-Butanol value (Kb) for a given composition reflects the ability of said
25 composition to solubilize various organic residues (e.g., machine and conventional refrigeration lubricants). The Kb value may be determined by ASTM D-1133-94.

The following Examples are meant to illustrate the invention and are not meant to be limiting.

30

EXAMPLES

EXAMPLE 1

Impact of Vapor Leakage A vessel is charged with an initial composition at a specified temperature, and the initial vapor pressure of the composition is measured. The composition is allowed to leak from the vessel, while the temperature is held constant, until 50 weight percent of the initial composition is removed, at which time the vapor pressure of the composition remaining in the vessel is measured. Results are summarized in Table 6 below.

TABLE 6**A fter 50% Leak After 50% Leak**

<u>Compounds</u>	<u>Initial</u>	<u>Initial</u>			<u>Delta</u>
<u>wt% A/ wt% B</u>	<u>Psia</u>	<u>kPa</u>	<u>Psia</u>	<u>kPa</u>	<u>P %</u>
PFBE/1,1,3-trifluoropropane (41.7 °C)					
42.4/57.6	14.69	101.28	14.69	101.28	0.0%
20/80	14.40	99.29	14.07	97.01	2.3%
10/90	13.98	96.39	13.53	93.29	3.2%
1/99	13.27	91.49	13.19	90.94	0.6%
0/100	13.16	90.74	13.16	90.74	0.0%
60/40	14.50	99.97	14.26	98.32	1.7%
77/23	13.64	94.05	12.36	85.22	9.4%
78/22	13.55	93.42	12.18	83.98	10.1%
100/0	7.97	54.95	7.97	54.95	0.0%
PFBE/1,3-difluoropropane (37.8 °C)					
43.3/56.7	14.68	101.22	14.68	101.22	0.0%
20/80	14.41	99.35	14.01	96.60	2.8%
10/90	14.01	96.60	13.49	93.01	3.7%
1/99	13.31	91.77	13.22	91.15	0.7%
0/100	13.20	91.01	13.20	91.01	0.0%
60/40	14.53	100.18	14.31	98.66	1.5%
76/24	13.85	95.49	12.51	86.25	9.7%

77/23	13.77	94.94	12.30	84.81	10.7%
100/0	6.87	47.37	6.87	47.37	0.0%

PFBE/1,2-difluorobutane (48.5 °C)

42.0/58.0	14.70	101.35	14.70	101.35	0.0%
20/80	14.51	100.04	14.45	99.63	0.4%
10/90	14.30	98.60	14.23	98.11	0.5%
1/99	14.03	96.73	14.02	96.67	0.1%
0/100	14.00	96.53	14.00	96.53	0.0%
60/40	14.53	100.18	14.43	99.49	0.7%
80/20	13.63	93.98	13.08	90.18	4.0%
90/10	12.49	86.12	11.76	81.08	5.8%
95/5	11.56	79.70	10.98	75.70	5.0%
99/1	10.54	72.67	10.38	71.57	1.5%
100/0	10.24	70.60	10.24	70.60	0.0%

PFBE/1,3-difluorobutane (53.5 °C)

67.8/32.2	14.68	101.22	14.68	101.22	0.0%
80/20	14.50	99.97	14.40	99.29	0.7%
90/10	13.88	95.70	13.58	93.63	2.2%
95/5	13.24	91.29	12.94	89.22	2.3%
99/1	12.45	85.84	12.35	85.15	0.8%
100/0	12.20	84.12	12.20	84.12	0.0%
50/50	14.47	99.77	14.30	98.60	1.2%
40/60	14.20	97.91	13.84	95.42	2.5%
20/80	13.37	92.18	12.69	87.50	5.1%
10/90	12.76	87.98	12.24	84.39	4.1%
1/99	12.04	83.01	11.97	82.53	0.6%
0/100	11.94	82.32	11.94	82.32	0.0%

PFBE/1,4-difluorobutane (57.6 °C)

88.3/11.7	14.71	101.42	14.71	101.42	0.0%
-----------	-------	--------	-------	--------	------

95/5	14.54	100.25	14.49	99.91	0.3%
99/1	14.17	97.70	14.14	97.49	0.2%
100/0	14.02	96.67	14.02	96.67	0.0%
60/40	13.82	95.29	12.88	88.81	6.8%
56/44	13.64	94.05	12.36	85.22	9.4%
55/45	13.60	93.77	12.21	84.19	10.2%
0/100	7.66	52.81	7.66	52.81	0.0%

PFBE/1,3-difluoro-2-methylpropane (54.6 °C)

72.9/27.1	14.70	101.35	14.70	101.35	0.0%
90/10	14.16	97.63	13.95	96.18	1.5%
99/1	13.61	93.84	13.38	92.25	1.7%
100/0	12.67	87.36	12.67	87.36	0.0%
60/40	14.56	100.39	14.45	99.63	0.8%
40/60	13.98	96.39	13.36	92.11	4.4%
20/80	12.98	89.49	11.96	82.46	7.9%
10/90	12.24	84.39	11.51	79.36	6.0%
1/99	11.36	78.32	11.27	77.70	0.8%
0/100	11.25	77.57	11.25	77.57	0.0%

PFBE/2,3-difluorobutane (46.3 °C)

30.1/69.9	14.68	101.22	14.68	101.22	0.0%
20/80	14.65	101.01	14.64	100.94	0.1%
10/90	14.54	100.25	14.52	100.11	0.1%
1/99	14.39	99.22	14.38	99.15	0.1%
0/100	14.37	99.08	14.37	99.08	0.0%
60/40	14.28	98.46	14.06	96.94	1.5%
80/20	13.12	90.46	12.38	85.36	5.6%
90/10	11.84	81.63	10.95	75.50	7.5%
95/5	10.84	74.74	10.17	70.12	6.2%
99/1	9.77	67.36	9.59	66.12	1.8%
100/0	9.46	65.22	9.46	65.22	0.0%

PFBE/1,1,1-trifluoropentane (50.0 °C)

0/100	21.00	144.79	21.00	144.79	0.0%
1/99	20.95	144.45	20.93	144.31	0.1%
10/90	20.45	141.00	20.24	139.55	1.0%
20/80	19.85	136.86	19.42	133.90	2.2%
30/70	19.17	132.17	18.53	127.76	3.3%
40/60	18.41	126.93	17.57	121.14	4.6%
50/50	17.55	121.00	16.53	113.97	5.8%
60/40	16.57	114.25	15.43	106.39	6.9%
70/30	15.44	106.46	14.27	98.39	7.6%
80/20	14.14	97.49	13.07	90.12	7.6%
90/10	12.61	86.94	11.89	81.98	5.7%
99/1	10.99	75.77	10.90	75.15	0.8%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/1,1,1-trifluoro-3-methylbutane (50.0 °C)

0/100	21.58	148.79	21.58	148.79	0.0%
1/99	21.52	148.38	21.50	148.24	0.1%
10/90	21.00	144.79	20.76	143.14	1.1%
20/80	20.35	140.31	19.88	137.07	2.3%
30/70	19.63	135.34	18.92	130.45	3.6%
40/60	18.82	129.76	17.89	123.35	4.9%
50/50	17.91	123.49	16.79	115.76	6.3%
60/40	16.87	116.32	15.62	107.70	7.4%
70/30	15.68	108.11	14.39	99.22	8.2%
80/20	14.30	98.60	13.14	90.60	8.1%
90/10	12.69	87.50	11.92	82.19	6.1%
99/1	11.00	75.84	10.90	75.15	0.9%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/1,1-difluoropentane (50.0 °C)

0/100	7.90	54.47	7.90	54.47	0.0%
1/99	7.94	54.74	7.92	54.61	0.3%
10/90	8.29	57.16	8.10	55.85	2.3%
20/80	8.65	59.64	8.36	57.64	3.4%
30/70	9.00	62.05	8.66	59.71	3.8%
40/60	9.33	64.33	9.00	62.05	3.5%
50/50	9.65	66.53	9.37	64.60	2.9%
60/40	9.95	68.60	9.74	67.16	2.1%
70/30	10.23	70.53	10.11	69.71	1.2%
80/20	10.49	72.33	10.44	71.98	0.5%
90/10	10.70	73.77	10.69	73.71	0.1%
99/1	10.80	74.46	10.80	74.46	0.0%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/1,2-difluoropentane (50.0 °C)

0/100	6.50	44.82	6.50	44.82	0.0%
1/99	6.55	45.16	6.51	44.89	0.6%
10/90	7.03	48.47	6.67	45.99	5.1%
20/80	7.53	51.92	6.93	47.78	8.0%
30/70	8.00	55.16	7.28	50.19	9.0%
40/60	8.44	58.19	7.73	53.30	8.4%
50/50	8.86	61.09	8.25	56.88	6.9%
60/40	9.28	63.98	8.81	60.74	5.1%
70/30	9.68	66.74	9.37	64.60	3.2%
80/20	10.09	69.57	9.91	68.33	1.8%
90/10	10.47	72.19	10.42	71.84	0.5%
99/1	10.77	74.26	10.77	74.26	0.0%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/2,2-difluoropentane (57.5 °C)

69.7/30.3	14.71	101.42	14.71	101.42	0.0%
80/20	14.65	101.01	14.64	100.94	0.1%

90/10	14.44	99.56	14.42	99.42	0.1%
99/1	14.04	96.80	14.03	96.73	0.1%
100/0	13.98	96.39	13.98	96.39	0.0%
50/50	14.57	100.46	14.55	100.32	0.1%
40/60	14.43	99.49	14.38	99.15	0.3%
20/80	14.06	96.94	13.99	96.46	0.5%
10/90	13.84	95.42	13.79	95.08	0.4%
1/99	13.62	93.91	13.62	93.91	0.0%
0/100	13.60	93.77	13.60	93.77	0.0%

PFBE/1,1,1,2,2,3,4,5,5,5-decafluoropentane (50.0 °C)

0/100	12.38	85.36	12.38	85.36	0.0%
1/99	12.38	85.36	12.38	85.36	0.0%
10/90	12.33	85.01	12.32	84.94	0.1%
20/80	12.21	84.19	12.20	84.12	0.1%
30/70	12.06	83.15	12.03	82.94	0.2%
40/60	11.89	81.98	11.85	81.70	0.3%
50/50	11.71	80.74	11.66	80.39	0.4%
60/40	11.52	79.43	11.47	79.08	0.4%
70/30	11.33	78.12	11.29	77.84	0.4%
80/20	11.15	76.88	11.12	76.67	0.3%
90/10	10.97	75.64	10.95	75.50	0.2%
99/1	10.82	74.60	10.81	74.53	0.1%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/1,1,1-trifluorohexane (50.0 °C)

0/100	6.44	44.40	6.44	44.40	0.0%
1/99	6.47	44.61	6.46	44.54	0.2%
10/90	6.76	46.61	6.63	45.71	1.9%
20/80	7.09	48.88	6.85	47.23	3.4%
30/70	7.43	51.23	7.12	49.09	4.2%
40/60	7.80	53.78	7.43	51.23	4.7%

50/50	8.20	56.54	7.80	53.78	4.9%
60/40	8.62	59.43	8.23	56.74	4.5%
70/30	9.08	62.60	8.73	60.19	3.9%
80/20	9.59	66.12	9.31	64.19	2.9%
90/10	10.16	70.05	9.99	68.88	1.7%
99/1	10.73	73.98	10.71	73.84	0.2%
100/0	10.80	74.46	10.80	74.46	0.0%

PFBE/1,1,2,2-tetrafluorocyclobutane (46.8 °C)

39.6/60.4	14.69	101.28	14.69	101.28	0.0%
20/80	14.44	99.56	14.26	98.32	1.2%
10/90	14.05	96.87	13.76	94.87	2.1%
1/99	13.40	92.39	13.34	91.98	0.4%
0/100	13.30	91.70	13.30	91.70	0.0%
60/40	14.41	99.35	14.16	97.63	1.7%
80/20	13.20	91.01	12.25	84.46	7.2%
90/10	11.88	81.91	10.85	74.81	8.7%
95/5	10.90	75.15	10.19	70.26	6.5%
99/1	9.91	68.33	9.73	67.09	1.8%
100/0	9.63	66.40	9.63	66.40	0.0%

PFBE/1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene (50.0 °C)

0/100	12.67	87.36	12.67	87.36	0.0%
1/99	12.67	87.36	12.67	87.36	0.0%
10/90	12.60	86.87	12.59	86.81	0.1%
20/80	12.48	86.05	12.47	85.98	0.1%
40/60	12.18	83.98	12.14	83.70	0.3%
50/50	12.00	82.74	11.94	82.32	0.5%
60/40	11.80	81.36	11.72	80.81	0.7%
80/20	11.33	78.12	11.26	77.64	0.6%
90/10	11.08	76.39	11.03	76.05	0.5%
99/1	10.83	74.67	10.82	74.60	0.1%

100/0	10.80	74.46	10.80	74.46	0.0%
-------	-------	-------	-------	-------	------

The results show the difference in vapor pressure between the original composition and the composition remaining after 50 weight percent has been removed is less than about 10 percent for compositions of the present invention. This indicates compositions of the present invention are azeotropic or near-azeotrope.

EXAMPLE 2

Tip Speed to Develop Pressure

Tip speed can be estimated by making some fundamental relationships for refrigeration equipment that use centrifugal compressors. The torque an impeller ideally imparts to a gas is defined as

$$T = m(v_2 r_2 - v_1 r_1) \quad \text{Equation 1}$$

where

T = torque, Newton-meters

m = mass rate of flow, kg/sec

v_2 = tangential velocity of refrigerant leaving impeller (tip speed), meters/sec

r_2 = radius of exit impeller, meters

v_1 = tangential velocity of refrigerant entering impeller, meters/sec

r_1 = radius of inlet of impeller, meters

Assuming the refrigerant enters the impeller in an essentially axial direction, the tangential component of the velocity $v_1 = 0$, therefore

$$T = m v_2 r_2 \quad \text{Equation 2}$$

The power required at the shaft is the product of the torque and the rotative speed

$$P = T \omega \quad \text{Equation 3}$$

where

P = power, W

ω = angular velocity, radians/s

therefore,

$$5 \quad P = T \cdot \omega = m \cdot v_2 \cdot r_2 \cdot \omega \quad \text{Equation 4}$$

At low refrigerant flow rates, the tip speed of the impeller and the tangential velocity of the refrigerant are nearly identical; therefore

$$10 \quad r_2 \cdot \omega = v_2 \quad \text{Equation 5}$$

and

$$P = m \cdot v_2 \cdot v_2 \quad \text{Equation 6}$$

Another expression for ideal power is the product of the mass rate of flow and the isentropic work of compression,

$$15 \quad P = m \cdot H_i \cdot (1000 \text{ J/kJ}) \quad \text{Equation 7}$$

where

H_i = Difference in enthalpy of the refrigerant from a saturated vapor at the evaporating conditions to saturated condensing conditions, kJ/kg.

20

Combining the two expressions Equation 6 and 7 produces,

$$v_2 \cdot v_2 = 1000 \cdot H_i \quad \text{Equation 8}$$

25

Although Equation 8 is based on some fundamental assumptions, it provides a good estimate of the tip speed of the impeller and provides an important way to compare tip speeds of refrigerants.

The table below shows theoretical tip speeds that are calculated for 1,2,2-trichlorotrifluoroethane (CFC-113) and compositions of the present invention. The conditions assumed for this comparison are:

30

Evaporator temperature 40.0°F (4.4°C)

Condenser temperature	110.0°F (43.3°C)
Liquid subcool temperature	10.0°F (5.5°C)
Return gas temperature	75.0°F (23.8°C)
Compressor efficiency is	70%

5

These are typical conditions under which small turbine centrifugal compressors perform.

TABLE 7

Refrigerant Composition	Wt% PFBE	Wt% B	Hi Btu/lb	Hi*0.7 Btu/lb	Hi*0.7 KJ/Kg	V2 m/s	V2 rel to CFC-113
CFC-113	100		10.92	7.6	17.8	133.3	na
PFBE plus B:							
1,1,3-trifluoropropane	42.4	57.6	14.24	10.0	23.2	152.3	114%
1,3-difluoropropane	43.3	56.7	14.97	10.5	24.4	156.1	117%
1,2-difluorobutane	42.0	58.0	16.56	11.6	27.0	164.2	123%
1,3-difluorobutane	67.8	32.2	14.9	10.4	24.3	155.8	117%
1,4-difluorobutane	88.3	11.7	13.64	9.5	22.2	149.0	112%
1,3-difluoro-2- methylpropane	72.9	27.1	14.57	10.2	23.7	154.0	116%
2,3-difluorobutane	30.1	69.9	17.16	12.0	27.9	167.2	125%
1,1,1-trifluoropentane	50.0	50.0	15.63	10.9	25.4	159.5	120%
1,1,1-trifluoro-3- methylbutane	50.0	50.0	15.5	10.9	25.2	158.9	119%
1,1-difluoropentane	50.0	50.0	16.93	11.9	27.6	166.0	125%
1,2-difluoropentane	50.0	50.0	17.12	12.0	27.9	167.0	125%
2,2-difluoropentane	69.7	30.3	15.26	10.7	24.8	157.6	118%
1,1,1,2,2,3,4,5,5,5- decafluoropentane	50.0	50.0	12.36	8.7	20.1	141.9	106%
1,1,1-trifluorohexane	50.0	50.0	16.54	11.6	26.9	164.1	123%
1,1,2,2- tetrafluorocyclobutane	39.6	60.4	14.25	10.0	23.2	152.3	114%
1,1,1,4,4,4-hexafluoro-2,3- bis(trifluoromethyl)-2- butene	50.0	50.0	12.38	8.7	20.2	142.0	106%

10

The Example shows that compounds of the present invention have tip speeds within about +/- 25 percent of CFC-113 and would be effective replacements for CFC-113 with minimal compressor design changes. Compounds with tip speeds within +/-15 percent of CFC-113 are preferred.

EXAMPLE 3
Performance Data

The following table shows the performance of various refrigerants compared to CFC-113. The data are based on the following conditions.

Evaporator temperature	40.0°F (4.4°C)
Condenser temperature	110.0°F (43.3°C)
Subcool temperature	10.0°F (5.5°C)
Return gas temperature	75.0°F (23.8°C)
Compressor efficiency is	70%

TABLE 8

Composition	wt%	wt% B	Evap	Evap	Cond	Cond	Compr	Compr	COP	Capacity	Capacity
	PFBE		Pres	Pres	Pres	Pres	Disch	Disch		(Btu/min)	(kW)
			(Psia)	(kPa)	(Psia)	(kPa)	Temp	Temp			
			(F)	(C)							
PFBE			1.6	11	9.6	66	130.7	54.8	10.0	3.92	0.18
CFC-113			2.7	19	12.8	88	156.3	69.1	14.8	4.18	0.26
PFBE plus B:											
1,1,3-trifluoropropane	42.4	57.6	3.4	23	15.5	107	158.1	70.1	20.8	4.19	0.36
1,3-difluoropropane	43.3	56.7	3.9	27	17.6	122	161.1	71.7	23.9	4.19	0.42
1,2-difluorobutane	42.0	58.0	2.6	18	12.3	85	151.6	66.4	16.2	4.17	0.28
1,3-difluorobutane	67.8	32.2	2.1	14	10.4	71	143.9	62.2	13.1	4.10	0.23
1,4-difluorobutane	88.3	11.7	1.7	11	8.8	60	136.4	58.0	10.6	4.01	0.18
1,3-difluoro-2-methylpropane	72.9	27.1	2.0	14	10.0	69	142.2	61.2	12.5	4.09	0.22
2,3-difluorobutane	30.1	69.9	2.4	16	11.6	80	157.4	69.7	15.4	4.25	0.27
1,1,1-trifluoropentane	50.0	50.0	3.0	21	14.6	100	137.3	58.5	18.2	4.02	0.32
1,1,1-trifluoro-3-methylbutane	50.0	50.0	3.0	21	14.4	100	137.5	58.6	18.1	4.02	0.32
1,1-difluoropentane	50.0	50.0	1.5	10	8.1	56	144.7	62.6	10.0	4.14	0.18
1,2-difluoropentane	50.0	50.0	1.3	9	7.1	49	146.1	63.4	8.8	4.18	0.15
2,2-difluoropentane	69.7	30.3	1.8	12	9.0	62	137.6	58.7	11.1	4.04	0.19
1,1,1,2,2,3,4,5,5,5-decafluoropentane	50.0	50.0	1.9	13	10.0	69	131.3	55.2	11.7	3.92	0.20
1,1,1-trifluorohexane	50.0	50.0	1.2	8	6.7	46	137.3	58.5	7.9	4.08	0.14
1,1,2,2-tetrafluorocyclobutane	39.6	60.4	2.9	20	13.1	90	143.5	61.9	17.3	4.11	0.30
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene	50.0	50.0	1.8	12	9.5	65	126.8	52.7	10.8	3.83	0.19

Data show the compositions of the present invention have
5 evaporator and condenser pressures similar to CFC-113. Some

compositions also have higher capacity or energy efficiency (COP) than CFC-113.

While specific embodiments of the invention have been shown and described, further modifications and improvements will occur to those skilled in the art. It is desired that it be understood, therefore, that the invention is not limited to the particular form shown and it is intended in the appended claims which follow to cover all modifications which do not depart from the spirit and scope of the invention.

CLAIM(S)

What is claimed is :

1. A refrigerant or heat transfer fluid composition comprising
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and at least one
5 hydrofluorocarbon selected from the group consisting of:
1,1,3-trifluoropropane;
1,3-difluoropropane;
1,2-difluorobutane;
1,3-difluorobutane;
10 1,4-difluorobutane;
1,3-difluoro-2-methylpropane;
2,3-difluorobutane;
1,1,1-trifluoropentane;
1,1,1-trifluoro-3-methylbutane;
15 1,1-difluoropentane;
1,2-difluoropentane;
2,2-difluoropentane;
1,1,1,2,2,3,4,5,5,5-decafluoropentane;
1,1,1-trifluorohexane;
20 1,1,2,2-tetrafluorocyclobutane; and
1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

2. A refrigerant or heat transfer fluid composition as in claim 1,
wherein the composition is selected from the group consisting of:
25 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,3-trifluoropropane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,3-difluoropropane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,2-difluorobutane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,3-difluorobutane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,4-difluorobutane;
30 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,3-difluoro-2-
methylpropane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 2,3-difluorobutane;

- 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,1-trifluoropentane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,1-trifluoro-3-
methylbutane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1-difluoropentane;
5 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,2-difluoropentane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 2,2-difluoropentane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,1,2,2,3,4,5,5,5-
decafluoropentane;
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,1-trifluorohexane;
10 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,2,2-
tetrafluorocyclobutane; and
3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 1,1,1,4,4,4-hexafluoro-
2,3-bis(trifluoromethyl)-2-butene.
- 15 3. A refrigerant or heat transfer fluid composition as in claim 1,
wherein the composition is an azeotropic or near-azeotropic
composition selected from the group consisting of:
about 1 to about 77 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 23 to about 99 weight percent of 1,1,3-
20 trifluoropropane;
about 1 to about 76 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 24 to about 99 weight percent of 1,3-
difluoropropane;
about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
25 1-hexene and about 1 to about 99 weight percent of 1,2-
difluorobutane;
about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 99 weight percent of 1,3-
difluorobutane;
30 about 56 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 44 weight percent of 1,4-
difluorobutane;

- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,3-difluoro-2-methylpropane;
- 5 about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 2,3-difluorobutane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1,1-trifluoropentane;
- 10 about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1,1-trifluoro-3-methylbutane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1-
- 15 difluoropentane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,2-difluoropentane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
- 20 1-hexene and about 1 to about 99 weight percent of 2,2-difluoropentane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of
- 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
- 25 about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1,1-trifluorohexane;
- about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1,2,2-
- 30 tetrafluorocyclobutane; and

about 1 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 99 weight percent of 1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.

- 5 4. A refrigerant or heat transfer fluid composition as in claim 1,
wherein the composition is an azeotropic or near-azeotropic
composition selected from the group consisting of:
about 20 to about 77 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 23 to about 80 weight percent of 1,1,3-
10 trifluoropropane;
about 20 to about 76 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 24 to about 80 weight percent of 1,3-
difluoropropane;
about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
15 1-hexene and about 1 to about 80 weight percent of 1,2-
difluorobutane;
about 40 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 60 weight percent of 1,3-
difluorobutane;
20 about 60 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 40 weight percent of 1,4-
difluorobutane;
about 40 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 60 weight percent of 1,3-difluoro-2-
25 methylpropane;
about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
1-hexene and about 1 to about 80 weight percent of 2,3-
difluorobutane;
about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-
30 1-hexene and about 1 to about 80 weight percent of 1,1,1-
trifluoropentane;

- about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,1,1-trifluoro-3-methylbutane;
- 5 about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,1-difluoropentane;
- about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,2-difluoropentane;
- 10 about 40 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 60 weight percent of 2,2-difluoropentane;
- about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of
- 15 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
- about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,1,1-trifluorohexane;
- 20 about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,1,2,2-tetrafluorocyclobutane; and
- about 20 to about 99 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and about 1 to about 80 weight percent of 1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene.
- 25
5. A refrigerant or heat transfer fluid composition as in claim 1, wherein the composition is an azeotropic composition selected from the group consisting of:
- 30 42.4 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and 57.6 weight percent of 1,1,3-trifluoropropane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 41.7 °C;

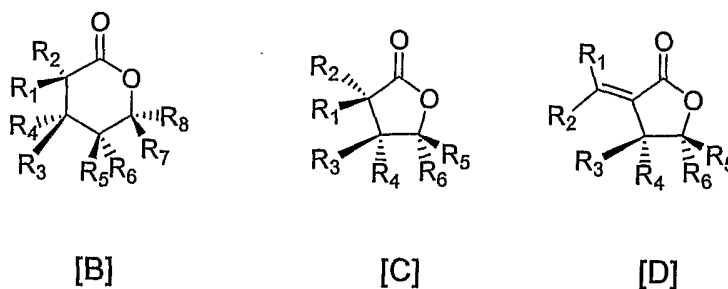
- 43.3 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
56.7 weight percent of 1,3-difluoropropane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 37.8 °C;
42.0 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
58.0 weight percent of 1,2-difluorobutane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 48.5 °C;
67.8 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
32.2 weight percent of 1,3-difluorobutane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 53.5 °C;
88.3 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
11.7 weight percent of 1,4-difluorobutane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 57.6 °C;
72.9 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
27.1 weight percent of 1,3-difluoro-2-methylpropane having a vapor
pressure of about 14.7 psia (101 kPa) at a temperature of about
54.6 °C;
30.1 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
69.9 weight percent of 2,3-difluorobutane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 46.3 °C;
69.7 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
30.3 weight percent of 2,2-difluoropentane having a vapor pressure
of about 14.7 psia (101 kPa) at a temperature of about 57.5 °C;
39.6 weight percent of 3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene and
60.4 weight percent of 1,1,2,2-tetrafluorocyclobutane having a
vapor pressure of about 14.7 psia (101 kPa) at a temperature of
about 46.8 °C.
6. A method for producing refrigeration, said method comprising
evaporating the refrigerant or heat transfer composition of claim 1 in
the vicinity of a body to be cooled, and thereafter condensing said
composition.

7. A method for producing heat, said method comprising condensing the refrigerant or heat transfer composition of claim 1 in the vicinity of a body to be heated, and thereafter evaporating said composition.
- 5
8. A method for transferring heat, said method comprising transferring the compositions of claim 1 from a heat source to a heat sink.
9. A composition as in claim 1 further comprising at least one ultra-
10 violet fluorescent dye selected from the group consisting of naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, derivatives of said dye and combinations thereof.
- 15 10. A composition as in claim 9, further comprising at least one solubilizing agent selected from the group consisting of hydrocarbons, dimethylether, polyoxyalkylene glycol ethers, amides, ketones, nitriles, chlorocarbons, esters, lactones, aryl
20 ethers, hydrofluoroethers, and 1,1,1-trifluoroalkanes; and wherein the refrigerant and solubilizing agent are not the same compound.
11. A composition as in claim 10, wherein said solubilizing agent is selected from the group consisting of:
- 25 a) polyoxyalkylene glycol ethers represented by the formula $R^1[(OR^2)_xOR^3]_y$, wherein: x is an integer from 1 to 3; y is an integer from 1 to 4; R^1 is selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from
30 hydrogen, and aliphatic and alicyclic hydrocarbon radicals having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radicals; and wherein said

polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units;

- 5
- b) amides represented by the formulae $R^1C(O)NR^2R^3$ and cyclo- $[R^4CON(R^5)-]$, wherein R^1 , R^2 , R^3 and R^5 are independently selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms, and at most one aromatic radical having from 6 to 12 carbon atoms; R^4 is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon atoms; and wherein said amides have a molecular weight of from about 100 to about 300 atomic mass units;
- 10
- c) ketones represented by the formula $R^1C(O)R^2$, wherein R^1 and R^2 are independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and wherein said ketones have a molecular weight of from about 70
- 15
- to about 300 atomic mass units;
- d) nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic
- 20
- mass units;
- e) chlorocarbons represented by the formula RCI_x , wherein; x is 1 or 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to
- 25
- about 200 atomic mass units;
- f) aryl ethers represented by the formula R^1OR^2 , wherein: R^1 is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R^2 is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl
- 30
- ethers have a molecular weight of from about 100 to about 150 atomic mass units;

- g) 1,1,1-trifluoroalkanes represented by the formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms;
- h) fluoroethers represented by the formula $R^1OCF_2CF_2H$, wherein R^1 is selected from aliphatic, alicyclic and aromatic hydrocarbon radicals having from about 5 to about 15 carbon atoms; or wherein said fluoroethers are derived from fluoro-olefins and polyols, wherein said fluoro-olefins are of the type $CF_2=CXY$, wherein X is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 ; and said polyols are linear or branched, wherein said linear polyols are of the type $HOCH_2(CHOH)_x(CRR')_yCH_2OH$, wherein R and R' are hydrogen, CH_3 or C_2H_5 , x is an integer from 0-4, y is an integer from 0-3 and z is either zero or 1, and said branched polyols are of the type $C(OH)_t(R)_u(CH_2OH)_v[(CH_2)_mCH_2OH]_w$, wherein R may be hydrogen, CH_3 or C_2H_5 , m is an integer from 0 to 3, t and u are 0 or 1, v and w are integers from 0 to 4, and also wherein $t + u + v + w = 4$;
- i) lactones represented by structures [B], [C], and [D]:



wherein, R_1 through R_8 are independently selected from hydrogen, linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals; and the molecular weight is from about 100 to about 300 atomic mass units; and

- j) esters represented by the general formula $R^1CO_2R^2$, wherein R^1 and R^2 are independently selected from linear and cyclic,

saturated and unsaturated, alkyl and aryl radicals; and wherein said esters have a molecular weight of from about 80 to about 550 atomic mass units.

- 5 12. A method for detecting the composition of claim 9 in a compression refrigeration or air conditioning apparatus, said method comprising providing said composition to said apparatus, and providing a suitable means for detecting said composition at a leak point or in the vicinity of said apparatus.
- 10
13. A method of producing refrigeration as in claim 6, wherein the refrigerant or heat transfer composition further comprises at least one ultra-violet fluorescent dye selected from the group consisting of naphthalimides, perylenes, coumarins, anthracenes,
15 phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, derivatives of said dye and combinations thereof.
14. A method of producing heat as in claim 7, wherein the refrigerant or heat transfer composition further comprises at least one ultra-violet
20 fluorescent dye selected from the group consisting of naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, derivatives of said dye and combinations thereof.
- 25 15. A composition as in claim 1 further comprising a stabilizer, water scavenger, or odor masking agent.
16. A composition as in claim 15 wherein said stabilizer is selected from the group consisting of nitromethane, hindered phenols,
30 hydroxylamines, thiols, phosphites and lactones.

17. A method as in claim 6, wherein said method comprises producing refrigeration in a refrigeration or air conditioning apparatus employing a multi-stage centrifugal compressor.
- 5 18. The method as in claim 17 wherein said multi-stage centrifugal compressor is a two-stage centrifugal compressor.
19. A method as in claim 7, wherein said method comprises producing heat in a refrigeration apparatus employing a multi-stage centrifugal compressor.
- 10
20. A method as in claim 19 wherein said multi-stage centrifugal compressor is a two-stage centrifugal compressor.
- 15 21. The composition as in claim 15 wherein said water scavenger is an ortho ester.
22. A method as in claim 6, wherein said method comprises producing refrigeration in a refrigeration or air conditioning apparatus employing a mini-centrifugal compressor powered by an engine exhaust gas driven turbine.
- 20
23. A method as in claim 6, wherein said method comprises producing refrigeration in a refrigeration or air conditioning apparatus employing a mini-centrifugal compressor powered by a ratioed gear drive assembly with a ratioed belt drive.
- 25
24. A process for removing residue from a surface comprising:
- 30 (a) contacting the surface with an azeotropic or azeotrope-like composition comprising perfluorobutylethylene (3,3,4,4,5,5,6,6,6-nonafluoro-1-hexene (PFBE)) and at least

one hydrofluorocarbon is selected from the group consisting of:

- 5 1,1,3-trifluoropropane;
 1,3-difluoropropane;
 1,2-difluorobutane;
 1,3-difluorobutane;
 1,4-difluorobutane;
 1,3-difluoro-2-methylpropane;
 2,3-difluorobutane;
10 1,1,1-trifluoropentane;
 1,1,1-trifluoro-3-methylbutane;
 1,1-difluoropentane;
 1,2-difluoropentane;
 2,2-difluoropentane;
15 1,1,1,2,2,3,4,5,5,5-decafluoropentane;
 1,1,1-trifluorohexane;
 1,1,2,2-tetrafluorocyclobutane; and
 1,1,1,4,4,4-hexafluoro-2,3-bis(trifluoromethyl)-2-butene;
- (b) recovering the surface from the composition.
- 20 25. A process as in claim 24 wherein said residue comprises an oil.
 26. A process as in claim 24 wherein said residue comprises a rosin
 flux.
 27. A process as in claim 24 wherein the surface is an integrated circuit
 device.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/015580

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09K5/04 C11D7/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09K C11D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 498 439 A (DAIKIN INDUSTRIES, LTD) 19 January 2005 (2005-01-19) claims 1,9	1-5
A	US 5 458 800 A (DESBIENDRAS ET AL) 17 October 1995 (1995-10-17) examples 16,18	1,24
A	US 2004/051074 A1 (SHIN HYUNKOOK ET AL) 18 March 2004 (2004-03-18) paragraphs [0030], [0031] examples 7,10,12	1
A	US 5 037 573 A (MERCHANT ET AL) 6 August 1991 (1991-08-06) the whole document	1,6-8, 24-27
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 August 2006

Date of mailing of the international search report

18/08/2006

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Puetz, C

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/015580

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 2005/067555 A (E.I. DUPONT DE NEMOURS AND COMPANY; MINOR, BARBARA, HAVILAND; NAPPA, M) 28 July 2005 (2005-07-28) the whole document -----	1-27
P,X	WO 2005/067554 A (E.I. DUPONT DE NEMOURS AND COMPANY; MINOR, BARBARA, HAVILAND; NAPPA, M) 28 July 2005 (2005-07-28) the whole document -----	1-27

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2006/015580

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1498439	A	19-01-2005	AU 2003235127 A1 10-11-2003 WO 03091305 A1 06-11-2003 US 2005131091 A1 16-06-2005
US 5458800	A	17-10-1995	NONE
US 2004051074	A1	18-03-2004	NONE
US 5037573	A	06-08-1991	NONE
WO 2005067555	A	28-07-2005	AR 048147 A1 05-04-2006
WO 2005067554	A	28-07-2005	NONE