



(43) International Publication Date
23 January 2014 (23.01.2014)

(51) International Patent Classification:
F01L 1/18 (2006.01)

(21) International Application Number:
PCT/US2013/051361

(22) International Filing Date:
19 July 2013 (19.07.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/674,063 20 July 2012 (20.07.2012) US

(71) Applicant: **JACOBS VEHICLE SYSTEMS, INC.**
[US/US]; 22 East Dudley Town Road, Bloomfield, CT
06002 (US).

(72) Inventors: **ROBERTS, Gabriel Scott**; 347 East Main
Street, Wallingford, CT 06492 (US). **AUDIBERT, Kevin**;
27 Overvale Road, Wolcott, CT 06716 (US). **BAL-
TRUCKI, Justin Damien**; 23 Summer St, Manchester, CT
06040 (US).

(74) Agent: **YOHANNAN, David R.**; Kelley Drye & Warren
LLP, 3050 K Street, N.W., Suite 400, Washington, DC
20007 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: SYSTEMS AND METHODS FOR HYDRAULIC LASH ADJUSTMENT IN AN INTERNAL COMBUSTION ENGINE

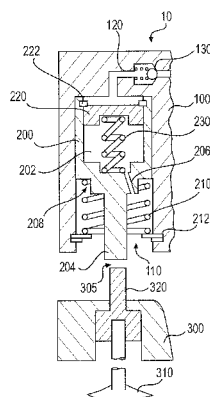


FIG. 3A

(57) **Abstract:** Systems and methods for actuating engine valves for positive power and engine braking operation are disclosed. The systems may include a self-lashing hydraulic piston slidably disposed in a fixed or rocker arm housing. The hydraulic piston may have an internal cavity in which a motion absorbing piston is disposed. A hydraulic fluid source may communicate with the hydraulic piston bore. A check valve which may be incorporated in a control valve may controls hydraulic fluid supply from the hydraulic fluid source to the hydraulic piston to provide self-lashing operation of the valve actuation system.



SYSTEMS AND METHODS FOR HYDRAULIC LASH ADJUSTMENT IN AN INTERNAL COMBUSTION ENGINE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application relates to, and claims the benefit of the earlier
5 filing date and priority of U.S. Patent Application No. 61/674,063, filed July 20,
2012, and entitled "SYSTEMS AND METHODS FOR HYDRAULIC LASH
ADJUSTMENT IN AN INTERNAL COMBUSTION ENGINE."

FIELD OF THE INVENTION

[0002] The present invention relates to systems and methods for
10 hydraulically adjusting lash space between engine poppet valves and
actuators therefore in internal combustion engines.

BACKGROUND OF THE INVENTION

[0003] Internal combustion engines typically use either a mechanical,
electrical, or hydro-mechanical valve actuation system to actuate the engine
15 valves. These systems may include a combination of camshafts, rocker arms
and push rods that are driven by the engine's crankshaft rotation. When a
camshaft is used to actuate the engine valves, the timing of the valve actuation
may be fixed by the size and location of the lobes on the camshaft.

[0004] For each 360 degree rotation of the camshaft, the engine completes a
20 full cycle made up of four strokes (*i.e.*, expansion, exhaust, intake, and
compression). Both the intake and exhaust valves may be closed, and remain
closed, during most of the expansion stroke wherein the piston is traveling away
from the cylinder head (*i.e.*, the volume between the cylinder head and the piston
head is increasing). During positive power operation, fuel is burned during the
25 expansion stroke and positive power is delivered by the engine. The expansion
stroke ends at the bottom dead center point, at which time the piston reverses
direction and the exhaust valve may be opened for a main exhaust event. A
lobe on the camshaft may be synchronized to open the exhaust valve for the
main exhaust event as the piston travels upward and forces combustion gases

out of the cylinder. Near the end of the exhaust stroke, another lobe on the camshaft may open the intake valve for the main intake event at which time the piston travels away from the cylinder head. The intake valve closes and the intake stroke ends when the piston is near bottom dead center. Both the intake and exhaust valves are closed as the piston again travels upward for the compression stroke.

[0005] The above-referenced main intake and main exhaust valve events are required for positive power operation of an internal combustion engine. Additional auxiliary valve events, while not required, may be desirable. For example, it may be desirable to actuate the intake and/or exhaust valves during positive power or other engine operation modes for compression-release engine braking, bleeder engine braking, exhaust gas recirculation (EGR), brake gas recirculation (BGR), or other auxiliary intake and/or exhaust valve events. Fig. 6 illustrates examples of a main exhaust event **700**, and auxiliary valve events, such as a compression-release engine braking event **710**, bleeder engine braking event **720**, exhaust gas recirculation event **740**, and brake gas recirculation event **730**, which may be carried out by an engine valve using various embodiments of the present invention to actuate engine valves for main and auxiliary valve events.

[0006] With respect to auxiliary valve events, flow control of exhaust gas through an internal combustion engine has been used in order to provide vehicle engine braking. Generally, engine braking systems may control the flow of exhaust gas to incorporate the principles of compression-release type braking, exhaust gas recirculation, exhaust pressure regulation, and/or bleeder type braking.

[0007] During compression-release type engine braking, the exhaust valves may be selectively opened to convert, at least temporarily, a power producing internal combustion engine into a power absorbing air compressor. As a piston travels upward during its compression stroke, the gases that are trapped in the cylinder may be compressed. The compressed gases may oppose the upward motion of the piston. As the piston approaches the top dead center (TDC)

position, at least one exhaust valve may be opened to release the compressed gases in the cylinder to the exhaust manifold, preventing the energy stored in the compressed gases from being returned to the engine on the subsequent expansion down-stroke. In doing so, the engine may develop retarding power to help slow the vehicle down. An example of a prior art compression release engine brake is provided by the disclosure of the Cummins, U.S. Pat. No. 3,220,392 (November 1965), which is hereby incorporated by reference.

[0008] During bleeder type engine braking, in addition to, and/or in place of, the main exhaust valve event, which occurs during the exhaust stroke of the piston, the exhaust valve(s) may be held slightly open during the remaining three engine cycles (full-cycle bleeder brake) or during a portion of the remaining three engine cycles (partial-cycle bleeder brake). The bleeding of cylinder gases in and out of the cylinder may act to retard the engine. Usually, the initial opening of the braking valve(s) in a bleeder braking operation is in advance of the compression TDC (i.e., early valve actuation) and then lift is held constant for a period of time. As such, a bleeder type engine brake may require lower force to actuate the valve(s) due to early valve actuation, and generate less noise due to continuous bleeding instead of the rapid blow-down of a compression-release type brake.

[0009] Exhaust gas recirculation (EGR) systems may allow a portion of the exhaust gases to flow back into the engine cylinder during positive power operation. EGR may be used to reduce the amount of NO_x created by the engine during positive power operations. An EGR system can also be used to control the pressure and temperature in the exhaust manifold and engine cylinder during engine braking cycles. Generally, there are two types of EGR systems, internal and external. External EGR systems recirculate exhaust gases back into the engine cylinder through an intake valve(s). Internal EGR systems recirculate exhaust gases back into the engine cylinder through an exhaust valve(s) and/or an intake valve(s). Embodiments of the present invention primarily concern internal EGR systems.

[0010] Brake gas recirculation (BGR) systems may allow a portion of the

exhaust gases to flow back into the engine cylinder during engine braking operation. Recirculation of exhaust gases back into the engine cylinder during the intake stroke, for example, may increase the mass of gases in the cylinder that are available for compression-release braking. As a result, BGR may
5 increase the braking effect realized from the braking event.

[0011] During operation of an engine, beginning from a cold start, certain engine components heat up and may experience thermal expansion. Additionally, over the life of an engine, engine components may wear, and thus change size and shape. Engine poppet valves and the systems used to actuate
10 them are exposed to significant temperature changes and potential wear, and accordingly, these systems must allow for thermal growth and other phenomena that may affect actuation of the engine valves. Historically, thermal growth and the like have been accommodated by providing a lash space between the engine valve (or a valve bridge that spans two or more engine valves) and the valve
15 actuator, such as a rocker arm, cam, push tube, and the like. This lash space has been set manually, or in some cases, automatically, using hydraulic lash adjusters between the engine valve and the valve actuator.

[0012] Hydraulic lash adjustors, however, have not been used to automatically adjust lash space between an engine valve and a valve actuation
20 system designed to provide both positive power and auxiliary engine valve events, such as engine braking events. Accordingly, lash has been set manually in engines equipped with compression-release or bleeder type engine brakes. Manually setting lash may be a cumbersome and expensive process required both at the factory during manufacturing and in service. A system for
25 hydraulically adjusting lash in engines equipped with an engine brake may reduce or even eliminate the need for automatic lash setting machines at the factory, cutting production time and assembly cost. Further, such systems may reduce maintenance needs and thereby provide even more savings.

[0013] An advantage of some, but not necessarily all, embodiments of the
30 present invention may result from providing a hydraulic lash adjustor of the type described herein in systems that provide both positive power and auxiliary valve

events. For example, it is not uncommon for engine valve float to occur as the result of an over speed condition or high exhaust backpressure in the engine. In such situations, a conventional hydraulic lash adjuster may “jack” by progressively locking excess hydraulic fluid in the lash adjustment circuit such that the engine valve at issue does not close properly even when the cam actuating it is at base circle. Unlike these conventional hydraulic lash adjusters, embodiments of the invention may be largely impervious to jacking due to the operation of the motion absorbing piston.

SUMMARY OF THE INVENTION

10 **[0014]** Responsive to the foregoing challenges, Applicants have developed an innovative system for hydraulic lash adjustment and engine valve actuation comprising: a housing disposed above an engine valve train element, said housing having a piston bore and a hydraulic fluid supply passage communicating with the piston bore; a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity; a motion absorbing piston slidably disposed in the hydraulic piston internal cavity; a hydraulic fluid source communicating with the hydraulic fluid supply passage; a check valve in the hydraulic fluid supply passage between the hydraulic fluid source and the piston bore; a first spring disposed between the motion absorbing piston and the hydraulic piston; and a second spring biasing the hydraulic piston into the piston bore.

[0015] Applicants have further developed an innovative system for hydraulic lash adjustment and engine valve actuation comprising: first and second engine valves; a valve bridge extending between the first and second engine valves; a sliding pin extending through an end of the valve bridge, wherein the sliding pin contacts the first engine valve; means for actuating both the first and second engine valves through the valve bridge to provide a main valve event; a housing disposed above the valve bridge, said housing having a piston bore and a hydraulic fluid supply passage communicating with the piston bore; a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity; a motion absorbing piston slidably disposed in the hydraulic

piston internal cavity; a hydraulic fluid source communicating with the hydraulic fluid supply passage; a control valve incorporating a check valve disposed in the hydraulic fluid supply passage between the hydraulic fluid source and the piston bore; a first spring disposed between the motion absorbing piston and the hydraulic piston; a second spring biasing the hydraulic piston into the piston bore; and a cam operatively connected to the hydraulic piston, said cam having an auxiliary event lobe, wherein the hydraulic piston or the motion absorbing piston contact the sliding pin.

[0016] Applicants have still further developed an innovative system for hydraulic lash adjustment and engine valve actuation comprising: a rocker arm having a piston bore and a hydraulic fluid supply passage communicating with the piston bore; a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity; a motion absorbing piston slidably disposed in the hydraulic piston internal cavity; a hydraulic fluid source communicating with the hydraulic fluid supply passage; a check valve in the hydraulic fluid supply passage between the hydraulic fluid source and the piston bore; a first spring disposed between the motion absorbing piston and the hydraulic piston; a second spring biasing the hydraulic piston into the piston bore; a cam operatively contacting the rocker arm, said cam having a main event lobe and an auxiliary event lobe; a reset bore provided in the housing; a reset passage extending through the housing from the piston bore to the reset bore; and a reset piston disposed in the reset bore, wherein the hydraulic piston or the motion absorbing piston contact the engine valve.

[0017] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only, and are not restrictive of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] In order to assist the understanding of this invention, reference will now be made to the appended drawings, in which like reference characters refer to like elements.

[0019] Figure 1 is a schematic diagram of bridged engine valves including a

self-lashing system for engine braking in accordance with one or more embodiments of the present invention.

[0020] Figure 2 is a schematic diagram of bridged engine valves including a self-lashing system for engine braking in accordance with one or more alternative embodiments of the present invention.

[0021] Figures 3A-3E are cross-sectional views of a self-lashing hydraulic piston system used to provide bleeder braking and assembled in accordance with first and second embodiments of the present invention.

[0022] Figures 4A-4D are cross-sectional views of a self-lashing hydraulic piston and dedicated engine braking cam system used to provide engine braking and assembled in accordance with a third embodiment of the present invention.

[0023] Figures 5A-5E are cross-sectional views of a self-lashing hydraulic piston and rocker arm lost motion system used to provide engine braking and assembled in accordance with a fourth embodiment of the present invention.

[0024] Figure 6 is a graph of a number of different and exemplary auxiliary valve events.

[0025] Figure 7 is a cross-sectional view of a control valve which may be used in various embodiments of the present invention.

[0026] Figure 8 is a cross-sectional view of an alternative master piston that may be used in connection with the system shown in Figs. 4A-4D.

[0027] Figure 9 is a cross-sectional view of a hydraulic lash adjuster that may be used in connection with the Figs. 3A-3E and 4A-4D embodiments of the present invention.

[0028] Figure 10 is a cross-sectional view of an alternative valve actuation system that may be used in connection with the Figs. 3A-3E and 4A-4D embodiments of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0029] With reference to Fig. 1, in one or more embodiments of the present invention, two or more engine valves **310** may be connected by a valve bridge **300**. A first valve actuation system **20** may be used to provide the engine valves with positive power valve actuation, such as main intake or main exhaust valve

actuation. The first valve actuation system **20** may include one or more valve train elements, such as rocker arms, cams, push tubes and hydraulically adjusted components. A second valve actuation system **10** may be used to provide one of the engine valves **310** with auxiliary valve actuation motion, such as engine braking valve actuation. The second valve actuation system **10** may include a self-lashing hydraulic actuator which acts on a sliding pin **320** to actuate the engine valve **310** while also automatically adjusting lash space between the second valve actuation system and the sliding pin.

[0030] The first valve actuation system **20** may, optionally, include a hydraulic lash adjuster **800** which is designed to automatically adjust a lash space between the first valve actuation system and the valve bridge **300**. The hydraulic lash adjuster portion **800** of the first valve actuation system **20** may be provided in either a rocker arm **40** or the valve bridge **300** and designed so that it does not “jack” (*i.e.*, take up more than the desired amount of lash space) when used in combination with the second valve actuation system **10**.

[0031] A non-limiting example of a non-jacking hydraulic lash adjuster that may be used in the first valve actuation system **20** is illustrated in Fig. 9. With regard to Fig. 9, a cylindrically shaped outer piston **810** may be slidably disposed in the housing comprised of the valve bridge **300** or a rocker arm **40**. The outer piston **810** may include a hollow interior portion, a central orifice **880** in a lower portion of the outer piston, one or more check passages **840**, a fluid passage **815** in an lower portion of the outer piston and below the central orifice **880**, and an upper end. One or more check balls **845** which may rest on a seat at the upper end of each check passage **840**. The check balls permit one-way fluid flow from the lower housing portion **804** to the space between the outer piston **810** and the catch piston **820**. The check balls **845** may permit extra refill of the hydraulic lash adjuster **800** with hydraulic fluid during engine operation.

[0032] With continued reference to Fig. 9, the central orifice **880** may permit hydraulic fluid to flow between the hollow interior portion of the outer piston **810** and the fluid passage **815**. The outer piston **810** may include a lower end which contacts the valve bridge **300**. The lower end of the outer piston **810** permits

transfer of engine valve closing force and valve seating resistance between the engine valves **310** and the hydraulic lash adjuster **800**.

[0033] As shown in Fig. 9, a cylindrically-shaped catch piston **820** may be slidably disposed in the hollow interior portion of the outer piston **810** and rest
5 against a ring **830**. The catch piston **820** may include a cone-shaped extension **825** which extends from the bottom of the catch piston into the orifice **880** when the catch piston **820** is resting against the ring **830** in the outer piston **810**. The catch piston **820** may also include a hollow interior portion.

[0034] The cone-shaped extension **825** of the catch piston **820** may be
10 selectively shaped to taper from its base to its lower terminus. The taper of the cone-shaped extension **825** may be selected to have substantially the same diameter of the orifice **880** at its base and a smaller diameter at its lower terminus. The cone-shaped extension **825** may taper linearly, progressively, or less than linearly from base to terminus depending upon the desired level of
15 throttling of the flow of fluid through the orifice **880** during valve actuation events and for lash adjustment.

[0035] A cap **890** may be provided at the upper end of the outer piston **810**. A catch piston spring **870** may be disposed in the interior portions of the catch piston **820**. The catch piston spring **870** may bias the catch piston **820** and the
20 cap **890** away from each other.

[0036] In order to slow the valve during valve seating events and to establish a full hydraulic link between the outer piston **810** and the catch piston **820**, hydraulic fluid may be provided to the hydraulic lash adjuster **800** from a source of engine lubricant (not shown) through the housing side wall openings **811** and
25 into the fluid passage **815**. The incoming fluid may flow into the outer piston **810** and through the central orifice **880**. The fluid may fill the interior of the outer piston **810** without restriction, taking up the full lash between the outer piston **810** and the catch piston **820**. Hydraulic fluid may also leak past the space between the catch piston **820** and the outer piston **810** to fill all interior spaces of the
30 hydraulic lash adjuster **800**, including the interior portions of the catch piston and the outer piston, as well as the space above the cap **890**. The fill rate of the

space above the cap **890** to take up lash is designed to be sufficiently slow such that it does not change markedly from engine cycle to engine cycle and will not change substantially for the duration of a single engine cycle. As a result, the lash adjuster **800** reduces the likelihood of "jacking" when used in cooperation with a hydraulic lash adjuster for engine braking (discussed below). As the interior spaces of the hydraulic lash adjuster **800** fill with hydraulic fluid, outer piston **810** is pushed downward to take up any lash space that may exist between the outer piston and the valve bridge **300**. At the same time, the hydraulic pressure above and below the catch piston **810** may become equalized so that the catch piston **820** is biased downwards against the outer piston **810** by the catch spring **870** as shown in Fig. 9, thus stopping the flow of fluid through orifice **880**.

[0037] With reference to Fig. 2, in one or more alternative embodiments of the present invention, two or more engine valves **310** may be connected by a valve bridge **300**. A third valve actuation system **30** may be used to provide the engine valves with both positive power valve actuation, such as main intake or main exhaust valve actuation, and with auxiliary valve actuation motion, such as engine braking valve actuation. The third valve actuation system **30** may include a self-lashing hydraulic actuator which acts on the valve bridge **300** to actuate the engine valves **310** while also automatically adjusting lash space between the third valve actuation system and the valve bridge. Alternatively, the third valve actuation system **30** may act directly on a single engine valve (such as shown, for example, in Figs. 5A-5E).

[0038] Reference will now be made in detail to an embodiment of the present invention, an example of which is illustrated in the accompanying drawings in Figs 3A-3E, which is also schematically illustrated by Fig. 1. With reference to Fig. 3A, a system **10** for actuating engine valves **310** is shown. The system **10** may be used to provide bleeder braking in an internal combustion engine, or compression release engine braking alone or in combination with other auxiliary engine valve events, such as brake gas recirculation events. However, the system **10** is not limited to these uses or providing only these valve events.

- [0039] With reference to Fig. 3A, when used for bleeder braking, the system **10** may include a fixed overhead housing **100** mounted above one of the engine valves **310**, and the engine valves (only one of two engine valves connected with a valve bridge **300** is shown) may be exhaust valves. The housing **100** may include a bore **110** and a hydraulic fluid supply passage **120**. A check valve **130**, of any type, may be provided in the hydraulic fluid supply passage **120** in a manner that prevents hydraulic fluid supplied to the bore **110** from returning to the hydraulic fluid supply. The hydraulic fluid supply may be of a relatively low pressure, for example in the range of 30 to 100 pounds per square inch (psi).
- [0040] With reference to Fig. 7, the check valve **130** may be provided in a control valve piston **132** disposed in a control valve bore **138** formed in the hydraulic fluid supply passage **120**. The control valve piston **132** may control the supply of hydraulic fluid to the system **10**. The control valve piston **132** may be a cylindrically shaped element with one or more internal passages, and which may incorporate an internal control check valve **130**. The check valve **130** may permit fluid to pass from the control valve bore **138** to the hydraulic fluid supply passage **120**, but not in the reverse direction. The control valve piston **132** may be spring biased by one or more control valve springs **134** into the control valve bore **138**. A central internal passage may extend axially from the inner end of the control valve piston **132** towards the middle of the control valve piston where the control check valve **130** may be located. The central internal passage in the control valve piston **132** may communicate with one or more passages extending across the diameter of the control valve piston.
- [0041] As a result of translation of the control valve piston **132** relative to its bore **138**, the passages extending through the control valve piston **132** may selectively register with a port that connects the side wall of the control valve bore with the hydraulic fluid supply passage **120**. When the passages extending through the control valve piston **132** register with the supply fluid passage **120**, low pressure fluid may flow from the control valve bore **138**, through the control valve piston **132**, and into the hydraulic fluid supply passage **120**. When low pressure hydraulic fluid supply to the control valve bore **138** is interrupted, the

control valve springs **134** push the control valve piston **132** in the bore and hydraulic fluid may vent from the hydraulic fluid supply passage **120** to the ambient.

[0042] With renewed reference to Fig. 3A, the hydraulic fluid supply passage **120** communicates with bore **110** which may be sized to receive a self-lashing hydraulic piston **200**. The hydraulic piston **200** may include an upper portion in which a piston cavity **202** is formed, and a lower extension **204**. An optional vent passage **206** may extend between the piston cavity **202** and the lower portion of the bore **110**. A shoulder **208** may be formed below the piston cavity **202**, and an external piston spring **210** may be disposed between the shoulder **208** and a lower retaining ring **212**. The external piston spring **210** may bias the hydraulic piston **200** into the bore **110** and into contact with the inner end wall of the bore.

[0043] A valve bridge **300** may be disposed below the system **10** and include a sliding pin **320** disposed in a cavity formed therein between the system **10** and the exhaust valve **310**. The sliding pin **320** may slide relative to the valve bridge **300** so that the exhaust valve **310** may be actuated independently of the valve bridge. When the hydraulic piston **200** contacts the bore **110** end wall and the sliding pin **320** is in its upper most position, as shown in Fig. 3A, a lash space **305** may exist between the piston lower extension **204** and the sliding pin **320**. Another valve train element, such as a rocker arm, cam, or push tube (not shown) may act on the valve bridge **300** to actuate two or more exhaust valves simultaneously, independent of the system **10**.

[0044] A motion absorbing piston **220** may be disposed within the piston cavity **202** such that the motion absorbing piston is capable of sliding into and out of the piston cavity. In a non-preferred embodiment, the motion absorbing piston **220** may also permit some hydraulic fluid to leak past the motion absorbing piston into the interior portion of the piston cavity, although this is not required for operation of the system **10**. An inner spring **230** may bias the motion absorbing piston against a stop **222**. The bias force of the inner spring **230** may be greater than the force exerted on the motion absorbing piston **220**

by a low pressure hydraulic fluid source (not shown). For example, the bias force of the inner spring **230** may be in the range of greater than 50 to 100 psi.

[0045] With reference to Fig. 3A, when no bleeder braking is desired, hydraulic fluid supply to the system **10** through the hydraulic fluid supply passage **120** may be interrupted. If no control valve is provided, the system may reset by leak down past the hydraulic piston **200** and/or the reset passage **206**. Preferably, hydraulic fluid pressure may vent out of the control valve bore **138** in systems which utilize a check valve within a control valve and which do not require any fluid to leak past the motion absorbing piston. In either case, venting of the hydraulic fluid from the system permits the external piston spring **210** to push the hydraulic piston into contact with the end wall of the bore **110** as shown in Fig. 3A. When bleeder braking is desired, low pressure hydraulic fluid may be supplied to the system **10** via the hydraulic fluid supply passage **120** so that the hydraulic piston **200** translates downward to take up the lash space **305**, as shown in Fig. 3B. The pressure of the hydraulic fluid above the hydraulic piston **200** and the motion absorbing piston **220** is not sufficient at this point to overcome the biasing forces of the inner spring **230** or of the exhaust valve **310** return spring (not shown). Accordingly, the supply of low pressure hydraulic fluid to the system **10** only results in elimination of the lash space **305** and does not cause the exhaust valve **310** to open.

[0046] With reference to Fig. 3C, a valve train element, such as a rocker arm, cam, or push tube (shown in Fig. 1 as first valve actuation system **20**) acts on the valve bridge **300** so that it translates downward to actuate two or more exhaust valves, including the exhaust valve **310**, independent of the system **10**. The downward translation of the valve bridge **300** may be for a main exhaust valve actuation event, for example. As the valve bridge **300** translates downward, the hydraulic piston **200** and the sliding pin **320** also translate downward to the same extent and compress the external piston spring **210**. As a result of the downward translation of the hydraulic piston **200**, low pressure hydraulic fluid fills the portion of the bore **110** above the motion absorbing piston **220**. The hydraulic fluid in the upper portion of the bore **110** is trapped therein due to the

presence of the check valve **130** which may be disposed in the control valve piston **132**. The hydraulic piston **200** reaches its most downward position at the point that the valve bridge **300** is at its most downward position.

[0047] With reference to Fig. 3D, the valve bridge **300** and the exhaust valves, including exhaust valve **310**, may translate upward due to the upward bias of the exhaust valve springs (not shown) while the main exhaust valve event ends. In turn, the sliding pin **320** and the hydraulic piston **200** are pushed upward by the exhaust valve **310**. As the hydraulic piston **200** translates upward, the motion absorbing piston **220** is pushed into the piston cavity **202** because the hydraulic fluid above the motion absorbing piston is locked within the bore **110**. The motion absorbing piston **220** eventually seats against the bottom wall of the hydraulic piston **200**, compressing the inner spring **230**. The shape and size of the hydraulic piston **200** and the motion absorbing piston **220** may be selected such that the volume of hydraulic fluid locked in the upper portion of the bore **110** causes the motion absorbing piston to engage the hydraulic piston before the hydraulic piston seats against the end wall of the bore, as shown in Fig. 3D. When the system **10** reaches the position shown in Fig. 3D, the hydraulic piston **200** can not move upward any further and, in turn, the sliding pin **320** can not move upward any further. As a result, the exhaust valve **310** remains slightly cracked open, as indicated by the open space between the sliding pin **320** and the valve bridge **300** cavity end wall. This slight opening of the exhaust valve **310**, for example in the range of 0.5-3 mm, may provide bleeder braking. When bleeder braking is no longer desired, hydraulic fluid supply to the bore **110** may be interrupted, which permits the hydraulic fluid in the system **10** to leak down past the hydraulic piston **200** and/or past the motion absorbing piston **220** and through the vent passage **206** or, alternatively, in embodiments which use a control valve piston **132** and do not require fluid to leak past the motion absorbing piston, hydraulic fluid may vent from the hydraulic fluid supply passage **120** to ambient (see Fig. 7).

[0048] With renewed reference to Figs. 3A-3D, and additionally to Fig. 3E, the system **10** may also be used to provide compression release engine braking,

alone or in combination with other auxiliary valve actuation events. When used for compression release engine braking, a dedicated engine braking rocker arm may comprise the housing **100**, as shown in Fig. 3E. Low pressure hydraulic fluid may be supplied to the system **10** via one or more passages **106** provided in the rocker arm, including, but not necessarily limited to hydraulic fluid supply passage **120**. The system **10**, when provided in a rocker arm as the housing **100**, as shown in Fig. 3E, may be similar to the system **10** shown in Figs. 3A-3D in all other respects.

[0049] With reference to Figs. 3A and 3E, when no compression release engine braking is desired, hydraulic fluid supply to the system **10** through the hydraulic fluid supply passage **120** may be interrupted. As a result, hydraulic fluid pressure in the system leaks down past the hydraulic piston **200** and/or through the vent passage **206** so that the external piston spring **210** pushes the hydraulic piston into contact with the end wall of the bore **110**, as shown in Fig. 3A. Alternatively, hydraulic fluid pressure may vent out of the control valve bore **138** in systems which utilize a check valve within a control valve, and which do not require fluid to leak past the motion absorbing piston.

[0050] When compression release engine braking is desired, low pressure hydraulic fluid may be supplied to the system **10** via the hydraulic fluid supply passage **120** so that the hydraulic piston **200** translates downward to take up the lash space **305**, as shown in Fig. 3B. The pressure of the hydraulic fluid above the hydraulic piston **200** and the motion absorbing piston **220** is not sufficient at this point to overcome the biasing forces of the inner spring **230** or of the external piston spring **210** in combination with the biasing force of the exhaust valve **310** return spring (not shown). Accordingly, the supply of low pressure hydraulic fluid to the system **10** only results in elimination of the lash space **305** and may not cause the exhaust valve **310** to open.

[0051] With reference to Figs. 3C and 3E, a valve train element, such as a rocker arm, cam, or push tube (shown in Fig. 1 as first valve actuation system **20**) acts on the valve bridge **300** so that it translates downward to actuate two or more exhaust valves, including the exhaust valve **310**, independent of the

system **10**. The downward translation of the valve bridge **300** may be for a main exhaust valve actuation event, for example. As the valve bridge **300** translates downward, the hydraulic piston **200** and the sliding pin **320** also translate downward to the same extent and compress the external piston spring **210**. As
5 a result of the downward translation of the hydraulic piston **200**, low pressure hydraulic fluid fills the portion of the bore **110** above the motion absorbing piston **220**. The hydraulic fluid in the upper portion of the bore **110** is trapped therein due to the presence of the check valve **130** which may be disposed in a control valve. The hydraulic piston **200** reaches its most downward position at the point
10 that the valve bridge **300** is at its most downward position.

[0052] With reference to Fig. 3E, at the same time that the valve bridge **300** is translated downward for the main valve event, such as main exhaust, the rocker arm housing **100** may be pivoted by an optional main event follow lobe **540** on the cam 500 to reduce the hydraulic volume required in bore 110 and reduce the
15 overall size of the device. The size and design of the main event follow lobe **540** should permit the rocker arm housing **100** and the hydraulic piston **200** contained therein to follow the valve bridge **300** at a constant maximum differential position through a sufficient amount of the main valve event to permit refill of the portion of the bore **110** above the motion absorbing piston **220**. For
20 example, the main event follow lobe **540** may match the lift of the main event valve lift for the first and last 10-50 cam angle degrees of the main valve event. It is preferable to design the main event follow lobe **540** to dwell for 20-100 cam angle degrees of the main valve event centered around peak lift to permit adequate refill before returning to cam base circle.

25 **[0053]** With reference to Figs. 3D and 3E, the valve bridge **300** and the exhaust valves, including exhaust valve **310**, may translate upward due to the upward bias of the exhaust valve springs (not shown) while the main exhaust valve event ends. In turn, the sliding pin **320** and the hydraulic piston **200** are pushed upward by the exhaust valve **310**. As the hydraulic piston **200** translates
30 upward, the motion absorbing piston **220** is pushed into the piston cavity **202** because the hydraulic fluid above the motion absorbing piston is locked within

the bore **110**. The motion absorbing piston **220** eventually seats against the bottom wall of the hydraulic piston **200**, compressing the inner spring **230**. The shape and size of the hydraulic piston **200** and the motion absorbing piston **220** may be selected such that the volume of hydraulic fluid locked in the upper
5 portion of the bore **110** causes the motion absorbing piston to engage the hydraulic piston just as the exhaust valve **310** seats or slightly thereafter.

[0054] With reference to Fig. 3E, subsequent rotation of the cam **500**, causes the first auxiliary lobe **510**, such as a compression release brake bump, and the one or more optional auxiliary cam bumps **520**, to pivot the rocker arm **100** and
10 open the exhaust valve **310** for a compression release valve event, and one or more optional auxiliary exhaust valve events. When compression release engine braking is no longer desired, hydraulic fluid supply to the bore **110** may be interrupted, which permits the hydraulic fluid in the system **10** to leak down past the hydraulic piston **200** and/or past the motion absorbing piston **220** and
15 through the vent passage **206**. Alternatively, hydraulic fluid pressure may vent out of the control valve bore **138** in systems which utilize a check valve within a control valve, and which do not require any fluid to leak past the motion absorbing piston.

[0055] With reference to Figs. 4A-4D, in another embodiment of the present
20 invention, a system **10** for actuating engine valves **310** is shown which is also schematically illustrated by Fig. 1. The system **10** may be used to provide compression-release engine braking in an internal combustion engine, alone or in combination with other auxiliary engine valve events, such as brake gas recirculation events. However, the system **10** is not limited to these uses or to
25 providing only these valve events.

[0056] The system **10** may include a fixed overhead housing **100** mounted above one of the engine valves **310**, and the engine valves (only one of two engine valves connected with a valve bridge **300** is shown) may be exhaust valves. The housing **100** may include a bore **110** and a hydraulic fluid supply
30 passage **120**. A check valve **130**, of any type, may be provided in the hydraulic fluid supply passage **120** in a manner that prevents hydraulic fluid supplied to the

bore **110** from returning to the hydraulic fluid supply. The hydraulic fluid supply may be of a relatively low pressure, for example in the range of 30 to 100 pounds per square inch (psi).

[0057] As noted above with reference to Fig. 7, the check valve **130** may be provided in a control valve piston **132** disposed in a control valve bore **138** formed in the hydraulic fluid supply passage **120**. The operation of the control valve is discussed above.

[0058] With renewed reference to Figs. 4A-4D, the bore **110** may be sized to receive a self-latching hydraulic piston **200**. The hydraulic piston **200** may include an upper portion in which a piston cavity **202** is formed, and a lower extension **204**. A vent passage **206** may extend between the piston cavity **202** and the lower portion of the bore **110**. A shoulder **208** may be formed below the piston cavity **202**, and an external piston spring **210** may be disposed between the shoulder **208** and a lower retaining ring **212**. The external piston spring **210** may bias the hydraulic piston **200** into the bore **110** and into contact with the inner end wall of the bore.

[0059] A valve bridge **300** may be disposed below the system **10** and include a sliding pin **320** disposed in a cavity formed therein between the system **10** and the exhaust valve **310**. The sliding pin **320** may slide relative to the valve bridge **300** so that the exhaust valve **310** may be actuated independently of the valve bridge. When the hydraulic piston **200** contacts the bore **110** end wall and the sliding pin **320** is in its upper most position, as shown in Fig. 3A, a lash space **305** may exist between the piston lower extension **204** and the sliding pin **320**. Another valve train element, such as a rocker arm, cam, or push tube (not shown) may act on the valve bridge **300** to actuate two or more exhaust valves simultaneously, independent of the system **10**.

[0060] A motion absorbing piston **220** may be disposed within the piston cavity **202** such that the motion absorbing piston is capable of sliding into and out of the piston cavity. An inner spring **230** may bias the motion absorbing piston against a stop **222**. The bias force of the inner spring **230** may be greater than the force exerted on the motion absorbing piston **220** by a low pressure

hydraulic fluid source (not shown). For example, the bias force of the inner spring **230** may be in the range of greater than 50 to 100 psi.

[0061] The hydraulic fluid supply passage **120** may be connected by a master piston hydraulic passage **440** to a master piston bore **410** provided in a master piston housing **400**. A master piston **420** may be disposed in the master piston bore **410** and biased by a master piston spring **430** either into contact with a master piston cam **500** or biased away from the cam and into the bottom of the master piston bore so that when low pressure hydraulic fluid is applied to the circuit, the master piston extends into contact with the cam (see Fig. 8). The master piston cam may have one or more auxiliary engine valve actuation lobes, including for example, an compression-release lobe **510**, a brake gas recirculation lobe **520**, and a main event follow lobe **540**. The lobes **510**, **520** and **540** may act on the master piston **420** to slide it in and out of the master piston bore **410**, which in turn may provide hydraulic actuation of the hydraulic piston **200** for auxiliary engine valve events, such as compression-release engine braking.

[0062] With reference to Fig. 4A, when the system **10** is used for compression-release engine braking, but no engine braking is yet desired (*i.e.*, during positive power operation or at engine start up), hydraulic fluid supply to the system **10** through the hydraulic fluid supply passage **120** may be interrupted. As a result, hydraulic fluid pressure in the system **10** leaks down past the hydraulic piston **200** and/or through the vent passage **206** so that the external piston spring **210** pushes the hydraulic piston into contact with the end wall of the bore **110**, as shown in Fig. 4A. Alternatively, in embodiments which use a control valve piston **132** and which do not require any fluid to leak past the motion absorbing piston, hydraulic fluid may vent from the hydraulic fluid supply passage **120** to ambient (see Fig. 7). When compression release engine braking is desired, low pressure hydraulic fluid may be supplied to the system **10** via the hydraulic fluid supply passage **120** so that the hydraulic piston **200** translates downward to take up the lash space **305**, as shown in Fig. 4B. Hydraulic fluid may also be provided to the master-piston bore **410** via the master piston

hydraulic fluid passage **440**. The pressure of the hydraulic fluid above the hydraulic piston **200** and the motion absorbing piston **220** is not sufficient at this point to overcome the biasing forces of the inner spring **230** or of the exhaust valve **310** return spring (not shown). Accordingly, the supply of low pressure
5 hydraulic fluid to the system **10** only results in elimination of the lash space **305** and may not cause the exhaust valve **310** to open, as shown in Fig. 4B.

[0063] With reference to Fig. 4C, a valve train element, such as a rocker arm, cam, or push tube (shown in Fig. 1 as first valve actuation system **20**) acts on the valve bridge **300** so that it translates downward to actuate two or more exhaust
10 valves, including the exhaust valve **310**, independent of the system **10**. The downward translation of the valve bridge **300** may be for a main exhaust valve actuation event, for example. As the valve bridge **300** translates downward, the hydraulic piston **200** and the sliding pin **320** also translate downward to the same extent and compress the external piston spring **210**. As a result of the
15 downward translation of the hydraulic piston **200**, low pressure hydraulic fluid fills the portion of the bore **110** above the motion absorbing piston **220**. The hydraulic fluid in the upper portion of the bore **110** is trapped therein due to the presence of the check valve **130** which may be disposed within a control valve. The hydraulic piston **200** reaches its most downward position at the point that
20 the valve bridge **300** is at its most downward position.

[0064] At the same time that the valve bridge **300** is translated downward for the main valve event, such as main exhaust, the master piston **420** may be pushed inward by an optional main event follow lobe **540** on the cam **500**. The design, operation and purpose of the main event follow lobe **540** are discussed
25 above. The size and design of the cam lobe **540** should permit the master piston **420** and the hydraulic piston **200** hydraulically linked thereto to follow the valve bridge **300** at a constant maximum differential position through a sufficient amount of the main valve event to permit refill of the portion of the bore **110** above the motion absorbing piston **220**.

30 **[0065]** With reference to Fig. 4D, the valve bridge **300** and the exhaust valves, including exhaust valve **310**, may translate upward due to the upward

bias of the exhaust valve springs (not shown) while the main exhaust valve event ends. In turn, the sliding pin **320** and the hydraulic piston **200** are pushed upward by the exhaust valve **310**. As the hydraulic piston **200** translates upward, the motion absorbing piston **220** may be pushed into the piston cavity **202** because the hydraulic fluid above the motion absorbing piston is locked within the bore **110**. The motion absorbing piston **220** eventually seats against the bottom wall of the hydraulic piston **200**, compressing the inner spring **230**. The shape and size of the hydraulic piston **200** and the motion absorbing piston **220** may be selected such that the volume of hydraulic fluid locked in the upper portion of the bore **110** causes the motion absorbing piston to engage the hydraulic piston just as the exhaust valve **310** seats or slightly thereafter.

[0066] Subsequent rotation of the cam **500**, causes the first auxiliary event bump **510**, such as a compression release brake bump, and the one or more optional auxiliary cam bumps **520**, to push the master piston **420** into the master piston bore **410** which displaces a sufficient amount of hydraulic fluid in the circuit to open the exhaust valve **310** for a compression release valve event, and one or more optional auxiliary exhaust valve events. When compression release engine braking is no longer desired, hydraulic fluid supply to the bore **110** may be interrupted, which permits the hydraulic fluid in the system **10** to leak down past the hydraulic piston **200** and/or past the motion absorbing piston **220** and through the vent passage **206**. Alternatively, in embodiments which use a control valve piston **132**, hydraulic fluid may vent from the hydraulic fluid supply passage **120** to ambient (see Fig. 7).

[0067] In alternative embodiments of the invention, in which like reference numerals refer to like elements, the hydraulic piston and motion absorbing piston assemblies shown in Figs. 3A-3E and 4A-4D may be replaced with the hydraulic piston **900** and motion absorbing piston **920** assembly shown in Fig. 10. With reference to Figs. 3A-3E, 4A-4D and 10, the system **10** may be disposed in a fixed overhead housing or rocker arm **100** mounted above one of the engine valves **310**, and the engine valves (only one of two engine valves connected with a valve bridge **300** is shown) may be exhaust valves. The housing **100** may

include a bore **110** and a hydraulic fluid supply passage **120**. A check valve **130** may be provided in the hydraulic fluid supply passage **120** in a manner that prevents hydraulic fluid supplied to the bore **110** from returning to the hydraulic fluid supply. The hydraulic fluid supply may be of a relatively low pressure, for example in the range of 30 to 100 pounds per square inch (psi). In an alternative embodiment, the hydraulic fluid supply passage **120** may be connected by a master piston hydraulic passage **440** to a master piston bore **410** provided in a master piston housing **400** as explained in connection with Figs. 4A-4D.

[0068] The bore **110** may be sized to receive a self-lashing hydraulic piston **900**. The hydraulic piston **900** may include an upper portion in which a piston cavity **902** is formed. A shoulder **908** may be formed along the wall of the hydraulic piston **900**, and an external piston spring **210** may be disposed between the shoulder **208** and a lower retaining ring **212**. The external piston spring **210** may bias the hydraulic piston **900** into the bore **110** and into contact with the inner end wall of the bore. As discussed above, a valve bridge **300** may be disposed below the system **10** and include a sliding pin **320** disposed in a cavity formed therein between the system **10** and the exhaust valve **310**. When the hydraulic piston **900** contacts the bore **110** end wall and the sliding pin **320** is in its upper most position, as shown in Fig. 10, a lash space **305** may exist between the piston lower extension **904** and the sliding pin **320**. Another valve train element, such as a rocker arm, cam, or push tube (not shown) may act on the valve bridge **300** to actuate two or more exhaust valves simultaneously, independent of the system **10**.

[0069] A motion absorbing piston **920** may be disposed within the piston cavity **902** such that the motion absorbing piston is capable of sliding into and out of the piston cavity. An inner spring **930** may bias the motion absorbing piston **920** towards the sliding pin **320**. The bias force of the inner spring **930** may be greater than the force exerted on the hydraulic piston **900** by a low pressure hydraulic fluid source (not shown) through passage **120**. For example, the bias force of the inner spring **930** may be in the range of greater than 50 to 100 psi.

[0070] With continued reference to Fig. 10, when no bleeder braking is desired, hydraulic fluid supply to the system **10** through the hydraulic fluid supply passage **120** may be interrupted. As a result, hydraulic fluid pressure may vent out of the control valve bore **138** in systems which utilize a check valve within a control valve (discussed above). When bleeder braking is desired, low pressure hydraulic fluid may be supplied to the system **10** via the hydraulic fluid supply passage **120** so that the hydraulic piston **900** translates downward to take up the lash space. The pressure of the hydraulic fluid above the hydraulic piston **900** and the motion absorbing piston **920** is not sufficient at this point to overcome the biasing forces of the inner spring **930** or the exhaust valve **310** return spring (not shown). Accordingly, the supply of low pressure hydraulic fluid to the system **10** does not cause the exhaust valve **310** to open.

[0071] A valve train element, such as a rocker arm, cam, or push tube (shown in Fig. 1 as first valve actuation system **20**) acts on the valve bridge **300** so that it translates downward to actuate two or more exhaust valves, including the exhaust valve **310**, independent of the system **10**. The downward translation of the valve bridge **300** may be for a main exhaust valve actuation event, for example. As the valve bridge **300** translates downward, the hydraulic piston **900** and the sliding pin **320** also translate downward to the same extent and compress the external piston spring **210**. As a result of the downward translation of the hydraulic piston **900**, low pressure hydraulic fluid fills the portion of the bore **110** above the hydraulic piston **920**. The hydraulic fluid in the upper portion of the bore **110** is trapped therein due to the presence of the check valve **130** which may be disposed in the control valve piston **132**. The hydraulic piston **200** reaches its most downward position at the point that the valve bridge **300** is at its most downward position.

[0072] The valve bridge **300** and the exhaust valves, including exhaust valve **310**, may translate upward due to the upward bias of the exhaust valve springs (not shown) as the main exhaust valve event ends. In turn, the sliding pin **320** and the motion absorbing piston **920** are pushed upward by the exhaust valve **310**. As the motion absorbing piston **920** translates upward, it is pushed into the

piston cavity **902** because the hydraulic fluid above the hydraulic piston **900** is locked within the bore **110**. The motion absorbing piston **920** eventually seats against the upper end wall of the hydraulic piston **900**, compressing the inner spring **930**.

5 **[0073]** The shape and size of the hydraulic piston **900** and the motion absorbing piston **920** may be selected such that the volume of hydraulic fluid locked in the upper portion of the bore **110** causes the motion absorbing piston to engage the hydraulic piston before the motion absorbing piston seats against the upper end wall of the hydraulic piston. When the system **10** reaches this
10 position, the motion absorbing piston **900** cannot move upward any further and, in turn, the sliding pin **320** can not move upward any further. As a result, the exhaust valve **310** remains slightly cracked open. This slight opening of the exhaust valve **310**, for example in the range of 0.5-3 mm, may provide bleeder braking. When bleeder braking is no longer desired, hydraulic fluid supply to the
15 bore **110** may be interrupted, which permits the hydraulic fluid in the system **10** to vent from the hydraulic fluid supply passage **120** to ambient.

[0074] The system shown in Fig. 10 may also be used to provide compression release engine braking, as described in connection with Figs. 4A-4D.

20 **[0075]** Reference is now made to another embodiment of the invention, shown in Figs. 2 and 5A-5E, in which a system **30** for actuating engine valves **310** is illustrated. The system **30** may be used to provide main engine valve actuations (*i.e.*, main intake or main exhaust valve events) in combination with auxiliary valve actuations. The system **30** will be described as used to provide
25 main exhaust valve actuation in combination with compression-release engine braking, alone or in combination with other auxiliary engine valve events, such as brake gas recirculation events. However, it should be noted that the system **30** is not limited to these uses or to providing only these valve events.

[0076] With reference to Fig. 5A, the system **30** may include a rocker arm **102**
30 which forms a housing for the system. The rocker arm **102** may include a bore **110** and a hydraulic fluid supply passage **120**. A check valve **130**, of any type,

may be provided in the hydraulic fluid supply passage **120** in a manner that prevents hydraulic fluid supplied to the bore **110** from returning to the hydraulic fluid supply. The hydraulic fluid supply may be of a relatively low pressure, for example in the range of 30 to 100 pounds per square inch (psi).

5 **[0077]** The bore **110** may be sized to receive a self-lashing hydraulic piston **200**. The hydraulic piston **200** may include an upper portion in which a piston cavity **202** is formed, and a lower extension **204**. The hydraulic piston **200** may further include an annular recess **214** and a vent (or reset) passage **206** which extends between the piston cavity **202** and the annular recess **214**. A shoulder
10 may be formed below the piston cavity **202**, and an external piston spring **210** may be disposed between the shoulder and a lower retaining ring **212**. The external piston spring **210** may bias the hydraulic piston **200** into the bore **110** and into contact with the inner end wall of the bore.

[0078] An engine valve **310** may be disposed below the system **30**. In the
15 described embodiment, the engine valve **310** is an exhaust valve, however, the invention may be used to actuate intake valves or other engine poppet valves. In alternative embodiments, the engine valve **310** may be one of two or more engine valves which are connected by a valve bridge, as shown in Fig. 2. When the hydraulic piston **200** is in its upper most position and contacts the bore **110**
20 end wall, as shown in Fig. 5A, a lash space **305** may exist between the piston lower extension **204** and the exhaust valve **300**.

[0079] A motion absorbing piston **220** may be disposed within the piston cavity **202** such that the motion absorbing piston is capable of sliding into and out of the piston cavity while also permitting some hydraulic fluid to leak past the
25 motion absorbing piston into the interior portion of the piston cavity. An inner spring **230** may bias the motion absorbing piston against an upper stop. The bias force of the inner spring **230** may be greater than the force exerted on the motion absorbing piston **220** by a low pressure hydraulic fluid source (not shown). For example, the bias force of the inner spring **230** may be in the range
30 of greater than 50 to 100 psi.

[0080] The rocker arm **102** may further include an optional reset piston **620**

disposed in a reset bore **610** adjacent to the bore **110**. The bore **110** and the reset bore **610** may be connected by a reset passage **600**. The reset piston **620** may include a lower extension and a reset piston annular recess **622**. A reset spring **630** may bias the reset piston **620** into contact with a lower stop. A reset
5 lash space **642** may exist between the reset piston lower extension and a surface **640** when the cam **500** is at base circle, as shown in Fig. 5A. A fill passage, including a check valve **650**, may extend from the reset bore **610** to a rocker shaft **104**. The check valve **650** may permit flow of hydraulic fluid in only one direction, from the rocker shaft to the reset bore **610**. Both the hydraulic
10 piston annular recess **214** and the reset piston annular recess **622** may be sized to selectively register with the reset passage **600** when the reset piston **620** is in its lower most position. It should be noted that, while the reset passage **600** is schematically shown to have multiple bends for ease of illustration, in a preferred embodiment the reset passage may extend directly between the bore **110** and
15 the reset bore **610** for ease of manufacturing.

[0081] The rocker arm **102** may be pivotally mounted on the rocker shaft **104**. First and second rocker shaft hydraulic fluid supply passages **106** and **108** may be provided in the rocker shaft. The first rocker shaft hydraulic fluid supply passage **106** may register with the hydraulic fluid supply passage **120** which
20 communicates with the bore **110**. The second rocker shaft hydraulic fluid supply passage **108** may register with the fill passage containing the check valve **650**.

[0082] The rocker arm may further include a cam roller **112** which is biased by a rear spring **114** into contact with a cam, in this instance and exhaust cam **500**. The exhaust cam **500** may include a main exhaust lobe **530** and a
25 compression-release engine braking lobe **510** as well as other valve motion events.

[0083] With reference to Fig. 5A, when the system **30** is used for positive power and compression-release engine braking, but the engine is in a cold, non-running, state, hydraulic fluid supply to the system **30** through the first and
30 second rocker shaft hydraulic fluid supply passages **106** and **108**, and through the hydraulic fluid supply passage **120** may be interrupted. As a result, hydraulic

fluid pressure in the system **30** will be at a minimum after leaking down past the hydraulic piston **200** and/or through the vent passage **206** past the reset piston **610**, or as a result of opening control valve **130**. As a result, the external piston spring **210** pushes the hydraulic piston **200** into contact with the upper end wall
5 of the bore **110**, as shown in Fig. 5A.

[0084] When positive power operation of the engine is desired, low pressure hydraulic fluid may be supplied to the system **30** via the first rocker shaft hydraulic fluid supply passage **106** and the hydraulic fluid supply passage **120** so that the hydraulic piston **200** translates downward to take up the lash space **305**,
10 as shown in Fig. 5B. At this time, hydraulic fluid is not supplied to the second rocker shaft hydraulic fluid supply passage **108** and, as a result, the reset piston **620** remains in its lower most position. The pressure of the hydraulic fluid above the hydraulic piston **200** and the motion absorbing piston **220** is not sufficient at this point to overcome the biasing forces of the inner spring **230** or of the
15 external piston spring **210** in combination with the biasing force of the exhaust valve **310** return spring (not shown). Accordingly, the supply of low pressure hydraulic fluid to the system **30** only results in elimination of the lash space **305** and may not cause the exhaust valve **310** to open, as shown in Fig. 5B.

[0085] With reference to Fig. 5C, during positive power operation, the cam
20 **500** rotates such that a pivoting motion is applied to the rocker arm **102** by the compression-release lobe **510** and the main exhaust lobe **530** as well as other valve motion events. The height of the main exhaust lobe exceeds that of the compression-release lobe. When the rocker arm **102** is pivoted by the compression-release lobe **510**, the end of the rocker arm that is proximal to the
25 exhaust valve **310** translates downward toward the exhaust valve. Because the bias force of the inner spring **230** is less than the combined biasing forces of the external piston spring **210** and the exhaust valve spring (not shown), the pivoting motion imparted to the rocker arm **102** by the compression-release lobe **510** causes the motion absorbing piston **220** to be pushed into the piston cavity **202**,
30 resulting in the compression-release motion being absorbed by the motion absorbing piston. The shape and size of the hydraulic piston **200** and the

motion absorbing piston **220** may be selected such that the motion absorbing piston **220** seats against the bottom wall of the hydraulic piston **200** when the maximum amount of pivoting motion is applied to the rocker arm **102** by the compression-release lobe **510**, as shown in Fig. 5C. As the rocker arm pivots
5 back during the later portion of the compression-release motion, the motion absorbing piston **220** may reset to the position shown in Fig. 5B.

[0086] With continued reference to Fig. 5C, continued rotation of the cam **500**, causes the rocker arm **102** to next pivot in response to the main exhaust lobe **530**. During the initial portion of the main exhaust pivoting motion, the
10 motion absorbing piston **220** once again is pushed into the piston cavity **202** until it seats against the bottom wall of the hydraulic piston **200**. However, because the height of the main exhaust lobe **530** exceeds the height of the compression-release lobe **510**, the hydraulic piston **200**, which is locked into position by the presence of hydraulic fluid in the upper portion of the bore **110**, moves
15 downward with the head of the rocker arm **102** and actuates the exhaust valve **310** for a main exhaust valve event. The process described in the preceding two paragraphs continues during positive power operation of the engine.

[0087] With reference to Fig. 5D, during compression-release engine braking, low pressure hydraulic fluid is provided to the second rocker shaft hydraulic fluid
20 supply passage **108**. This hydraulic fluid flows past the check valve **650**, through the annular recess **622** of the reset piston **620**, the reset passage **600**, the hydraulic piston annular recess **214** and the vent passage **206** to the piston cavity **202**. The provision of the hydraulic fluid to the piston cavity **202** causes the motion absorbing piston **220** to be hydraulically locked into its upper most
25 position, as shown in Fig. 5D. When so hydraulically locked, the combination of the motion absorbing piston **220** and the hydraulic piston **200** transfer the full pivoting motion of the compression-release lobe **510** to the exhaust valve **310**. As a result, the system **30** actuates the exhaust valve (or valves as shown in Fig. 2) for compression-release engine braking.

30 [0088] With reference to Fig. 5E, during compression-release engine braking, when the rocker arm **102** is pivoted in response to the main exhaust lobe **530**,

the magnitude of the pivoting motion may cause the reset piston **620** to engage the surface **640** and push the reset piston upward into its bore until the reset piston unblocks the reset passage **600**, allowing it to vent to an ambient. The magnitude of the pivoting motion required to cause the reset piston **620** to engage surface **640** should be more than the amount of pivoting motion required for the compression-release event, but less than the amount of motion required for actuation of the engine valves for the main exhaust event. Venting of the reset passage **600** causes the hydraulic fluid pressure in the piston cavity **202** to vent and the hydraulic piston **200** translates upward and collapse against the motion absorbing piston **220** (see Fig. 5C). As a result, the actuation of the exhaust valve **310** is reduced by the amount of motion absorbing piston travel, which is also the height of the compression-release cam lobe **510**, and the system **30** resets for the next compression-release and main exhaust events.

[0089] It will be apparent to those skilled in the art that variations and modifications of the present invention can be made without departing from the scope or spirit of the invention. It is intended that the present invention cover all such modifications and variations of the invention, provided they come within the scope of the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A system for hydraulic lash adjustment and engine valve actuation comprising:
 - a housing disposed above an engine valve train element, said housing
 - 5 having a piston bore and a hydraulic fluid supply passage communicating with the piston bore;
 - a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity;
 - a motion absorbing piston slidably disposed in the hydraulic piston internal
 - 10 cavity;
 - a hydraulic fluid source communicating with the hydraulic fluid supply passage;
 - a check valve in the hydraulic fluid supply passage between the hydraulic fluid source and the piston bore;
 - 15 a first spring disposed between the motion absorbing piston and the hydraulic piston; and
 - a second spring biasing the hydraulic piston into the piston bore.
2. The system of claim 1, wherein a rocker arm forms said housing.
- 20 3. The system of claim 1, wherein the housing is provided in a fixed position relative to the engine valve.
4. The system of claim 1, further comprising a cam operatively connected to
- 25 the hydraulic piston, said cam having a main event follow lobe and an auxiliary event lobe.
5. The system of claim 4, wherein the cam is operatively connected to the hydraulic piston by a master piston and a master piston hydraulic passage
- 30 extending between the master piston and the piston bore.

6. The system of claim 4, wherein the cam is operatively connected to the hydraulic piston by the housing, and wherein a rocker arm forms the housing.
7. The system of claim 1, wherein the check valve is provided in a control
5 valve.
8. The system of claim 1, further comprising an engine valve bridge having a sliding pin disposed in an end of the engine valve bridge, wherein the hydraulic piston or the motion absorbing piston contacts the sliding pin.
10
9. The system of claim 8, further comprising:
means for actuating the engine valve bridge; and
a hydraulic lash adjuster disposed between the means for actuating the engine valve bridge and the valve bridge.
- 15
10. The system of claim 1, further comprising:
a reset bore provided in the housing;
a reset passage extending through the housing from the piston bore to the reset bore; and
20 a reset piston disposed in the reset bore.
11. The system of claim 10, further comprising a cam operatively connected to the housing, said cam having a main event lobe and an auxiliary event lobe.
- 25
12. The system of claim 1, wherein the first spring exerts a biasing force greater than a pressure force of the hydraulic fluid source, and the second spring exerts a biasing force less than a pressure force of the hydraulic fluid source.
13. A system for hydraulic lash adjustment and engine valve actuation
30 comprising:
first and second engine valves;

a valve bridge extending between the first and second engine valves;
a sliding pin extending through an end of the valve bridge, wherein the sliding pin contacts the first engine valve;
means for actuating both the first and second engine valves through the
5 valve bridge to provide a main valve event;
a housing disposed above the valve bridge, said housing having a piston bore and a hydraulic fluid supply passage communicating with the piston bore;
a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity;
10 a motion absorbing piston slidably disposed in the hydraulic piston internal cavity;
a hydraulic fluid source communicating with the hydraulic fluid supply passage;
a control valve incorporating a check valve disposed in the hydraulic fluid
15 supply passage between the hydraulic fluid source and the piston bore;
a first spring disposed between the motion absorbing piston and the hydraulic piston;
a second spring biasing the hydraulic piston into the piston bore; and
a cam operatively connected to the hydraulic piston, said cam having an
20 auxiliary event lobe,
wherein the hydraulic piston or the motion absorbing piston contact the sliding pin.

14. The system of claim 13, wherein a rocker arm forms said housing.

25

15. The system of claim 13, wherein the housing is provided in a fixed position relative to the engine valve.

16. The system of claim 13, wherein the cam is operatively connected to the
30 hydraulic piston by a master piston and a master piston hydraulic passage extending between the master piston and the piston bore.

17. The system of claim 13, wherein the cam is operatively connected to the hydraulic piston by the housing, and wherein a rocker arm forms the housing.
- 5 18. The system of claim 13, further comprising:
means for actuating the engine valve bridge; and
a hydraulic lash adjuster disposed between the means for actuating the engine valve bridge and the valve bridge.
- 10 19. The system of claim 13, wherein the first spring exerts a biasing force greater than a pressure force of the hydraulic fluid source, and the second spring exerts a biasing force less than a pressure force of the hydraulic fluid source.
20. The system of claim 13, further comprising a main event follow lobe
15 provided on the cam.
21. A system for hydraulic lash adjustment and engine valve actuation comprising:
a rocker arm having a piston bore and a hydraulic fluid supply passage
20 communicating with the piston bore;
a hydraulic piston slidably disposed in the piston bore, said hydraulic piston having an internal cavity;
a motion absorbing piston slidably disposed in the hydraulic piston internal cavity;
25 a hydraulic fluid source communicating with the hydraulic fluid supply passage;
a check valve in the hydraulic fluid supply passage between the hydraulic fluid source and the piston bore;
a first spring disposed between the motion absorbing piston and the
30 hydraulic piston;
a second spring biasing the hydraulic piston into the piston bore;

- a cam operatively contacting the rocker arm, said cam having a main event lobe and an auxiliary event lobe;
- a reset bore provided in the housing;
- a reset passage extending through the housing from the piston bore to the
- 5 reset bore; and
- a reset piston disposed in the reset bore,
- wherein the hydraulic piston or the motion absorbing piston contact the engine valve.
- 10 22. The system of claim 21, wherein the first spring exerts a biasing force greater than a pressure force of the hydraulic fluid source, and the second spring exerts a biasing force less than a pressure force of the hydraulic fluid source.

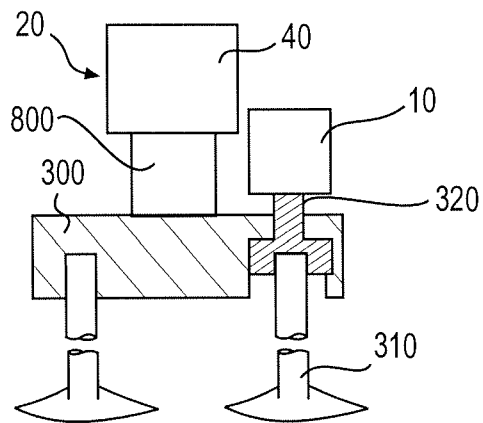


FIG. 1

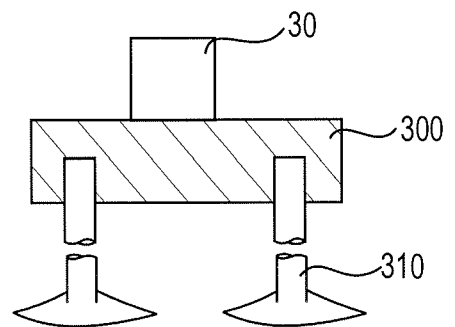


FIG. 2

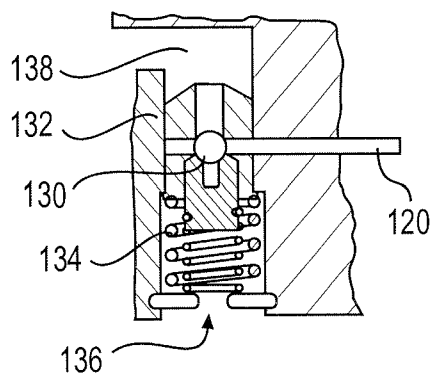


FIG. 7

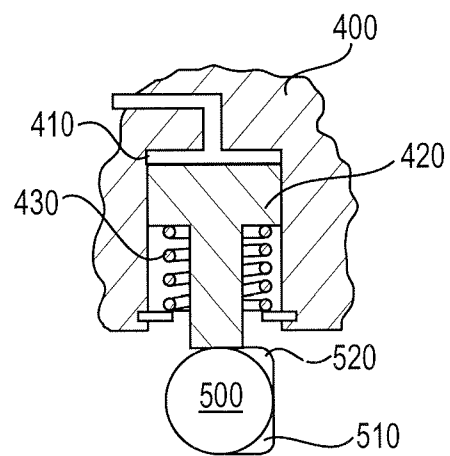


FIG. 8

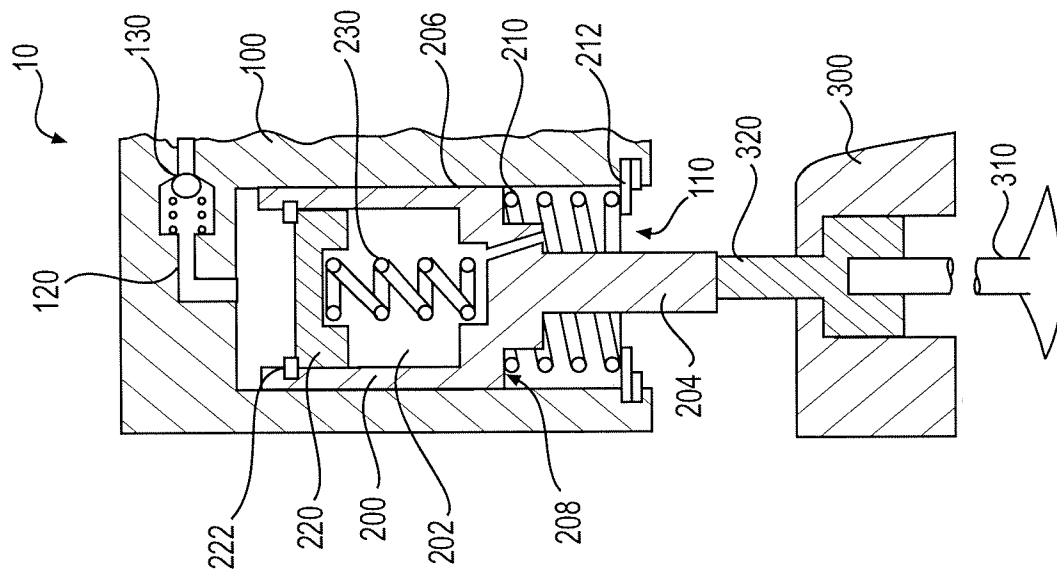


FIG. 3B

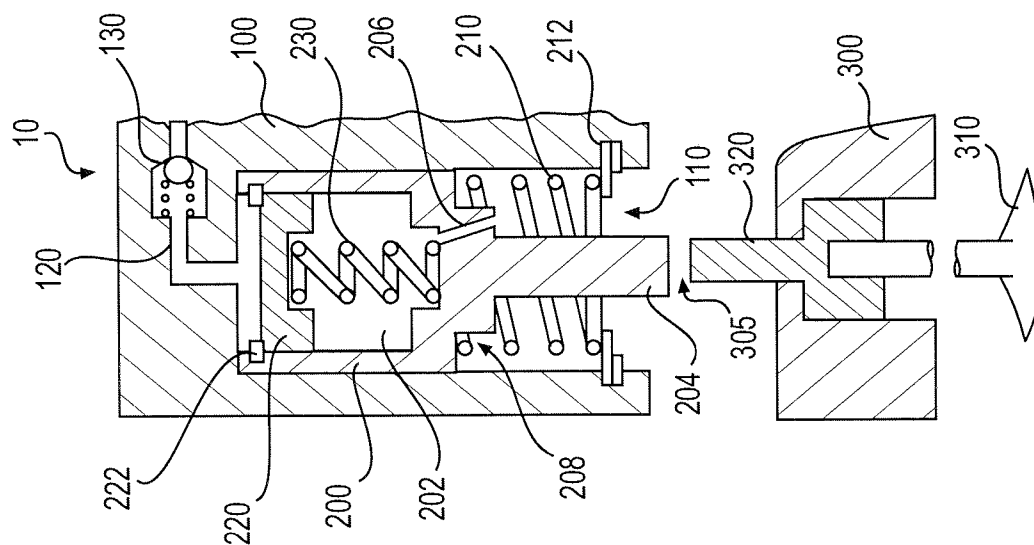


FIG. 3A

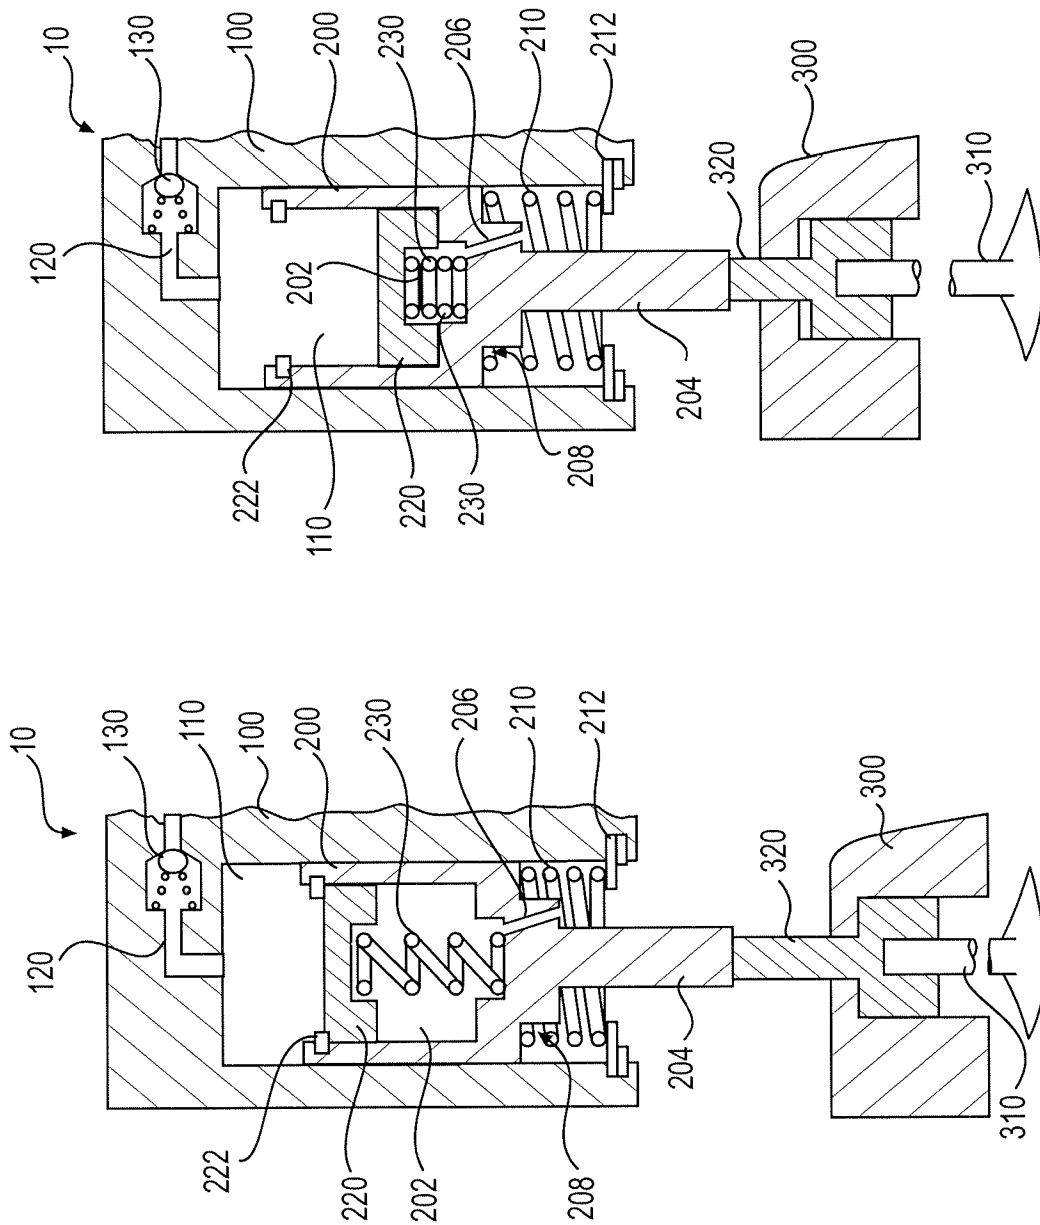


FIG. 3D

FIG. 3C

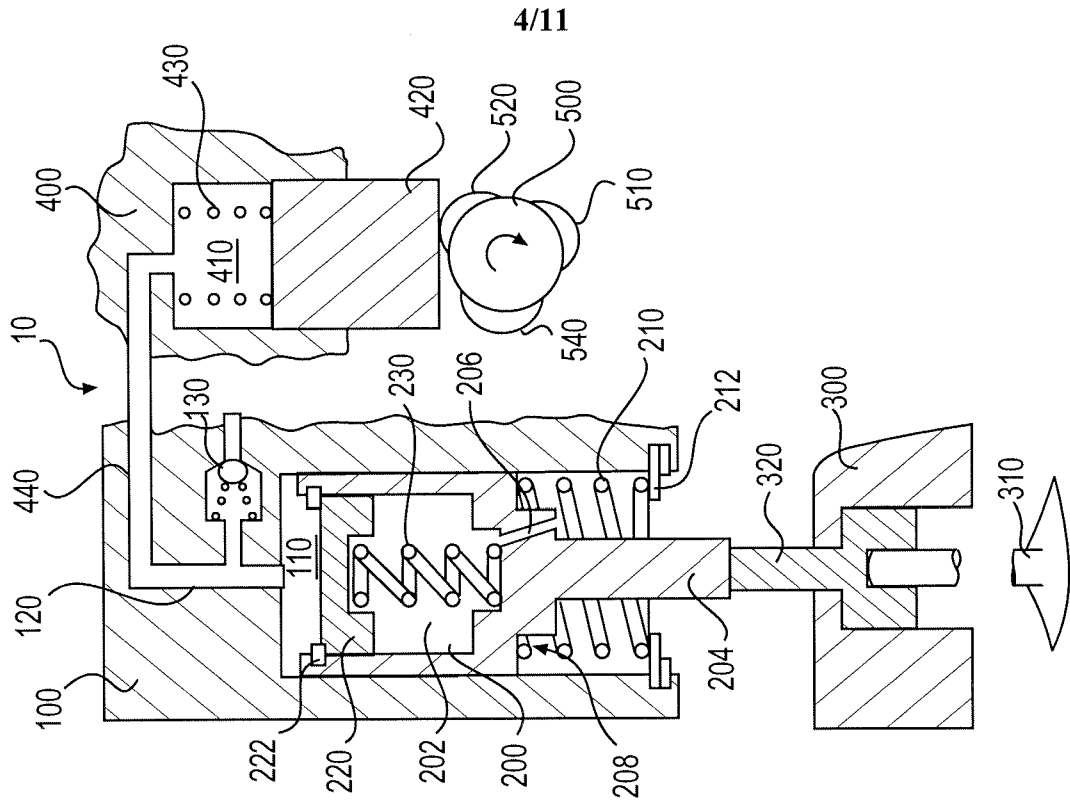


FIG. 4B

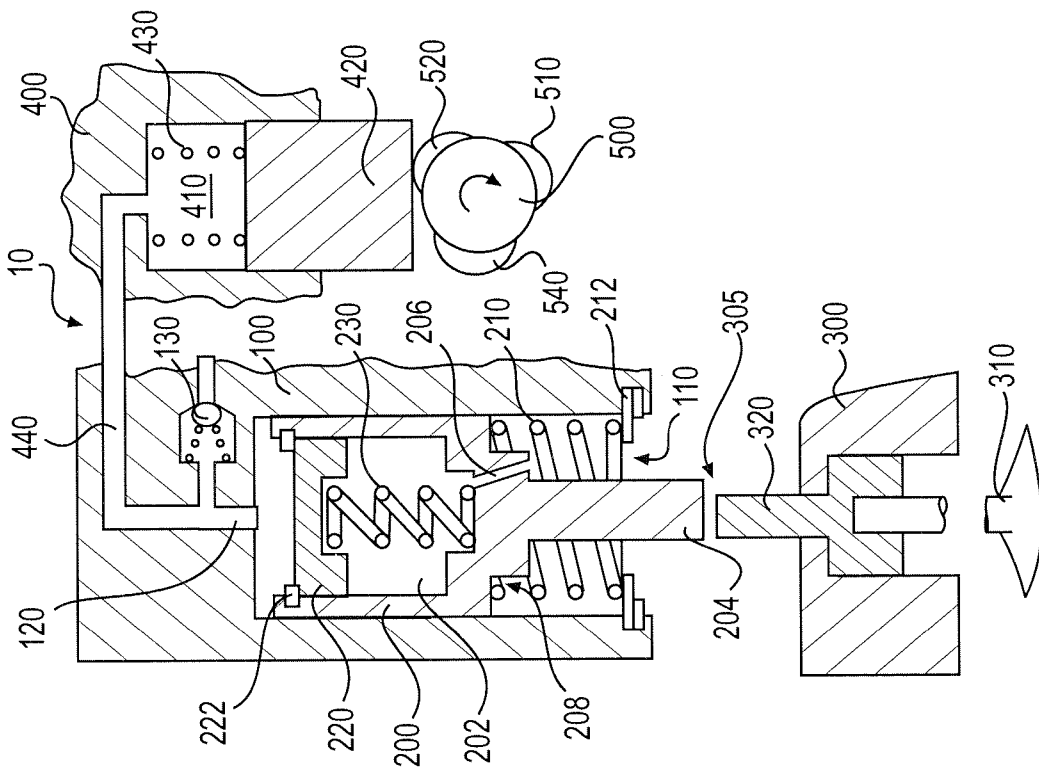


FIG. 4A

5/11

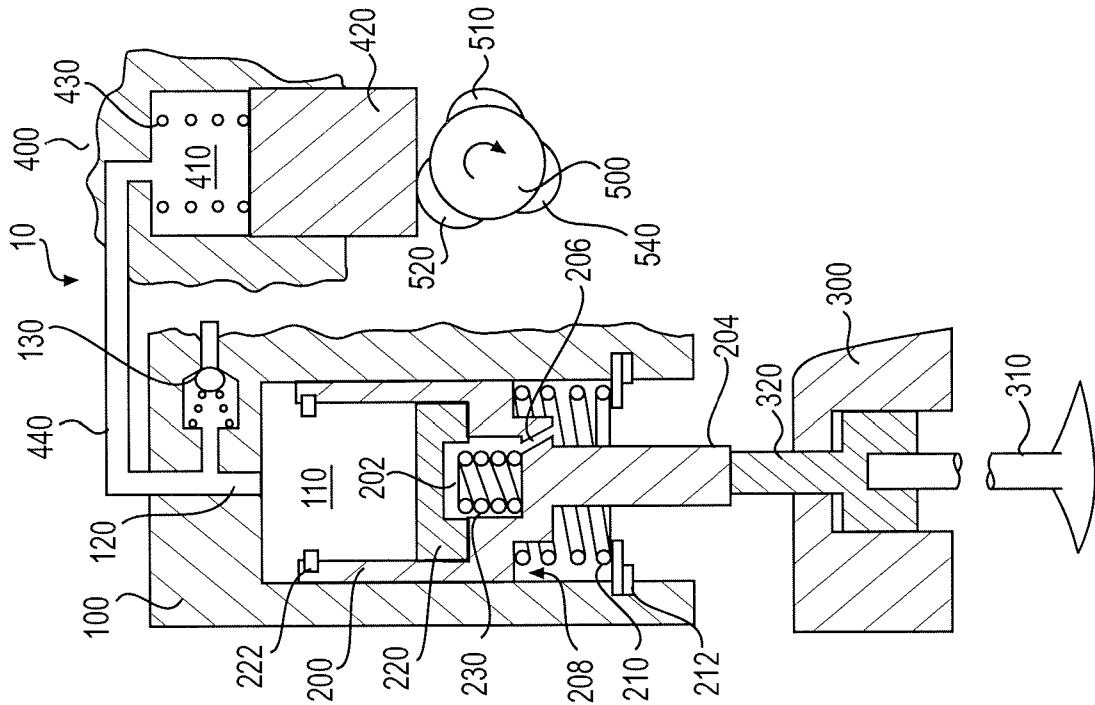


FIG. 4D





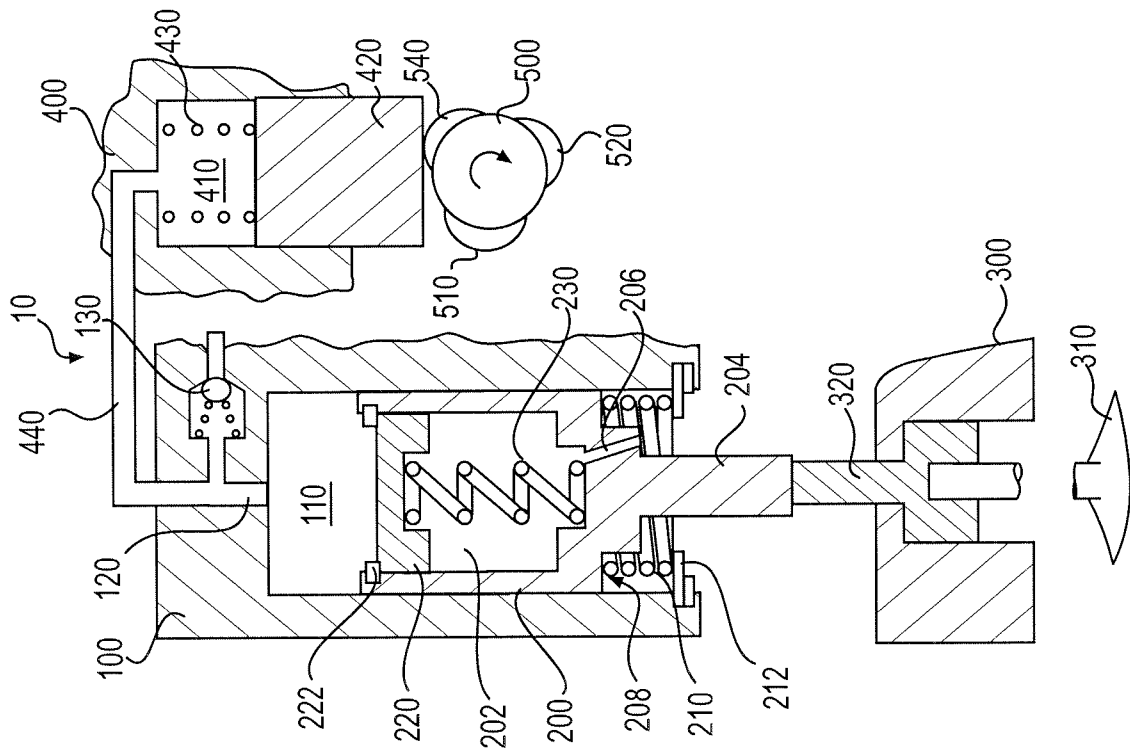


FIG. 4C



6/11

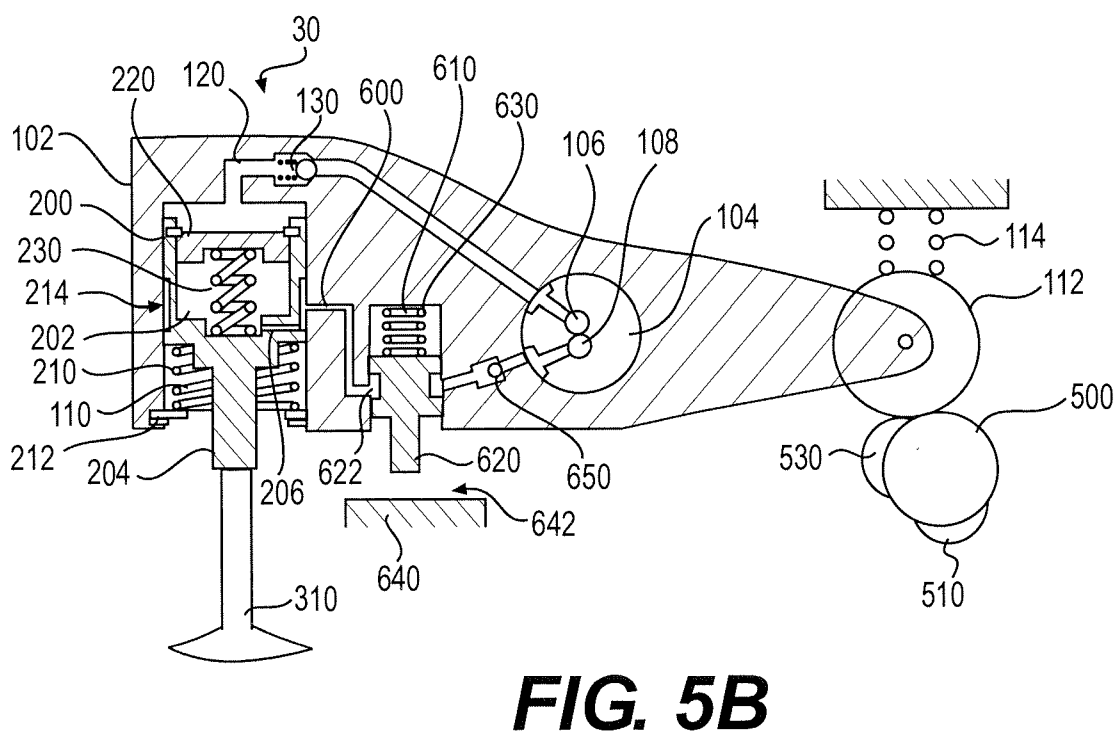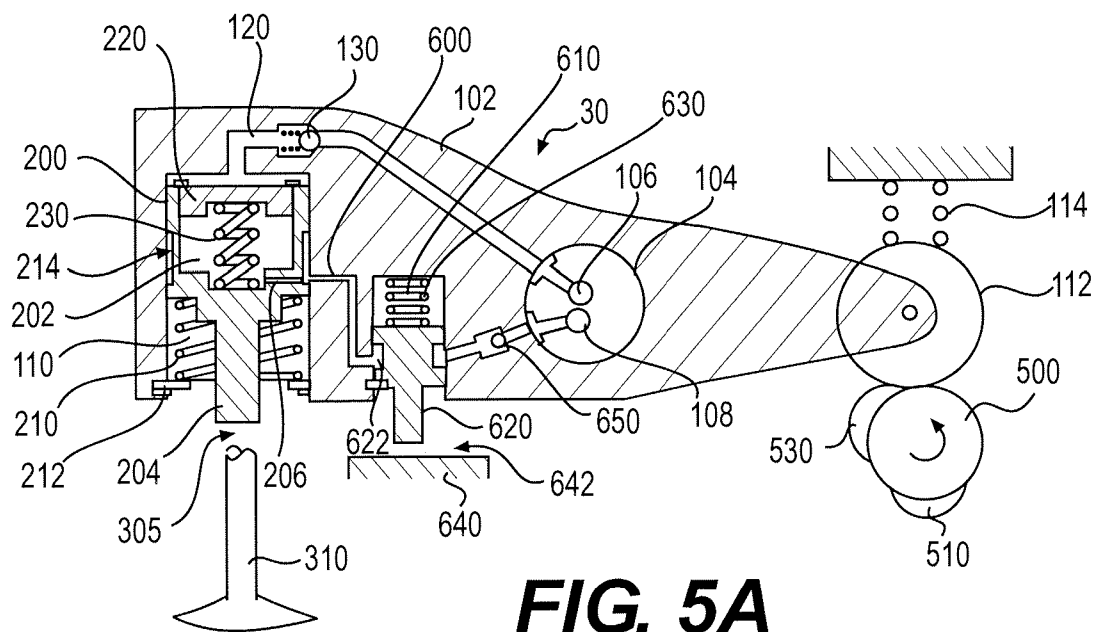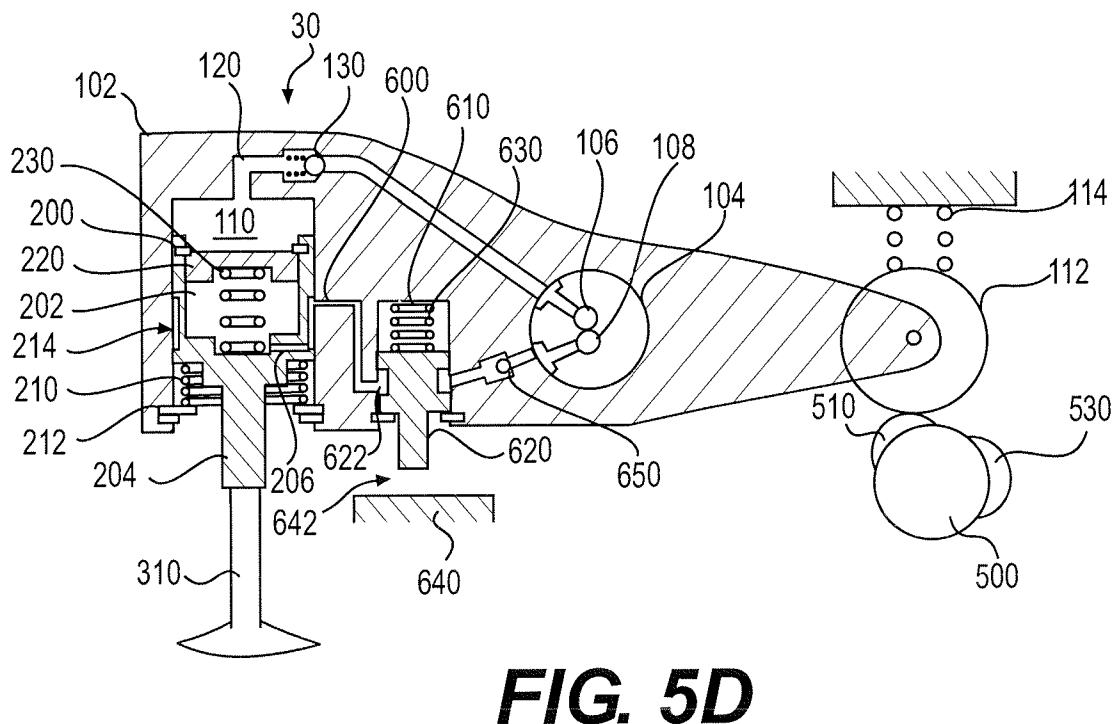

7/11

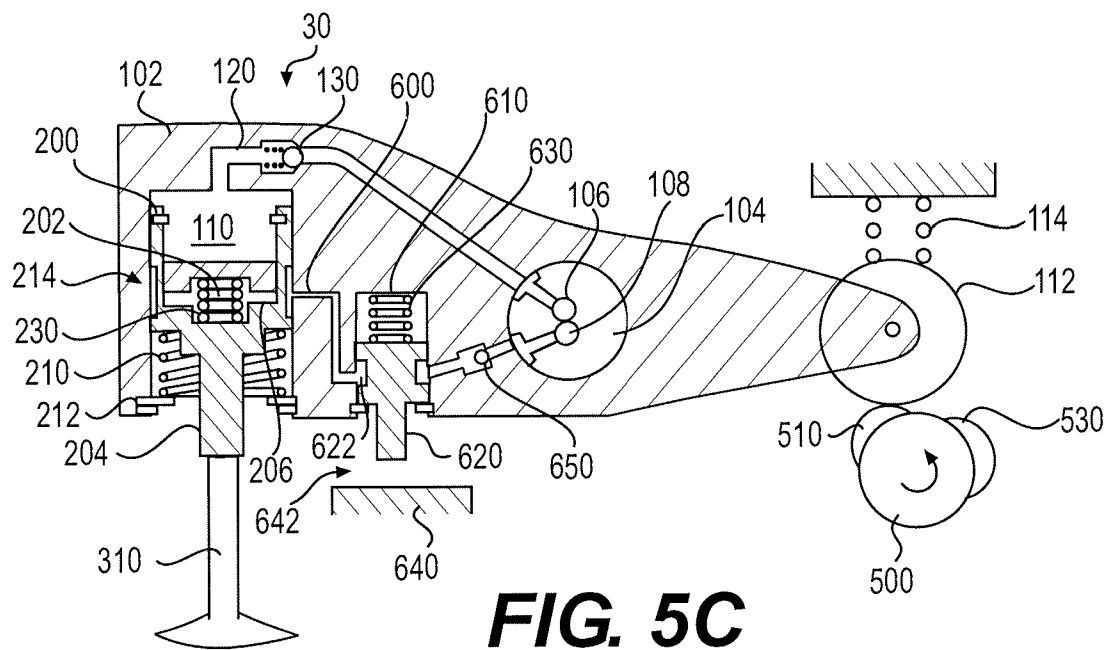

8/11

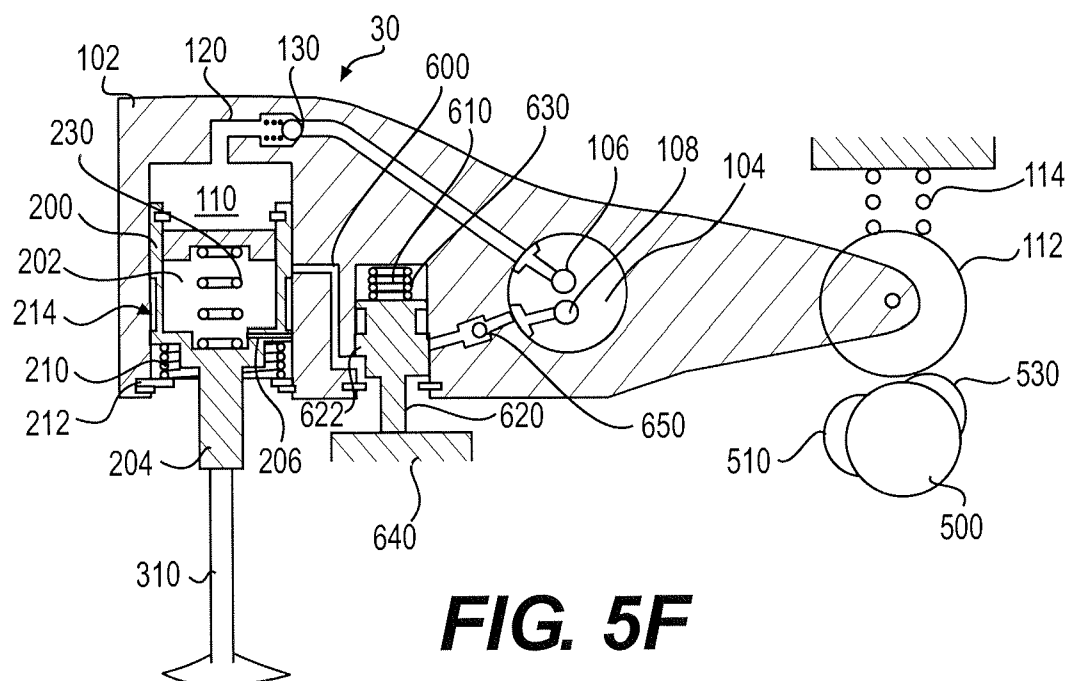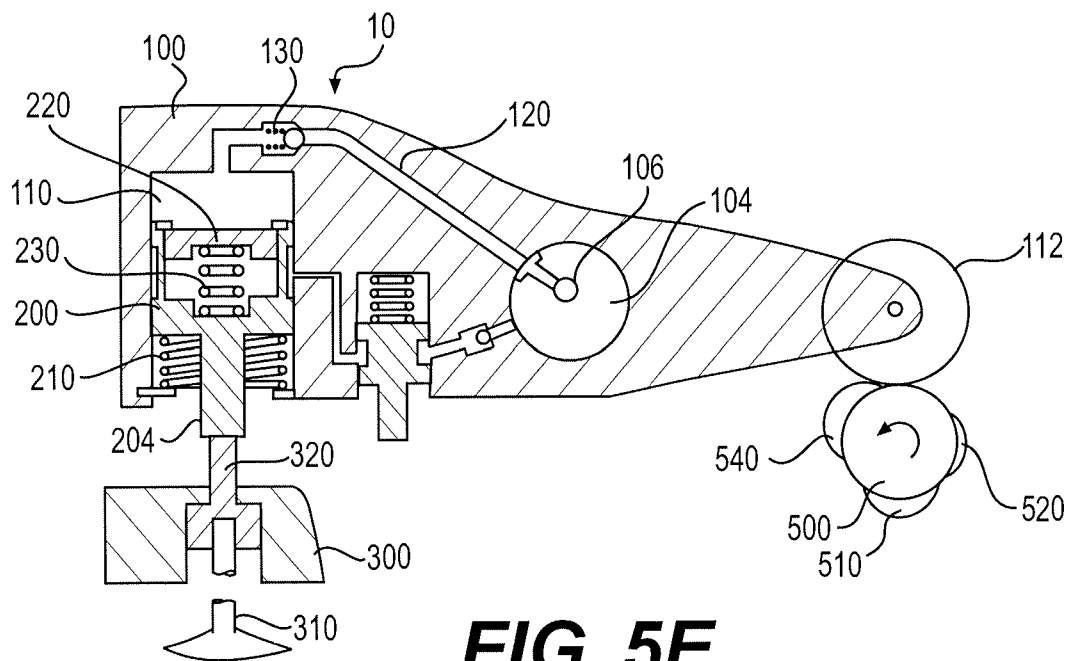

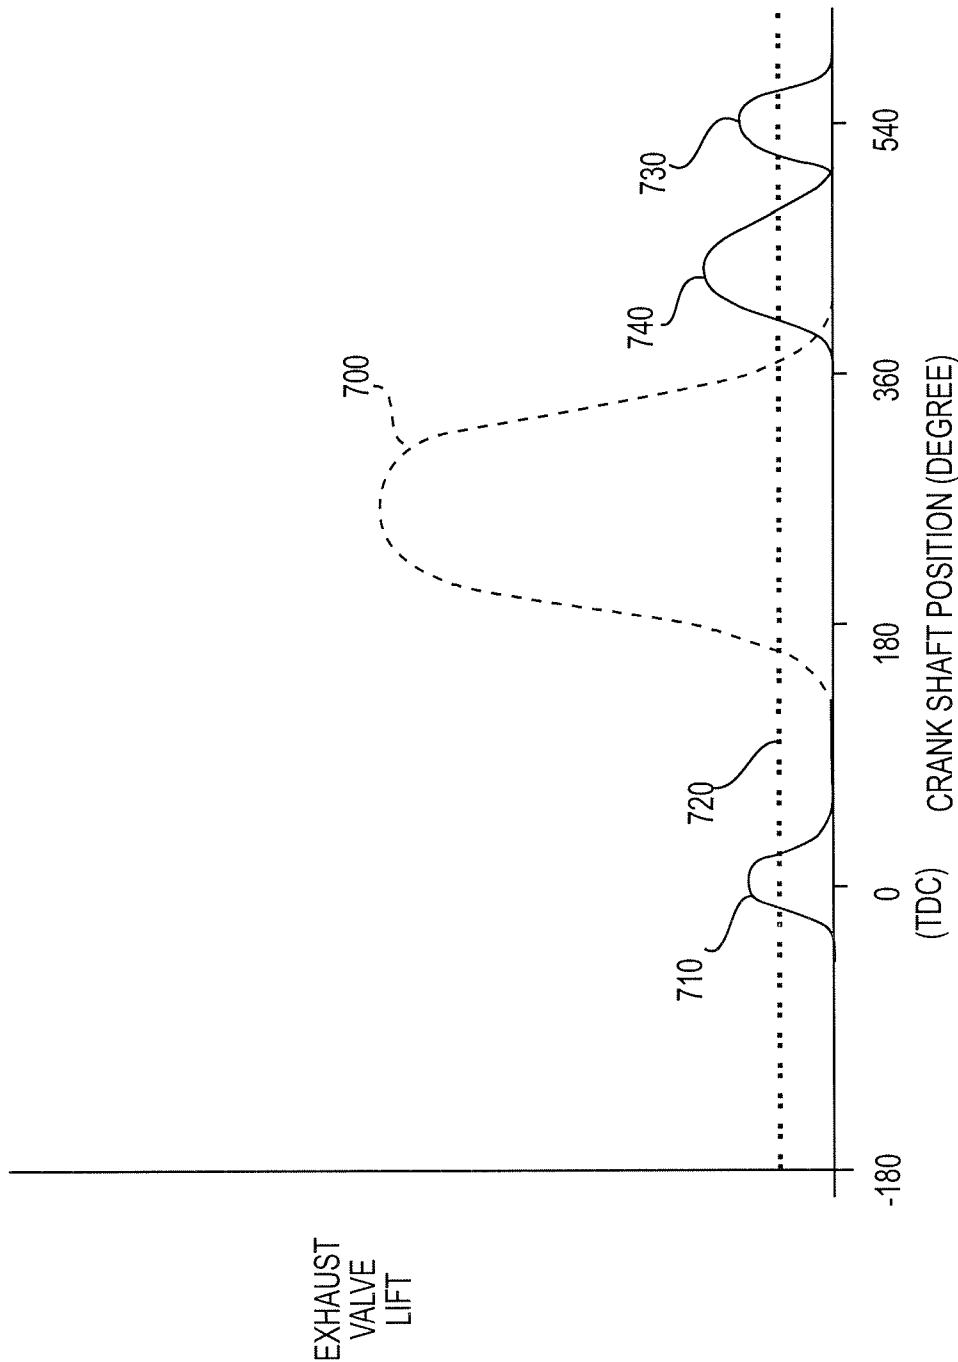


FIG. 6

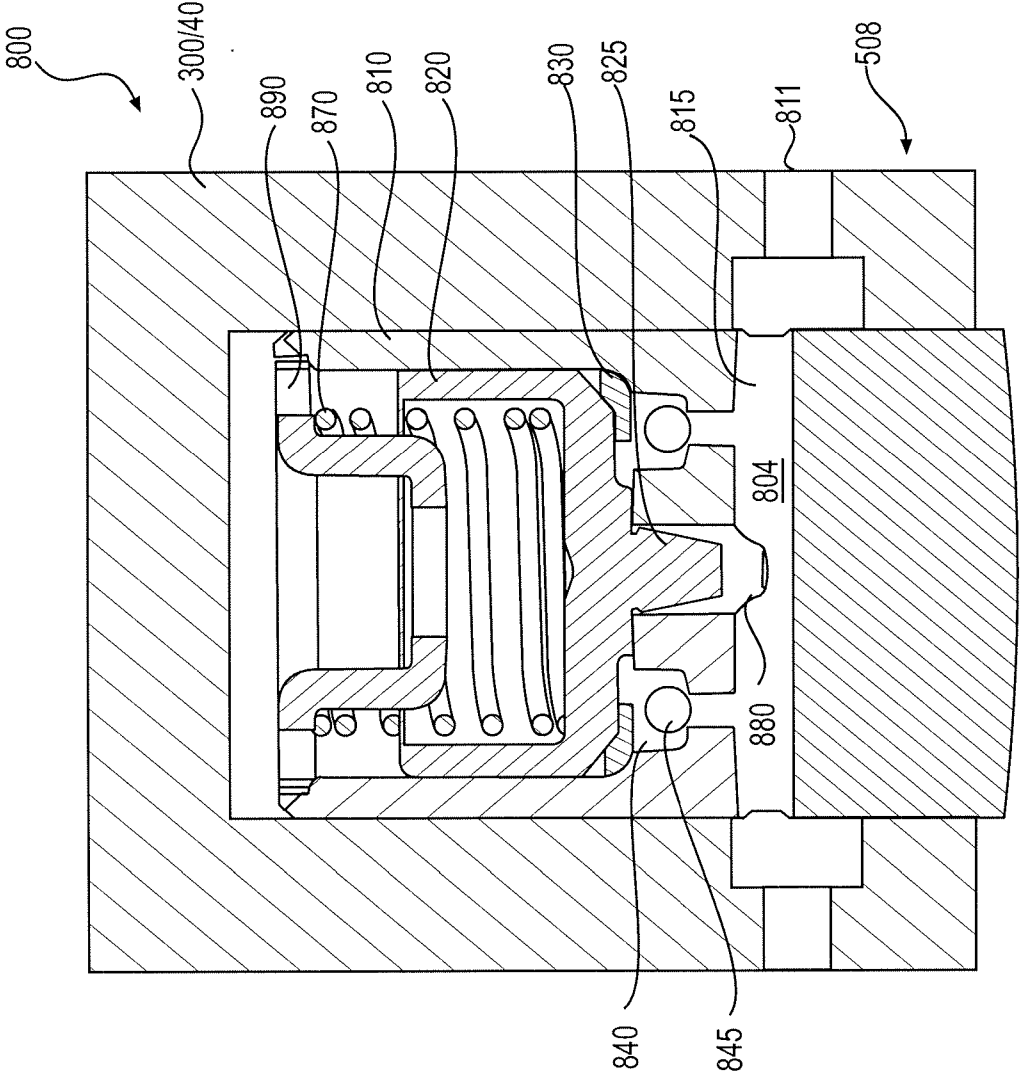


FIG. 9

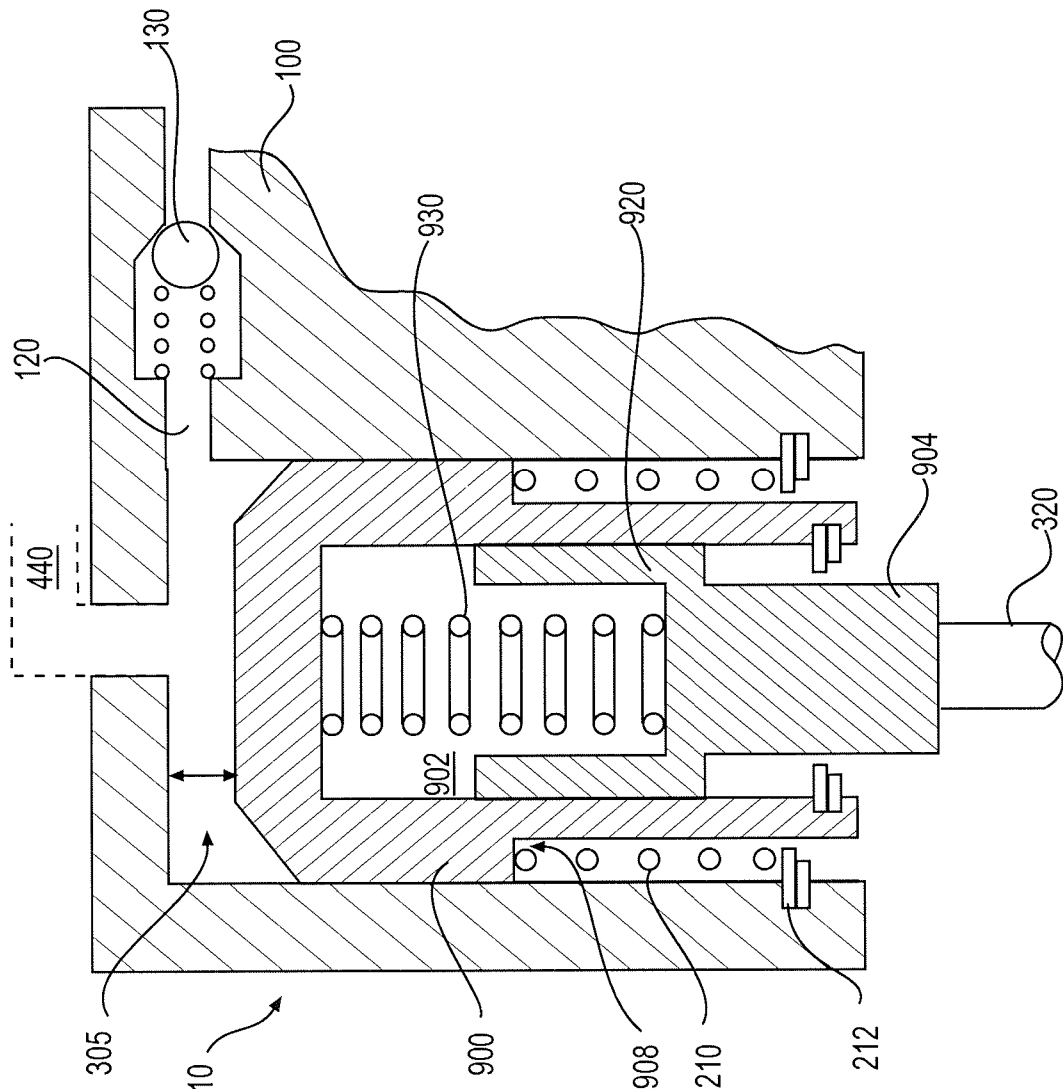


FIG. 10