

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 188 120 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the opposition decision:
11.06.1997 Bulletin 1997/24

(51) Int. Cl.⁶: **B29C 45/00**, B29C 45/46,
B29C 45/57

(45) Mention of the grant of the patent:
27.06.1990 Bulletin 1990/26

(21) Application number: 85309311.0

(22) Date of filing: 20.12.1985

(54) Moulding process

Giesserei

Procédé de moulage

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

(30) Priority: 21.12.1984 GB 8432335
20.05.1985 GB 8512708

(43) Date of publication of application:
23.07.1986 Bulletin 1986/30

(73) Proprietor: NATIONAL RESEARCH
DEVELOPMENT CORPORATION
London SE1 6BU (GB)

(72) Inventors:
• Allan, Peter Stewart
Iver, Buckinghamshire SL0 0JS (GB)
• Bevis, Michael John
Uxbridge Middlesex UB8 1XS (GB)

(74) Representative: Neville, Peter Warwick et al
Patents Department
British Technology Group Ltd
101 Newington Causeway
London SE1 6BU (GB)

(56) References cited:
EP-A- 0 166 038 DE-A- 2 205 727
DE-A- 2 513 594 DE-A- 2 614 213
DE-B- 1 140 340 GB-A- 1 220 213
US-A- 3 483 288 US-A- 3 626 495
US-A- 4 120 922 US-A- 4 469 649

• PLASTICS & RUBBER INTERNATIONAL, vol. 9,
no. 2, April 1984, pages 32-36, London, GB; P.
ALLAN et al.: "Producing void-free thick-section
thermoplastic and fibre reinforced thermoplastic
mouldings"

• MODERN PLASTICS INTERNATIONAL, October
1981, pages 38,39; G. MENGES et al.: "Self-
reinforcing plastics: a new approach to high-
performance resins"
• PLASTICS MOLD ENGINEERING, 1965, pages
438 to 451 (DuBols and Pribble);
• PLASTICS AND RUBBER PROCESSING AND
APPLICATIONS, Vol. 3, No 4, pp. 331-336 (1983)
(P. Allan and M. Bevis): "The Production of void-
free thick-section injection flow mouldings. 2.
Preferred orientation and residual stress
measurements";
• POLYMER COMMUNICATIONS, Vol. 24, pp.331-
335 (Nov. 1983) (J.P. Ibar), "Instability in the
rubbery state revealed by d.s.c. of Rheomolded
polystyrene samples";
• POLYM.-PLAST. TECHNOL. ENG., Vol. 17; No 1,
pp.11-44 (1981), "Rheomolding: A New Process
to Mold Polymeric Materials" (J.P. Ibar);
• SHOCK AND VIBRATION HANDBOOK, 2nd ed.,
by Harris, C.M. and Crede, C.E., p. of 33-5,
Copyright 1976;
• "The principles of injection moulding";
Technical Service Note G103,3rd ed., ICI Ltd.,
1978, p. 28, column 2, 2nd and 3rd complete
paragraphs, headed "Frozen-in-Strain and
Molecular Orientation";
• "Plastic Product Design Engineering
Handbook", 2nd ed., Sidney Levy, J. Harry
DuBols, Chapman and Hall, 1977, pp. 218-235;
• "Plastics Engineering", by R.J. Crawford,
Pergamon Press, 1981, pp. 188-191;
• "Plastics Engineering Handbook of the Society
of the Plastics Industry, Inc.", ed. by Joel
Frados, published by Van Nostrand Reinhold
Company, 1976, pp. 113-117;

EP 0 188 120 B2

- **Encyclopedia of Materials Science and Engineering, supplementary vol. 3, ed. Robert W. Cahn, published by Pergamon Press, pp. 1902-1908, "Polymer-Matrix Composites Processing: Shear-Controlled Orientation";**
- **Concise Encyclopedia of Polymer Processing and Applications, ed. Patrick J. Corish, Pergamon Press, pp. 560-566, "Processing: Shear-Controlled Orientation";**

- **"Processing Shear-Controlled Orientation" from Rheological Properties and Fluid Mechanics, pp. 560-566**

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

Description

This invention relates to a moulding process according to the preamble of claim 1.

It is well known that the properties, notably mechanical properties such as tensile modulus and strength, of a thermoplastic material, especially a semicrystalline polymeric thermoplastic material, may be enhanced in a given direction by causing the material to be oriented in that direction. Many processes have now been devised for accomplishing this enhancement of mechanical properties either by forming the material in the mass *ab initio* in an oriented state or by subsequently imparting plastic strain to the solid material. All such processes provide, or seek to provide, oriented product of comparatively simple, and constant, cross-section: examples are fibre and film, including biaxially oriented film; and rod, tube and sheet stock. No comparable benefit has hitherto been available for thermoplastic materials moulded from the melt.

It is also well known that successfully moulding a thermoplastic, especially a semicrystalline and/or filled polymeric thermoplastic, material from the melt to a cavity of substantial volume but low surface area:volume ratio is fraught with difficulty because the cooling in the mass of material of low thermal conductivity is not easy to control and because, as a result, contraction occurs in the mass as solidification proceeds (which contraction can be exacerbated by crystallite formation). This can result in sinking of the mould surface and both macroporosity and microporosity throughout the moulded product.

Moreover in relation to conventional injection moulding processes, the molten mass of mouldable material is injected into the mould cavity from one feeding point and the subsequent packing force is also applied at this single point. For certain requirements of mould design, in particular moulds with long flow paths and moulds with variation in cavity wall thicknesses the single feed may be split so that the cavity can be filled satisfactorily from a number of feeds, or gating points. This practice results in the production of internal weld lines within the moulded part, at the positions where the various melt flow fronts from the multiple gate points meet. It has been shown that the presence of weld lines can cause undesirable discontinuities in the mechanical properties of the moulded article.

One prior publication of particular relevance is an article by the present inventors, entitled "Producing void-free thick-section thermoplastic and fibre reinforced thermoplastic mouldings", on pages 32-36 of "Plastics and Rubber International", April 1984, Vol. 9 No. 2. In that article the inventors describe an injection-moulding process in which the propelling force of the extruder screw is not the only force acting upon the molten material within the mould cavity. A single, oscillating plunger superimposes a second force, which creates a shear effect within part of the molten material. However, the effect, and the declared purpose, of this shear force is to generate internal heat and thereby prevent premature freezing-off of the molten material in narrow sections of the mould, such as the gate, sprue or runner, before the thicker parts of the moulding have had sufficient time to freeze. Nothing is said in this publication about the structure of any part of the finished product, thick or thin.

In contrast, the present invention seeks to provide a moulding technique in which shear effects are generated in such a way as to achieve useful improvements in the structure of a moulded product. The invention is defined by the claims, the contents of which are to be read as included within the disclosure of this specification.

This invention is of particular importance in relation to thick sectioned moulding; that is, mouldings in which the cross-sectional breadth is at least 5 mm; for example 40 mm or even up to 110 mm or more. However, the process of the invention can operate to advantage to form mouldings in which the cross-section breadth is 3 mm or less.

The moulding process of this invention is suitable for application to a mouldable material which comprises a polymer material; for example, an organic polymer material. The process may be applied to thermosettable polymer materials; for example, those formed *in situ* by reactive injection moulding (RIM) processes. It is particularly suited, however, for application to thermoplastic polymer materials; these may be amorphous thermoplastic polymer materials such as LDPE, certain polyesters, free radical-polymerised polystyrene (crystal and HI grades), polymers of (meth)acrylate esters and poly(ether-sulphones). Alternatively, they may be, or become during moulding, semicrystalline polymer materials such as HDPE; PVC; PVF and PVdF. The moulding process of this invention is particularly suitable for application to polymer material, especially semicrystalline polymer material which can be effectively oriented; for example, a homo- or copolyolefin.

The moulding process of this invention is also particularly suitable for application to polymer material which comprises a liquid crystalline, preferably a thermotropic liquid crystalline, polymer; for example, liquid crystalline polyester, preferably a liquid crystalline aromatic polyester.

Blends of one or more of thermoplastic polymers, including one or more liquid crystalline polymers, may be moulded by the process of this invention.

The mouldable material used in the moulding process of this invention may comprise a filler; for example, a fibrous filler such as glass or carbon fibre, or a particulate organic or inorganic, preferably a solid, particulate, ceramic, inorganic filler; for example as platelets. Suitable such compositions are described in our GB 2085461B.

Preferred filled moulding compositions include glass fibre-filled polypropylene, PEEK and PES; and carbon fibre-filled PEEK and nylon.

At high loadings (for example, from 50 to 80% by volume of filler such as 55 to 60% by volume of filler) the resulting

moulded articles can be subjected to controlled heat treatment to convert them into sintered ceramic or metal products. Where a second, anisotropic, refractory filler is present (for example, a refractory fibrous filler) such products of the present invention will incorporate oriented fibres.

The mouldable material used in the moulding process of this invention may also comprise imbibed solvent, as is disclosed in our GB 2152938A.

In processes according to the product invention, forces substantially higher than those generally used in moulding processes may be employed. The aggregate of the shear-generating force and the normal injection force may be about 70,000 p.s.i., and is typically in the range 40,000 to 80,000 p.s.i.

In order to obtain a sufficient amount of heating from (and, indeed, to retain molecular orientation generated by) the work done by oscillating shear, the molten mouldable material must not be too fluid. It has been found that polymer materials having a melt flow index (MFI) of 4 to 10, preferably from 5 to 6, are very suitable; where the MFI is about 10 the molten polymer material tends to be too fluid to enable sufficient work to be done on it; where the MFI is very low it tends (for example, as is the case with UHMWHDPE and PTFE) to be too intractable.

The periodic force is applied for the minimum time consonant with obtaining the controlled cooling and degree of orientation required. This depends principally on the mould cavity dimensions and the nature of the mouldable composition. We have found that for glass filled polypropylene injected into a mould cavity forming a bar of 172 mm x 20 mm x 20 mm a time of no more than 400 seconds was very suitable. Suitable times may be determined by routine experimentation. Both the periodic force, and its frequency, can be continuously reduced by appropriate force-frequency-time microprocessor control means. The periodic forces are independently controlled by means of a microprocessor control system. A further requirement is that a mould cavity must be constructed with provision for the required number of feed points to suit the device.

Immediately prior to solidification of the molten, mouldable material, the periodic forces may be applied in phase to provide auxiliary packing pressure to the mould cavity. Sequences wherein the periodic forces are effective to cause shear may be interposed with sequences wherein the forces provide auxiliary packing pressure.

A still further important feature of the process and apparatus of the present invention is the control it offers over residual stress, including low levels of residual stress, and the substantial freedom from sinking or voids found in the moulded products, which may for example be automotive or aerospace components.

The process of the invention facilitates the introduction of high levels of stress in fibre reinforced materials in which the fibres act to preserve stress in the as-moulded component. The orientation of the fibres, and the composition of the composite material, determine the distribution of the locked-in or latent moulded-in stresses. The pattern of their release by the application of heat, and the resultant changes in part dimensions, are determined by the fibre orientations, bulk modulus and processing forces. This application of the process of the present invention with composite materials provides a way of controlling and preserving residual stresses in as-moulded components, and the subsequent application of heat provides for release of stresses and resultant definable change in shape.

The invention will now be further illustrated, by way of example, with reference to the accompanying drawings, in which:

Figure 1 represents a schematic, axially-sectioned side elevation of a conventional injection moulding machine; Figures 2 to 4, inclusive, represent schematic plans, axially sectioned along the flow path, of the manifold of this invention, made at different cycle times, and shown *in situ* interposed between the mould and the injection moulding machine;

Figure 5 represents a variant wherein a single source of applied force is provided;

Figure 6 represents, in greater detail, a plan of the manifold of this invention;

Figure 7 represents a side elevation, sectioned along B—B', of Figure 5;

Figure 8 represents the variation in tensile modulus of the moulding prepared in accordance with Example 2; and

Figure 9 represents stress-strain curves for the tensile testing of the moulding prepared in accordance with Example 3.

In the drawings, an injection moulding machine 1 comprises a drivable injection screw 2 mounted for rotation about, and for oscillation along, its axis within a substantially coaxially extending elongate cavity 3 of a cylindrical, heatable barrel 4. Downstream from the screw the cavity communicates within a nozzle 5 lined with bush 6, and upstream with a feed hopper 7 containing polymer feedstock.

The nozzle mates with manifold 8 and the bush communicates with an axially-symmetric, bifurcated channel 9, each branch of which leads upwardly into cylinders 10, 11 in each of which is opposably mounted an axially-slidable, drivable piston 12, 13, respectively. In turn, each cylinder communicates downstream with axially aligned twin nozzles 14, 15.

The twin nozzles mate with mould 16 (shown closed) which comprises a double sprued, double gated bar mould cavity 17, the sprues 18, 19 communicating with the bushes 20, 21 of the twin nozzles, respectively.

In use, at start-up the mould tooling is assembled; demoulding agent is applied to the surfaces defining the mould

cavity; the mould is then closed and brought to temperature, for example from 20°C to 80°C. Granular polymer feedstock is fed from the feed hopper into the elongate cavity and heated by the cylindrical barrel heater (not shown). The molten polymer feedstock is further heated, plasticised, and rendered substantially homogeneous by rotation of the injection screw. When the molten polymer feedstock is determined to be of the right viscosity it is next injected, by rotation and downstream translation of the injection screw, into the mould cavity. The molten polymer feedstock enters the manifold and passes, successively, through cylinder 10; nozzle 14; sprue 18; mould cavity 17; sprue 19; nozzle 15 and into cylinder 11 where further transport is prevented by piston 13. When the mould cavity, sprues and manifold are filled with molten polymer feedstock the injection screw is stopped from rotating but is held at position to provide a constant packing force downstream thereof. It can thus be seen that the first function of the manifold is to split the single feed (ex nozzle 5) into the desired number of separate feeds. In the illustrated example the feed has been split into two identical channels.

Pistons 12 and 13 are then reciprocated (see Figure 3) at the same frequency, but out of phase with each other by 180°. This reciprocation maintains the molten polymer feedstock in the mould cavity, sprues and manifold under continual, oscillating shear which generates heat and which, by appropriate microprocessor control (not shown), enables the rate of cooling of the polymer feedstock to be controlled. In effect, the molten polymer feedstock in the mould cavity is continuously sheared by repetitive injection of molten polymer feedstock from cylinders 10 and 11. Shrinkage of the polymer feedstock on cooling is compensated for by further molten polymer feedstock necessarily being fed into the mould cavity from the manifold (and also from the elongate cavity) during the first reciprocation cycle.

At the end of the first reciprocation cycle (when a substantial bulk of the polymer feedstock in the mould cavity has solidified but while that in the gates is still molten) the pistons are, in a second reciprocation cycle, reciprocated in phase with each other to provide a packing force auxiliary to that of the injection screw until the polymer feedstock in the gate has solidified.

In another embodiment of this invention, it is found desirable, in order to effect a greater degree of control over the shearing of the molten polymer feedstock in the mould cavity and its rate of solidification that a part of the second reciprocation cycle can be performed during the first reciprocation cycle.

The mould is then removed from the manifold; the moulded polymer feedstock is demoulded; and the injection screw is translated upstream ready for the next injection moulding cycle.

(It may be desirable, in successive injection moulding cycles, to alternate injection of the molten polymer feedstock between cylinders 10 and 11 in order to prevent polymer feedstock becoming trapped in a nozzle and thereby becoming degraded.)

The following Examples illustrate the invention.

Example 1

In this Example, the moulding line was arranged essentially as is shown in Figure 1 and 2 of the accompanying drawings. The mould was of a bar test specimen of rectangular cross-section; its dimensions were, in different specimens, 3 × 20 × 160 mm and 6 × 20 × 160 mm and the feedstock was, in different specimens, 20% and 30% by weight glass fibre reinforced polypropylene ("PROPATHENE" ex ICI Ltd.). Three classes of moulding process were utilised under otherwise optimised processing conditions:

- (a) single end-gating without application of a periodic force;
- (b) double end-gating without application of a periodic force; (both these latter being comparative moulding processes) and
- (c) double end-gating with application of a periodic force in accordance with the present invention.

The room temperature tensile properties of the mouldings were determined using a 5 cm per minute cross-head speed. The results are shown in Table 1.

TABLE 1

Moulding process	Tensile strength (MPa)			
	6 mm test specimen		3 mm test specimen	
	20% glass fibre	30% glass fibre	20% glass fibre	30% glass fibre
a	56.1	62.8	52.2	67.3
b	30.5	25.5	26.3	26.6
c	57.2	62.2	48.2	56.5

These results show that the tensile strength of double end-gated mouldings can be substantially improved by the application of a periodic force in accordance with the present invention. The weld line strengths in double end-gated mouldings produced without application of a periodic force are reduced to the weld line strengths of reinforced polypropylene (25 MPa). Processing in accordance with the present invention causes the strength of the 6 mm thick fibre reinforced mouldings to increase to that of the strength of the single gate mouldings without internal weld lines. A substantial increase in strength from less than 50% to more than 85% of the strength of weld line-free specimens was recorded for the 3 mm thick mouldings. These improvements were gained without increasing peak mould cavity force. (It is appropriate to use the term "weld line strengths" in relation to double end-gated mouldings produced without application of a periodic force because it is clear, both from microradiography and from the mode of failure of the test specimen, that the morphology of the weld region controls the strength of the test specimen.)

X-ray microradiographs of the weld regions showed a preferred fibre orientation parallel to the injection direction and normal to the plane of the weld when processing was effected in accordance with the present invention. Without the application of a periodic force in accordance with this invention the preferred fibre orientation at the weld was found to be normal to the injection direction.

Fibre length distributions in the moulded test specimens were measured and showed that no significant fibre degradation results from the processing in accordance with the present invention, beyond that which occurs during the initial melting and supplying of the composite mouldable material to the mould cavity.

Example 2

Examples 1 (a) and (c) were repeated with a mould of a bar test specimen of rectangular cross-section of dimension 20 × 20 × 170 mm; the feedstock was a 30% by weight glass fibre reinforced polypropylene ("PROPATHENE" ex ICI. Ltd.). The test specimens were then sectioned and the tensile moduli of the sections were determined. The results are shown in Figure 8 in which the depth is measured from the surface containing the sprue(s) (at 0 mm) to the opposite surface (at 20 mm). The hatched curve represents the variation of modulus with depth of the comparative specimen; the continuous curve represents the variation of modulus with depth of the specimen prepared in accordance with this invention.

It will be seen that the averaged tensile modulus of the specimen prepared in accordance with this invention is increased, relative to the comparative specimen, by approximately 50%. It is to be particularly noted that the tensile modulus in the core of the specimen prepared in accordance with this invention is increased, relative to the comparative specimen, by approximately four times.

Example 3

Example 1 was repeated except that the mouldable material used was a thermotropic liquid crystal polymer prepared from ca. 70% p-acetoxybenzoic acid and 30% by weight acetoxynaphthalic acid. Results are shown in Table 2 and Figure 7 of the accompanying drawings.

TABLE 2

Moulding process	Tensile strength (MPa)	Failure mode
a	200	
b	28	Brittle (see Figure 9a)
c	94	Ductile (see Figure 9b)

Example 4

Example 1(c) was repeated with a mould of a bar test specimen of rectangular cross-section 6 × 6 × 160 mm; the feedstock was unfilled HDPE (RIGIDEX HO50; \bar{M}_w approximately 100,000 ex BP Chemicals Ltd.). Application of a periodic force in accordance with the present invention resulted in the melt pressure oscillating about a mean pressure of 80 MPa and 100 MPa, respectively, at 50 oscillations per minute.

Results are shown in Table 3.

TABLE 3

Mean cavity pressure (MPa)	Tensile modulus (GPa)
80	2.26
100	3.94

It was found that the optimum tensile modulus obtained with a single end-gated mould was 1.1 GPa.

Successive removal of the outer layers of the specimen revealed a central core region in a solid coherent clear plug which usually failed in a brittle mode of fracture in a tensile test; which exhibited, in differential scanning thermogram, two melting points at 136°C and 143°C, respectively, the latter being indicative of extended chain crystallites; and which had a tensile modulus of up to 11 GPa. Transmission electron micrographs of replicas from etched sections demonstrated, in this core, the presence of shish-kebab micromorphologies.

The process of the present invention allows control of the molten, mouldable material in the mould cavity such that the moulded articles prepared in accordance with this invention possess a number of advantages not obtainable by conventional moulding processes.

Thus, it is found that, by appropriate control of the process temperature, pressure, cooling and shear rates, the micromorphology of the resulting moulded material (and also the orientation of any filler which may be present) will provide an anisotropic enhancement of the mechanical properties of the moulded article. It is a particularly important feature of the process of this invention that, in a cross-section across the flow, the core is highly oriented while the surface of resulting moulded article is less oriented, tougher and more resistant to cracking or fibrillation.

It is also found that, by using the present invention, the adverse mechanical properties associated with the previously mentioned weld lines and produced by multiple gating can be substantially ameliorated: the shearing produced by the process of the invention disturbs the weld line and restores the microstructure of the moulded article to that which would be expected from a single gated moulding. This is particularly the case in relation to fibre-filled and thermotropic liquid crystalline polymeric materials.

A further important feature of the present invention is that it provides a greater efficiency relative to a single feed oscillating packing unit. With the single feed oscillating unit the movement of polymeric material, which keeps the thinnest sections of the moulding molten while the thicker sections solidify, relies on the compression and decompression of the molten polymeric material remaining within the mould cavity. This can result in very high fluctuations of force within the cavity while the material is solidifying and can also cause over-packing of the material within the region of the feed point. With two (or more) feed zones the process of the invention can provide the necessary movement of material required to keep the sections of the moulding molten without having to resort to high forces to compress the melt. In fact the cavity force fluctuations can be greatly reduced from that of the single feed device and, therefore, allow the moulding to solidify under a much more even packing force than that experienced with a single feed oscillating packing force device.

A still further important feature of the present invention is the low level of residual stress; and the substantial freedom from sinking or voids found in the moulded articles prepared by the process of the present invention; for example, automotive or aerospace components.

Claims

1. A moulding process, which process comprises supplying molten, mouldable material to a mould cavity (17); subjecting at least a part of the supplied molten material to a shear force; causing the material to solidify while maintaining the shear force; and demoulding the moulded material;

characterised in that the supplied molten material is subjected to the shear force by applying a periodic force to each of a plurality of spaced-apart regions of the molten material within the mould cavity, there being a phase difference in the periodic forces applied to at least two different such regions (via 14, 15) effective to cause oscillating shear of the molten material at least between the two such regions, the molten material in the mould cavity being sheared by repetitive injection of molten material at the said different regions, in order to orient the material.
2. A moulding process according to Claim 1 wherein the mouldable material comprises a polymer material.
3. A moulding process according to Claim 2 wherein the polymer material comprises a thermoplastic polymer.
4. A moulding process according to Claim 3 wherein the thermoplastic polymer comprises a semicrystalline polymer.

5. A moulding process according to any of Claims 2 to 4 wherein the polymer material is a homo- or copolyolefin, or a blend thereof with one or more other polymers.
6. A moulding process according to Claim 1 wherein the mouldable material is filled.
7. A moulding process according to Claim 2 wherein the polymer material comprises a liquid crystalline polymer.
8. A moulding process according to Claim 2 wherein the polymer material comprises a thermosetting polymer.
9. A moulding process according to Claim 1 wherein the periodic forces applied to at least two different such regions of the molten material are of the same frequency.
10. A moulding process according to Claim 1 wherein, immediately prior to solidification of the molten, mouldable material, the periodic forces are applied in phase to provide auxiliary packing force to the mould cavity.

Patentansprüche

1. Formungsverfahren, welches Verfahren aufweist,
Zuführen geschmolzenen formbaren Materials zu einem Formenhohlraum (17),
Unterwerfen mindestens eines Teils des zugeführten geschmolzenen Materials einer Scherkraft,
Erreichen, daß das Material unter Aufrechterhalten der Scherkraft aushärtet, und Ausformen des geformten Materials;
dadurch gekennzeichnet,
daß das zugeführte geschmolzene Material der Scherkraft dadurch ausgesetzt wird, daß eine periodische Kraft auf jede von mehreren Bereichen des geschmolzenen Materials innerhalb des Formenhohlraums ausgeübt wird, wobei eine Phasendifferenz bei den periodischen Kräften vorliegt, die auf mindestens zwei unterschiedliche derartige Bereiche ausgeübt werden (über 14, 15), um eine oszillierende Scherung des geschmolzenen Materials zwischen zumindest diesen beiden Bereichen zu bewirken, wobei das geschmolzene Material im Formenhohlraum durch wiederholtes Einspritzen geschmolzenen Materials in die verschiedenen Bereiche geschert wird, um das Material auszurichten.
2. Formungsverfahren nach Anspruch 1, bei dem das formbare Material ein Polymermaterial enthält.
3. Formungsverfahren nach Anspruch 2, bei dem das Polymermaterial ein thermoplastisches Polymer enthält.
4. Formungsverfahren nach Anspruch 3, bei dem das thermoplastische Polymer ein teilkristallines Polymer enthält.
5. Formungsverfahren nach einem der Ansprüche 2 bis 4, bei dem das Polymermaterial ein Homo- oder Copolyolefin oder ein Blend davon mit mindestens einem anderen Polymer ist.
6. Formungsverfahren nach Anspruch 1, bei dem das formbare Material gefüllt ist.
7. Formungsverfahren nach Anspruch 2, bei dem das Polymermaterial ein Flüssigkristall-Polymer enthält.
8. Formungsverfahren nach Anspruch 2, bei dem das Polymermaterial ein wärmehärtbares Material enthält.
9. Formungsverfahren nach Anspruch 1, bei dem die auf mindestens zwei unterschiedliche Bereiche des geschmolzenen Materials ausgeübten periodischen Kräfte mit gleicher Frequenz ausgeübt werden.
10. Formungsverfahren nach Anspruch 1, bei dem unmittelbar vor der Verfestigung des geschmolzenen formbaren Materials die periodischen Kräfte in

Phase ausgeübt werden, um auf den Formenhohlraum eine Hilfs-Verdichtungskraft auszuüben.

Revendications

- 5 1. Procédé de moulage, ce procédé comprenant la fourniture d'une matière moulable fondue à une cavité (17) de moule ; la soumission d'au moins une partie de la matière fondue fournie aux effets d'une force de cisaillement ; la réalisation de la solidification de la matière tout en maintenant la force de cisaillement ; et le démoulage de la matière moulée; procédé caractérisé en ce que la matière moulée fournie est soumise aux effets de la force de cisaillement par application d'une force périodique à chacune de plusieurs régions séparées de la matière fondue dans la cavité de moule, une différence de phase existant dans les forces périodiques appliquées à au moins deux régions différentes de ce genre (par l'intermédiaire de 14, 15), cette différence étant efficacement capable de provoquer un cisaillement oscillant de la matière fondue au moins entre les deux telles régions, la matière fondue dans la cavité de moule étant cisailée par l'injection répétitive de matière fondue dans lesdites régions différentes, de manière à orienter la matière.
- 10
- 15 2. Procédé de moulage selon la revendication 1, dans lequel la matière moulable est constituée par, ou comprend, une matière polymère.
3. Procédé de moulage selon la revendication 2, dans lequel la matière polymère est constituée par, ou comprend, un polymère thermoplastique.
- 20 4. Procédé de moulage selon la revendication 3, dans lequel le polymère thermoplastique est constitué par, ou comprend, un polymère semi-cristallin.
- 25 5. Procédé de moulage selon l'une quelconque des revendications 2 à 4, dans lequel la matière polymère est une homopolyléfine ou une copolyléfine, ou un de leurs mélanges avec un ou plusieurs autres polymères.
6. Procédé de moulage selon la revendication 1, dans lequel la matière moulable comporte une charge.
- 30 7. Procédé de moulage selon la revendication 2, dans lequel la matière polymère est constituée par, ou comprend, un polymère à propriétés de cristaux liquides.
8. Procédé de moulage selon la revendication 2, dans lequel la matière polymère est constituée par, ou comprend, un polymère thermodurcissable.
- 35 9. Procédé de moulage selon la revendication 1, dans lequel les forces périodiques appliquées sur au moins deux telles régions différentes de la matière fondue ont la même fréquence.
- 40 10. Procédé de moulage selon la revendication 1 dans lequel, immédiatement avant la solidification de la matière moulable fondue, les forces périodiques sont appliquées en phase pour exercer une force de compactage auxiliaire sur la cavité du moule.
- 45
- 50
- 55

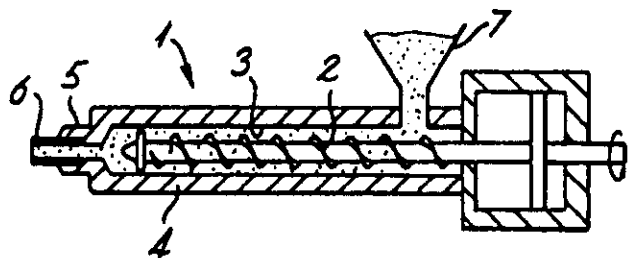


Fig. 1

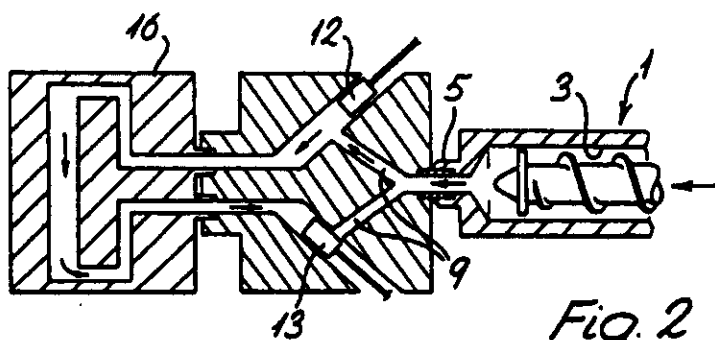


Fig. 2

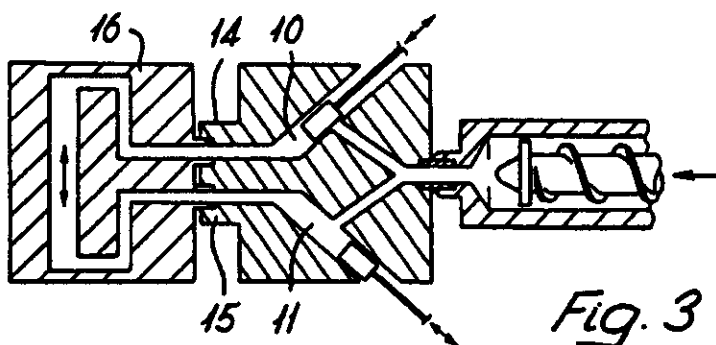


Fig. 3

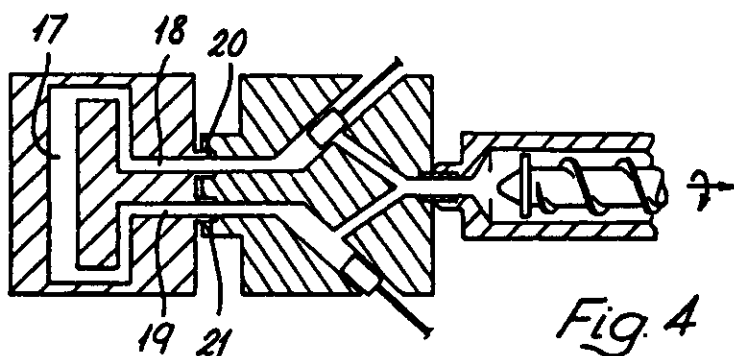


Fig. 4

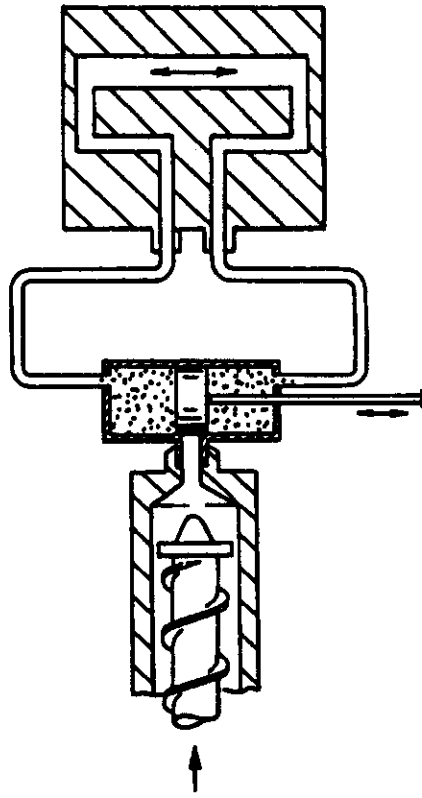


Fig. 5

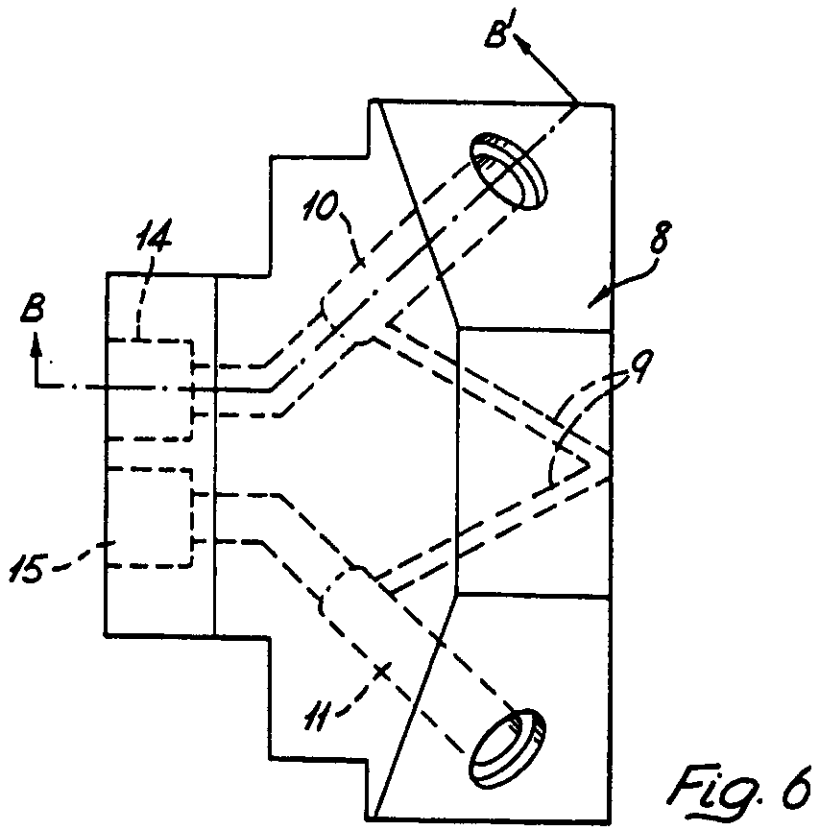


Fig. 6

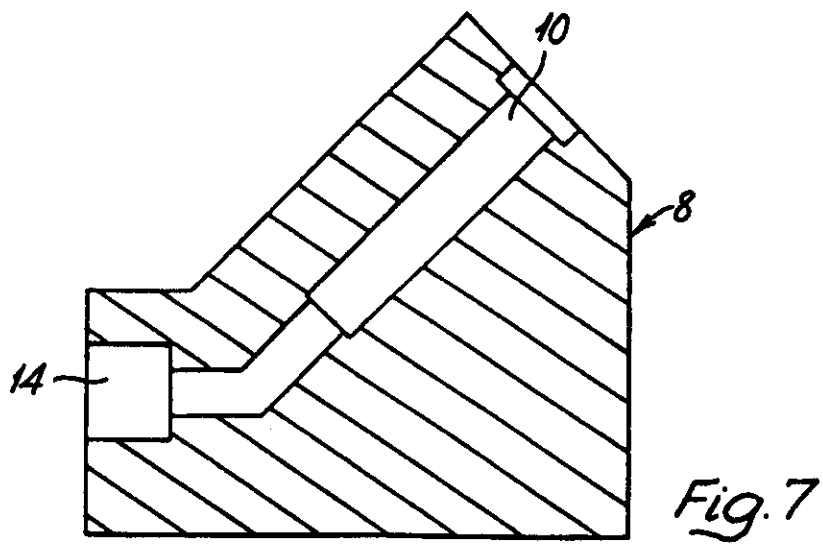


Fig. 7

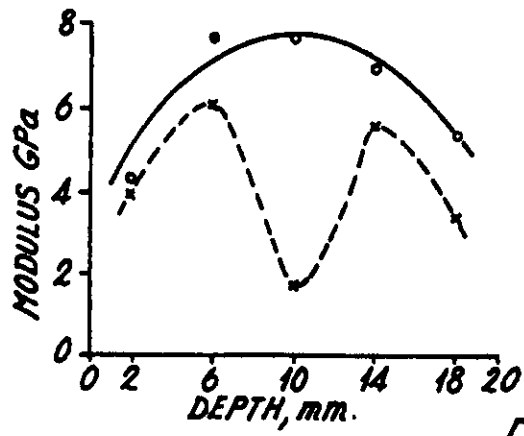


Fig. 8

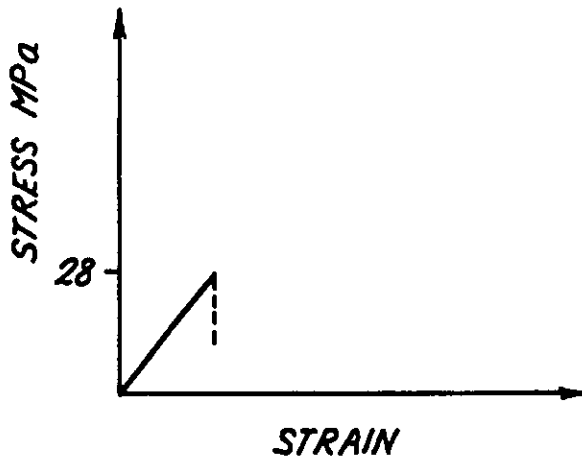


Fig. 9a

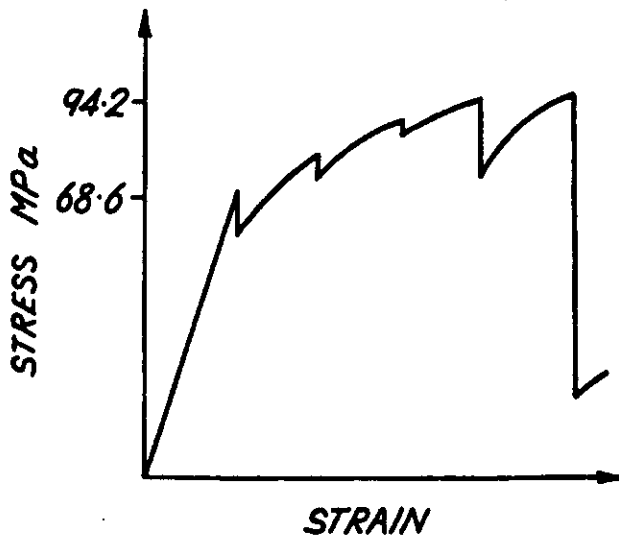


Fig. 9b

REGISTER ENTRY FOR EP0188120

European Application No EP85309311.0 filing date 20.12.1985

Priorities claimed:

21.12.1984 in United Kingdom - doc: 8432335

20.05.1985 in United Kingdom - doc: 8512708

Designated States BE CH DE FR GB IT LI NL SE AT

Title MOULDING PROCESS

Applicant/Proprietor

NATIONAL RESEARCH DEVELOPMENT CORPORATION, 101 Newington Causeway, London
SE1 6BU, United Kingdom [ADP No. 50394980002]

Inventors

PETER STEWART ALLAN, 14 Lossie Drive, Iver, Buckinghamshire SL0 0JS,
United Kingdom [ADP No. 54179544001]MICHAEL JOHN BEVIS, 26 Water Tower Close, Uxbridge Middlesex UB8 1XS,
United Kingdom [ADP No. 54179551001]

Classified to

B5A

B29C

Address for Service

PATRICK ANTONY STABLES, British Technology Group 101 Newington Causeway,
London SE1 6BU, United Kingdom [ADP No. 50426584001]

EPO Representative

PATRICK ANTONY STABLES, British Technology Group 101 Newington Causeway,
London SE1 6BU, United Kingdom [ADP No. 50426584001]

Publication No EP0188120 dated 23.07.1986

Publication in English

Examination requested 20.12.1985

Patent Granted with effect from 27.06.1990 (Section 25(1)) with title MOULDING
PROCESS.

19.02.1988 EPO: Search report published on 24.02.1988			
	Entry Type 25.11	Staff ID.	Auth ID. EPT
15.04.1991 EPO: Opposition filed on 25.03.1991			
	Entry Type 25.1	Staff ID. RD06	Auth ID. EPT
15.04.1991 EPO: Opposition filed on 25.03.1991			
	Entry Type 25.1	Staff ID. RD06	Auth ID. EPT
11.03.1992 Application under Section 32 filed on 05.03.1992			
	Entry Type 8.1	Staff ID. MM	Auth ID. F21

29.04.1992 BRITISH TECHNOLOGY GROUP LIMITED, Incorporated in the United Kingdom, 101 Newington Causeway, LONDON, SE1 6BU, United Kingdom [ADP No. 06095822001]
registered as Applicant/Proprietor in place of
NATIONAL RESEARCH DEVELOPMENT CORPORATION, 101 Newington Causeway, London SE1 6BU, United Kingdom [ADP No. 50394980002]
by virtue of statutory instrument dated 31.03.1992. Certified copy filed on GB2246727

Entry Type 8.4 Staff ID. CT Auth ID. F21

04.02.1997 FILE RAISED ON 3/2/97.

Entry Type 10.1 Staff ID. LB Auth ID. AA

09.05.1997 EPO: Case amended on 11.06.1997

Entry Type 25.12 Staff ID. RD06 Auth ID. EPT

**** END OF REGISTER ENTRY ****

OA80-01
EP

OPTICS - PATENTS

28/08/97

09:18:21
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER EP0188120

PROPRIETOR(S)

British Technology Group Limited, Incorporated in the United
Kingdom, 101 Newington Causeway, LONDON, SE1 6BU, United Kingdom

DATE FILED 20.12.1985

DATE GRANTED 27.06.1990

DATE NEXT RENEWAL DUE 20.12.1997

DATE NOT IN FORCE

DATE OF LAST RENEWAL 21.11.1996

YEAR OF LAST RENEWAL 12

STATUS PATENT IN FORCE

**** END OF REPORT ****