



(22) Date de dépôt/Filing Date: 2001/02/22

(41) Mise à la disp. pub./Open to Public Insp.: 2001/09/24

(30) Priorité/Priority: 2000/03/24 (09/534,670) US

(51) Cl.Int.⁷/Int.Cl.⁷ H01H 85/00, H02H 1/00


(71) Demandeur/Applicant:
CORNING CABLE SYSTEMS LLC, US

(72) Inventeurs/Inventors:
BROWER, BOYD G., US;
NAPIORKOWSKI, JOHN J., US;
VO, CHANH C., US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROTECTEUR DE SURTENSION

(54) Title: OVERVOLTAGE PROTECTOR

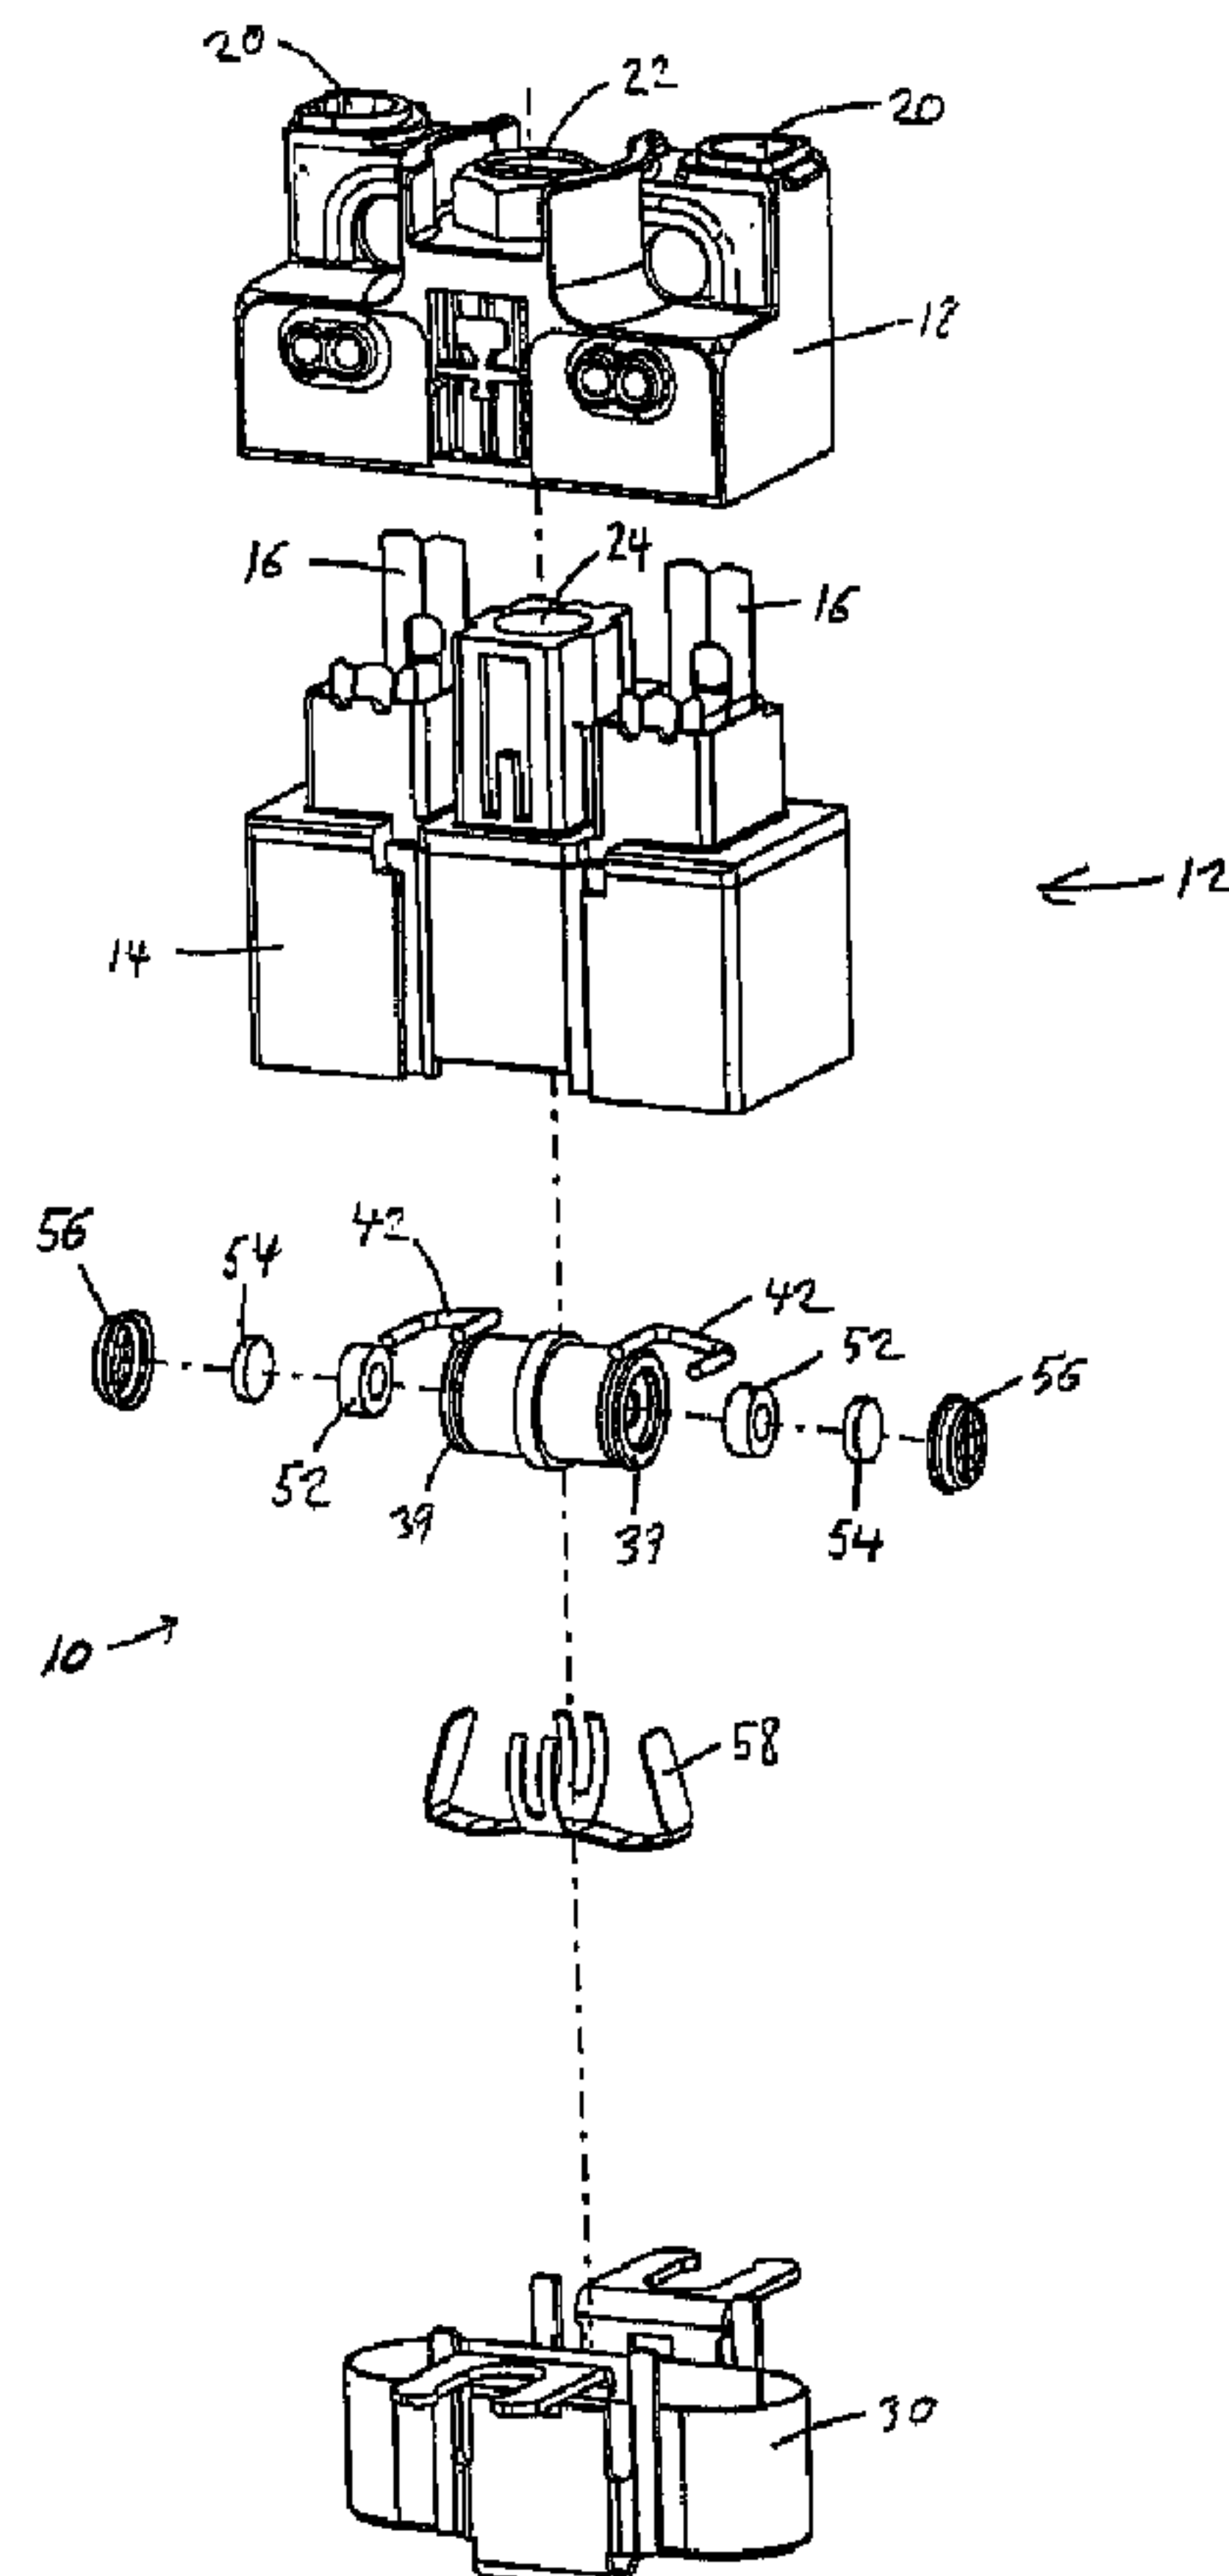

(57) Abrégé/Abstract:

An overvoltage protector assembly that utilizes a gas tube to divert surges to ground. The protector assembly has several features that ensure reliability of the gas tube as a protective element. A toroidal non-conductive element, such as a ceramic or plastic insert, is disposed between the end cap and the axial ends of the gas tube. A fusible element foamed of a fluxed solder

(57) Abrégé(suite)/Abstract(continued):

pellet is also located between the end cap and the non-conductive element. The end cap provides includes a number of apertures therein and a raised projection on its outer surface so that axial forces applied by the clip are centrally applied to the cap and not unevenly distributed on different portions of the cap. Molten solder that flows into the hole in the toroidal element will be transmitted to the end conductors of the gas tube thereby providing an electrical contact between the end cap and the conductors of the gas tube. The protector assembly also uses end caps having raised projections that engage the tangs of a securing clip.

PATENT

ABSTRACT

An overvoltage protector assembly that utilizes a gas tube to divert surges to ground. The protector assembly has several features that ensure reliability of the gas tube as a protective element. A toroidal non-conductive element, such as a ceramic or plastic insert, is disposed between the end cap and the axial ends of the gas tube. A fusible element formed of a fluxed solder pellet is also located between the end cap and the non-conductive element. The end cap provides includes a number of apertures therein and a raised projection on its outer surface so that axial forces applied by the clip are centrally applied to the cap and not unevenly distributed on different portions of the cap. Molten solder that flows into the hole in the toroidal element will be transmitted to the end conductors of the gas tube thereby providing an electrical contact between the end cap and the conductors of the gas tube. The protector assembly also uses end caps having raised projections that engage the tangs of a securing clip.

PATENT

OVERVOLTAGE PROTECTOR**Background**

The present invention is directed to overvoltage protectors of the type for use in telecommunication lines. In one aspect, the invention relates to a gas tube based protector that is operable without the need for a backup varistor or other device.

Overvoltage protectors are known that use a gas tube as the primary means for diverting voltage surges to ground and also use a second device, such as a metal oxide varistor (MOV), as a backup protection device. The backup protector is intended to become operable in the event of or to prevent a failure in the gas tube, as might occur from a gas leak from the tube. Arrangements of this type are described in U.S. Patents 5,909,349 and 5,388,023. The MOV is intended to become operable at higher voltages than the gas tube so that the gas tube will operate to ground a surge rather than the MOV under normal circumstances.

Unfortunately, there are drawbacks to using an MOV as a backup device. First, it may be possible for a defective MOV to be a short rather than act as a varistor. Also, the use of MOVs drives up the cost of making the overvoltage protector.

U.S. Patent No. 5,388,023 teaches placement of a cylindrical non-conductive disk, rather than an MOV, between the end cap and the end of the gas tube in order to ensure that there is no contact between the end caps and the outside body of the gas tube. When the protector assembly becomes overheated, as in the case of a

PATENT

malfunction, solder disks near the axial ends of the gas tube melt, and it is intended that a spring clip will urge the end caps against the end terminals of the gas tube, thereby intentionally shorting out the protector assembly and rendering it inoperable. This is intended to provide a "fail-safe" mode for the protector assembly. In practice, however, the mass of the molten solder may not flow adequately and continue to prevent the end caps from contacting the end terminals of the gas tube, thereby preventing the assembly from providing the fail-safe protection.

Other problems with conventional protector assemblies stem from the fact that spring clips used to secure the end caps against the ends of the gas tube can apply forces to the caps unevenly, thereby causing the caps to tilt or become seated improperly. The outer axial surface of the cap is usually flat, and the portions of the spring clips that engage them are also typically flat. However, the solder pellet and MOV located inside of the cap have a smaller diameter than that of the cap, allowing the cap room to move about. Uneven application of axial forces by the spring clip presents a small possibility that the cap could contact conductive portions of the gas tube and essentially short out the protector assembly prematurely.

Summary of the Invention

The present invention provides an overvoltage protector assembly that utilizes a gas tube to divert surges to ground. An exemplary protector assembly is described that includes a gas tube that is the primary and only mechanism for transmitting excessive voltage to ground.

PATENT

The protector assembly has several features that ensure reliability of the gas tube as a protective element. A toroidal non-conductive element, such as a glass, ceramic, or plastic insert, is disposed between the end cap and the axial ends of the gas tube. A fusible element formed of a fluxed solder pellet is also located between the end cap and the axial ends of the gas tube. The end cap provides includes a number of apertures therein and a raised projection on its outer surface. The spring clip of the protector element engages the projection of the cap so that axial forces applied by the clip are centrally applied to the cap and not unevenly distributed on different portions of the cap.

In the event of a failure in the gas tube that would result in melting of the fluxed solder pellet, the molten solder will adhere to the surfaces of the end cap and the non-conductive element due to the presence of the flux in the solder. Solder from the pellet is transmitted through the apertures of the end caps as well as the hole in the toroidal non-conductive element. As a result, the mass of the solder that provided for a gap between the end caps and the end conductors of the gas tube essentially disappears, and the spring clip urges the end caps against the conductors. Molten solder that flows into the hole in the toroidal element will also be transmitted to the end conductors of the gas tube thereby providing an electrical contact between the end cap and the conductors of the gas tube.

The protector assembly also uses end caps having raised projections that engage the tangs of a securing clip. In contrast to the prior art assemblies, this arrangement ensures that the force applied to the caps by the clip is centralized and does not result in

PATENT

the end caps being tilted onto the ends of the gas tube, thereby resulting in a premature short-out condition.

The improvements of the present invention help provide an effective and reliable protector assembly that does not require an MOV back up device. The devices of the present invention also reduces the costs associated with creating protector assemblies and improve overall reliability.

Brief Description of the Drawings

Fig. 1 is an exploded perspective view of a protector module application that incorporates an exemplary protector assembly constructed in accordance with the present invention;

Fig. 2 is an exploded view of portions of the protector assembly used in the module shown in Fig. 1;

Fig. 3 is a top view of the protector assembly portions illustrated in Fig. 2;

Fig. 4 is a side, cross-sectional view of the protector assembly portions shown in Fig. 3;

Fig. 5 is an end view of the protector assembly portions shown in Figs. 2-4;

Fig. 6 illustrates an alternative embodiment for a protector assembly constructed in accordance with the present invention wherein the gas tube protector element is made up of a pair of two-element gas tubes;

Fig. 7 is a cross-sectional view of a single two-element gas tube; and

PATENT

Fig. 8 illustrates an alternative embodiment for a protector assembly constructed in accordance with the present invention wherein the protector has two toroidal non-conductive elements on either side of the gas tube.

Detailed Description of the Invention

With reference to Fig. 1, an exemplary protector module 12 is shown with a protector assembly 10 contained within. The protector module 12 is commonly referred to as a station protection module and is used in telephone network interface devices (NIDs). The module 12 is placed on the side of a telephone subscriber's residence to protect the telephone lines and equipment at the subscriber from being damaged by surges caused, for example, by lightning strikes. The particular construction of the protector assembly 10 is exemplary only and can be adapted for use in other telecommunications-related applications and packaging, as are known in the art.

The module 12 generally includes a plastic housing 14 from which electrically conductive insulation displacement terminal tines 16 extend. The tines 16 are used for the attachment and affixation of telephone lines (not shown) to the module 12. If desired, stud and nut terminals may be used in place of the insulation displacement terminal tines 16 shown.

A stuffer box 18 fits over the housing 14. The stuffer box 18 has apertures 20 through which the tines 16 are disposed and a securing screw 22 that can be secured within threaded hole 24 on the housing 14 to affix the stuffer box to the housing 14.

PATENT

The tines 16 are electrically connected to leads 42. The leads 42 are, in turn, connected to the two end, or line, electrodes 39 of gas tube element 40 of protector assembly 10. The protector assembly 10 is in contact with a grounding box 30 that slides into the lower end of the housing 14. The assembly 10 is intended to conduct any surges to the grounding box 30 as the grounding box 30 is connected to earth ground on installation of the NID. The components of the module 12 are typically potted to help secure them all together.

Referring now also to Fig.s 2-5, it can be seen that the gas tube protector element 40 is generally cylindrical in shape and has non-conductive elements 52 located on either axial end. The non-conductive elements 52 are toroidal in shape and, therefore, have a central hole 53 disposed therein. Solder pellets, shown schematically as discs 54, are disposed outside of the non-conductive elements 52, and are covered by end caps 56. These components are held against the axial ends 60, 62 of the gas tube 40 by a clip 58. The non-conductive elements 52 may be formed of glass, ceramic, or a hardened plastic having a high resistance to melting. Although not shown, the solder pellets 54 and the non-conductive elements 52 could be reversed. That is, the non-conductive elements could be located on the outside, next to the end caps 56, rather than on the inside next to the axial ends of the gas tube 40. It is preferable, however, that the solder pellets 54 are next to gas tube 40.

The solder pellets 54 are flat, cylindrical, fusible elements that are composed of a fusible alloy and impregnated with flux. A currently preferred alloy is 60% SN and 40%

PATENT

Pb, although other suitable alloys may be used. The pellets **54** are preferably fabricated by using a powder metallurgy process of pressing and sintering. In a current preferred embodiment, the pellets **54** may also include an additional amount of solid, non-corrosive, non-conductive rosin flux. The additional amount used for the configuration shown is less than 15%, preferably less than 10%, and most preferably about 8%. The presence of the flux in the pellets **54** assists the solder to flow and helps ensure that the solder making up the pellets **54** will adhere to metal surfaces on the end cap **56** after being melted. Because the solder adheres to these surfaces, the solder is less likely to prevent the cap **56** and the body of the gas tube **40** from contacting one another as designed.

The gas tube protector element **40** has a central electrode **64** that surrounds the circumference of the tube **40**. Two end electrodes **66**, **68** (shown in Fig. 4) are disposed within the tube **40** and are located at either axial end of the tube **40**. Because there are three separate electrodes, or conductive elements, the gas tube protector element **40** is often referred to as a "three-element" gas tube. If not apparent from the drawings, it is noted that the end electrodes **66**, **68** (visible in Fig. 4) are in electrically conductive communication with the end terminals **39** of the gas tube **40**.

The end caps **56** are formed of electrically conductive material. They are dome shaped and have a peripheral flange **70**. The central domed portion of each cap **56** contains a raised projection **72**. The projection **72** extends outwardly from the upper surface of the cap **56** at least .007 mm. It is preferred that the projection extend from

PATENT

0.010 to 0.026 mm from the upper surface of the cap 56. In addition, as Figs 2 and 5 show, the caps 56 each have a number of apertures 74 cut therein.

The clip 58 is of a design known in the art having a longitudinal central spine 76 and arcuate central gripping portions 78 that extend upwardly from the spine 76. As shown in Figs 3, 4, and 5, the gripping portions 78 can be snapped onto the body of the gas tube 40 to engage the central electrode 64 that surrounds the central portion of the gas tube 40. Either end of the spine 76 of the clip 58 has a tang 80 that contacts the raised projection 72 of an end cap 56 when the clip 58 is snapped on to the tube 40.

The use of the fluxed solder pellets 54 in conjunction with the toroidal-shaped non-conductive elements 52 and the end caps 56 is advantageous and helps to ensure the reliability of the protector assembly 10. It is intended and desired that when the protector assembly 10 overheats and the solder pellets 54 melt, the end caps 56 should be brought into contact with the end terminals 39 of the gas tube 40. This is a "fail safe" feature that will essentially short out the protector assembly 10 rendering it inoperable and grounding it. The apertures 74 in the end caps 56 allows the molten solder to flow through them, providing an alternative path to that offered by the gap between the flanged edges 70 and the end terminals 39.

A desired melting of the solder is also promoted by the presence of the holes 53 within the non-conductive elements 52. The molten solder can be transmitted through the holes 53 and ultimately contact the electrodes 66, 68, thereby completing an electrical connection between the electrodes 66, 68 and the end caps 56.

PATENT

The present invention is also applicable to two-element gas tube-type protector devices that lack a central electrode. Fig. 6 depicts an exemplary protector assembly 100 that is constructed and operates, in most respects, the same as the protector assembly 10 described earlier. For clarity, like reference numerals are used for like components. Two separate "two element" gas tubes 102, 104 have been placed in an end-to-end relation to make up a single protector element 106.

Fig. 7 is a cross-sectional view of one of the two-element gas tubes 102, although it should be understood that the gas tube 104 will have the same construction. The gas tube 102 has a cylindrical, non-conductive housing 108 with a first end terminal 110 and a second end terminal 112 affixed to either axial end of the housing 108. The two terminals 110, 112 are made of conductive material. These components are sealed to enclose a gas chamber 114.

As Fig. 6 shows, the second terminal 112 of the first gas tube 102 contacts and adjoins the first terminal 110 of the second gas tube 104, thereby forming a single conductive portion that provides the same function as the central electrode 64 of gas tube protector element 40. The two gas tubes 102, 104 are secured to one another using the spring clip 58.

Fig. 8 illustrates an alternative embodiment to that shown in Fig. 2. Rather than having a single non-conductive element 52 on either side of the gas tube, a second non-conductive element 52a is placed between the end cap 56 and the solder pellets 54.

PATENT

While the invention has been shown or described in only some of its forms, it should be apparent to those skilled in the art that it is not so limited, but is susceptible to various changes within departing from the scope of the invention.

PATENT

CLAIMS

What is claimed is:

1. A protector assembly for use in telecommunication lines and the like, comprising:
a generally cylindrical gas tube protector element having an electrically
conductive terminal;
an end cap for being selectively brought into contact with the terminal to ground
said protector element, and
a toroidal non-conductive element disposed between the end cap and the terminal.
2. The protector assembly of claim 1 further comprising a fusible solder pellet
disposed between the non-conductive element and the end cap.
3. The protector assembly of claim 1 further comprising a fusible solder pellet
disposed between the terminal and the end cap.
4. The protector assembly of claim 1 wherein the end cap contains a number of
apertures to permit solder flow therethrough.
5. The protector assembly of claim 1 wherein the end cap has a raised projection for
engagement of portions of a spring clip.

PATENT

6. The protector assembly of claim 1 further comprising a spring clip having portions to engage the end cap and urge it toward the terminals of the gas tube.
7. The protector assembly of claim 1 wherein the non-conductive element is comprised of ceramic.
8. The protector assembly of claim 1 wherein the non-conductive element is comprised of plastic.
9. The protector assembly of claim 1 wherein the non-conductive element is comprised of glass.
10. The protector assembly of claim 2 wherein the solder pellet contains an amount of flux.
11. The protector assembly of claim 8 wherein the solder pellet includes about 8% solid, non-corrosive, non-conductive rosin flux.
12. A protector assembly for use in telecommunications lines and the like comprising:

PATENT

a gas tube having a first and second electrically conductive end terminals located at either axial end of the gas tube and a third conductive terminal disposed between the end terminals;

a toroidal non-conductive element in contact with each of the first and second conductive end terminals;

a fusible element in contact with each toroidal non-conductive element;

a conductive end cap in contact with each of the fusible elements; and

a spring clip engaging the gas tube and each of the end caps to urge the end caps toward the conductive end terminals of the gas tube.

13. The protector assembly of claim 12 wherein the fusible elements each comprise a solder pellet containing an amount of flux sufficient to cause the material making up the pellet to adhere to metal surfaces when in a molten state.

14. The protector assembly of claim 12 wherein the end caps are generally dome shaped and provide a raised projection thereon to engage a portion of a spring clip.

15. The protector assembly of claim 12 wherein the end caps have apertures therein to permit flow of molten solder therethrough.

PATENT

16. A protector assembly for use with telecommunication lines and the like, comprising:

a generally cylindrical gas tube protector element having an electrically conductive terminal;

an end cap for being selectively brought into contact with the terminal to ground said protector element;

a non-conductive element disposed between the end cap and the terminal; and

a fusible element disposed between the non-conductive element and the end cap, the fusible element comprising a fluxed solder pellet.

17. The protector assembly of claim 16 wherein the end cap contains an aperture to permit flow of molten solder therethrough.

18. The protector assembly of claim 16 wherein the end cap is substantially dome shaped and comprises a raised projection for contacting a portion of a spring clip.

19. The protector assembly of claim 16 wherein the non-conductive element comprises a toroidal body having a hole therein for the transmission of molten solder therethrough.

20. The protector assembly of claim 19 wherein the non-conductive element is formed substantially of one of ceramic, glass, and plastic.

PATENT

21. The protector assembly of claim 16 wherein the protector element comprises a three-element gas tube.

22. The protector assembly of claim 16 wherein the protector element comprises at least one two-element gas tube.

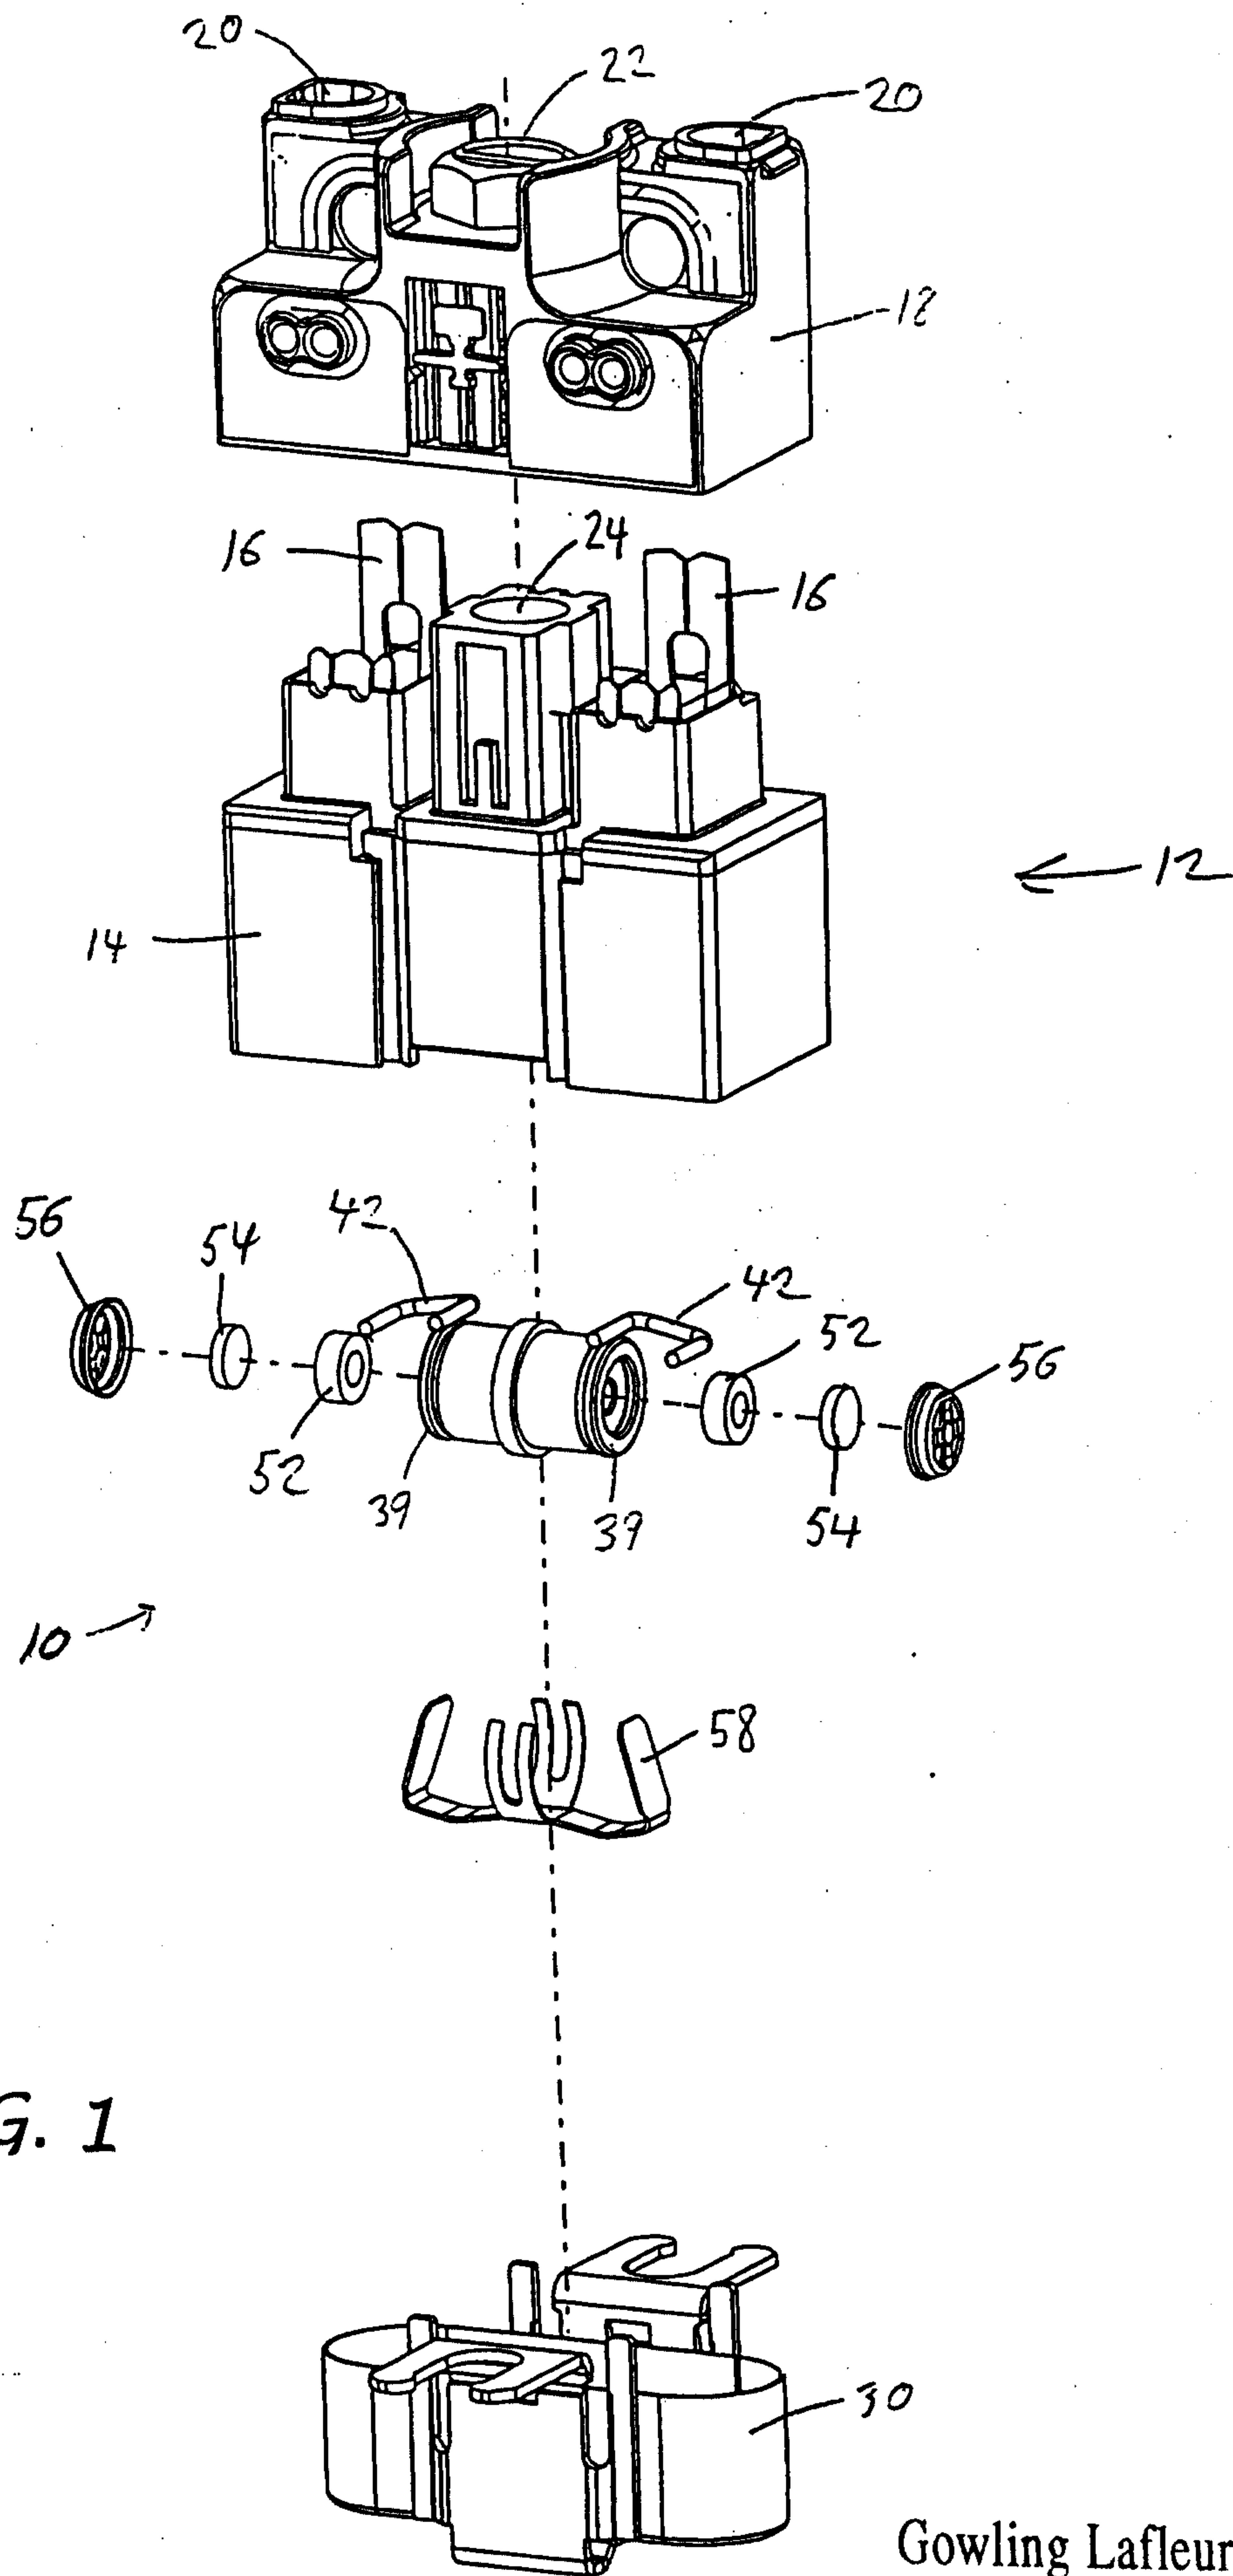


FIG. 1

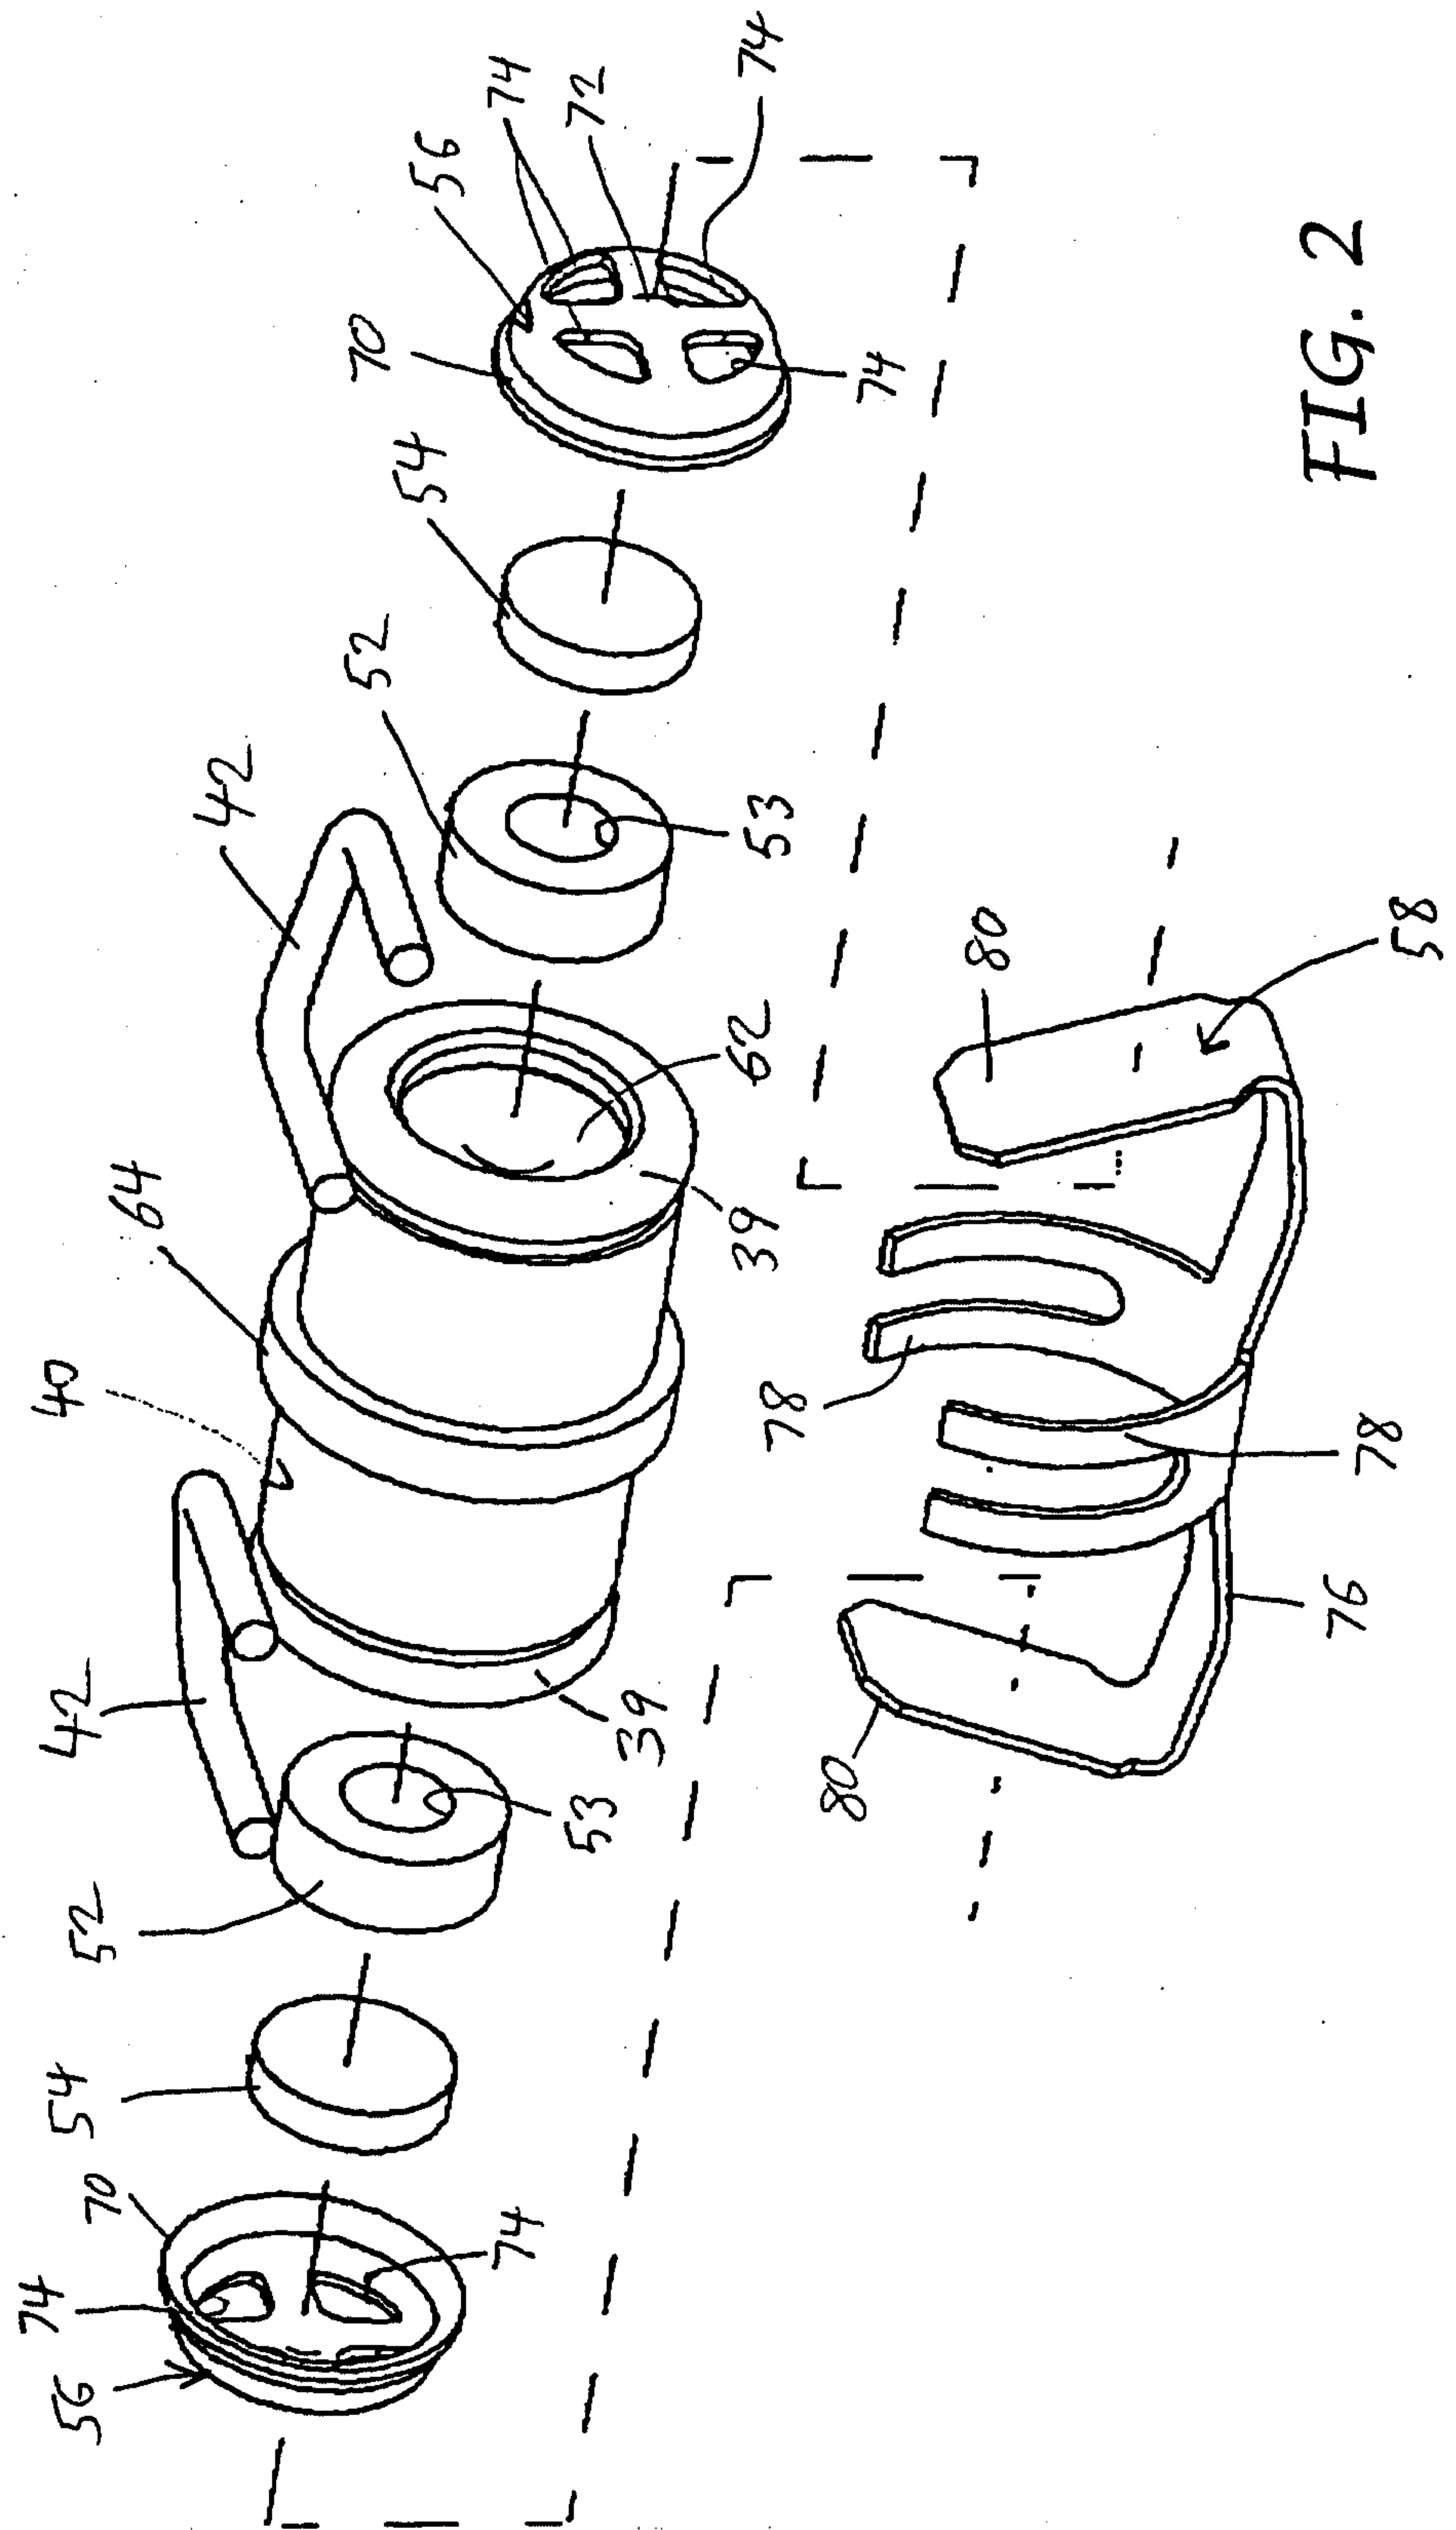


FIG. 2

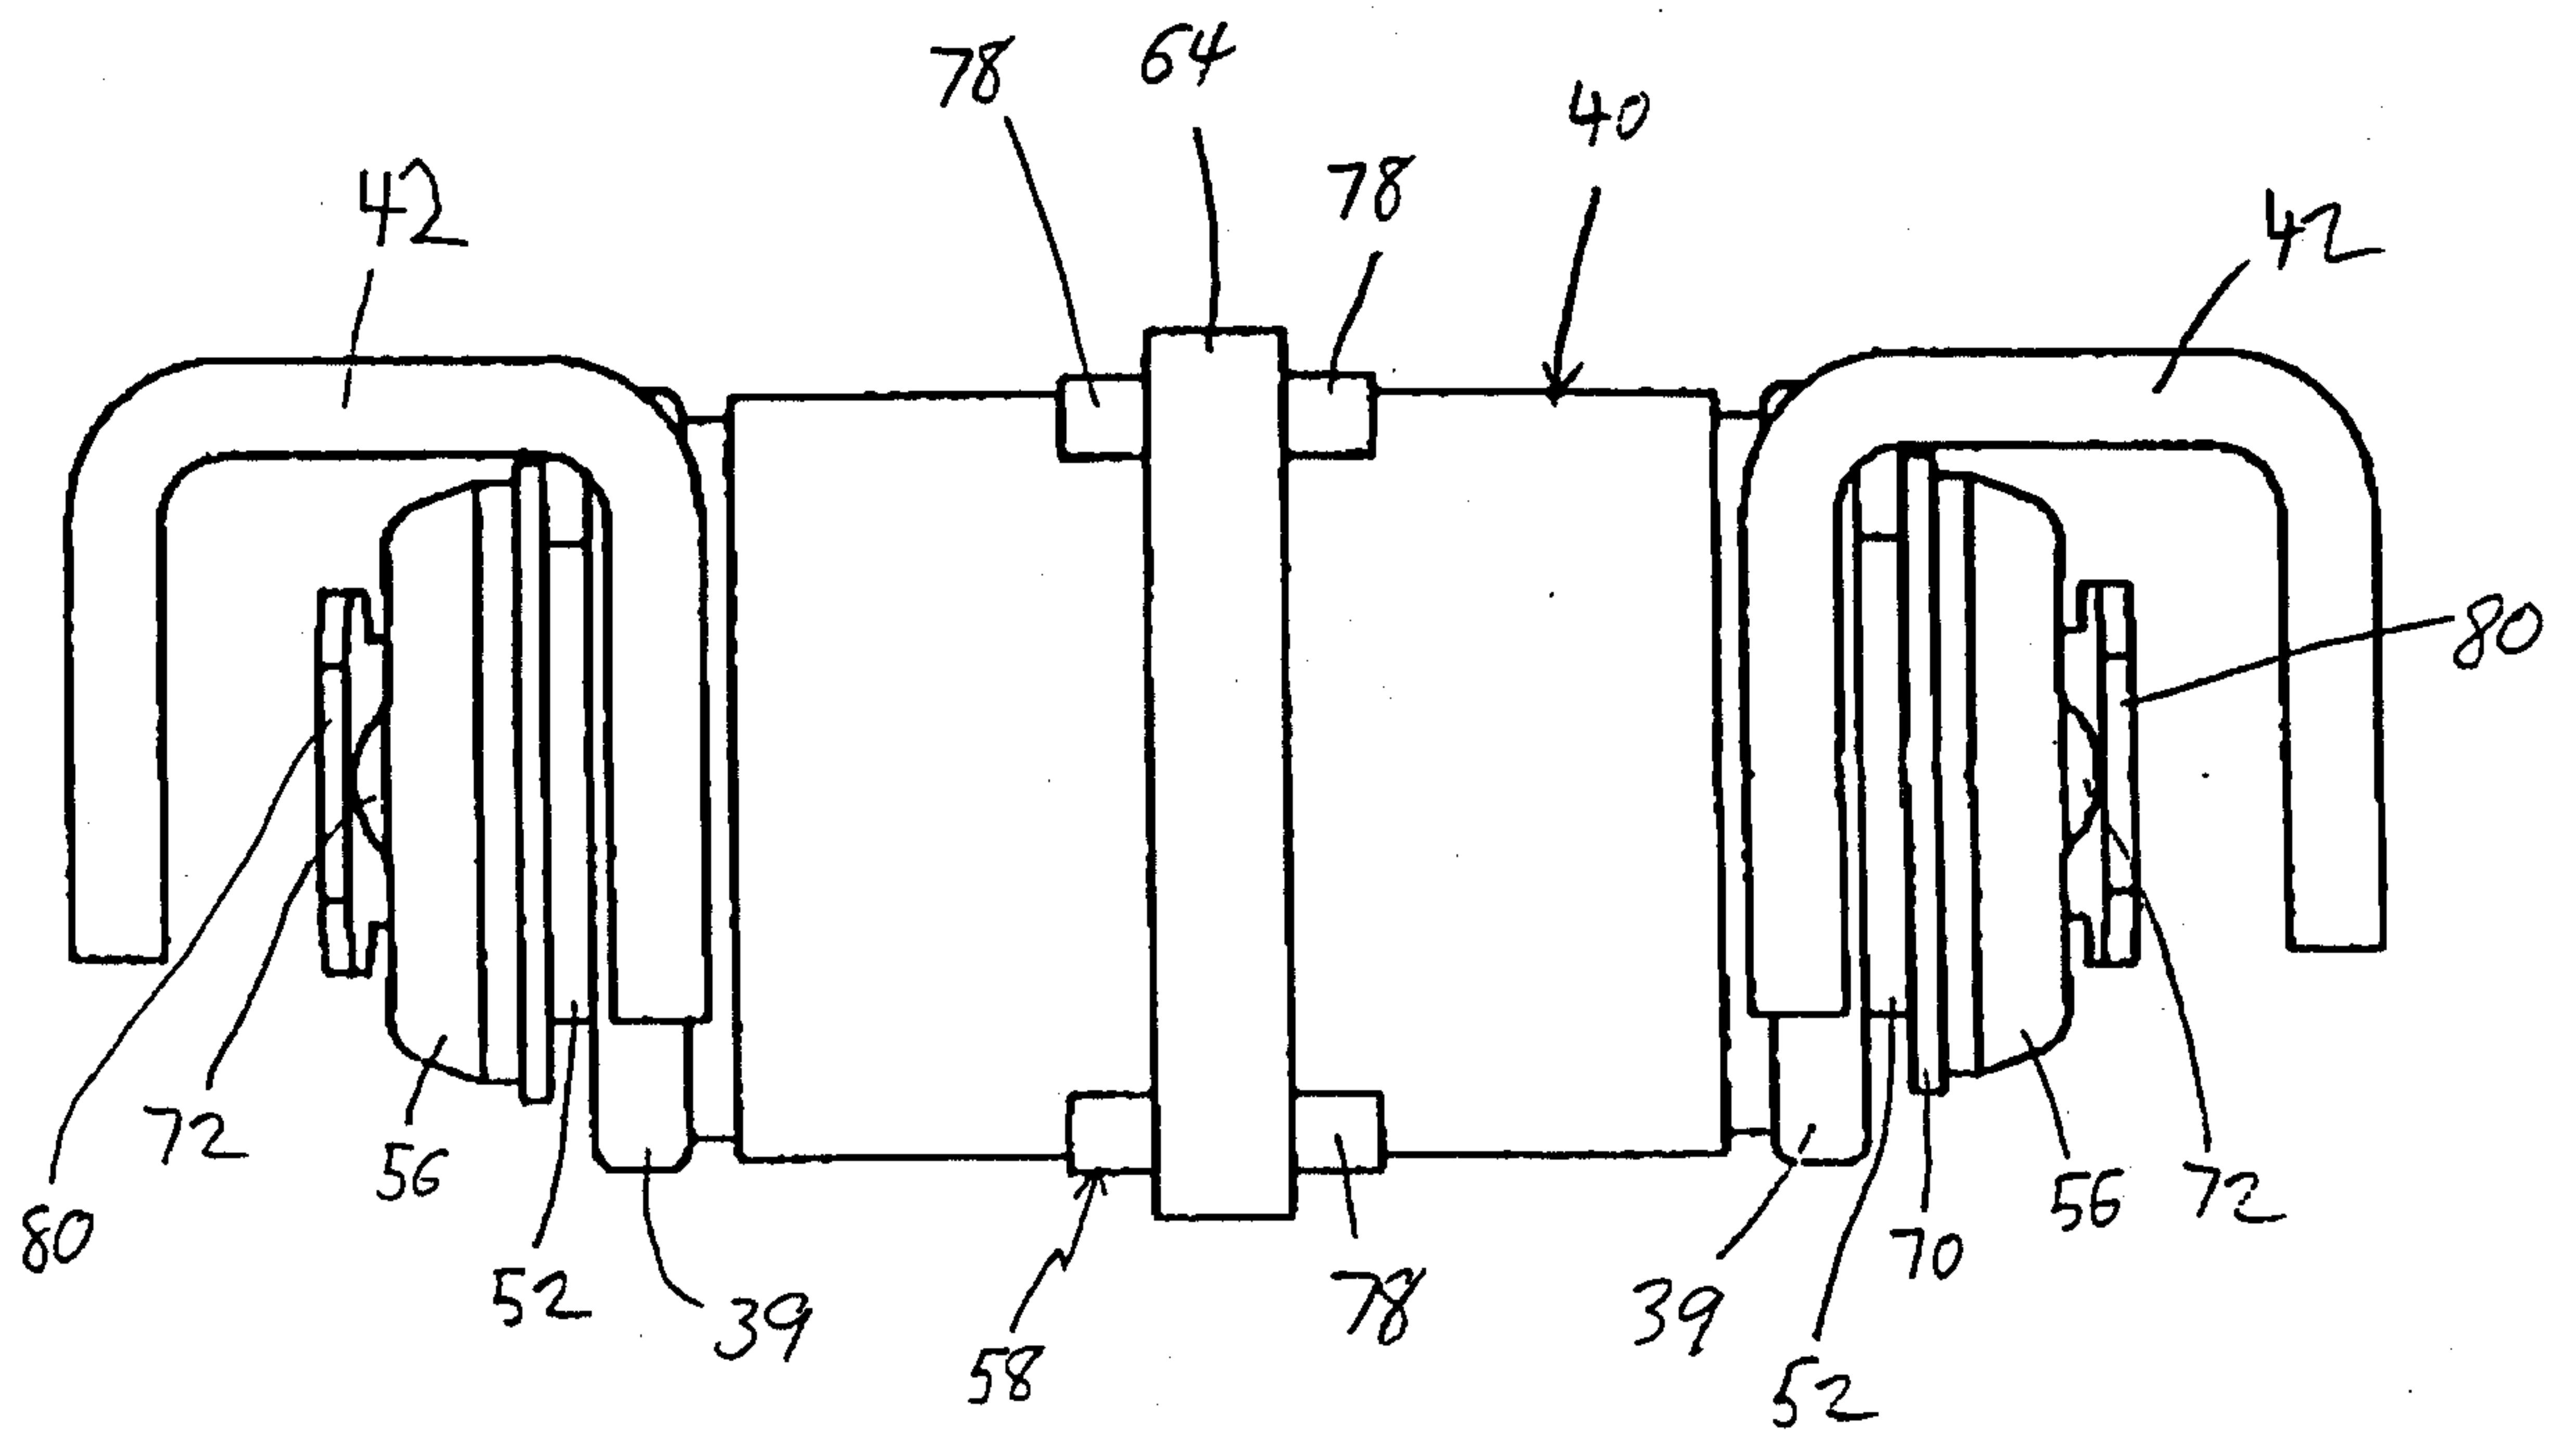


FIG. 3

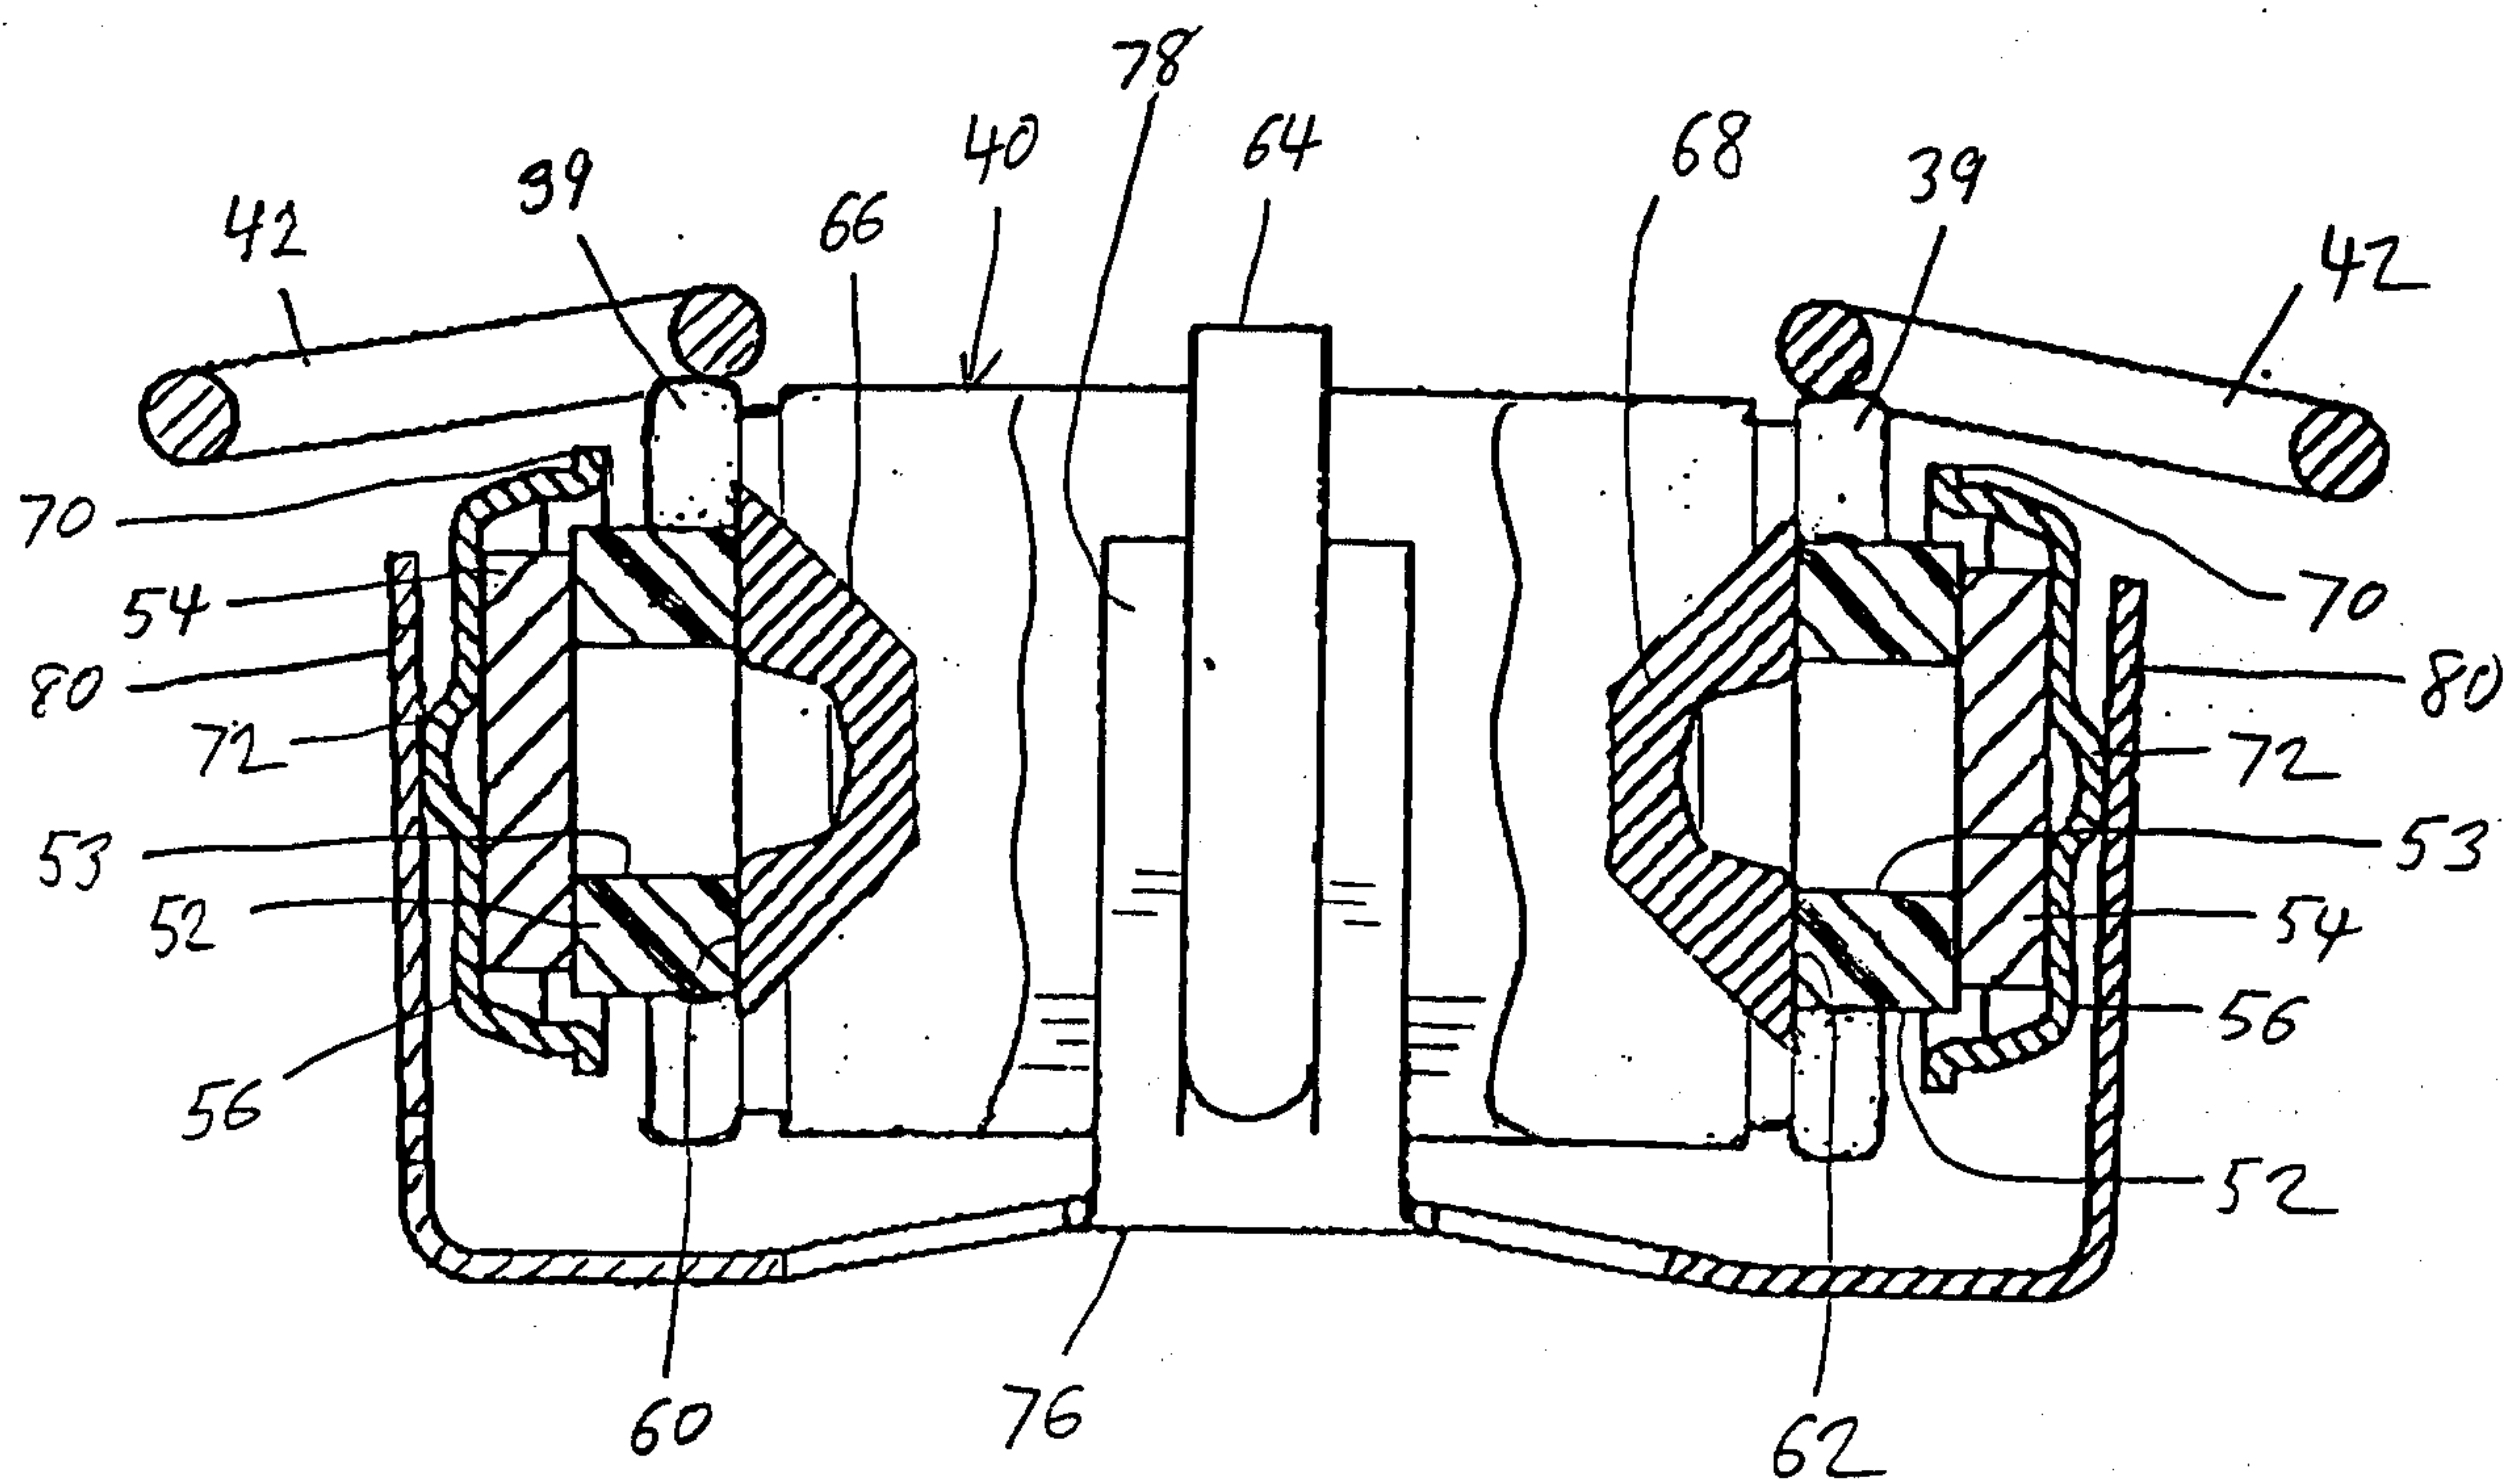


FIG. 4

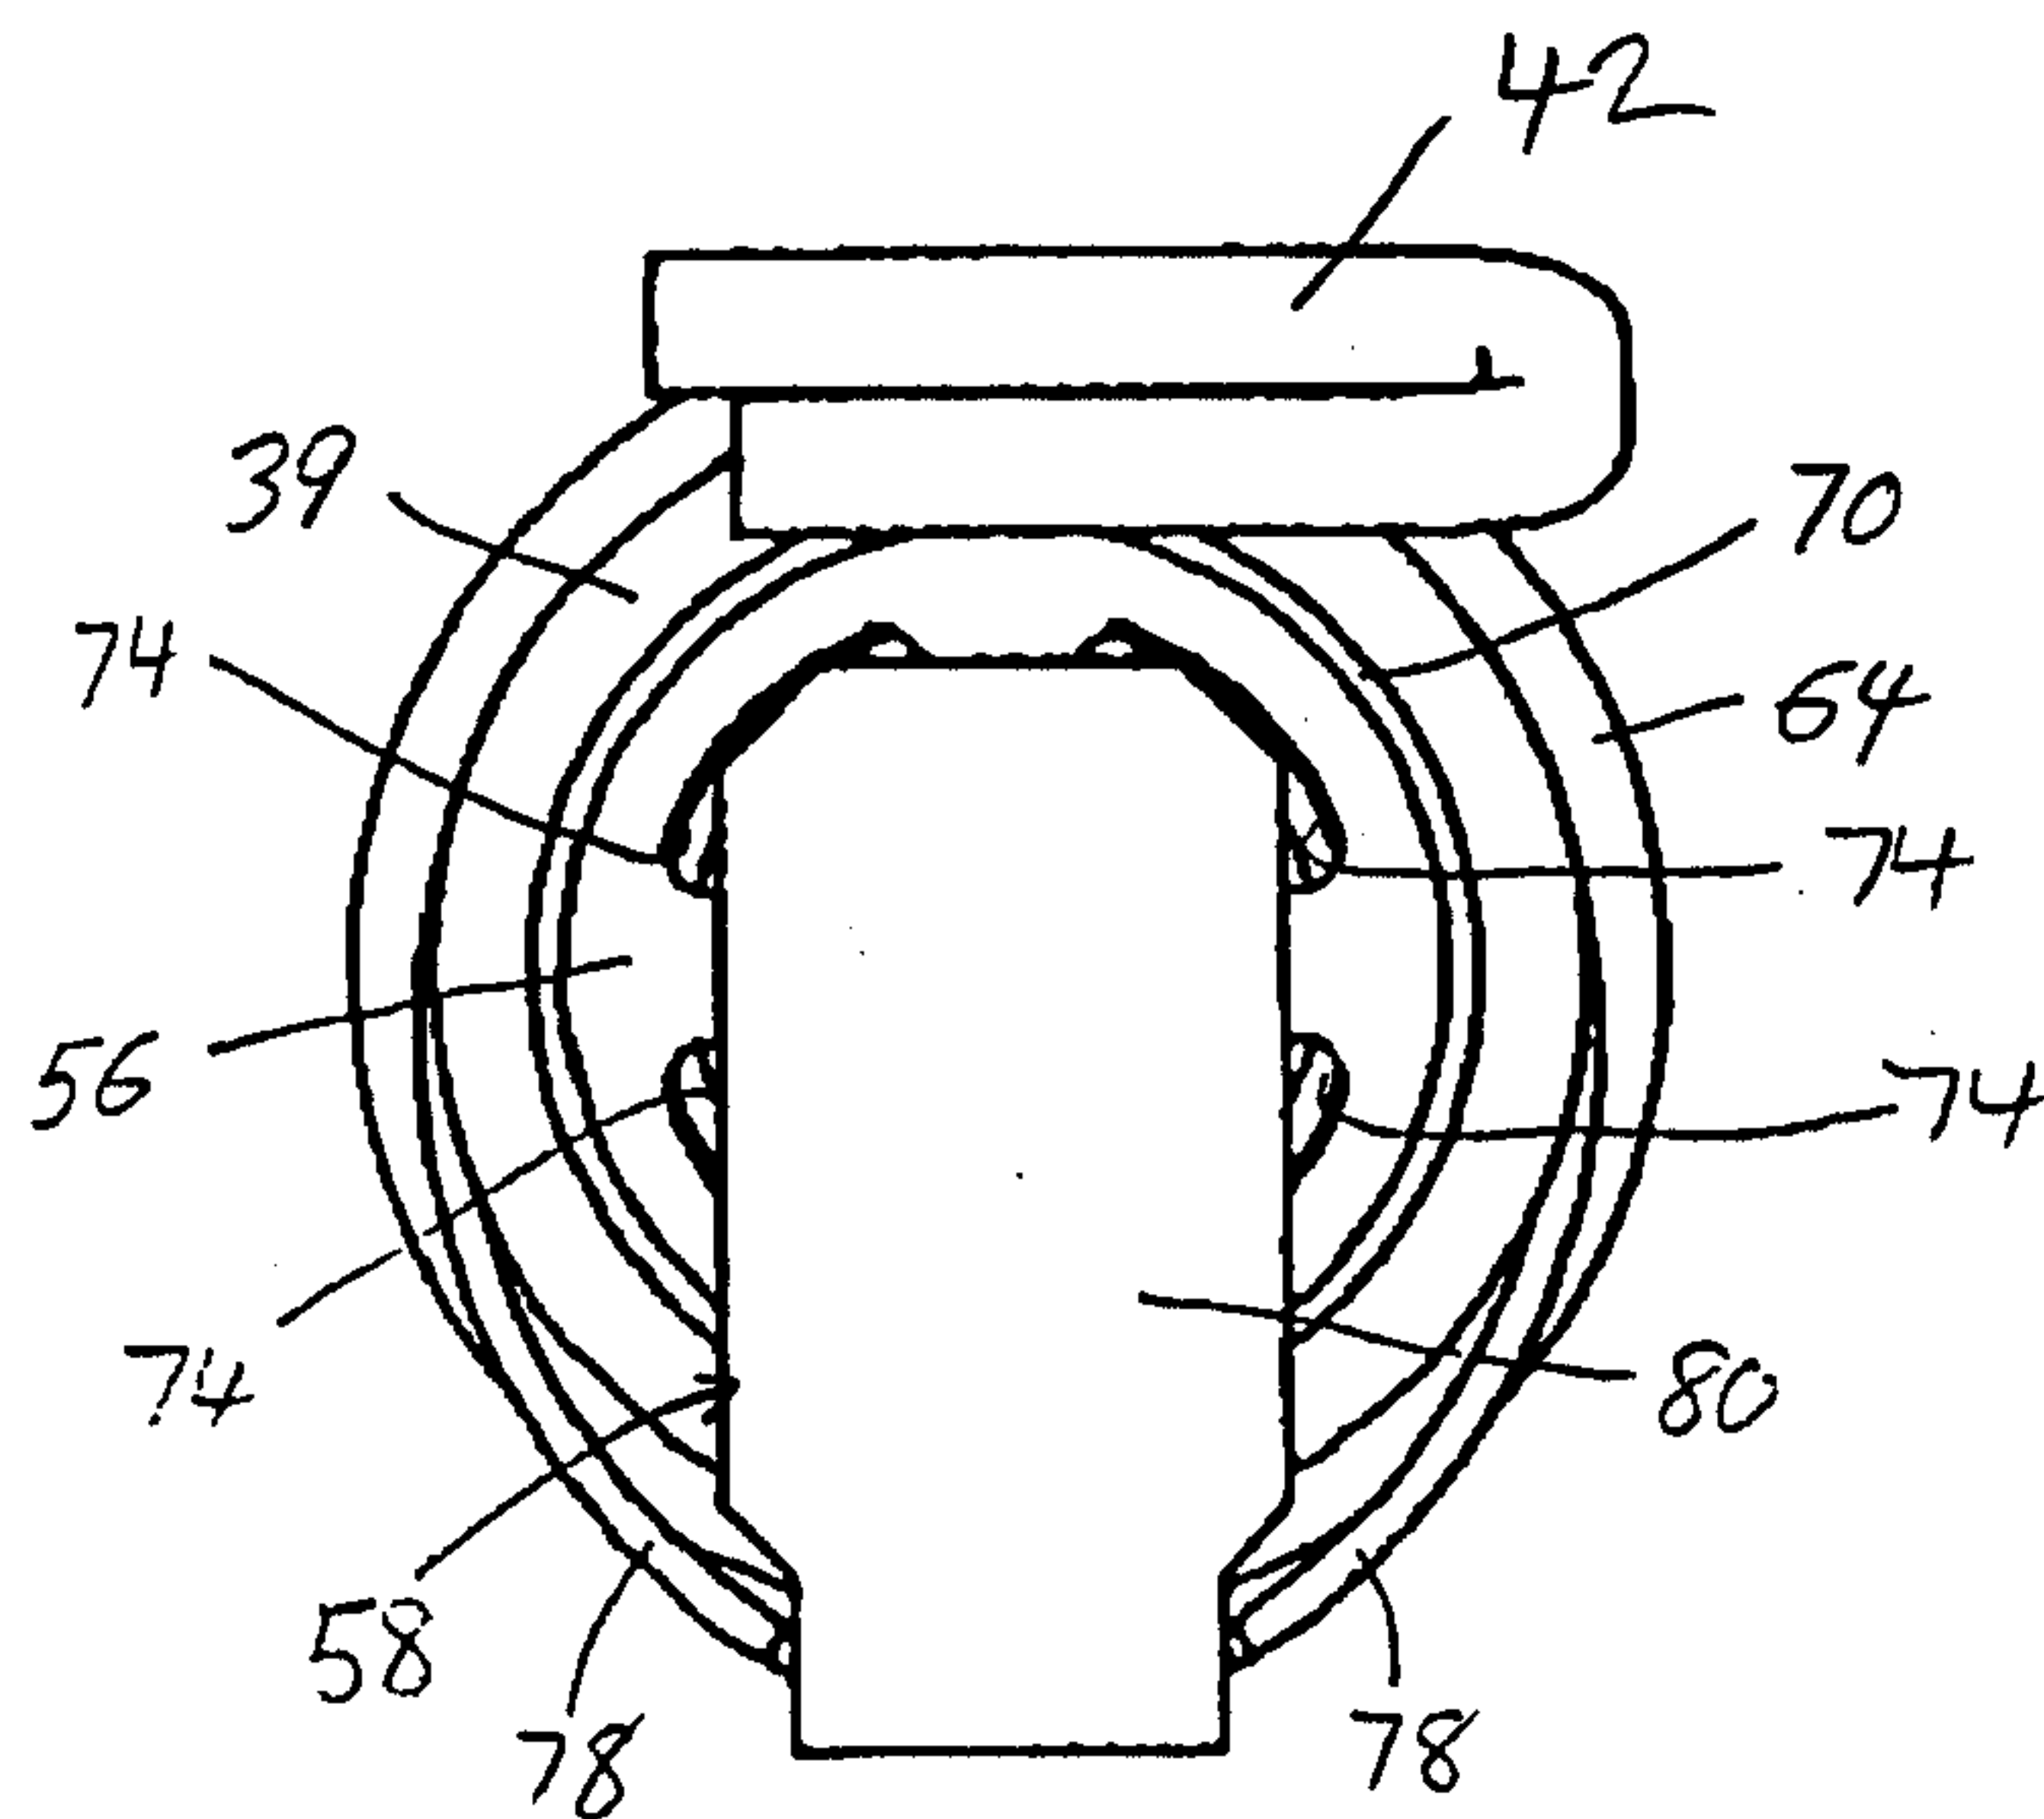


FIG. 5

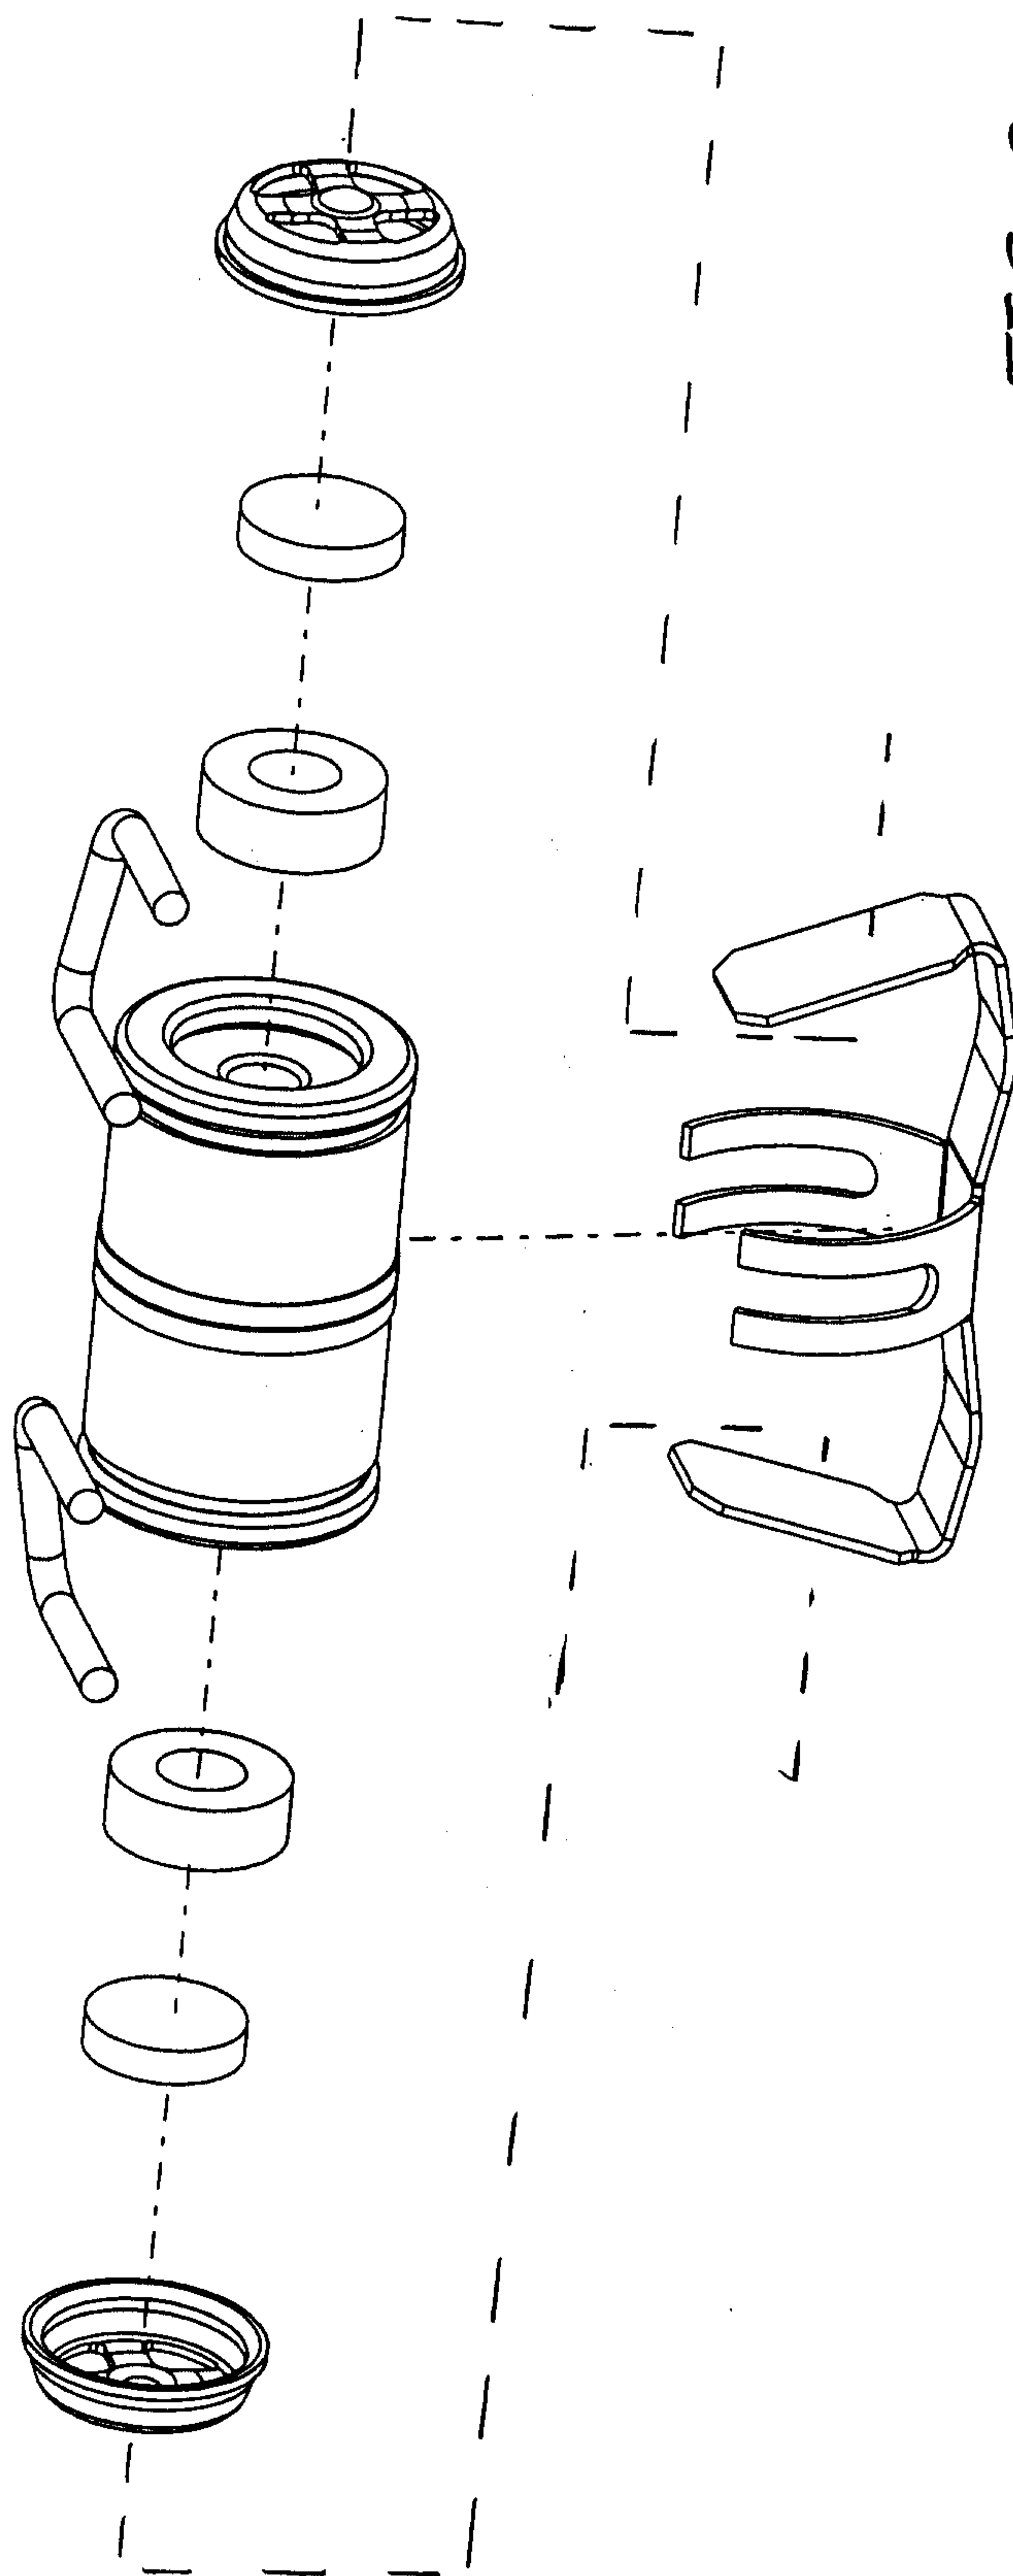


FIG. 6

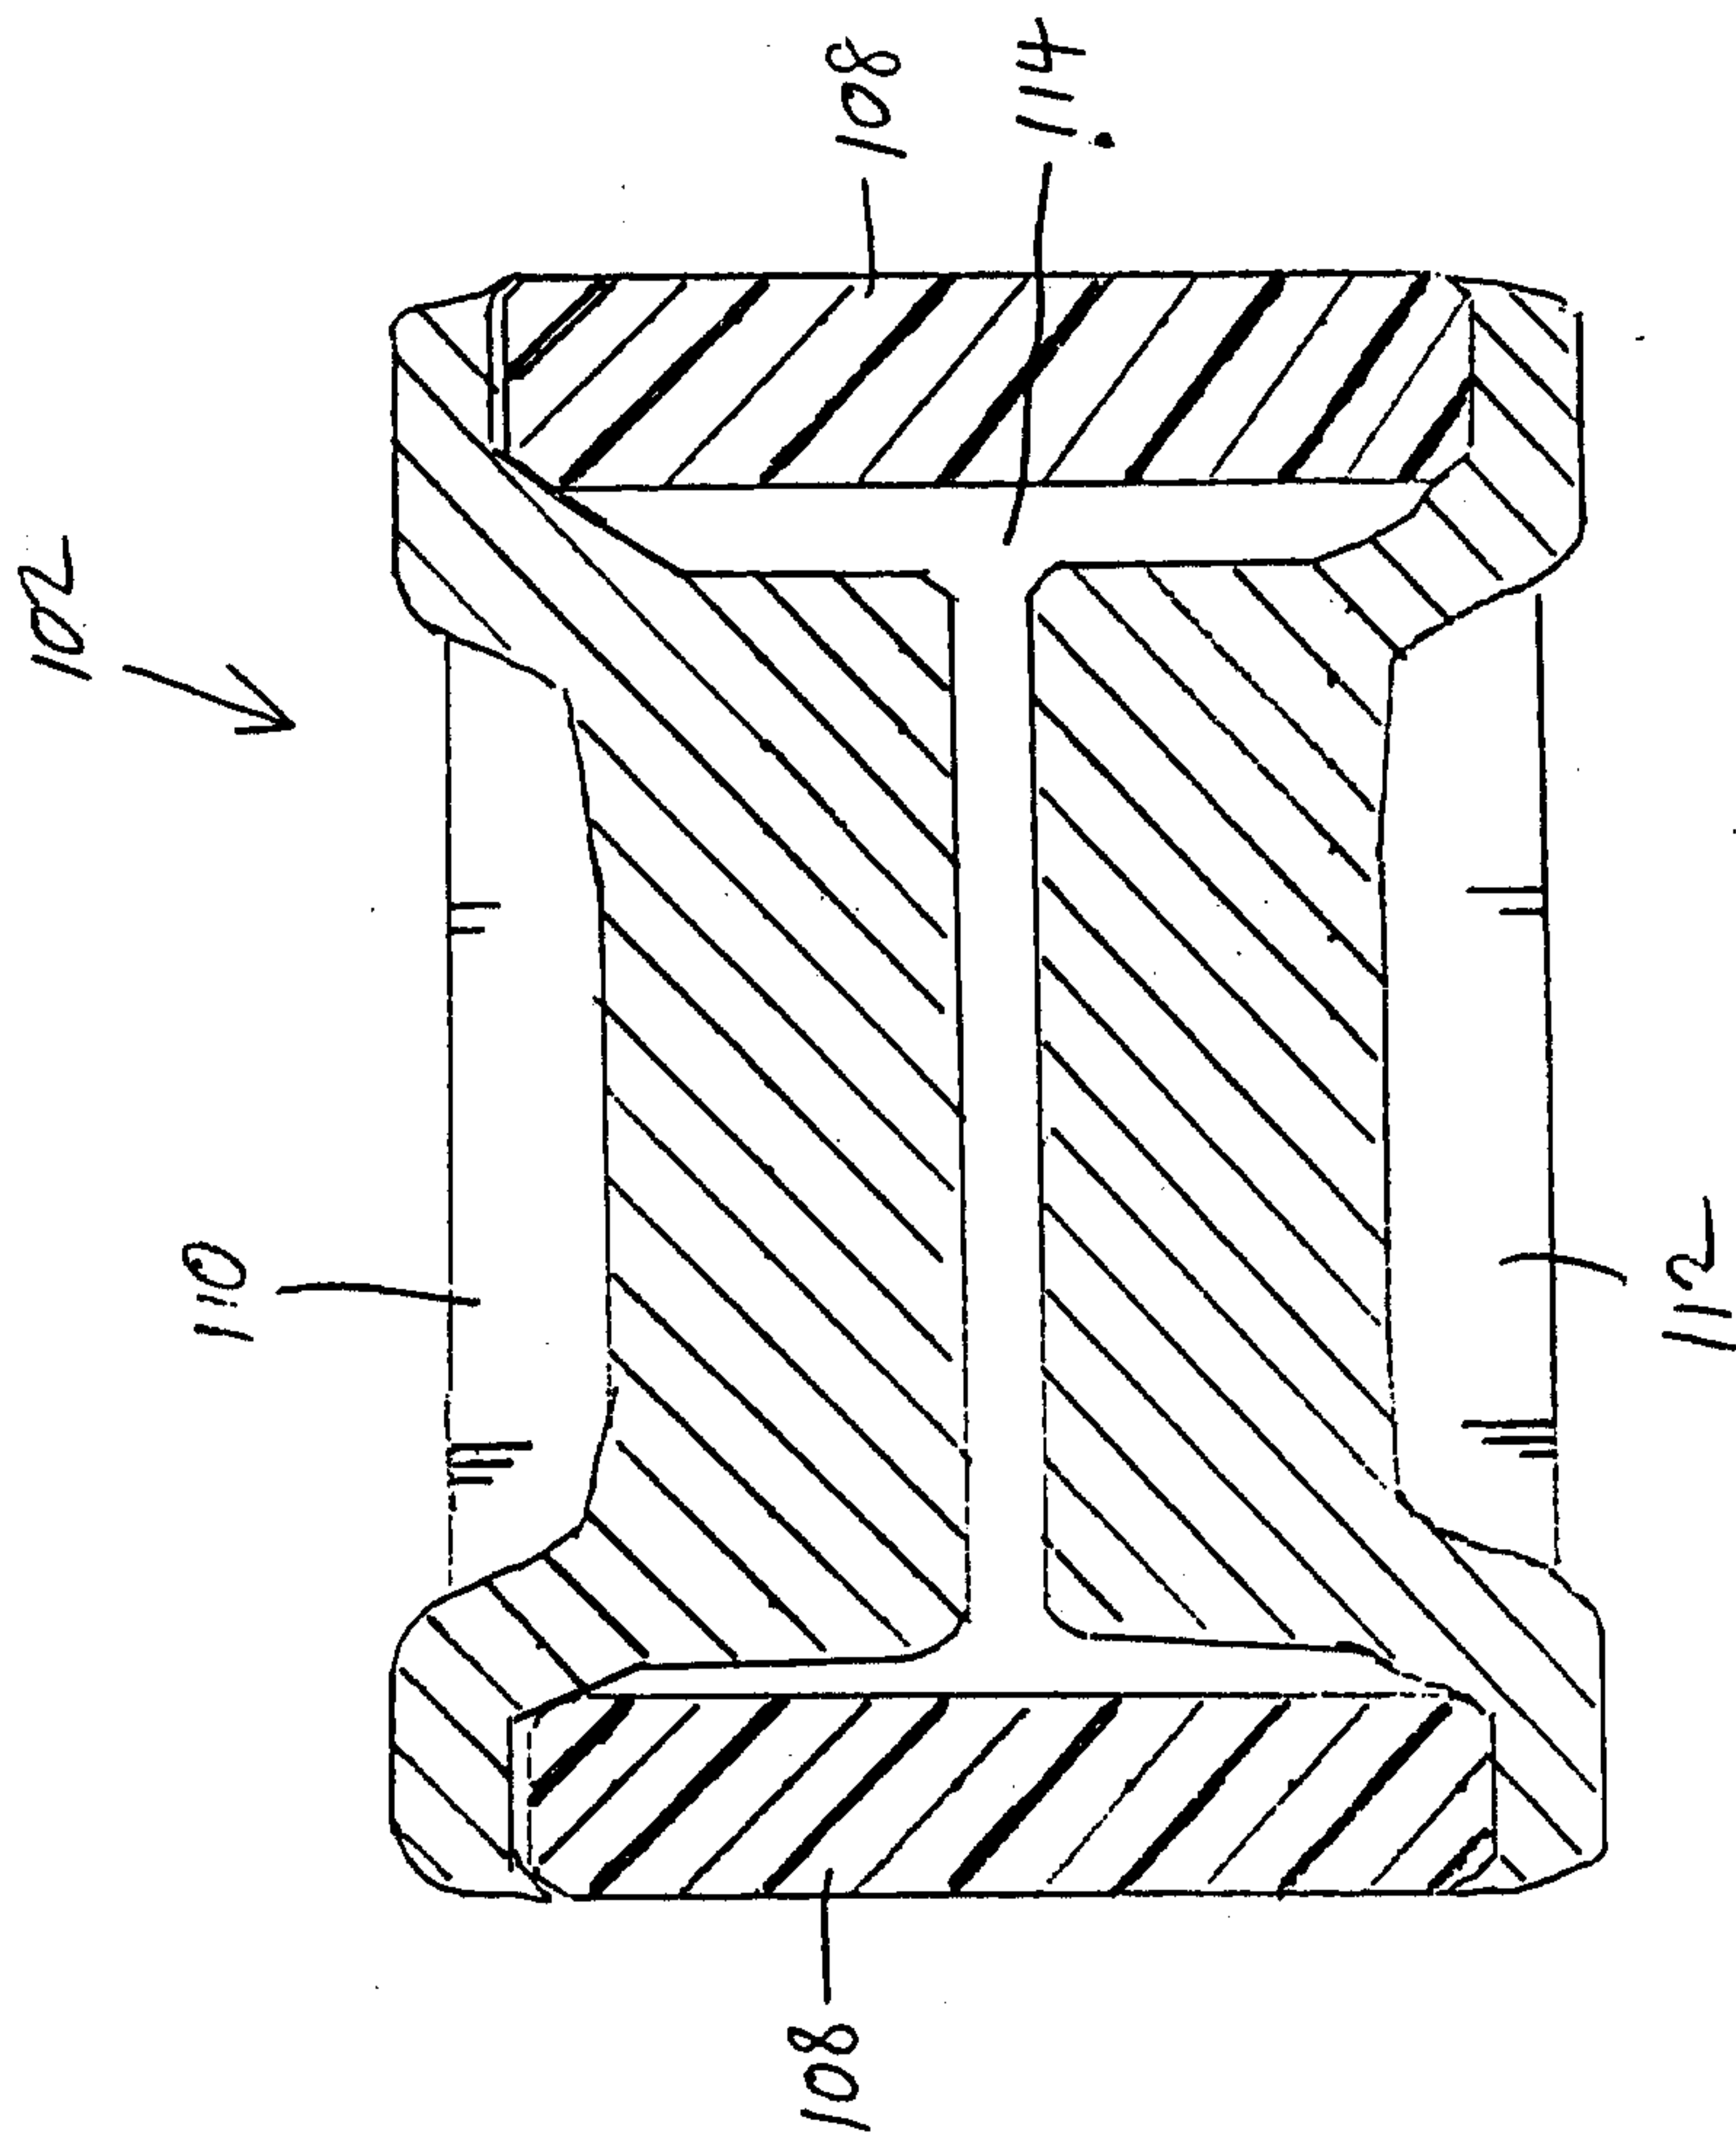


FIG. 7




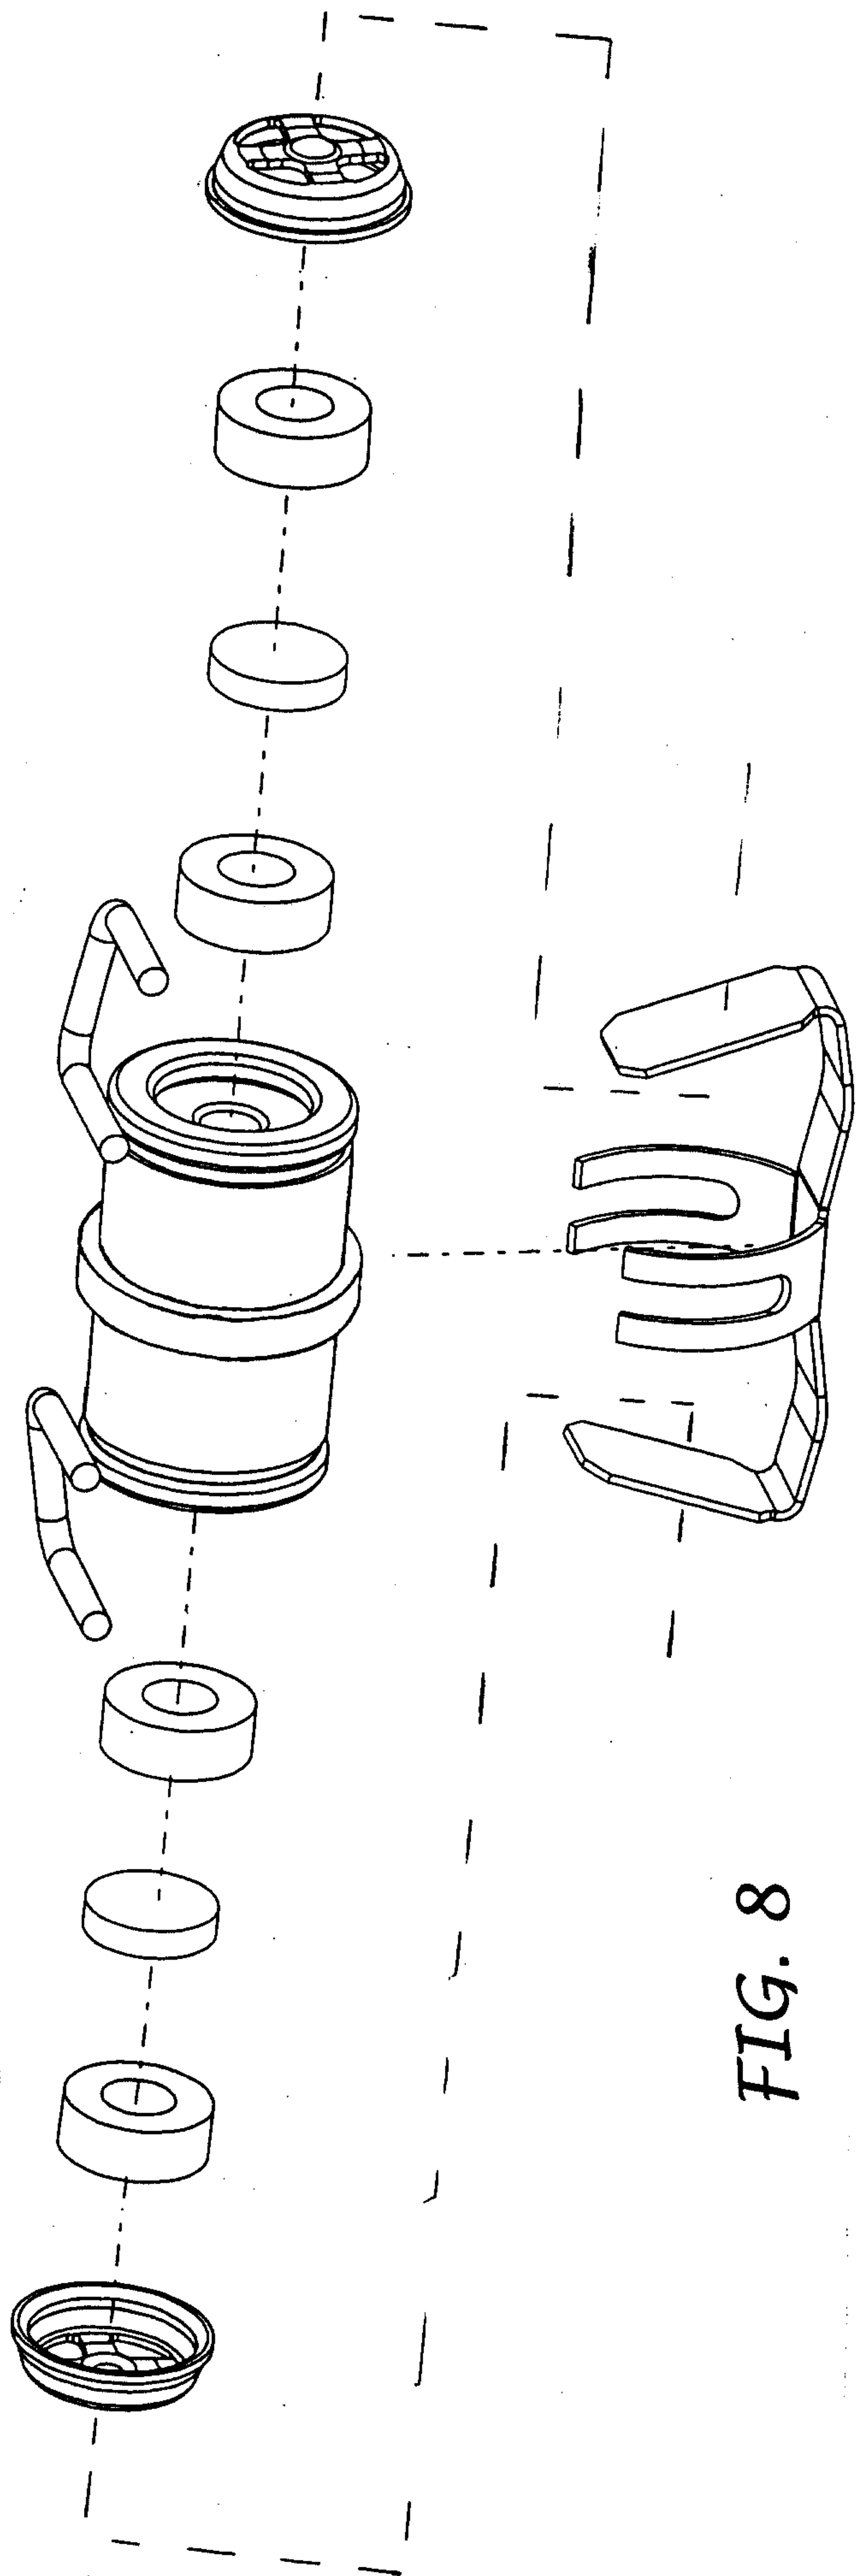


FIG. 8

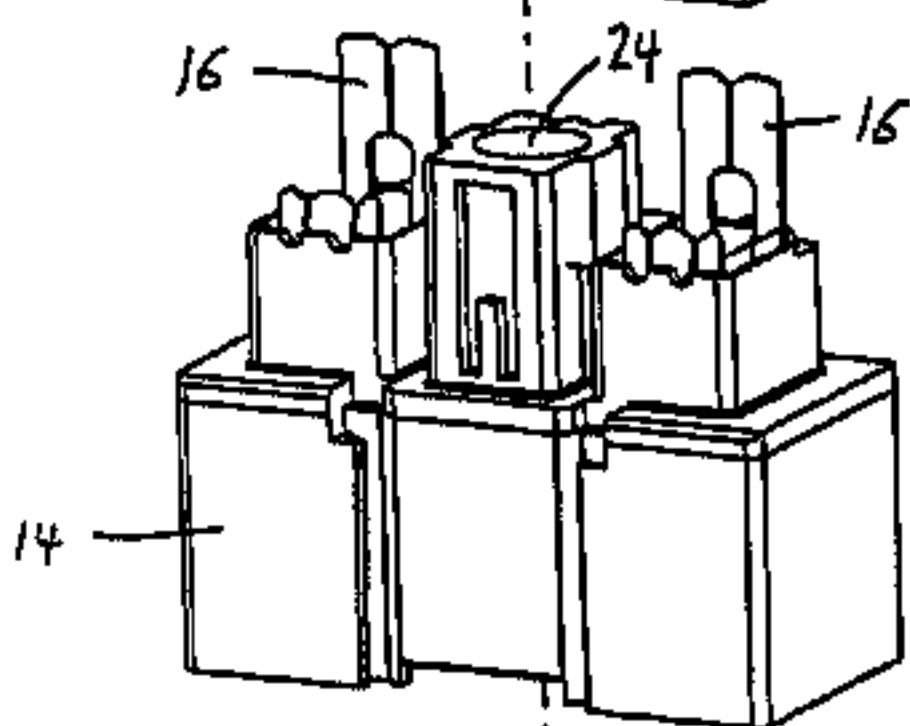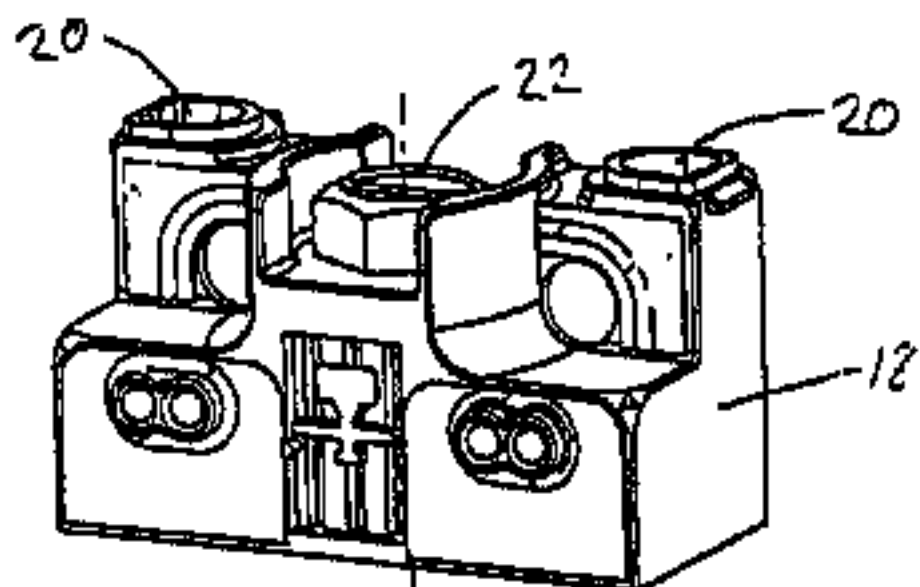

← 12

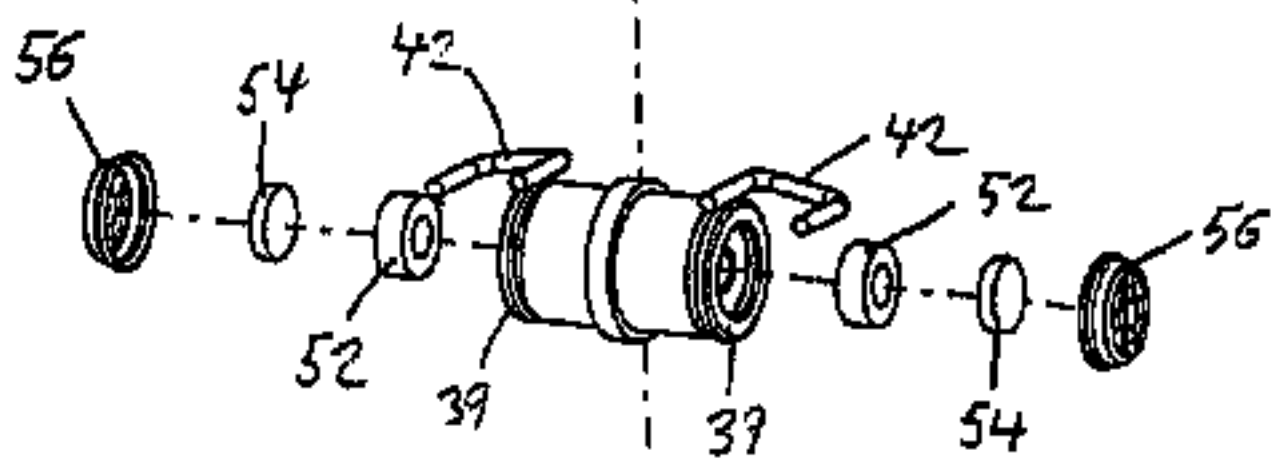

10 →

