



(51) International Patent Classification:
F02M 51/06 (2006.01) *F02M 63/00* (2006.01)

(21) International Application Number:
PCT/EP2010/067723

(22) International Filing Date:
18 November 2010 (18.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09015392.5 11 December 2009 (11.12.2009) EP

(71) Applicant (for all designated States except US): **CONTINENTAL AUTOMOTIVE GMBH** [DE/DE]; Vahrenwalder Straße 9, 30165 Hannover (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GRANDI, Mauro** [IT/IT]; Viale Città del Vaticano, N°44, I-57128 Livorno (IT).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: VALVE ASSEMBLY FOR AN INJECTION VALVE AND INJECTION VALVE

FIG 2

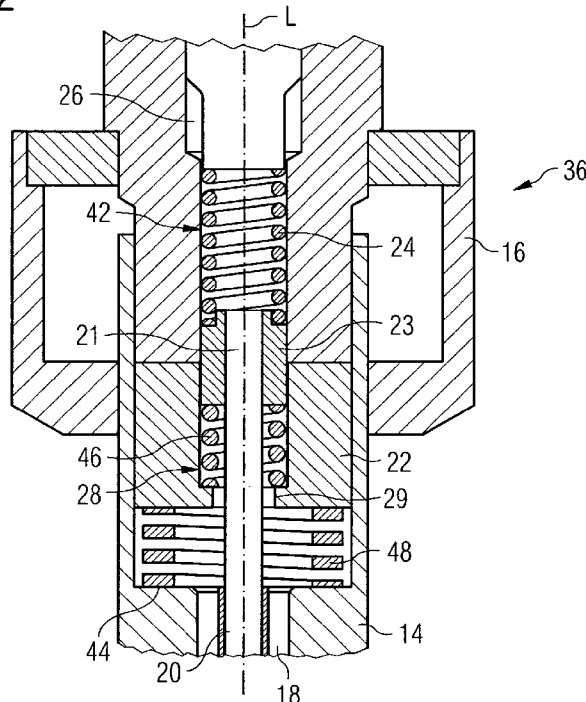

(57) Abstract: The invention relates to a valve assembly (11) for an injection valve (10), comprising a valve body (14) including a central longitudinal axis (L), the valve body (14) comprising a cavity (18) with a fluid inlet portion (42) and a fluid outlet portion (40), a valve needle (20) axially movable in the cavity (18), the valve needle (20) preventing a fluid flow through the fluid outlet portion (40) in a closing position and releasing the fluid flow through the fluid outlet portion (40) in further positions, the valve needle (20) comprising a ring element (23) extending in radial direction and being arranged at an axial end (21) of the valve needle (20) facing away from the fluid outlet portion (40), and an electro-magnetic actuator unit (36) being designed to actuate the valve needle (20). The electro-magnetic actuator unit (36) comprises an armature (22) axially movable in the cavity (18). The armature (22) comprises a recess (28) taking up the ring element (23) and a protrusion (29) extending into the recess (28) in radial direction. A spring element (46) is arranged in the recess (28) axially between the ring element (23) and the protrusion (29) of the armature (22).

Description

Valve assembly for an injection valve and injection valve

- 5 The invention relates to a valve assembly for an injection valve and an injection valve.

Injection valves are in wide spread use, in particular for internal combustion engines where they may be arranged in order to dose the fluid into an intake manifold of the internal combustion engine or directly into the combustion chamber of a cylinder of the internal combustion engine.

Injection valves are manufactured in various forms in order to satisfy the various needs for the various combustion engines. Therefore, for example, their length, their diameter and also various elements of the injection valve being responsible for the way the fluid is dosed may vary in a wide range. In addition to that, injection valves may accommodate an actuator for actuating a needle of the injection valve, which may, for example, be an electromagnetic actuator or piezo electric actuator.

In order to enhance the combustion process in view of the creation of unwanted emissions, the respective injection valve may be suited to dose fluids under very high pressures. The pressures may be in case of a gasoline engine, for example, in the range of up to 200 bar and in the case of diesel engines in the range of up to 2000 bar.

30

The object of the invention is to create a valve assembly which facilitates a reliable and precise function.

These objects are achieved by the features of the independent claim. Advantageous embodiments of the invention are given in the sub-claims.

5 The invention is distinguished by a valve assembly for an injection valve, comprising a valve body including a central longitudinal axis, the valve body comprising a cavity with a fluid inlet portion and a fluid outlet portion, a valve needle axially movable in the cavity, the valve needle preventing a fluid flow through the fluid outlet portion in a
10 closing position and releasing the fluid flow through the fluid outlet portion in further positions, the valve needle comprising a ring element extending in radial direction and being arranged at an axial end of the valve needle facing
15 away from the fluid outlet portion, and an electro-magnetic actuator unit being designed to actuate the valve needle. The electro-magnetic actuator unit comprises an armature axially movable in the cavity. The armature comprises a recess taking up the ring element. The armature comprises a protrusion extending into the recess in radial direction. A spring element
20 is arranged in the recess axially between the ring element and the protrusion of the armature.

The spring element is designed to partially decouple the
25 valve needle from the armature.

This has the advantage that the armature acts on the valve needle via the spring element so that the movement of the valve needle may be slightly delayed relative to the armature. By this the dynamic behavior of the valve needle is
30 dampened compared to the dynamic behavior of a valve needle which is directly coupled to the armature. Consequently, wearing effects on the valve needle and/or on the armature in the contact area between the valve needle and/or the armature

may be kept small. Consequently, a good long term contact between the valve needle and the armature may be obtained and a static flow drift caused by the wearing effects may be kept small. Furthermore, in the long term a reliable transmission
5 of the energy from the armature to the valve needle may be obtained.

In an advantageous embodiment the spring element is a coil spring. This has the advantage that a simple shape of the
10 spring element and a low cost solution is possible. Furthermore, a secure arrangement of the spring element in the recess of the armature may be obtained.

In a further advantageous embodiment an armature support
15 spring is arranged in the cavity axially between a step of the valve body and the armature. This has the advantage that the armature may be supported referring to the valve needle.

In a further advantageous embodiment the armature support
20 spring is a coil spring. This has the advantage that a simple shape of the armature support spring and a low cost solution is possible. Furthermore, a secure arrangement of the armature support spring in the cavity of the valve body may be obtained.

25

Exemplary embodiments of the invention are explained in the following with the aid of schematic drawings. These are as follows:

30 Figure 1 an injection valve with a valve assembly in a longitudinal section view, and

Figure 2 an enlarged view of a section of an electromagnetic actuator unit of the valve assembly.

Elements of the same design and function that appear in different illustrations are identified by the same reference character.

5

An injection valve 10 that is in particular suitable for dosing fuel to an internal combustion engine comprises in particular a valve assembly 11 and an inlet tube 12.

10 The valve assembly 11 comprises a valve body 14 with a central longitudinal axis L. The valve assembly 11 has a housing 16 which is partially arranged around the valve body 14. A cavity 18 is arranged in the valve body 14.

15 The cavity 18 takes in a valve needle 20 and an armature 22. The valve needle 20 is axially movable in the cavity 18. At an axial end 21 of the valve needle 20 the valve needle comprises a ring element 23. The ring element 23 is formed as a collar around the axial end 21 of the valve needle 20. The
20 ring element 23 is fixedly coupled to the axial end 21 of the valve needle 20. The armature 22 is axially movable in the cavity 18.

A calibration spring 24 is arranged in a recess 26 which is
25 provided in the inlet tube 12. The calibration spring 24 is mechanically coupled to the ring element 23. The ring element 23 forms a first seat for the calibration spring 24

The armature 22 has a recess 28. The valve needle 20 with the
30 ring element 23 is in contact with an inner surface of the armature 22 and can guide the valve needle 20 in axial direction in the recess 28 of the armature 22.

The armature 22 has a protrusion 29 which extends in radial direction into the recess 28. Preferably, the protrusion 29 is shaped as a ring element. The protrusion 29 overlaps with the ring element 23 in axial direction.

5

A filter element 30 is arranged in the inlet tube 12 and forms a further seat for the calibration spring 24. During the manufacturing process of the injection valve 10 the filter element 30 can be axially moved into the inlet tube 12 in order to preload the calibration spring 24 in a desired manner. By this the calibration spring 24 exerts a force on the valve needle 20 towards an injection nozzle 34 of the injection valve 10.

15 In a closing position of the valve needle 20 it sealingly rests on a seat plate 32 by this preventing a fluid flow through the at least one injection nozzle 34. The injection nozzle 34 may be, for example, an injection hole. Adjacent to the seat plate 32 a lower guide 35 is provided which is adapted to guide the valve needle 20 near the injection nozzle 34.

The valve assembly 11 is provided with an actuator unit 36 that is preferably an electro-magnetic actuator. The electro-magnetic actuator unit 36 comprises a coil 38, which is preferably arranged inside the housing 16 and overmolded. Furthermore, the electro-magnetic actuator unit 36 comprises the armature 22. The valve body 14, the housing 16, the inlet tube 12 and the armature 22 are forming an electromagnetic circuit.

30

A fluid outlet portion 40 is a part of the cavity 18 near the seat plate 32. The fluid outlet portion 40 communicates with

a fluid inlet portion 42 which is provided in the valve body 14.

Inside the valve body 14 a step 44 is arranged in the valve
5 body 14.

In the recess 28 of the armature 22 a spring element 46 is arranged axially between the ring element 23 and the protrusion 29 of the armature 22. The spring element 46 enables a
10 transmission of forces between the protrusion 29 of the armature 22 and the ring element 23. Preferably, the spring element 46 has a high stiffness. This enables an exact transmission of the movement of the armature 22 to the valve needle 20 with a small delay of the movement of the valve needle 20.
15 The dampening effect of the spring element 46 enables that the wearing effects on the armature 22 and/or on the valve needle 20 may be kept small during the opening or closing process of the valve needle 20.

20 An armature support spring 48 is arranged in the cavity 18 axially between the step 44 of the valve body 14 and the armature 22. Preferably, the armature support spring 48 is a coil spring. The armature support spring 48 is supported by the step 44 in the valve body 14. The armature support spring
25 48 may form a soft support element for the armature 22.

In the following, the function of the injection valve 10 is described in detail:

30 The fluid is led through the filter element 30 in the recess 26 to the fluid inlet portion 42. Subsequently, the fluid is led towards the fluid outlet portion 40.

The valve needle 20 prevents a fluid flow through the fluid outlet portion 40 in the valve body 14 in a closing position of the valve needle 20. Outside of the closing position of the valve needle 20, the valve needle 20 enables the fluid
5 flow through the fluid outlet portion 40.

In the case when the electro-magnetic actuator unit 36 with the coil 38 gets energized the actuator unit 36 may affect an electro-magnetic force on the armature 22. The armature 22 is
10 attracted by the electro-magnetic actuator unit 36 with the coil 38 and moves in axial direction away from the fluid outlet portion 40. The armature 22 takes the valve needle 20 with it via the spring element 46. Consequently, the valve needle 20 moves in axial direction out of the closing position. Outside of the closing position of the valve needle 20
15 the gap between the valve body 14 and the valve needle 20 at the axial end of the injection valve 10 facing away from of the actuator unit 36 forms a fluid path and fluid can pass through the injection nozzle 34.

20

In the case when the actuator unit 36 is de-energized the calibration spring 24 can force the valve needle 20 to move in axial direction in its closing position. It is depending on the force balance between the force on the valve needle 20
25 caused by the actuator unit 36 with the coil 38 and the force on the valve needle 20 caused by the calibration spring 24 whether the valve needle 20 is in its closing position or not.

30 Due to the spring element 46 a reliable transmission of the movement of the armature 22 to the valve needle 20 can be obtained. The high stiffness of the spring element 46 makes it possible that only a small delay of the movement of the valve needle 20 relative to the armature 22 may be obtained. The

dynamic behavior of the valve needle 20 is dampened compared to the dynamic behavior of a valve needle 20 which is coupled to the armature 22 in a direct manner without the spring element 46 in-between. Therefore, the wearing effects on the armature 22 and/or the valve needle 20 in the contact area between the valve needle 20 and/or the armature 22 may be kept small during the opening or closing of the valve needle 20. Consequently, a good long term contact between the valve needle 20 and the armature 22 may be obtained. In the long term a static flow drift caused by the wearing effects may be kept small and a reliable transmission of the energy from the armature 22 to the valve needle 20 may be obtained.

Claims


1. Valve assembly (11) for an injection valve (10), comprising
 - 5 - a valve body (14) including a central longitudinal axis (L), the valve body (14) comprising a cavity (18) with a fluid inlet portion (42) and a fluid outlet portion (40),
 - a valve needle (20) axially movable in the cavity (18),
10 the valve needle (20) preventing a fluid flow through the fluid outlet portion (40) in a closing position and releasing the fluid flow through the fluid outlet portion (40) in further positions, the valve needle (20) comprising a ring element (23) extending in radial direction and being arranged at an axial end (21) of the
15 valve needle (20) facing away from the fluid outlet portion (40), and
 - an electro-magnetic actuator unit (36) being designed to actuate the valve needle (20), the electro-magnetic actuator unit (36) comprising an armature (22) axially
20 movable in the cavity (18), the armature (22) comprising a recess (28) taking up the ring element (23) and the armature (22) comprising a protrusion (29) extending into the recess (28) in radial direction,
25 wherein a spring element (46) is arranged in the recess (28) axially between the ring element (23) and the protrusion (29) of the armature (22).
2. Valve assembly (11) according to claim 1, wherein the
30 spring element (46) is a coil spring.
3. Valve assembly (1) according to claim 1 or 2, wherein an armature support spring (48) is arranged in the cavity

(18) axially between a step (44) of the valve body (14) and the armature (22).

4. Valve assembly (11) according to claim 3, wherein the
5 armature support spring (46) is a coil spring.
5. Injection valve (10) with a valve assembly (11) according to one of the preceding claims.


1/2

FIG 1

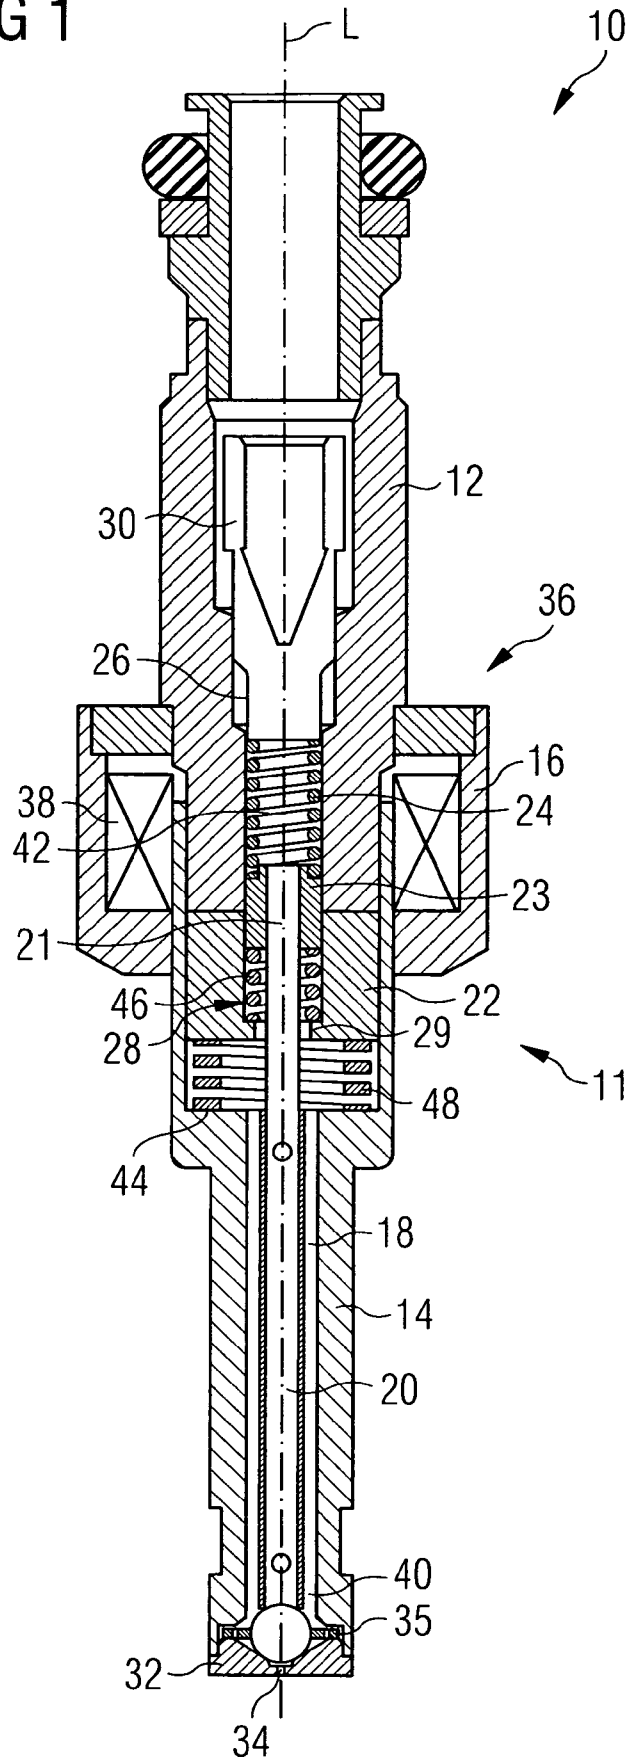

2/2

FIG 2

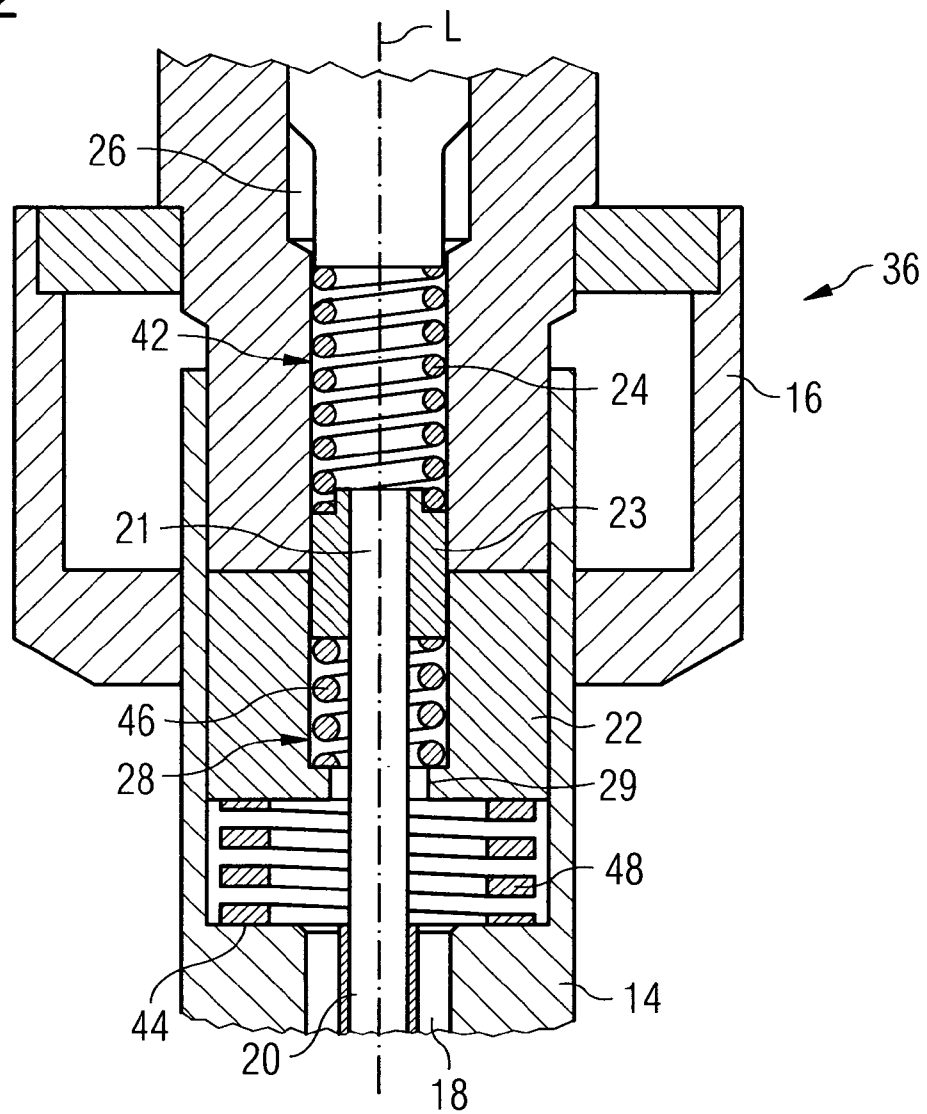

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/067723

A. CLASSIFICATION OF SUBJECT MATTER

INV. F02M51/06

ADD. F02M63/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F02M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/12712 A1 (BOSCH GMBH ROBERT [DE]; SEBASTIAN THOMAS [DE]; BOEE MATTHIAS [DE]) 14 February 2002 (2002-02-14) page 8, line 24 - page 9, line 11; figure 3 * abstract	1,2,5
X	DE 10 2004 056424 A1 (BOSCH GMBH ROBERT [DE]) 24 May 2006 (2006-05-24) paragraph [0019] - paragraph [0024]; figure 2 * abstract	1,2,5
A	DE 198 16 315 A1 (BOSCH GMBH ROBERT [DE]) 14 October 1999 (1999-10-14) column 6, line 24 - column 7, line 38; figures 2,3,4 * abstract	1-5
	----- -/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 January 2011

Date of mailing of the international search report

19/01/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hermens, Sjoerd

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/067723

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/068810 A1 (BOSCH GMBH ROBERT [DE]; STIER HUBERT [DE]) 6 September 2002 (2002-09-06) page 6, line 34 - page 7, line 6; figure 1 * abstract -----	1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/067723

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0212712	A1	14-02-2002	DE 10039077 A1 21-02-2002
			EP 1309791 A1 14-05-2003
			JP 2004506130 T 26-02-2004
			US 2003102386 A1 05-06-2003
DE 102004056424	A1	24-05-2006	NONE
DE 19816315	A1	14-10-1999	WO 9953189 A1 21-10-1999
			EP 1012469 A1 28-06-2000
			JP 4503711 B2 14-07-2010
			JP 2002506502 T 26-02-2002
			US 6279873 B1 28-08-2001
WO 02068810	A1	06-09-2002	CN 1457391 A 19-11-2003
			DE 10108945 A1 05-09-2002
			DE 50204771 D1 08-12-2005
			EP 1364116 A1 26-11-2003
			JP 4335528 B2 30-09-2009
			JP 2004518858 T 24-06-2004
			US 2003160117 A1 28-08-2003