

598902
Regulation 9

Regulation 9

APPLICATION FOR A STANDARD PATENT OR
A STANDARD PATENT OF ADDITION



XXXXXXXXXX

29.

RECEIVED
 FEB 28 1964
 585
 ATTACHED
 MAIL OFFICER

BRUCE S. WELLINGTON

The image shows three Australian 40 dollar banknotes. The leftmost note is clearly visible, showing the number '40' in the top left corner and the word 'FORTY DOLLARS' at the bottom. The middle note is partially obscured by a large, dark, rectangular stamp that reads 'PATENT OFFICE' in a bold, sans-serif font. The rightmost note is also partially obscured by the stamp, showing the number '5' in the top left corner. The banknotes feature the Australian coat of arms and the word 'AUSTRALIA' at the bottom.

LODGED AT SUB-OFFICE
29 JAN 1938
WILBOURNE
LODGED AT SUB-OFFICE
29 JAN 1938
WILBOURNE

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

FORM 8

REGULATION 12(2)

DECLARATION IN SUPPORT OF A CONVENTION APPLICATION
~~XXXXXXXXXXXX~~ FOR A PATENT OR PATENT OF ADDITION.

In support of the Convention Application made ~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~
~~XXX~~ by MONSANTO COMPANY for a patent for an invention entitled:

FIRE RETARDANT CONCENTRATES AND METHODS FOR
PREPARATION THEREOF

I, William Harry Duffey, General Patent Counsel, Monsanto Company, of 800 North
Lindbergh Boulevard, St. Louis, 63167, in the State of Missouri, United States of
America, do solemnly and sincerely declare as follows:

1. I am authorized by MONSANTO COMPANY, the applicant for the Patent to
make this declaration on its behalf.

2. The basic application as defined by Section 141 of the Act was made at the
Patent Office, Washington, District of Columbia, in the United States of America
on the 30th of January 19 87, by
Howard Lawrence Vandersall.

3. Howard Lawrence Vandersall, 2137 Albright Avenue,
Upland, California 91786, United States of America,


is/~~is~~ the actual inventor~~(s)~~ of the invention, and the facts upon which the
MONSANTO COMPANY is entitled to make the application are as follows:
The Company is the assignee of the actual inventor~~(s)~~.

4. The basic application referred to in paragraph 2 of this declaration was the first
application made in a Convention country in respect of the invention, the subject of
the application.

DECLARED at St. Louis, Missouri, aforesaid this 17th day of
December, 19 87.

William Harry Duffey
WILLIAM HARRY DUFFEY

To Commissioner of Patents
COMMONWEALTH OF AUSTRALIA

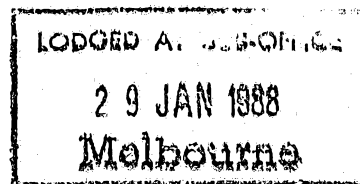

(12) PATENT ABRIDGMENT (11) Document No. AU-B-10955/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 598902

- (54) Title
FIRE RETARDANT CONCENTRATES AND METHODS FOR PREPARATION THEREOF
- International Patent Classification(s)
(51)⁴ C09K 021/04 A62D 001/00 C09K 021/02
- (21) Application No. : 10955/88 (22) Application Date : 29.01.88
- (30) Priority Data
- (31) Number (32) Date (33) Country
009305 30.01.87 US UNITED STATES OF AMERICA
- (43) Publication Date : 04.08.88
- (44) Publication Date of Accepted Application : 05.07.90
- (71) Applicant(s)
MONSANTO COMPANY
- (72) Inventor(s)
HOWARD LAWRENCE VANDERSALL
- (74) Attorney or Agent
E.F. WELLINGTON & CO, MELBOURNE.
- (56) Prior Art Documents
US 4447336
US 4447337

(57) This invention relates to chemical fire retardants and more particularly to concentrates adapted for dilution with water to produce long-term fire retardant solutions comprising such concentrates.

 An important method for controlling wildland fires involves dropping an aqueous fire retardant solution from helicopter or fixed-wing aircraft onto timber or other foliage to form a chemical fire break in front of an oncoming fire. Fire retardant mixtures adapted for release from fixed-wing aircraft are desirably of relatively high viscosity, for example, about 1000 to 2000 centipoise, so that the mixture resists atomizing or spreading out to form a thin, discontinuous layer as it falls from the aircraft. However, a mixture exhibiting too high a viscosity is difficult to pump and may tend to form globules and so does not drop in fluid, continuous form to create an uninterrupted fire break. While the particular viscosity at which this occurs

depends on the particular thickener incorporated in the mixture, it is typically preferred that the viscosity of the mixture be maintained below about 3000 centipoise, and more preferably below about 2000 centipoise. On the other hand, if the mixture is to be released by a helicopter, atomization of the fire control mixture is not as much of a problem because the helicopter may hover close to the target. Thus, fire retardant mixtures adapted for release from a helicopter typically are of a relatively low viscosity, generally about 50 to 250 centipoise.

CLAIM

1. An aqueous concentrate adapted to be diluted with water and used in fire control, said concentrate exhibiting a viscosity of less than 3000 centipoise, a concentration of from 0.75% to 6% by weight of a thickening agent, and a concentration of at least 24% by weight solids derived from a fire retardant selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952-1969

598902

FORM 10

COMPLETE SPECIFICATION
(Original)

Application Number:
Lodged:

Class: Int. Class

Complete specification Lodged:
Accepted:
Published:

Priority:

Related Art:

This document contains the
entire specification made under
Section 100 of the Act for
patenting

Name of Applicant: MONSANTO COMPANY

Address of Applicant: 800 North Lindbergh Boulevard,
St. Louis, Missouri 63177, U.S.A.

Actual Inventor/s: HOWARD LAWRENCE VANDERSALL

Address for Service: E. F. WELLINGTON & CO.,
Patent and Trade Mark Attorneys,
457 St. Kilda Road,
Melbourne, 3004, Vic.

Complete Specification for the invention entitled:

"FIRE RETARDANT CONCENTRATES AND
METHODS FOR PREPARATION THEREOF"

The following statement is a full description of this invention
including the best method of performing it known to me/us:

Background of the Invention

5 This invention relates to chemical fire retardants and more particularly to concentrates adapted for dilution with water to produce long-term fire retardant solutions comprising such concentrates.

10 An important method for controlling wildland fires involves dropping an aqueous fire retardant solution from helicopter or fixed-wing aircraft onto timber or other foliage to form a chemical fire break in front of an oncoming fire. Fire retardant mixtures adapted for release from fixed-wing aircraft are desirably of relatively high viscosity, for example, about 1000 to 2000 centipoise, so that the mixture resists atomizing or spreading out to form a thin, discontinuous layer as it falls from the aircraft. However, a mixture exhibiting too high a viscosity is difficult to pump and may tend to form globules and so does not drop in fluid, continuous form to create an uninterrupted fire break. While the particular viscosity at which this occurs depends on the particular thickener incorporated in the mixture, it is typically preferred that the viscosity of the mixture be maintained below about 3000 centipoise, and more preferably below about 2000 centipoise. On the other hand, if the mixture is to be released by a helicopter, atomization of the fire control mixture is not as much of a problem because the helicopter may hover close to the target. Thus, fire retardant mixtures adapted for release from a helicopter typically are of a relatively low viscosity, generally about 50 to 250 centipoise.

15
20
25
30

Fire retardant mixtures employed in such fire control methods ordinarily comprise aqueous mixtures containing between about 5% and about 20% by weight, usually between about 10% and about 16% by weight, fire retardant. The retardant typically is a composition that produces phosphoric acid or sulfuric acid when heated. Common retardants are ammonium phosphate compositions and ammonium sulfate compositions such as monoammonium orthophosphate, diammonium orthophosphate, monoammonium pyrophosphate, diammonium pyrophosphate, triammonium pyrophosphate, tetraammonium pyrophosphate, ammonium polyphosphate, substituted ammonium polyphosphate, amide polyphosphate, melamine polyphosphate, ammonium-alkali metal mixed salts of orthophosphate, ammonium-alkali metal mixed salts of pyrophosphate, ammonium-alkali metal mixed salts of polyphosphate, ammonium-alkaline earth metal mixed salts of orthophosphate, ammonium-alkaline earth metal mixed salts of pyrophosphate, ammonium-alkaline earth metal mixed salts of polyphosphate, ammonium sulfate and blends thereof. So-called "liquid ammonium polyphosphates", as described in U.S. patent 3,730,890 (Nelson), are also commonly used as fire retardants. Such liquid ammonium polyphosphates are often used commercially as fertilizers and may be aqueous mixtures of ammonium ortho, pyro, and polyphosphate and, optionally, also metaphosphate. Typical formulations of such liquid ammonium polyphosphates contain 10% by weight nitrogen and 34% by weight phosphorus, or 11% by weight nitrogen and 37% by weight phosphorus.

Whereas fire suppressant mixtures rely solely on the water they contain to retard combustion, phosphate or sulfate containing fire retardant mixtures are

useful for relatively long-term fire retardancy and include water primarily as a carrier for the fire retardant composition. Thus, long-term fire retardant mixtures continue to function even after the free water they contain evaporates. Long-term fire retardant mixtures are discussed in U.S. patent 4,145,296 (Fox et al.), U.S. patent 4,272,414 (Vandersall), U.S. patent 4,101,485 (Brooks et al.), U.S. patent 3,350,305 (Langguth et al.), U.S. patent 4,190,634 (Feiler), U.S. patent 3,558,486 (Morgenthaler), U.S. patent 3,364,149 (Morgenthaler), U.S. patent 3,342,749 (Handleman et al.), U.S. patent 3,338,829 (Langguth et al.), U.S. patent 3,309,324 (Langguth et al.), U.S. patent 3,293,189 (Morgenthaler), U.S. patent 3,275,566 (Langguth), U.S. patent 3,257,316 (Langguth et al.), U.S. patent 3,223,649 (Langguth), U.S. patent 3,024,100 (Langguth et al.), U.S. patent 3,024,099 (Martinson) and U.S. patent 2,526,083 (Nielson).

When such aqueous long-term fire retardant mixtures are used to assist in gaining control of a fire, the retardant and the foliage coated by the retardant are heated. As an ammonium phosphate or ammonium sulfate retardant is heated, ammonia is released, leaving phosphoric or sulfuric acid on the cellulose of the foliage, whereupon a reaction is understood to take place and, as a by-product, water is given off as fire suppressing steam. Thus, the compositions which act as retardants are salts or other compounds that release phosphoric acid or sulfuric acid below the ignition temperature of cellulose. Aqueous fire retardant mixtures are frequently prepared by mixing a solid powder form fire retardant mixture with water. Such mixtures may also be prepared by diluting liquid ammonium phosphate with water.

Commonly, fire control mixtures further contain a gum thickener to modify the viscosity of the mixture. Low viscosity mixtures contain a relatively lower proportion of thickener than do high viscosity mixtures. Some typical gum thickeners are discussed in U.S. patent 3,634,234 (Morgenthaler), in U.S. patent 4,447,336 (Vandersall) and in U.S. patent 4,447,337 (Adl et al.). In addition, the mixture may contain corrosion inhibitors and flow conditioners. Aqueous fire retardant solutions are frequently prepared by mixing a solid powder form fire retardant composition with water. Typical flow conditioners, which are added to the powder form of the fire control mixture to keep the mixture free-flowing, are tricalcium phosphate, magnesium carbonate, talc, sodium silicate and finely divided, colloidal silica. Optionally, the aqueous fire control mixture may also contain a colorant. The colorant may be a pigment such as iron oxide, which produces a red color, titanium dioxide pigment, which produces a white color, or an ultra-violet sensitive dye dispersed in biodegradable plastic.

Since the mixture, as used in fire control, comprises a relatively dilute solution or suspension of active ingredients and other auxiliary components in water, it is more economical to ship and store the fire control mixture in a relatively concentrated, lighter and less voluminous dry form, and to dilute the dry or liquid concentrate form on site or as needed. Further, because of the emergency nature of fire fighting, the frequent lack of manpower and the desirability of minimizing potential mechanical failure, it is frequently preferred to have a concentrated liquid retardant composition which can be merely diluted before use rather than a dry powder composition which must be mixed.

While certain suppliers have sold a thickener-free liquid concentrate of the fire retardant in water, use of the conventional concentrates has involved several drawbacks. For example, such products do not contain a thickening agent and may not include other desirable additives. Therefore, the thickener and other additives must be obtained, shipped, handled and stored separately from the concentrate or not used at all. Exclusion of thickener or other additives, of course, results in a less effective fire retardant solution. If obtained as individual components, the thickener and other additives are difficult to handle and careful metering is required to mix the thickener and other additives with the retardant solution. Thus, carefully trained personnel are needed. These are particularly serious drawbacks in view of essence of time during a fire emergency. While attempts have been made to prepare thickener-containing concentrates, it has been found in such attempts that mixing as little as 1% by weight thickener in water has produced an unmanageable, unpumpable solid. It has been found that the maximum concentration of thickener before development of such undesirable results depends on the particular thickener employed.

Thus, a need has existed for a liquid fire retardant concentrate that can be easily handled, without sacrificing effectiveness.

Summary of the Invention

Among the several objects of the invention, therefore, may be noted the provision of a fire retardant concentrate that reduces shipping costs by avoiding

transporting large quantities of water which can be obtained on site; the provision of such concentrate that is as easily handled as a water-like liquid; the provision of such concentrate that can be diluted accurately with simple equipment to a high viscosity, elastic gum thickened mixture of end use concentration; the provision of a method for preparing such concentrate; and the provision of a method for preparing a fire control retardant from such concentrate.

Briefly, therefore, the present invention is directed to a novel aqueous concentrate adapted to be diluted with water and used in fire control. The concentrate exhibits a viscosity of less than about 3000 centipoise and contains between about 0.75% and about 6% by weight thickening agent and at least about 24% by weight solids derived from a fire retardant selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen to phosphorus ratio of at least about 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen to phosphorus ratio of at least about 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

The present invention is also directed to a novel aqueous concentrate that is adapted to be diluted with water to produce an aqueous fire retardant mixture exhibiting a viscosity of between about 1000 centipoise and about 3000 centipoise and containing between about 5% and about 20% by weight fire retardant and between about 0.2% and about 3% by weight thickening agent.



The characteristics of the fire retardant component are such that (a) the fire retardant releases phosphoric acid or sulfuric acid or both at a temperature below the ignition temperature of cellulose; and (b) mixing
5 of one part by weight of the fire retardant component with between about 6 and about 20 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity of between about 1000 and about 3000 centipoise; but
10 (c) mixing of one part by weight of the same fire retardant component with less than about 4 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity less than about 1000 centipoise.

15 The present invention is further directed to a novel aqueous concentrate that contains such fire retardant and is adapted to be diluted with water to produce a fire retardant mixture exhibiting a viscosity of between about 50 centipoise and about 250 centipoise
20 and containing between about 5% and about 20% by weight fire retardant.

 The present invention is also directed to a novel method for preparing an aqueous concentrate that is adapted to be diluted with water and used in fire
25 control. The method comprises mixing a fire retardant composition with water to produce a concentrate exhibiting a viscosity of less than about 2000 centipoise and having a concentration of solids derived from the fire retardant composition of at least about 30% by
30 weight of total concentrate, 40 parts by weight total fire retardant composition containing between about 1 and about 3 parts by weight of a thickening agent and

between about 34 and about 38 parts by weight of a fire retardant. The characteristics of the fire retardant component are such that (a) the fire retardant releases phosphoric acid or sulfuric acid or both at a temperature below the ignition temperature of cellulose; and (b) mixing of one part by weight of the fire retardant component with between about 6 and about 20 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity of between about 1000 and about 3000 centipoise; but (c) mixing of one part by weight of the same fire retardant with less than about 4 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity less than about 1000 centipoise. The mixing is carried out in a manner such that the concentration of fire retardant composition in the aqueous phase remains above about 30% by weight during the entire mixing process.

The present invention is also directed to a novel method for preparing an aqueous concentrate that is adapted to be diluted with water and used in fire control, wherein the method comprises mixing a solid particulate fire retardant composition with water to produce a concentrate exhibiting a viscosity of less than about 2000 centipoise and a concentration of solids derived from the fire retardant composition of at least about 30% by weight of total concentrate, 40 parts by weight total fire retardant composition containing between about 1 and about 3 parts by weight of a thickening agent and between about 34 and about 38 parts by weight of a fire retardant. The fire retardant is selected from the group consisting of diammonium

phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen to phosphorus ratio of at least about 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen to phosphorus ratio of at least about 1.25, and a blend of such fire retardant with monoammonium phosphate. In the method, mixing being carried out in a manner such that the concentration of fire retardant composition in the aqueous phase remains above about 30% by weight during the entire mixing process.

The present invention is also directed to a novel multiple step method for preparing an aqueous concentrate that is adapted to be diluted with water and used in fire control. In the method, first a solid particulate fire retardant is mixed with water to produce a retardant solution having a concentration of solids derived from the fire retardant of at least about 24% by weight of solution. The characteristics of the fire retardant component are such that (a) the fire retardant releases phosphoric acid or sulfuric acid or both at a temperature below the ignition temperature of cellulose; and (b) mixing of one part by weight of the fire retardant component with between about 6 and about 20 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity of between about 1000 and about 3000 centipoise; but (c) mixing of one part by weight of the fire retardant component with less than about 4 parts by weight water and between about 0.02 and about 0.2 parts by weight thickening agent produces a mixture having a viscosity less than

about 1000 centipoise. Thereafter, a composition comprising a thickening agent is mixed with the solution to produce a concentrate comprising at between about 0.75% and about 6% by weight thickening agent and
5 exhibiting a viscosity of less than about 1000 centipoise.

The present invention is further drawn to such method wherein the fire retardant is selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen to phosphorus ratio of at least about 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate
10 having a nitrogen to phosphorus ratio of at least about 1.25, and a blend of such fire retardant with polyammonium phosphate.
15

The present invention is also directed to methods of preparing fire retardant mixtures from such concentrates and to methods of controlling fires with such mixtures.
20

Description of the Preferred Embodiments

In accordance with the present invention, it has been discovered that an aqueous fire retardant concentrate can be prepared, having a moderate viscosity despite the presence of a thickener, by maintaining the concentration of fire retardant in the concentrate at a high level. More particularly, it has been found that, by maintaining the concentration of certain fire
25 retardants above about 24% by weight, the viscosity of
30

the concentrate is controlled at less than about 2000 cps, even in the presence of 6% and possibly as much as 50% by weight of a thickening agent.

Ordinarily, the viscosity of a mixture would
5 be expected to increase with increasing concentration of thickener or other high-viscosity components. And, as expected, it has been found that increasing the concentration of fire retardant in an aqueous fire control mixture from about 10% to 20% by weight (while
10 maintaining a constant thickener to retardant concentration ratio), increases the viscosity of the mixture. Surprisingly and seemingly inexplicably, however, it has been discovered that the concentrate of this invention, which has a fire retardant concentra-
15 tion of at least about 24% by weight and a thickener concentration of between about 0.75% and 6% by weight, not only has a viscosity that is not appreciably higher than that of the diluted mixture ultimately used in fire control, (5% to 10% by weight fire retardant and
20 at most about 0.3% by weight thickener) but typically the concentrate has a much lower viscosity than the diluted mixture. Yet this phenomenon has been found not to be determined by the pH of the concentrate, and has been observed only for certain fire retardants.
25 For example, if the fire retardant in the concentrate is monoammonium phosphate with an N/P ratio of less than 1.25, the viscosity of the concentrate is very high. However, if the retardant in a concentrate of the same pH is diammonium sulphate, the viscosity of
30 the concentrate is relatively low. It has been found that the concentrate of this invention has a viscosity far below 2000 centipoise, typically below about 350 centipoise and often below about 50 centipoise.

Therefore, the concentrate of this invention avoids the pumping and handling problems that are encountered with mixtures of viscosities above about 2000 centipoise. In addition, the aqueous concentrate tends to disperse into mixture during dilution more readily than does powder. Accordingly, the concentrates of this invention require less meticulous metering of water than is required for ordinary powder concentrates. Also, since the concentrate includes thickener and, optionally, other additives, the only ingredients necessary on-site to produce a fire control retardant ready for application are the concentrate and water.

Generally, it has been discovered that addition of thickener to an aqueous mixture containing a relatively high concentration of certain fire retardants surprisingly produces a mixture of lower viscosity than mixtures containing substantially lower concentrations of retardant and thickener. It has been found that when the retardant concentration is maintained at a high level, added thickener does not act to significantly increase the viscosity of the mixture, but instead tends to settle in a sand-like form, remains suspended in a semi-colloidal form, or rises to the surface of the mixture. More particularly, it has been found that certain fire retardants produce mixtures exhibiting viscosities of between about 1000 and about 2000 centipoise when one part by weight of the fire retardant is mixed with between about 0.055 and about 0.2 parts by weight thickening agent and between about 6 and about 20 parts by weight water. Yet, these same retardants produce mixtures exhibiting viscosities below 1000 centipoise when one part by weight fire

retardant is mixed with the same amount of thickening agent, but less than about 4 parts by weight water. This is a significant advantage in preparing and handling concentrates of high viscosity fire control retardants adapted for application by fixed-wing aircraft.

Similarly, the same phenomenon of decreased viscosity with increased thickener concentration has been observed when such fire retardants are incorporated in fire retardant solutions of relatively lower viscosity. The low viscosity mixtures are similar to the high viscosity mixtures adapted for delivery by fixed-wing aircraft. However, the lower viscosity mixtures contain lower levels of thickener. Thus, for the lower viscosity mixtures which are adapted for delivery by helicopter, the fire retardant produces a mixture exhibiting a viscosity between about 50 and about 250 centipoise when one part by weight of the fire retardant is mixed with between about 0.02 and about 0.075 parts by weight thickening agent and between about 6 and about 20 parts by weight water. However, the fire retardant produces a mixture exhibiting a viscosity below 50 centipoise when one part by weight fire retardant is mixed with the same amount of thickening agent, but less than about 4 parts by weight water. Clearly, therefore, this is a significant advantage in preparing and handling concentrates of high viscosity fire control retardants adapted for application by helicopter.

The fire retardants of the concentrates and fire control retardants of the invention are compounds or a mixture of compounds that degrade or decompose at temperatures below the ignition temperature of the

fuels to be protected (e.g., cellulose), thereby releasing a mineral acid, such as phosphoric acid or sulfuric acid. Among the various fire retardants typically used in fire retardant mixtures and which might be used in the concentrate of this invention are monoammonium orthophosphate, diammonium orthophosphate, monoammonium pyrophosphate, diammonium pyrophosphate, triammonium pyrophosphate, tetraammonium pyrophosphate, ammonium polyphosphate, substituted ammonium polyphosphate, amide polyphosphate, melamine polyphosphate, ammonium-alkali metal mixed salts of orthophosphate, ammonium-alkali metal mixed salts of pyrophosphate, ammonium-alkali metal mixed salts of polyphosphate, ammonium-alkaline earth metal mixed salts of orthophosphate, ammonium-alkaline earth metal mixed salts of pyrophosphate, ammonium-alkaline earth metal mixed salts of polyphosphate, ammonium sulfate, liquid ammonium polyphosphates and blends thereof. While liquid ammonium polyphosphates are generally too dilute in their commercial forms for application as fire retardants, other retardants, such as those noted above, may be mixed with liquid ammonium polyphosphate until a minimum acceptable concentration is obtained. Ammonium polyphosphate is often called polyammonium phosphate, and commonly contains other ammonium phosphate such as pyroand metaphosphates, and the alkali metal equivalents thereof, as well as a blend of phosphate polymers. Such polyammonium phosphates are often referred to as 10-34-0, 11-37-0, 12-40-0, 13-42-0 or the like, where the first number indicates the percentage of nitrogen in the blend, the middle number indicates the percentage phosphate in the blend and the last number indicates the percentage potash in the blend.

Specifically, it has been found that diammonium phosphate (DAP) and diammonium sulfate (DAS) may be employed as the fire retardant in the concentrates of this invention, but that use of a retardant comprising monoammonium phosphate (MAP) produces a concentrate of the above discussed desirable properties only if it is combined with another retardant, particularly DAP. No explanation has been discovered to explain why a concentrate containing MAP and no other fire retardant has a high viscosity, while use of DAP or DAS as the only fire retardant results in relatively low viscosity concentrates. Regardless, fire retardants in commercial use usually comprise a blend of some of the various fire retardants available. Typical commercial blends comprise MAP and DAP in ratios ranging from about 9:1 to about 1:9. One particular blend contains about 30 parts by weight DAS and about 9 parts by weight MAP per 1 part by weight DAP. It has been found, however, that for a MAP containing concentrate to have a viscosity below about 2000 centipoise, the concentrate should contain at least 0.3 mole DAP per mole of MAP. The MAP:DAP ratio tends to affect the pH of concentrates of this invention, with a concentrate of high MAP:DAP ratio having a pH of about 5.5 to 6, and a low MAP:DAP ratio concentrate having a pH near 8.

The fire retardants are commonly available in solid, particulate form but may also be obtained in a concentrated thickener-free aqueous solution requiring dilution with water and addition of thickener and other additives before application to wildland for fire control. The concentrated aqueous solution of commerce typically contains 34% to 42% by weight P_2O_5 (15% to 18% by weight phosphorus) in the form of ammonium

ortho, pyro and polyphosphates, water and various impurities, but no thickening agent or other intended additive.

When solid, particulate retardant is to be incorporated in the concentrate of this invention, the retardant may first be mixed with water. In a separate step, a solid particulate premix comprising thickener and other additives, is mixed with the water with which the retardant was mixed. Thus, in this process, as will be discussed in more detail below, the solid, particulate fire retardant is added independently, and before the thickener. It is also possible to simultaneously add the thickener and retardant to water under agitation. Therefore, the solid, particulate form of fire retardant may be combined with the thickener and other additives to form a dry solid, particulate fire retardant composition for mixing with water. Such dry solid, particulate fire retardant composition may contain between about 85% and 95% by weight fire retardant, between about 2.5% and about 7.5% by weight gum thickener, between about 1% and about 5% by weight corrosion inhibitor, up to about 4% by weight color pigment and other functional components as desired.

The thickening agent of the composition of this invention may be any of a number of thickeners, including standard gum thickeners such as galactomannan guar gum compositions. The thickening agent is employed to maintain the viscosity of the diluted fire retardant solution, for example, at between about 1000 centipoise and about 2000 centipoise for aerial bombardment from fixed-wing aircraft, or between about 50 centipoise and about 250 centipoise for aerial bombardment from helicopter. The thickener should make up

between about 0.75% and about 6% by weight of the concentrate. Since addition of thickener to the concentrate of this invention does not produce the expected thickening action, the thickener concentration in the concentrate can be even higher, but the specific concentration depends on the viscosity desired in the diluted mixture. Thus, the thickener concentration in the concentrate for fixed-wing aircraft applications should be between about 1.9% and about 6% by weight of the concentrate to produce an expanded mixture upon dilution exhibiting a viscosity of between about 1000 cps and about 2000 cps, and comprising about 0.8% or 0.9% by weight thickener. The thickener concentration in the concentrate for helicopter applications should be and between about 0.25% and about 2% by weight of the concentrate to produce an expanded mixture upon dilution exhibiting a viscosity of between about 50 cps and about 250 cps, and comprising between about about 0.28% and about 0.36% by weight thickener.

20 The composition of this invention may also contain a pigment such as iron oxide, which produces a red color, titanium dioxide pigment, which produces a white color, or a fugitive pigment which fades upon exposure to the elements. These colors aid a fire-
25 fighting pilot by enabling the pilot to see where fire retardant solutions have already been dropped. On the other hand, for certain uses, particularly along roadsides or in parks, it may be preferable to exclude any colorant from the mixture. The concentrate would
30 contain as much color pigment as would be required for visibility upon dilution. Thus, the amount of pigment depends on the degree of dilution contemplated.

Other ingredients commonly included in low concentrations in fire retardant mixtures are flow conditioners, such as tricalcium phosphate, magnesium carbonate, talc, sodium silicate and finely divided colloidal silica, added to keep the powder form of fire retardant composition free-flowing; and defoaming and antifoaming agents, such as polyalkylene derivatives of propylene glycol. Each of these additives may be present in minor amounts, about 0.3% to about 1.5% by weight, in the concentrate.

In addition, various impurities are often found in such concentrates and resulting fire retardant mixtures. Certain of these impurities, such as ferrous ions, are believed to result in variation of the viscosity of the concentrates of this invention over a storage period of days or months. In addition, the instability believed to be brought on by such impurities may be manifested in significantly lower viscosity of fire retardant mixtures prepared by diluting concentrates stored for several days or months. Consequently, it is desired to maintain the concentrations of these impurities to a minimum since concentrates contaminated with these impurities and stored for several months might not produce fire retardant mixtures of acceptable viscosity. Thus, if a concentrate is intended to be stored for long periods of time, it is preferred to use a fire retardant of essentially pure or technical grade as opposed to, for example, fertilizer grade.

The ferrous ions are believed sometimes to result from certain methods of production of the fire retardant, but also result from corrosion by certain

fire retardant concentrates or mixtures of iron or steel holding tanks.

Since the ferrous ions are believed to impair the stability of the concentrates and fire control retardants made therefrom, when the concentrate or related mixtures are to be stored in iron or steel tanks, it is preferred that small amounts of corrosion inhibitors (usually less than about 0.1% by weight), such as sodium silicofluoride, dimercaptotriazole and/or sodium thiosulfate, be added to the concentrates of this invention to minimize the iron introduced into the concentrate from corrosion.

The water used in formation of the aqueous concentrate and in dilution of the concentrate may be tap water or water from other convenient water sources. Due to the potentially long periods of storage and the danger of bacteria growth supported by the gum thickener (which typically is a polysaccharide), it may be desirable that the water be substantially bacteria-free. Accordingly, it may be desirable to add a bactericide, such as sodium silicofluoride in a proportion of about 0.90% by weight sodium silicofluoride in the concentrate. The bactericide may be added to the water either before, after or simultaneously with incorporation of the fire retardant and thickener. However, the aqueous mixtures of this invention tend to have high ionic strength, so it is believed that use of bacteria-free water or a bactericide is not always necessary.

Thus, the aqueous concentrate of this invention contains at least about 24% and as much as about

75% by weight fire retardant, between about 0.75% and about 6% by weight thickening agent, minor amounts of other additives as discussed above, and exhibits a viscosity below about 2000 centipoise. When a fire retardant solution for helicopter delivery is prepared by diluting a concentrate of appropriate composition with enough water to lower the concentration of the fire retardant to between about 5% and 20% by weight of the mixture, the mixture obtained exhibits a viscosity between about 50 centipoise and about 250 centipoise. When a fire control retardant for fixed-wing aircraft delivery is prepared in a comparable manner, the mixture obtained exhibits a viscosity between about 1000 centipoise and about 2000 centipoise.

The aqueous concentrate of this invention should be prepared by mixing fire retardant with water in a manner such that the fire retardant concentration in the mixture does not fall below about 24% by weight during incorporation of the thickening agent into the concentrate. Thus, the thickener should not be added before the retardant, since it has been found that retardant-free mixtures which contain even 1.5% by weight thickener exhibit unmanageably high viscosity. Moreover, once such viscosity is produced, the low viscosity concentrates of this invention cannot be formed from the mixture even by adding large amounts of fire retardant. Similarly, even fire retardant mixtures in which the fire retardant concentration is in a somewhat moderate range of between about 15% and about 23% by weight, exhibit very high viscosities, rendering the mixtures difficult to handle and to pump. It has been found that, once a relatively high viscosity is reached in the process of preparing the concentrate,

increasing the concentration of additives to the levels of the concentrates of this invention is not effective for reducing the viscosity to the low ranges achievable if the desired concentrations are maintained throughout the mixing process. Thus, it is not feasible even to premix thickener with water and then add that premixture to a high fire retardant/water mixture. Such premixture would be a thick paste or solid if the premixture contained a high enough thickener concentration so that a proper resulting thickener concentration is reached upon dilution of the premix with retardant/water mixture. The viscosity does not decrease to a satisfactory level upon addition to the fire retardant/water mixture.

Several techniques may be used to maintain the concentration above 24% throughout the addition of thickener, and optionally throughout the mixing process. In a preferred method, the fire retardant is first mixed with water to a concentration of at least 24%, after which the thickener is added to the fire retardant and water mixture. However, if so desired, thickener and fire retardant may be mixed with water simultaneously and quickly and with agitation. Due to the higher dissolution rate of the retardant, it tends to dissolve in water more quickly than the thickener and it has been found that the overly high viscosity is avoided. According to this method, the water may be added to a fire retardant composition comprising fire retardant and thickener, or such fire retardant composition and water may be introduced simultaneously to a mixing chamber. However, slow addition of fire retardant composition to a large volume of water, results, at some point during the mixing process, in a

retardant composition concentration which exhibits an inconveniently high viscosity.

The preferred techniques, particularly when carried out with agitation of the mixture, avoid not only the high viscosity range of fire retardant concentration, but also such problems as the formation of clumps in the mixture. Thus, in practice, the concentrate may be prepared by mixing dry solid, particulate fire retardant with water until the desired concentration is reached, and then mixing the resulting retardant solution with a "premix" comprising thickener and other additives. Similarly, a very highly concentrated thickener-free aqueous retardant solution may be mixed with premix. If the resultant fire retardant concentration is higher than desired in the concentrate, water may be added to achieve the proper retardant concentration for the concentrate of this invention.

The concentrate of this invention can be stored in a tank near the site of potential wildland fires. The tank may be equipped either with a small pump to recirculate the concentrate or with a slow agitator to maintain the homogeneity of the concentrate. Another method of maintaining the homogeneity might be to thicken the concentrate by adding a relatively small amount of a second thickener that would be more effective in the concentrate than the original thickener. Or, if desired, the concentrate may be diluted well in advance of any fire to form the expanded fire control retardant. The mixture may then be stored in its expanded form. Upon dilution of the concentrate, the fire retardant solution as employed in

control of fire ordinarily contains between about 5% and about 20% by weight fire retardant and between about 0.2% and about 3.0% by weight thickener.

5 Any of a number of techniques may be used to expand the concentrate for use as a fire control retardant. For example, the concentrate may be diluted in a holding tank. Alternatively, the concentrate and water may be introduced from separate feed lines into a common conduit wherein mixing takes place. Advantage-
10 ously, the resultant fire retardant solution may be discharged directly from the mixing conduit into a delivery tank inside the delivery vehicle. Regardless of the method of expanding the concentrate, it has been found that less meticulous metering of ingredients is
15 necessary than in the conventional process of diluting a powdered fire retardant composition directly to a full volume fire retardant solution. However, to ensure and preserve homogeneity, it has been found that either some degree of agitation or circulation of the
20 concentrate before the dilution process or some degree of agitation or circulation of the expanding mixture during the dilution process is desired.

Other advantages derived from the practice of this invention will become apparent from the following
25 description and examples:

EXAMPLE 1

A sample of typical commercially available low viscosity, diammonium phosphate (DAP) based fire retardant concentrate (retardant composition with relatively low thickener concentration useful for dilution with water to produce a helicopter deliverable fire retardant solution) of viscosity between about 50 cps and about 250 cps was mixed with water to form a 16.1% by weight mixture. The viscosity of the mixture was measured and found to be 70 centipoise (cps). Another sample of the same low viscosity, high proportion DAP fire retardant composition was mixed with water to form a 40% by weight concentrate. The viscosity of the solution measured 10 minutes after mixing of this concentrate was measured with a Brookfield viscometer operating at 60 rpm and was found to be about 22 cps. A portion of the concentrate was then diluted with tap water to form a mixture comprising 16.1% by weight solids derived from the composition. The 10 minute viscosity of this mixture was found to be about 112 cps. The viscosity of the remaining concentrate remained 22 cps when measured at a later time.

EXAMPLE 2

Nine samples (labeled a through i) of various weights of high viscosity, dry, high proportion DAP fire retardant composition were measured and each sample was added rapidly to water (each sample added to 350 ml) with rapid agitation. The resulting mixtures were stirred for five minutes after addition of the samples. The mixtures then sat undisturbed for five

minutes. The viscosity of each mixture was then determined with a Brookfield viscometer operating at 60 rpm using a No. 4 spindle.

5 Three more mixtures were prepared as above, but instead of the high viscosity, high proportion DAP fire retardant composition, the following compositions were used. For mixture j, the composition comprised the following:

- 10 (1) monoammonium phosphate (N/P ratio of 1.0 to 1.05) (204.6 gm)
- (2) gum thickener (hydroxypropyl guar gum derivative) (18.1 gm)
- (3) premix (10.6 gm) containing by weight:
- 15 44.4% tricalcium phosphate
- 6.7% mercaptobenzothiazole
- 4.4% sodium molybdate
- 22.2% iron oxide
- 22.3% thiourea

For mixture l, the composition comprised the following:

- 20 (1) monoammonium phosphate (N/P ratio of 1.0 to 1.05) (306.95 gm)
- (2) hydroxypropyl guar derivative (27.1 gm)
- (3) premix (15.9 gm) of the above proportions.

25 For mixture k, the composition comprised the following:

- (1) diammonium sulfate (306.95 gm)
- (2) hydroxypropyl guar derivative (27.1 gm)
- (3) premix (15.9 gm) of the above proportions.

The following results were obtained:

	<u>Sample</u>	<u>Concentration of dry composition (% by weight)</u>	<u>Weight of dry composition (gm. in 350 ml)</u>	<u>10 min. viscosity (cps)</u>
5	a (DAP)	12.0	47.9	1863
	b (DAP)	13.1	52.7	2040
	c (DAP)	17.0	71.8	4203
	d (DAP)	25.5	119.8	8473
	e (DAP)	30.0	150.0	350
10	f (DAP)	40.0	237	113
	g (DAP)	50.0	350.0	less than 50
	h (DAP)	60.0	525.0	less than 50
	i (DAP)	70.0	816.7	167
	j (MAP)	40.0	233.3	above 10,000
15	k (MAP)	50.0	350.0	could not mix
	l (DAS)	50.0	350.0	about 100

EXAMPLE 3

The mixtures of Example 2 were stored in tightly capped jars for about forty hours. Then a sample of each mixture was diluted with some agitation to a 12% solution as might be used in fire control. The viscosity of each diluted mixture was measured by the procedure of Example 1 with the following results (the 40 hr. visc. is the viscosity of the mixture before dilution to a 12% solution, but after sitting for forty hours; the 10 min. visc. is the viscosity ten minutes after dilution; and the 2 hr. visc. is the viscosity two hours after dilution):

	Sample	Sample mixture wgt. (gm)	Diluting water wgt. (gm.)	40 hr. visc. (cps)	10 min. visc. (cps)	2 hr. visc. (cps)
	a (DAP)			1760		
5	b (DAP)	201.4	17.5	2050	1575	1567
	c (DAP)	210.9	87.3	4346	1617	1637
	d (DAP)	187.8	210.1	9590	1547	1527
	e (DAP)	159.7	238.2	1307	1587	1635
	f (DAP)	119.8	278.1	120	1718	1783
10	g (DAP)	95.8	302.1	below 50	1925	2010
	h (DAP)	79.8	318.1	below 50	1975	2032
	i (DAP)	68.4	329.5	below 50	2937	3060
	j (MAP)			solid		
	k (MAP)			solid		
15	l (DAS)	95.8	302.1	below 50	2377	2415

Sample i was rerun with the dilution performed without agitation. The concentrate was stirred into water and the resulting mixture sat for ten minutes. The viscosity ten minutes after dilution was found to be 1847

20 cps, and the viscosity two hours after dilution was found to be 2040 cps. Sample i was again rerun with the dilution performed with agitation. The viscosity ten minutes after dilution was found to be 1718 cps, and the viscosity two hours after dilution was found to be 1833 cps.

EXAMPLE 4

Four fire control concentrates, A, B, C and D, were prepared. Concentrate A was prepared by dissolving dry powder MAP (1047.5 lbs.) and dry powder DAP (698.5 lbs.) in water (2660 lbs.) and then adding a blended dry premix (254.0 lbs.) consisting of by weight of total premix:

57.2% colloid thickener (a polysaccharide
guar gum)

16.4% tricalcium phosphate

2.3% mercaptobenzothiazole

5 1.5% sodium molybdate

5.7% dimercaptothiadiazone

3.7% sodium silicofluoride

12.1% fugitive color

10 1% polyalkylene derivatives of propylene
glycol

Concentrate B was prepared in the same manner, except
that less water (2283 lbs. as opposed to 2660 lbs.) was
used.

Concentrate C was prepared by dissolving dry
15 powder MAP (1069.6 lbs.) and dry powder DAP (713.5
lbs.) in water (2760 lbs.) and then adding a blended
dry premix (217.0 lbs.) consisting of by weight:

68.5% colloid thickener

2.8% mercaptobenzothiazole

20 1.8% sodium molybdate

6.8% dimercaptothiadiazone

4.4% sodium silicofluoride

14.5% fugitive color

25 1.4% polyalkylene derivatives of propylene
glycol

Concentrate D was prepared in the same manner, except
that less water (2375 lbs. as opposed to 2760 lbs.) was
used.

The concentrates were stirred or shaken to
30 increase the homogeneity, and an aliquot sample was
withdrawn from each concentrate. Under agitation, each
sample was then diluted with water in the following

ratios in pounds of concentrate per pound of water: for A, 3.00; for B, 3.35; for C, 2.99; and for D, 3.34.

The composition of the concentrates and the diluted mixtures are shown in the following tables and compared to the corresponding exemplary requirements set forth by the government of Italy:

Concentrates

		<u>ITALY</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
Phosphate Content						
10	(% wgt)	min. 21.6	21.6	23.5	21.6	23.5
Viscosity (cps						
	at 20°C)	max. 2000	19	22	20	22
Viscosity (cps						
	at 5°C)	max. 2000	24	26	24	25
15	Density (gm/cm ³)	1.15-1.35	1.25	1.26	1.24	1.26
	Iron oxide (% wgt)	0.4-0.8	0	0	0	0
Pouring Time (%)						
	at 40°C)	min. 97	-	99.5	-	99.6
Pouring Time (%)						
20	at 5 °C)	min. 95	-	98.5	-	98.9

Diluted Mixtures

		<u>ITALY</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
Phosphate Content						
	(% wgt)	min. 5.4	5.4	5.4	5.4	5.4
25	Viscosity (cps					
	at 20°C)	1000-2000	1606	1563	1580	1581
Viscosity (cps						
	at 5°C)	-	Pass	Pass	Pass	Pass
	Density (gm/cm ³)	1.05-1.10	1.06	.06	1.06	1.06
30	Solution pH	6.0-8.0	6.0	6.0	6.0	6.0
	Stability at 20°C	*	Pass	Pass	Pass	Pass

*Appearance only; absence of crystals or visible separation in 48 hours.

The viscosity stability of the concentrates was also measured. Each of the concentrates were separated into samples, one sample stored at 40°F, one at 72°F and one at 90°F. The 10 minute viscosity was measured with a number two spindle at various times and the results are shown in the following table:

		Viscosity (in cps) after storage for:				
Conc.	Temp.	10 min.	24 hrs.	7 days	30 days	150 days
10	A 41	24	25	25	24	26
	A 72	24	31	19	19	19
	A 90	24	18	19	22	22
	B 41	27	29	25	26	28
	B 72	27	31	20	22	22
	B 90	27	20	20	20	20
15	C 41	25	28	22	24	27
	C 72	25	20	18	20	20
	C 90	25	18	19	18	18
	D 41	25	27	25	25	27
	D 72	25	20	19	22	21
	D 90	25	20	19	17	17

Samples of concentrates B and D were stored at 74°F for various lengths of time and then were diluted to fire control application strength. The viscosities measured for these mixtures and the percentage of viscosity lost from that found for the mixture made from concentrate stored only 10 minutes were as follows:

		From Concentrate B		From Concentrate D	
Storage Time		Viscosity(cps)	% Lost	Viscosity(cps)	% Lost
30	10 min.	1606	-	1616	-
	27 days	1563	3	1450	10
	42 days	1580	2	1640	gain 1
	150 days	1581	2	1403	13
	150 days				
35	(repeat)	1431	11	1442	11

EXAMPLE 5

Concentrated thickener-free, high DAP concentration fire retardant solution was obtained and analyzed. The solution was of low quality grade (i.e.,
5 high concentration of impurities), cloudy and yellowish, had a pH of 6.95, a phosphate (in the form of P_2O_5) concentration of 19.71% by weight and a ferrous ion content of 0.070% by weight. Hydroxypropyl guar thickener (6 gm.) was added to a sample (200 gm.)
10 of the solution to produce a suspension exhibiting a viscosity of 40 centipoise. Dilution of the suspension by addition of enough water to lower the phosphate ion concentration to 5.46% by weight produced a thickened mixture, but the results were not consistently repro-
15 ducible. It is believed that the inconsistent results are attributable to inadequate thickener dispersion. In addition, it was found that the viscosity of the diluted mixture dropped from 1000 or 1500 cps to 100 or 200 cps within a few days. It is believed that this
20 viscosity instability is caused by the high ferrous ion content of the thickener-free solution sample.

A second sample (97.3 gm.) of the low quality grade thickener-free solution was mixed with water (247.6 gm.) and a premix comprising gum thickener
25 (3.165 gm.), sodium silicofluoride (0.95 gm.), sodium thiosulfate (0.316 gm.), mercaptobenzothiazole (0.127 gm.), fugitive color (0.675 gm.), tricalcium phosphate (0.844 gm.) and antifoaming agent (0.063 gm.) to form Mixture 1. Another sample was neutralized by adding
30 aqueous ammonia (about 1.4% by weight) to increase the pH to 7.9. The neutralized sample (100 gm.) was mixed with water (244.9 gm.) and the same amount of premix as

used to make Mixture 1. The resulting mixture was labeled Mixture 2. The viscosities of the two mixtures were measured with Brookfield Viscometer Model LVF at 60 rpm and spindle number 4 at various times after dilution and the results were as follows:

	<u>Time after dilution</u>	<u>Viscosity (cps) of:</u>	
		<u>Mixture 1</u>	<u>Mixture 2</u>
10	10 minutes	1633	1480
	1 day	1570	1570
	2 days	1300	1523
	7 days	670	1380
	16 days	270	1203

Thus, it appears that neutralization may reduce the observed instability.

Two more samples, A and B, of the thickener-free fire retardant solution were obtained. The pH of one sample, Sample A, was increased to 8.0 by bubbling anhydrous NH_3 into the liquid with agitation. Each sample was mixed with a premix to form a sample containing the fire retardant solution (94.84% by weight), gum thickener (3.09% by weight), sodium silicofluoride (0.93% by weight), sodium thiosulfate (0.31% by weight), mercaptobenzothiazole (0.12% by weight), fugitive color (0.66% by weight) and antifoam (0.05% by weight). Sample A was separated into Samples A-1, A-2 and A-3. To Sample A-2 was added $\text{Na}_4\text{Fe}(\text{CN})_6$ to produce a concentrate containing 1.41% by weight $\text{Na}_4\text{Fe}(\text{CN})_6$. To Sample A-3 was added $\text{Na}_4\text{Fe}(\text{CN})_6$ to produce a concentrate containing 4.23% by weight $\text{Na}_4\text{Fe}(\text{CN})_6$. The viscosity of the concentrates was measured periodically. The results are shown in the following table:

		Viscosity (cps)			
	<u>Time after prep'n</u>	<u>A-1</u>	<u>A-2</u>	<u>A-3</u>	<u>B</u>
	10 minutes	53	53	53	53
	3 days	50	47	50	50
5	11 days	97	100	97	67

The pH of each sample was measured after 12 days. All Sample A concentrates had a pH of 7.5, while the Sample B concentrate had a pH of 6.95.

Samples from each of the concentrates were obtained periodically after preparation of the concentrates. These samples were diluted and the 10 minute viscosity measured. The results were as follows:

		Viscosity (cps)			
	<u>Length of Conc. Storage</u>	<u>A-1</u>	<u>A-2</u>	<u>A-3</u>	<u>B</u>
15	0.5 hour	1890	1373	1400	1503
	3 days	1833	1407	1300	1430
	11 days	1763	1367	1327	1327
	% of viscosity lost:	6.7	0.4	5.2	11.7

When the diluted solutions were stored for 12 days, it was found that the diluted solution from Sample A-1 lost 14.3% of its viscosity, the diluted solution from Sample A-2 lost 10.4% of its viscosity, the diluted solution from Sample A-3 gained 6.2% of its viscosity, and the diluted solution from Sample B lost 70.6% of its viscosity.

EXAMPLE 6

In experiments conducted to investigate methods of ameliorating the effects of the impurities in the thickener-free fire retardant concentrates, a

sample (10 quart) of the low quality grade thickener-free concentrate as described in Example 5 was divided into 19 aliquots (418.9 gm. each). Some of the aliquots were treated with ammonium hydroxide until a
5 desired pH was obtained. Hydrogen peroxide (71.7 ml. of 3% solution) was added to some of the aliquots, and the aliquots left to set for one hour. Distilled water was added to all the aliquots to increase the total weight of each aliquot to 475.4 grams. Then premix
10 (24.3 g.), containing thickener (15.00 gm.), fugitive color (2.70 gm.), mercaptobenzothiazole (0.60 gm.), sodium silicofluoride (4.50 gm.) and sodium thiosulfate (1.50 gm.) plus other additives as shown in the tables below, and polyalkylene derivative of propylene glycol
15 were added to each aliquot. After mixing, the 10 minute viscosity of each aliquot was measured. Then, the aliquots were homogenized by agitation and a portion (120 gm.) of each aliquot was removed and stored. Five minutes after the viscosity measurement, distilled
20 water (276.9 gm.) was added to each aliquot and the 10 minute viscosity of the diluted aliquots was measured. The stored aliquot portions as well as the diluted aliquots were monitored for viscosity stability. Periodically, samples of the stored aliquot portions
25 were diluted and the 10 minute viscosities measured. The results are shown in tables I, II and III.

TABLE I

Additives (% in solution)						Viscosity of Concentrate After:					
I.D. #	Sodium Molyb- date	Thiourea	Sodium Ferrocy- anide	Hydro- gen Perox- ide	NH ₃ to change pH	pH of Final Liquor	10 Minutes	7 Days	31 Days	45 Days	60 Days
1	0	0	0	0	No	6.4	47	40	40	-	47
2	0	0	0	0	Yes	6.8	90	77	60	-	70
3	0	0	0	0	Yes	7.0	60	97	20	-	67
4	0	0	0	0	Yes	7.2	100	123	60	-	60
5	0	0	0	0	Yes	7.5	120	140	90	-	80
6	0.06	0.31	0	0	No	6.4	40	30	30	80	-
7	0.06	0.31	0	0	Yes	7.0	60	100	60	90	-
8	0	0.06	0	0	Yes	7.0	50	103	80	-	103
9	0	0.12	0	0	Yes	7.0	50	117	60	-	103
10	0	0.25	0	0	Yes	7.0	95	107	90	-	53
11	0	0.50	0	0	Yes	7.0	80	-	60	-	57
12	0	0	0.06	0	Yes	7.0	75	110	75	-	80
13	0	0	0.12	0	Yes	7.0	60	110	60	-	100
14	0	0	0.25	0	Yes	7.0	70	83	45	-	57
15	0	0	0	0.25	No	6.4	75	30	-	-	-
16	0	0	0	0.25	Yes	7.0	110	80	-	-	-
17	0	0.12	0	0.25	Yes	7.0	175	60	-	-	-
18	0	0	0.12	0.25	Yes	7.0	50	90	-	-	-
19	-Same as #1 except Galactosol 211 is used as thickener instead of E9				No	6.4	50	107	60	-	70

35

43-21(6917)A

TABLE II

Additives (% in solution)							Viscosity of:					Percent Change				
I.D. #	Sodium Molybdate	Thiourea	Sodium Ferrocyanide	Hydrogen Peroxide	NH to change pH	pH of final L ² g-uor	Initial Concentrate	Diluted Solution, Dilution after:					Zero to 7 Days	7 Days to 31 Days	31 Days to Final	Zero to Final
								Zero Time	7 Days	31 Days	45 Days	60 Days				
1	0	0	0	0	No	6.4	47	1637	1413	967	-	600	-14	-32	-38	-63
2	0	0	0	0	Yes	6.8	90	1637	1500	1316	-	897	-8	-12	-32	-45
3	0	0	0	0	Yes	7.0	60	1637	1440	1297	-	900	-12	-10	-31	-45
4	0	0	0	0	Yes	7.2	100	1637	1417	1117	-	823	-13	-21	-26	-50
5	0	0	0	0	Yes	7.5	120	1637	1320	1095	-	873	-19	-17	-20	-47
6	0.06	-0.31	0	0	No	6.4	40	1637	1440	1348	997	-	-12	-6	-26	-39
7	0.06	0.31	0	0	Yes	7.0	60	1637	1447	1380	827	-	-12	-5	-40	-49
8	0	0.06	0	0	Yes	7.0	50	1637	1113	880	-	700	-32	-21	-20	-57
9	0	0.12	0	0	Yes	7.0	50	1637	1187	990	-	690	-27	-17	-30	-58
10	0	0.25	0	0	Yes	7.0	95	1637	1060	890	-	643	-35	-16	-28	-61
11	0	0.50	0	0	Yes	7.0	80	1637	-	1250	-	973	-	-	-22	-41
12	0	0	0.06	0	Yes	7.0	75	1637	1310	977	-	807	-20	-25	-17	-51
13	0	0	0.12	0	Yes	7.0	60	1637	1490	1238	-	890	-9	-17	-28	-46
14	0	0	0.25	0	Yes	7.0	70	1637	1280	1128	-	1010	-22	-12	-10	-38
15	0	0	0	0.25	No	6.4	75	1637	276	-	-	-	-83	-	-	-
16	0	0	0	0.25	Yes	7.0	110	1637	688	-	-	-	-58	-	-	-
17	0	0.12	0	0.25	Yes	7.0	175	1637	823	-	-	-	-50	-	-	-
18	0	0	0.12	0.25	Yes	7.0	50	1637	940	-	-	-	-43	-	-	-
19	-same as #1 except galactosol 211 is used as thickener instead of E9					6.4	50	1637	1073	898	-	633	+13	-16	-30	-34

Viscosity is measured with Brookfield Viscometer LVF with Spindle #4 @ 74°F.

Dilution of LC is 80 gms LC + 186.1 gms distilled H₂O which results in a solution equivalent to XAF in concentration.

TABLE III

I.D. #	Sodium Molybdate	Thiourea	Sodium Ferro-cyanide	NH to change pH	pH of Final Solution	Initial Viscosity	Viscosity Stability of the Diluted Solutions for Which the Dilutions Were After 7 Days					Viscosity Stability of the 31 Day Dilutions				
							Viscosity (in cps):			Percent Change		Viscosity (in cps):			Percent Change	
							10	24	3	10 Minutes to:		10	24	3	10 Minutes to:	
							Minutes	Hours	Days	24 Hr	3 Days	Minutes	Hours	Days	24 Hr	3 Days
1	0	0	0	No	6.4	1637	1413	860	492	-39	-65	967	610	317	-37	-67
2	0	0	0	Yes	6.8	1637	1500	1097	726	-27	-52	1316	813	520	-38	-60
3	0	0	0	Yes	7.0	1637	1440	1143	855	-21	-41	1297	867	593	-33	-54
4	0	0	0	Yes	7.2	1637	1417	1240	995	-12	-30	1117	860	703	-23	-37
5	0	0	0	Yes	7.5	1637	1320	1270	1120	-4	-15	1095	967	870	-12	-21
6	0.06	0.31	0	No	6.4	1637	1440	1260	-	-13	-	1348	-	-	-	-
7	0.06	0.31	0	Yes	7.0	1637	1447	1353	-	-6	-	1380	-	-	-	-
8	0	0.06	0	Yes	7.0	1637	1113	973	803	-13	-28	880	723	557	-18	-37
9	0	0.12	0	Yes	7.0	1637	1187	1053	895	-11	-25	990	820	660	-17	-33
10	0	0.25	0	Yes	7.0	1637	1060	1000	873	-6	-18	890	740	627	-17	-30
11	0	0.50	0	Yes	7.0	1637	-	-	-	-	-	1250	1166	940	-7	-25
12	0	0	0.06	Yes	7.0	1637	1310	1020	705	-22	-46	977	707	477	-28	-51
13	0	0	0.12	Yes	7.0	1637	1480	1217	850	-18	-43	1238	940	-	-24	-
14	0	0	0.25	Yes	7.0	1637	1280	1180	932	-8	-27	1128	1070	-	-5	-
19	Same as #1 except Galatol-211 is used as thickener instead of E9					6.4	952	1073	870	557	-19	-43	898	710	-	-21

(1) The samples evaluating hydrogen peroxide effect are eliminated as no viscosity stability data was taken.

EXAMPLE 7

Two thickener-free, low quality liquid concentrate samples were obtained. One of the samples was filtered in an effort to eliminate impurities. Analysis of the unfiltered sample (Sample 1) indicated that it contained by weight 23.59% P_2O_5 , 8.77% NH_3 , 2.47% SO_4 and 100 ppm Fe^{+2} , had a pH of 6.50, had a specific gravity of 1.292 kilograms per liter and had a nitrogen to phosphorus molar ratio of 1.55. Analysis of the filtered sample (Sample 2) indicated that it contained by weight 23.39% P_2O_5 , 8.42% NH_3 , 1.23% SO_4 and 89 ppm Fe^{+2} , had a pH of 6.38, had a specific gravity of 1.266 kilograms per liter and had a nitrogen to phosphorus molar ratio of 1.50. The analyses, therefore, indicated that the samples were about 40% by weight mono and diammonium phosphate in 1:1 molar ratio. The unfiltered sample was greenish brown, the filtered sample was yellow and both samples contained considerable quantities of fine, nearly colloidal insolubles. It appeared that the samples were prepared from wet-acid grade phosphoric acid.

A third sample (Sample 3) was prepared by dissolving dry solid, particulate DAP (1 kg.) in distilled water (1.34 liters). The third sample contained 23.13% by weight P_2O_5 and had a pH of 6.80.

The samples were each diluted and mixed with other components to adjust the complete liquid concentrate formulation to a 40% solids containing solution of 18.53% P_2O_5 , thereby forming mixtures of the following contents (concentrations shown in weight percent):

<u>Component</u>		<u>Adjusted Sample 1</u>	<u>Adjusted Sample 2</u>	<u>Adjusted Sample 3</u>
Sample		80.67	80.11	80.11
Added Water		14.29	14.85	14.85
5	Hydroxypropyl guar	3.06	3.06	3.06
	Sodium silicofluoride	0.92	0.92	0.92
	Sodium thiosulfate	0.31	0.31	0.31
	Thiotax MBT	0.12	0.12	0.12
	Fugitive Color	0.55	0.55	0.55
10	Pluronic	0.08	0.08	0.08

To study various methods of ameliorating the deleterious effects of impurities, further samples were prepared by adding ammonia to aliquots of the above
 15 samples to adjust the pH to the levels indicated in the tables below.

All samples were stored for 531 days at 23.3°C. Periodically during the first 74 days the samples were stirred to assure homogeneity and an
 20 aliquot removed and diluted to end-use concentration by mixing the aliquot (80 gm.) with water (191 gm.) and stirring for five minutes. The viscosity of the diluted samples was measured ten minutes and 24 hours after dilution. Viscosity was determined at ambient
 25 temperature with a Model LVF Brockfield viscometer fitted with a No. 4 spindle rotating at 60 rpm. A final dilution and viscosity measurement was made 513 days after initial preparation of the sample. The following table illustrates the viscosity measured for
 30 the undiluted samples over time:

<u>Sample</u>		<u>Sample Viscosity (cps) after storage for (days):</u>						
		<u>pH</u>	<u>0</u>	<u>1</u>	<u>12</u>	<u>25</u>	<u>47</u>	<u>74</u>
Unfiltered		6.6	130	47	97	80	100	87
Unfiltered		7.1	128	80	103	100	132	115
35	Filtered	6.4	53	200	153	103	128	90
Filtered		6.9	73	130	150	90	117	97
#3 (DAP)		7.8	80	130	130	80	130	110
								below 100
								below 100
								below 100
								below 100

The following table illustrates the 10 minute viscosity of the aliquots removed from the above described concentrates and diluted to a final end use concentration.

5	Sample Viscosity cps) after storage for								
	(days):								
	Sample	pH	0	1	12	25	47	74	513
	Unfiltered	6.6	1550	1523	1610	1201	940	864	547
	Unfiltered	7.1	1550	1607	1433	1270	1127	970	690
10	Filtered	6.4	1543	1393	1243	1055	850	605	340
	Filtered	6.9	1543	1477	1323	1032	1008	827	550
	#3 (DAP)	7.8	1570	1583	1607	1544	1485	1450	1190

In view of the above, it will be seen that the several objects of the invention are achieved and other advantageous results attained.

The matter contained in each of the following claims is to be read as part of the general description of the present invention.

The claims defining the invention are as follows:

1. An aqueous concentrate adapted to be diluted with water and used in fire control, said concentrate exhibiting a viscosity of less than 3000 centipoise, a concentration of from 0.75% to 6% by weight of a thickening agent, and a concentration of at least 24% by weight solids derived from a fire retardant selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

2. The aqueous concentrate of Claim 1 wherein the concentration of solids derived from the fire retardant comprises at most 75% by weight of total concentrate.

3. The aqueous concentrate of Claim 1 or 2 wherein the viscosity is not greater than 350 centipoise.

4. The aqueous concentrate of any one of Claims 1 to 3 wherein the thickening agent is a gum thickener.

5. The aqueous concentrate of Claim 4 wherein the gum thickener is a guar gum composition.

6. The aqueous concentrate of any one of Claims 1 to 5 wherein the aqueous concentrate further comprises a corrosion inhibitor.



7. The aqueous concentrate of any one of Claims 1 to 6 wherein the aqueous concentrate further comprises a second thickening agent for maintaining or increasing homogeneity of the aqueous concentrate.

8. The aqueous concentrate of any one of Claims 1 to 7 wherein the aqueous concentrate is prepared by mixing with water a solid particulate fire retardant composition comprising said thickening agent and said fire retardant, said aqueous concentrate exhibiting a concentration of at least 30% by weight solids derived from the solid particulate fire retardant composition.

9. The aqueous concentrate of Claim 8 wherein the solid particulate fire retardant composition exhibits a concentration of solids derived from the fire retardant of from 85% to 95% by weight and a concentration of said thickening agent of from 2.5% to 7.5% by weight.

10. The aqueous concentrate of any one of Claims 1 to 9 which, upon dilution with sufficient water, forms a fire retardant mixture characterized by exhibiting a concentration of from 5% by weight to 20% by weight fire retardant and a viscosity of from 50 centipoise to 3000 centipoise.

11. The aqueous concentrate of Claim 10 wherein the fire retardant mixture exhibits a viscosity of from 1000 centipoise to 2000 centipoise.

12. An aqueous concentrate adapted to be diluted with water to yield an aqueous fire retardant mixture, said aqueous concentrate being characterized by exhibiting a



viscosity of less than 50 centipoise, a concentration of at least 0.75% by weight thickening agent, and a concentration of at least 24.0% by weight solids derived from a solid particulate fire retardant, the fire retardant in solid form exhibiting characteristics such that (1) when phosphate-based, phosphoric acid is released, when sulfate-based, sulfuric acid, is released, and when phosphate/sulfate-based, both phosphoric acid and sulfuric acid are released at a temperature below the ignition temperature of cellulose, and (2) upon being mixed with water and a thickening agent in a ratio of (i) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 1000 centipoise to 3000 centipoise, (ii) one part by weight of fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 50 centipoise to 250 centipoise, (iii) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 1000 centipoise, or (iv) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 50 centipoise, and said fire retardant mixture being characterized by exhibiting a viscosity of less than 2000 centipoise, a concentration of from 0.2% by weight to 3.0% by weight thickening agent, and a concentration of from 5.0% by weight to 2.0% by weight solids derived from the solid particulate fire retardant.



13. The aqueous concentrate of Claim 12 wherein the concentration of the thickening agent is at least 1.5% by weight and the resultant diluted fire retardant mixture exhibits a viscosity of from 1000 centipoise to 2000 centipoise.

14. The aqueous concentrate of Claim 12 wherein the concentration of the thickening agent is at least 0.75% by weight, but less than 1.5% by weight, and the resultant diluted fire retardant mixture exhibits a viscosity of from 50 centipoise to 250 centipoise.

15. The aqueous concentrate of any one of Claims 12 to 14 wherein the solid particulate fire retardant is selected from the group consisting of monoammonium orthophosphate, diammonium orthophosphate, monoammonium pyrophosphate, diammonium pyrophosphate, triammonium pyrophosphate, tetraammonium pyrophosphate, ammonium polyphosphate, substituted ammonium polyphosphate, amide polyphosphate, melamine polyphosphate, ammonium-alkali metal mixed salts of orthophosphate, ammonium-alkali metal mixed salts of pyrophosphate, ammonium-alkali metal mixed salts of polyphosphate, ammonium-alkaline earth metal mixed salts of pyrophosphate, ammonium-alkaline earth metal mixed salts of polyphosphate, ammonium sulfate, and polyammonium phosphate, and blends thereof, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

16. The aqueous concentrate of any one of Claims 12 to 15 wherein the solid particulate fire retardant is in admixture with water in the form of a liquid concentrate.



17. The aqueous concentrate of Claim 16 wherein the liquid concentrate fire retardant is liquid polyammonium phosphate.

18. A method for preparing an aqueous concentrate that is adapted to be diluted with water and used in fire control, the method comprising:

(a) mixing a solid particulate fire retardant with
5 a thickening agent in an amount sufficient to produce a solid particulate fire retardant composition containing from 85% by weight to 95% by weight of the fire retardant and from 0.75% by weight to 7.5% by weight of the thickening agent, the fire retardant in solid form exhibiting characteristics such that (1) when phosphate-based, phosphoric acid is released, when sulfate-based, sulfuric acid is released, and when phosphate/sulfate-based, both phosphoric acid and sulfuric acid are released at a
15 temperature below the ignition temperature of cellulose, and (2) upon being mixed with water and the thickening agent in a ratio of (i) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which
20 exhibits a viscosity of from 1000 centipoise to 3000 centipoise; (ii) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which
25 exhibits a viscosity of from 50 centipoise to 250 centipoise, (iii) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than
30 1000 centipoise, or (iv) one part by weight of the fire



retardant, less than 4 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 50 centipoise; and

35 (b) mixing the fire retardant composition from Step (a) with water to yield the aqueous concentrate characterized by exhibiting a concentration of solids derived from the fire retardant of at least 30% by weight of the total aqueous concentrate, with the proviso that the
40 mixing is carried out in a manner such that the fire retardant composition in the aqueous phase is maintained at a concentration greater than 30% by weight throughout the Step (b) mixing process.

19. The method of Claim 18 wherein the fire retardant composition contains from 2.5% by weight to 7.5% by weight of the thickening agent and the aqueous concentrate is characterized by exhibiting a viscosity of less than 2000
5 centipoise.

20. The method of Claim 18 wherein the fire retardant composition contains from 0.75% by weight to 3.0% by weight of the thickening agent and the aqueous concentrate is characterized by exhibiting a viscosity of less than 50
5 centipoise.

21. The method of any one of Claims 18 to 20 wherein the solid particulate fire retardant is selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium
5 sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen-to-phosphorus



ratio of at least 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

22. The method of any one of Claims 18 to 21 wherein the aqueous concentrate is further mixed with ammonia.

23. A method for preparing an aqueous concentrate that is adapted to be diluted with water and used in fire control, the method comprising:

(a) mixing a solid particulate fire retardant with water in an amount sufficient to produce an aqueous fire retardant solution containing at least 24% by weight solids derived from the fire retardant, the fire retardant in solid form exhibiting characteristics such that (1) when phosphate-based, phosphoric acid is released, when sulfate-based, sulfuric acid, is released, and when phosphate/sulfate-based, both phosphoric acid and sulfuric acid are released at a temperature below the ignition temperature of cellulose, and (2) upon being mixed with water and a thickening agent in a ratio of (i) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 1000 centipoise to 3000 centipoise, (ii) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 50 centipoise to 250



centipoise, (iii) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 1000 centipoise, or (iv) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 50 centipoise; and

(b) mixing the aqueous fire retardant solution from Step (a) with the thickening agent to yield the aqueous concentrate characterized by exhibiting a concentration of solids derived from the fire retardant of at least 24% by weight and a concentration of the thickening agent of from 0.75% by weight to 7.5% by weight.

24. The method of Claim 23 wherein the fire retardant composition contains from 2.5% by weight to 7.5% by weight of the thickening agent and the aqueous concentrate is characterized by exhibiting a viscosity of less than 2000 centipoise.

25. The method of Claim 23 wherein the fire retardant composition contains from 0.75% by weight to 3.0% by weight of the thickening agent and the aqueous concentrate is characterized by exhibiting a viscosity of less than 50 centipoise.

26. The method of any one of Claims 23 to 25 wherein the solid particulate fire retardant is selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium



10 phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

27. The method of any one of Claims 23 to 26 wherein the mixing of solid particulate fire retardant and the thickening agent with water is carried out in a manner such that the solids derived from the fire retardant is
5 maintained in the aqueous phase at a concentration greater than 24% by weight throughout the mixing process.

28. The method of any one of Claims 23 to 27 wherein the solid particulate fire retardant and the thickening agent are mixed simultaneously with the water.

29. The method of any one of Claims 23 to 27 wherein the solid particulate fire retardant is initially mixed with the water and subsequently mixed with the thickening agent.

30. A method for preparing an aqueous fire retardant mixture suitable for use in fire control, the method comprising:

5 (a) mixing a solid particulate fire retardant and a thickening agent with water in amounts sufficient to produce an aqueous fire retardant concentrate characterized by exhibiting a viscosity of less than 2000 centipoise, a concentration of solids derived from the fire retardant of



at least 24% by weight, and a concentration of the thickening agent of from 0.75% by weight to 7.5% by weight, the fire retardant in solid form exhibiting characteristics such that (1) when phosphate-based, phosphoric acid is released, when sulfate-based, sulfuric acid is released, and when phosphate/sulfate-based, both phosphoric acid and sulfuric acid are released at a temperature below the ignition temperature of cellulose, and (2) upon being mixed with water and the thickening agent in a ratio of (i) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.055 parts by weight to about 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 1000 centipoise to 3000 centipoise, (ii) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 50 centipoise to 250 centipoise, (iii) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 1000 centipoise, or (iv) one part by weight of the fire retardant, less than 4 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of less than 50 centipoise; and

(b) mixing the aqueous concentrate from Step (a) with water in an amount sufficient to yield the aqueous fire retardant mixture characterized by exhibiting a viscosity of less than 2000 centipoise, a concentration of solids derived from the fire retardant of from 5% by weight to 20% by weight, and a concentration of the thickening agent of from 0.2% by weight to 3.0% by weight.



31. The method of Claim 30 wherein the concentration of the thickening agent in the aqueous concentrate is from 2.5% by weight to 7.5% by weight.

32. The method of Claim 30 wherein the fire retardant composition contains from 0.75% by weight to 3.0% by weight of the thickening agent.

33. The method of any one of Claims 30 to 32 wherein the solid particulate fire retardant is selected from the group consisting of diammonium phosphate, diammonium sulfate, a blend of diammonium phosphate and diammonium sulfate, a blend of monoammonium phosphate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, a blend of monoammonium phosphate, diammonium sulfate and diammonium phosphate having a nitrogen-to-phosphorus ratio of at least 1.25, and polyammonium phosphate, with the proviso that when polyammonium phosphate is the fire retardant component, it is admixed with at least one additional fire retardant component in an amount sufficient to provide the solids % by weight concentration derived from the fire retardant.

34. The method of any one of Claims 30 to 33 wherein the mixing of the solid particulate fire retardant and the thickening agent with water is carried out in a manner such that the solids derived from the fire retardant is maintained in the aqueous phase at a concentration greater than 24% by weight throughout the mixing process.

35. The method of any one of Claims 30 to 34 wherein the solid particulate fire retardant and the thickening agent are mixed simultaneously with the water.

36. The method of any one of Claims 30 to 34 wherein the solid particulate fire retardant is initially mixed with the water and subsequently mixed with the thickening agent.

37. The method of any one of Claims 30 to 34 wherein the mixing of the aqueous concentrate with water is carried out by agitating the aqueous concentrate prior to the mixing with water.

38. A method for controlling fires comprising the steps of:

(a) mixing with water an aqueous concentrate adapted to be diluted with water and used in fire control, said concentrate exhibiting a viscosity of less than 3000 centipoise and containing at least 0.75% by weight of a thickening agent and at least 24% by weight solids derived from a solid particulate fire retardant, the fire retardant in solid form exhibiting characteristics such that (1) when phosphate-based, phosphoric acid is released, when sulfate-based, sulfuric acid is released, and when phosphate/sulfate-based, both phosphoric acid and sulfuric acid are released at a temperature below the ignition temperature of cellulose, and (2) upon being mixed with water and the thickening agent in a ratio of (i) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.055 parts by weight to 0.2 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 1000 centipoise to 3000 centipoise, (ii) one part by weight of the fire retardant, from 6 parts by weight to 20 parts by weight water, and from 0.02 parts by weight to 0.075 parts by weight of the thickening agent, an aqueous mixture is produced which exhibits a viscosity of from 50 centipoise to 250

25 centipoise, (iii) one part by weight of the fire retardant,
less than 4 parts by weight water, and from 0.055 parts by
weight to 0.2 parts by weight of the thickening agent, an
aqueous mixture is produced which exhibits a viscosity of
less than 1000 centipoise, or (iv) one part by weight of the
30 fire retardant, less than 4 parts by weight water, and from
0.02 parts by weight to 0.075 parts by weight of the
thickening agent, an aqueous mixture is produced which
exhibits a viscosity of less than 50 centipoise, to produce
a fire retardant mixture exhibiting a viscosity between 50
35 centipoise and 2000 centipoise; and

(b) releasing the fire retardant mixture from an
aircraft to form a fire break in front of an oncoming fire.

39. The method of Claim 38 wherein the solid
particulate fire retardant is selected from the group
consisting of diammonium phosphate, diammonium sulfate, a
blend of diammonium phosphate and diammonium sulfate, a
5 blend of monoammonium phosphate and diammonium phosphate
having a nitrogen-to-phosphorus ratio of at least 1.25, a
blend of monoammonium phosphate, diammonium sulfate and
diammonium phosphate having a nitrogen-to-phosphorus ratio
of at least 1.25, and polyammonium phosphate, with the
10 proviso that when polyammonium phosphate is the fire
retardant component, it is admixed with at least one
additional fire retardant component in an amount sufficient
to provide the solids percent by weight concentration
derived from the fire retardant.

40. The method of Claim 38 or 39 wherein the fire
retardant mixture exhibits a viscosity of from 1000
centipoise to 2000 centipoise.



41. The method of Claim 40 wherein the aircraft from which the fire retardant mixture is released is a fixed-wing aircraft.

42. The method of Claim 38 or 39 wherein the fire retardant mixture exhibits a viscosity of from 50 centipoise to 250 centipoise.

43. The method of Claim 42 wherein the aircraft from which the fire retardant mixture is released is a helicopter.

DATED this 30th day of March, A.D. 1990

MONSANTO COMPANY,
By its Patent Attorneys,
E. F. WELLINGTON & CO.,
By:

(B. S. Wellington)

