

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 November 2011 (10.11.2011)

PCT

(10) International Publication Number  
**WO 2011/139719 A2**

(51) International Patent Classification:  
G01N 11/08 (2006.01)

(21) International Application Number:  
PCT/US2011/034002

(22) International Filing Date:  
26 April 2011 (26.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/327,889 26 April 2010 (26.04.2010) US

(71) Applicant (for all designated States except US):  
RHEOSENSE, INC. [US/US]; 2694 Bishop Dr., Suite  
260, San Ramon, CA 94583 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BAEK, Seong-gi [US/  
US]; 4073 Nice Court, Pleasanton, CA 94588 (US).

(74) Agents: MALLINCKRODT, Robert, P. et al.; Thorpe  
North & Western, LLP, Po Box 1219, Sandy, UT  
84091-1219 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,  
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,  
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,  
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished  
upon receipt of that report (Rule 48.2(g))

(54) Title: PORTABLE VISCOMETER

(57) Abstract: A portable viscometer includes a pump mechanism which cooperates with a positive displacement sample container referred to as a positive displacement pipette, for dispensing, at a known flow rate, a sample of liquid for which viscosity is desired to be determined. The dispensed liquid flows through a flow through miniature viscosity sensor having at least two pressure sensors which measure the pressure drop of the liquid as it flows through a rectangular flow channel, the pressure drop at the known flow rate being proportional to the viscosity. A controller controls operation of the viscometer and processes sensor data, and the resulting measurements of viscosity can be displayed on a display. The positive displacement pipette is removably positioned in the viscometer so that it can be removed from the viscometer when a viscosity test is completed and replaced with another positive displacement pipette containing another liquid to be tested.



WO 2011/139719 A2

## PORTABLE VISCOMETER

### **BACKGROUND**

5        Field of the Invention: This invention is in the field of viscometers that measure viscosity of liquids utilizing a flow-through type viscosity sensor.

State of the art: Viscosity is a measure of resistance of liquid to flow and its value depends on the rate of deformation for Non-Newtonian liquids as described in Dynamics of Polymeric Liquids, Vol. 1, 1987, authored by R.B. Bird, R.C. Armstrong, and O. Hassager.

10      The rate of deformation is given by a shear rate in a unit of (time)<sup>-1</sup>. The viscosity measured at a known shear rate is “true” viscosity. The dependence of the true viscosity on shear rate is a viscosity curve which characterizes material and is an important factor to consider for efficient processing. However, in many cases, viscosity is measured under ill-defined test condition so that shear rate cannot be known or calculated. Under ill-defined conditions, the

15      measured viscosity value is only “apparent”. Since the true viscosity is measured at a known shear rate, the true viscosity is universal whereas the apparent viscosity is not. Instead, the apparent viscosity depends on the measuring system. For example, as a common practice, a torque of a spindle immersed in a sea of test liquid is measured while the spindle is being rotated at a constant speed. In this case the torque value only yields an apparent viscosity

20      since the test condition is ill-defined and a shear rate is not known. At best, the apparent viscosity can be measured as a function of the rotational speed of the spindle. The rotational speed of the spindle can be in fact correlated with the shear rate only if a “constitutive equation” for the test liquid is known. However, a “constitutive equation” is not known for almost all Non-Newtonian liquids. Therefore, true viscosity cannot be measured with ill-

25      defined test conditions for most non-Newtonian liquids.

Methods of viscosity measurement that give only apparent viscosities have been developed and used for quality controls in manufacturing and material characterization. Various on-line viscometers are designed for real time viscosity measurement. U.S. Patent Nos. 5,317,908 (Fitzgerald et al.) and 4,878,378 (Harada) are concerned with systems that measure apparent viscosities for process controls. U.S. Patent No. 6,393,898 (Hajduk et al.) describes a system that measures many test liquids simultaneously. These viscometers measure apparent viscosities. However, because of the non-universality of the apparent viscosity measurement, a correlation of the apparent viscosity of a specific sample measured with a specific method with the true viscosity has to be found separately when desired.

Fundamental development of formulations for materials requires the true viscosity measurement. Also the designs of processing equipments and accessories, such as dies, molds, extrusion screws, etc., require the true viscosity of the materials. However, the apparent viscosity measurement has been used for a quick test as an indication since it is easier and faster to measure and often more economical. The true viscosity is more difficult to get and can be only measured with a few types of instruments: rheometers and capillary viscometers. The rheometers impose a precise and known shear rate on test samples, thereby measuring true viscosities. The rheometers are versatile and usually equipped to also measure other properties. Therefore they are usually expensive. Further, large amounts of samples are usually required for viscosity measurement with a rheometer. Also, rheometers are not well suited for on-line applications. Circular capillary viscometers can measure apparent and true viscosities depending on whether a proper compensation is taken into account. The capillary viscometer needs a pressure drop measurement along the capillary for viscosity. Since the capillary is circular in cross-section, only pressure at the entrance and exit can be measured. Because of this limitation, the capillary viscometer measures only

apparent viscosity unless the entrance effect is corrected for by using two different capillaries with different length to diameter ratios. However, use of two capillaries makes the capillary viscometers bulky and/or time consuming. Capillary viscometers are described in Patent Nos. 6,575,019 (Larson); 4,920,787 (Dual et al.); 4,916,678 (Johnson et al.); and  
5 4,793,174 (Yau). Microfluidic viscometers are disclosed in Patent No. 6,681,616 (Michael Spaid et al.) and Publication No. 2003/0182991 (Michael Spaid et al.). Residence time of a marker in a fluidic channel is used to measure the viscosity, which is not a true viscosity unless the test liquid is Newtonian. Only an apparent viscosity is measured for non-Newtonian liquids. The portable viscometer disclosed in Patent No. 5,503,003 (Brookfield)  
10 utilizes a well known torque measurement of a spindle rotating in a sea of liquid for viscosity measurement. As indicated, and as is well known, this method only measures apparent viscosity.

In summary, most viscosity measurement techniques yield apparent viscosity and require relatively large volumes of sample. Also, these instruments require cleaning of the parts in  
15 contact with liquid (container, spindle, etc.) before the measurement of the next sample. Such a cleaning is time consuming so that viscosity measurements typically take about 30 minutes from the set-up to the test. The larger sample volume requirement with current techniques also increases the cleaning time and waste. Therefore, there is no genuine portable viscometer which measures true viscosity for samples in small quantity and in a fast  
20 manner. The slit viscometer disclosed in my Patent No. 7,290,441 makes it possible to measure the true viscosity of small samples. It requires, however, a precision liquid dispensing system and associated electronics to provide and control the flow of liquid through the viscometer. A simple precision liquid dispensing system which is portable and can be use with a variety of samples is not disclosed in the prior art.

### **SUMMARY OF THE INVENTION**

According to the current invention, a portable viscosity measurement instrument or viscometer includes a miniature viscosity measurement sensor, a portable precision liquid  
5 dispensing system for forcing a liquid sample through the miniature viscosity measurement sensor, a controller for controlling operation of the viscometer, and a display for displaying the measured viscosity of the liquid. The sensor design is described in my Patent Nos. 6,892,583 and 7,290,441, which are hereby incorporated by reference as if fully set forth herein. The portable system of the current invention measures the true viscosity of a liquid  
10 and requires only small volume samples of the liquid for measurement. The invention also provides a fast and easy way to obtain samples of liquid to be tested and to insert the samples of liquid into the viscometer for testing.

The portable precision liquid dispensing system of the invention includes a positive displacement pump which operates in conjunction with a positive displacement sample  
15 container, which will be referred to as a positive displacement pipette, in which the sample of the liquid for which the viscosity is to be measured is supplied. The pipette may be removable from and replaceable in the viscometer so that a sample of liquid to be tested can be drawn into the pipette when removed and separate from the viscometer and the pipette with the sample of liquid therein then inserted into the viscometer for measuring the  
20 viscosity of the sample of liquid in the pipette. The pipette includes a plunger that slides within the pipette to draw a sample into the pipette (this can be done by hand) and to force the sample from the pipette when in the viscometer. In one embodiment of the positive displacement pump, a precision motor drives a lead screw which moves a push back in contact with the pipette plunger when positioned in the viscometer. As the push back moves

the plunger in the pipette, liquid is dispensed from the pipette into a flow passage of the miniature viscosity measurement sensor. Control electronics control operation of the precision motor to dispense the liquid to be tested from the pipette at a known flow rate into the flow passage of the miniature viscosity measurement sensor.

5           The miniature flow-through viscosity measurement sensor includes a micron scale flow channel combined with a pressure sensor array which measures the pressure drop of a fully developed flow of the liquid in the flow channel. The pressure drop is proportional to the shear stress of the liquid flowing through the channel. The shear rate is proportional to flow rate. Viscosity of the sample liquid is calculated by dividing the shear stress by the  
10       shear rate. The resulting measurement of viscosity can be shown in a display.

Microcontroller or microprocessor based electronics can form the controller electronics of the viscometer to control the motor of the pump and process the data from the pressure sensors. The processed data can be displayed and may also be stored and/or sent to remote devices.

15           If temperature control of the sample is desired, the viscometer, the viscosity sensor, and/or the sample in the pipette may be conditioned to a set temperature with a peltier based temperature control device or other generally accepted temperature control means.

          The viscometer may store a history of measured viscosity values for various uses and/or may store a database of the known viscosity values of various liquids, such as liquids  
20       frequently expected to be measured. This can allow a quick comparison of the known viscosity of a known liquid with the measured viscosity of a sample thought to be the known liquid. Discrepancies between the known value and the measured value can indicate that the test liquid is not the liquid it is thought to be or can indicate problems with the viscometer so that the viscometer can be checked.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Additional features and advantages of the invention will be apparent from the detailed description which follows, taken in conjunction with the accompanying drawings, which together illustrate, by way of example, features of the invention; and, wherein:

Figure 1 is a schematic representation of a portable viscometer of the invention;

Figure 2, a schematic cross-sectional representation of a flow-through viscosity sensor of the invention;

Figure 3, a cross-sectional view of a pipette useable in the system of the invention showing the pipette plunger in an intermediate position in the pipette;

Figure 4, a similar cross-sectional view of the pipette of Fig. 3 showing the pipette plunger in position before a sample of liquid has been drawn into the pipette or after the sample of liquid has been dispensed from the pipette, and

Figure 5, a schematic representation of a portable viscometer of the invention as shown in Figure 1 including additional temperature conditioning devices.

Reference will now be made to the exemplary embodiments illustrated, and specific language will be used herein to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended

**DETAILED DESCRIPTION OF EXAMPLE EMBODIMENT(S)**

The invention provides an improved viscometer which is portable, easier-to-use, more accurate, and a faster way of measuring the viscosities of liquid samples than prior art viscometers. Referring to Fig. 1, the viscometer 22 includes a precision pump, indicated generally by reference number 20, a liquid container 14 for supplying a sample of the liquid

for which a viscosity measurement is desired, a flow-through viscosity sensor 15, a controller 18, and a display 19.

The pump 20 works in conjunction with a sample container shown and referred to as a pipette 14 having a pipette barrel or body 13 and a plunger 12 slidably positioned in the pipette barrel 13 with plunger end portion 24 extending from an end of the barrel 13. The pipette 14 may be removably positioned and held in the viscometer by a mounting mechanism 28 so the pipette can be removed, filled with a sample of liquid to be tested, and replaced into the mounting mechanism of the viscometer, or can be removed and replaced with another similar pipette containing a sample of liquid to be tested. The pipette may be made disposable so a new, clean pipette is used for each sample of liquid. The pump includes a precision motor 23, a lead screw 10 rotatable by the motor 23 through a drive mechanism 26, such as a gear drive or belt drive, and a push back 11 mounted on lead screw 10 which contacts the end 25 of pipette plunger end portion 24 when pipette 14 is positioned in the viscometer. The push back 11 moves laterally along lead screw 10 in response to the rotation of the lead screw 10 by motor 23.

An example of a pipette construction usable with the invention is shown in Figs. 3 and 4. A pipette plunger 41 has a plunger head 42 sealingly and slidably received in pipette barrel 40 with an end portion 45 extending from an end of the pipette barrel 40. Both the pipette barrel and pipette plunger can be fabricated from plastic by injection molding. The plunger can slide back and forth inside of the barrel 40. In order to minimize air entrapment when filling the pipette with sample liquid, the end of plunger head 42 is shaped to closely fit into liquid flow barrel end 43, as shown in Fig. 4, to minimize any air gap 44 between the two. With the pipette in the condition shown in Fig. 4, the liquid flow end 43 of the pipette can be inserted into a liquid for which the viscosity is to be determined. A user can grasp the



end portion 45 of the plunger 41 extending from the pipette barrel 40 and pull the plunger back from the end 43 of the pipette barrel to draw sample into the pipette barrel through an opening in barrel end 43. Fig. 3 shows the plunger 41 pulled back from the barrel end to create space 46 in the pipette barrel which will contain the liquid sample drawn into the pipette. As the pipette plunger 41 continues to be pulled back in pipette barrel 40, sample will continue to be drawn into the increasing space 46. The user stops pulling back the plunger 41 when the desired amount of sample is drawn into the pipette barrel. If the plunger 41 is pushed toward the liquid flow end 43 of the barrel 40, fluid in space 46 is discharged from the barrel 40 through the opening in barrel end 43.

Flow-through viscosity sensor 15 includes a liquid inlet connector 16 and a liquid outlet connector 21. As shown in Fig. 1, the liquid discharged from the end of the pipette barrel 13 is coupled through liquid inlet connector 16 to a liquid entrance to the viscosity sensor 15. A liquid discharge tube 17 is coupled through the liquid outlet connector 21 to guide liquid away from a liquid exit of viscosity sensor 15.

Referring to Fig. 2, the flow-through viscosity sensor 15 includes a liquid flow channel 31, with a flow channel entrance 35 and flow channel exit 36 formed in a channel substrate 39. The flow channel 31 has a rectangular cross-section with the channel substrate 39 providing three sides of flow channel 31, leaving one open side. A monolithic sensor plate 38 formed by a pressure sensor membrane 37 and a pressure sensor substrate 30 is combined with the channel substrate 39 to close the open side of flow channel 31. Monolithic sensor plate 38 provides a plurality of independent pressure sensors and is positioned with respect to the channel substrate 39 to locate at least two independent pressure sensors along the flow channel 31 spaced sufficiently away from the channel entrance 35 and channel exit 36 whereby a pressure drop of fully developed flow of liquid

through the flow channel 31 can be measured by the pressure sensors. In the embodiment shown in Fig. 2, three independent pressure sensors are provided by the monolithic sensor plate 38 along flow channel 31. Each of the independent pressure sensors is formed by a cavity 33 in the pressure sensor membrane 37. The portions 34 of the pressure sensor  
5 membrane 37 that extend over the respective cavities 33 will deflect into the respective cavities 33 upon application of pressure to such portions 34 of the pressure sensor membrane extending over the respective cavities 33. The amount of deflection into a respective cavity is proportional to the pressure applied by the liquid flowing in the flow channel 31 to the pressure sensor membrane over the respective cavities.

10 A detector is provided in each of the cavities for detecting the displacement of the membrane into the respective cavity which provides a measurement of the pressure applied to the membrane over the cavity. Various detectors can be used, such as a capacitance detector wherein one capacitor electrode is located on the pressure sensor membrane over a cavity and the other capacitor electrode is located on the sensor substrate 30 covering the  
15 cavity. Displacement of the membrane moves the capacitor electrodes closer together and changes the capacitance which provides the measure of pressure. It will be noted that the surface of the pressure sensor membrane 37 along the liquid channel 31 is substantially a smooth continuous surface without individual pressure sensors being inserted into the surface to form irregularities and discontinuities. This smooth channel surface is important  
20 to obtaining accurate pressure measurements. A more detailed description of the pressure sensor and variations and different embodiments of the pressure sensor construction and of the flow-through viscosity sensor are provided in my Patent Nos. 6,892,583 and 7,290,441, hereby incorporated by reference into this disclosure. Liquid inlet connector 16 attached to channel substrate 39 around liquid channel entrance 35 provides for connection of a source

of pressurized sample liquid, here liquid discharged from pipette 14, and liquid outlet connector 21 attached to channel substrate 39 around liquid channel exit 36 provides for connection to a sample liquid drain or holding reservoir.

Controller 18 includes one or more microcontrollers or microprocessors, and other  
5 electrical and electronic components for controlling operation of the viscometer and peripheral components, for performing calculations, for controlling the display 19 which can display the measured viscosity and other information such as status of the viscometer, and for communicating with and transferring data to other equipment such as other computers. Communication can be through ports such as RS232 or USB ports or can be through  
10 wireless or other communication means. Controller 18 will generally include interface means, such as a keyboard, touch button pad or key pad, an external computer, or other data entry means such as buttons, a mouse, or a touch screen in display 19, whereby a user can enter control and other instruction and information into the controller.

To measure the viscosity of a sample of liquid, a sample of the liquid for which the  
15 viscosity is to be determined is obtained in a liquid sample holding pipette. The sample of liquid in the pipette can have been withdrawn from a source of the liquid into the pipette by the user of the viscometer or can be otherwise supplied to the user of the viscometer in the pipette. As shown in Fig. 1, the pipette 14 is mounted in the viscometer 22 and is held in position in the viscometer by mounting mechanism 28. The controller is then activated to  
20 control the viscometer to make a viscosity measurement. The controller will operate the motor 23 to advance the push back 11 to a position as shown in Fig. 1 against the end 25 of the pipette plunger. Alternatively, the push back 11 could be positioned, such as manually, by the user when the pipette is mounted in the viscometer prior to activation of the controller.

With the push back 11 in position against the end 25 of the pipette plunger, the controller controls the motor 23 so as to rotate lead screw 10 to advance the push back 11 and pipette plunger 12 at a desired speed or speeds to discharge the liquid from the pipette at a known desired flow rate or flow rates. As the plunger moves, the liquid is forced from the pipette into the viscosity sensor 15 and flows through the flow channel 31 in which the pressure drop of a fully developed flow of the liquid is measured by the pressure sensors of the monolithic pressure sensor 38. The pressures are measured as the local pressures over respective membrane portions of the pressure sensors along the flow channel 31 deflect sensor membrane portions 34 into respective cavities 33. The pressure drop measured along the flow channel 31 (the difference in pressures measured between successive pressure sensors along the flow channel) is proportional to the viscosity of the liquid at the specific flow rate. If the sample viscosity varies with the flow rate, then the control can be instructed to dispense the liquid at different flow rates in sequence, with or without flow stoppage. When the pressure values are acquired and the viscosity values calculated as a function of flow rate, the relationship is corrected for non-Newtonian viscosity in a known manner. The measured viscosities may be displayed on the display 19, may be stored in a controller memory or auxiliary memory, and/or transmitted to a remote memory or computer.

As the liquid is injected into liquid flow channel 31 in the viscosity sensor 15 at an initially set flow rate (or shear rate), the viscometer senses the pressure inside the liquid flow channel 31. The controller can be programmed to determine if the pressure level is optimal for the highest accuracy or assured accuracy of the viscosity measurement. If the pressure level is too low, the controller determines and sets the next flow rate value and ramps up the flow rate to the new set value. The controller continues the iteration to reach the optimal

flow rate for the particular viscosity measurement. In this way, viscosity of unknown liquids can be accurately and automatically measured.

When the viscosity measurement or measurements for a sample of liquid have been obtained, the push back 11 is operated to move it back to a position to allow the used pipette  
5 to be removed and a new pipette with a sample of new liquid therein for testing to be inserted in the viscometer. The pipette with the sample of new liquid to be tested may be a new disposable pipette or a reloaded used pipette. For the new viscosity measurement, the controller operates the viscometer as described above to determine the viscosity of the sample of new liquid. In this test, the liquid from the new sample displaces the liquid from  
10 the old sample in the viscosity sensor 15. In this way, no cleaning of the viscosity sensor is needed. If the two successive liquids to be tested are not compatible or miscible, then the viscosity sensor 15 needs to be cleaned with a cleaning liquid compatible to both liquids to be tested prior to dispensing the new liquid into the viscosity sensor 15. This cleaning can be done by loading a pipette containing the cleaning liquid into the viscometer and operating  
15 the viscometer to force the cleaning liquid through the viscosity sensor 15 between the two liquids being tested.

The viscometer 22 may be powered by a battery, such as a rechargeable battery, so that it is truly portable, or may be powered by connecting it to a source of power as it is moved from place to place.

20 In some instances it may be desirable to control the temperature of the liquid for which the viscosity is being measured. If temperature control is desired, the viscometer 22, the viscosity sensor 15, and/or the sample in the pipette 14 may be conditioned at a set temperature with a peltier based temperature control device or other generally accepted temperature control means. For example, as shown in Fig. 5, which is similar to Fig. 1, a

temperature control device 50 may be placed in or in contact with pipette mounting mechanism 28 so as to heat or cool a liquid sample holding pipette 14 and the liquid sample contained therein when the pipette is mounted in the mounting mechanism 28. Depending upon how the temperature control device 50 is mounted in pipette mounting mechanism 28, the pipette mounting mechanism may also be heated or cooled to the set temperature. Some time may be required for the sample in the pipette to reach the set temperature. Similarly, a temperature control device 52 may be placed in or in contact with the viscosity sensor 15 so as to heat or cool and maintain the temperature of the material forming flow channel 31 of the viscosity sensor 15 at the set temperature. This will tend to maintain the material flowing through the flow channel 31 at substantially the set temperature. As indicated, the temperature control devices may be peltier devices or other known temperature control devices. Further, temperature sensors can be positioned to measure the temperature of the sample liquid at various locations in the viscometer. For example, a temperature sensor can be included at one or more locations in the sensor membrane 37 along the flow channel 31 as shown in my prior referenced patents. Rather than separately controlling the temperature of separate components of the viscometer 22 as described above, the viscometer 22, or the parts thereof to be temperature controlled, may be mounted in a housing where the temperature within the housing, and thus the temperature of the entire viscometer or the parts thereof in the housing, are together temperature controlled.

As indicated in my prior referenced patents, the flow-through viscosity sensor described is very small, generally constructed of semiconductor materials or other materials used in microfabrication processes. For example, the pressure sensor membrane may be a portion of a silicon wafer, while the pressure sensor substrate and the channel substrate may be portions of a borosilicate glass wafer. The flow channel typically can be as small as

about ten micrometers in width and about one micrometer in depth, with a length as short as about one hundred micrometers. Thus, the flow-through viscosity sensor is very small and small sample sizes can be used in determining viscosity. This small size of the flow-through viscosity sensor and the small amount of sample needed for viscosity testing means that the other viscometer components, such as the pipettes and the pump can also be made relatively small so the viscometer can easily be made as a relatively small portable unit.

Rather than making a portable viscometer, the same viscometer construction can be used to provide a stationary viscometer where samples of liquid to be tested can be collected from different locations in different pipettes and then transported to the viscometer and tested at the location of the viscometer.

If desired, a database of published or otherwise known viscosity values for liquids frequently measured or that might be measured can be stored in a memory in the viscometer controller. With such a database available, a user can easily display a known viscosity value from the database for a selected liquid and compare it to the viscosity value measured for a sample liquid thought to be the known liquid. Discrepancies between the published value and the measured value can indicate that the test liquid is not the liquid it is thought to be or can indicate problems with the viscometer so that the viscometer can be checked. In addition, for various reasons, it may be advantageous for a user from time to time to have access to the known viscosity values of particular liquids other than the liquid being tested at that time. Further, the viscometer may store a history of measured viscosity values with appropriate identification, again which may be used by the user of the viscometer for various purposes. For example, with such a history of measured viscosity values, a user can compare the viscosity of a liquid component being used in a manufacturing process at different times to ensure that the liquid component is within specifications required for the

liquid component, or can determine and correlate a viscosity value of the component with particular desired attributes of the resulting product.

While the illustrated embodiment of the pump of the invention is shown and described as including a motor, lead screw, and push back to move the plunger in the pipette,  
5 various other means of moving the plunger in the pipette or of providing a precision discharge of sample liquid from a sample container can be used.

Whereas this invention is here illustrated and described with reference to embodiments thereof presently contemplated as the best mode of carrying out the invention in actual practice, it is to be realized that various changes may be made in adapting the  
10 invention to different embodiments without departing from the inventive concepts disclosed herein.



**CLAIMS**

1. A portable viscometer comprising:
  - a dispensing pump mechanism;
  - 5 a viscosity sensor having a rectangular liquid flow channel and at least two pressure sensors positioned along the flow channel that measure a pressure drop of fully developed flow of the liquid flowing through the flow channel;
  - a positive displacement pipette adapted to contain a sample of liquid for which a measurement of viscosity is desired, the dispensing pump mechanism and the positive displacement pipette cooperatively coupled so that operation of the dispensing pump
  - 10 mechanism, in cooperation with the positive displacement pipette, dispenses test liquid from the pipette at a known flow rate, and the positive displacement pipette being coupled to the viscosity sensor so that the liquid for which a measurement of viscosity is desired is forced into the viscosity sensor when dispensed from the positive displacement
  - 15 pipette; and
  - a controller that controls operation of the viscometer and processes sensor data.
2. A portable viscometer according to claim 1, additionally including a display that shows test results.
3. A portable viscometer according to claim 1, wherein the controller includes a
- 20 programmed microcontroller.
4. A portable viscometer according to claim 3, wherein the controller includes a user interface for inputting test variables.
5. A portable viscometer according to claim 1, wherein the positive displacement pipette includes a pipette barrel, and a pipette plunger sealingly and slidably positioned

within the pipette barrel, wherein the pipette plunger includes a plunger end portion that extends from the pipette barrel by which the pipette plunger can be slidingly moved in the pipette barrel.

6. A portable viscometer according to claim 5, wherein the pipette plunger is slidingly  
5 movable in two opposite directions with respect to the pipette barrel, movement in a filling direction providing for filling of the pipette barrel with a liquid and movement in a dispensing direction providing for dispensing of liquid from the pipette barrel.
7. A portable viscometer according to claim 6, wherein the operation of the dispensing  
10 pump mechanism in cooperation with the positive displacement pipette, moves the pipette plunger in a dispensing direction with respect to the pipette barrel at a known rate to dispense test liquid in the pipette barrel from the pipette barrel at a known flow rate.
8. A portable viscometer according to claim 7, wherein the dispensing pump includes a  
15 motor, a lead screw coupled to the motor so that operation of the motor results in rotation of the lead screw, and a push back coupled to the lead screw so that rotation of the lead screw results in linear movement of the push back, said push back also coupled to the  
plunger end portion whereby linear movement of the push back moves the pipette  
plunger in the dispensing direction.
9. A portable viscometer according to claim 8, wherein the controller controls operation  
of the motor.
- 20 10. A portable viscometer according to claim 7, additionally including mounting  
mechanism for removably mounting the positive displacement pipette in the viscometer.
11. A portable viscometer according to claim 1, additionally including mounting  
mechanism for removably mounting the positive displacement pipette in the viscometer.
12. A portable viscometer according to claim 1, wherein the viscosity sensor comprises:

- a channel substrate with at least one flow channel formed therein having three side walls, a flow channel entrance, and a flow channel exit; and
- a monolithic sensor plate having a substantially smooth sensing surface and at least two independent pressure sensors at different locations therein;
- 5 wherein the channel substrate and the monolithic sensor plate are combined so that the sensor plate's substantially smooth sensing surface becomes a fourth side wall of the at least one flow channel enabling full containment of liquid during flow through the at least one flow channel, and at least two of the at least two independent pressure sensors in the monolithic sensor plate are positioned along the at least one flow channel
- 10 sufficiently away from the flow channel entrance and flow channel exit so that a pressure drop of fully developed flow of the liquid in the at least one flow channel is measured as the liquid flows in the flow channel.
13. A portable viscometer according to claim 12, wherein the pressure sensor plate is made of semiconductor materials.
- 15 14. A portable viscometer according to claim 12, wherein the flow channel has a depth and the depth is greater than 1 micro meter and less than 1 mm.
15. A portable viscometer according to claim 1, wherein the viscometer stores a data base of known viscosity values for a plurality of liquids.
16. A portable viscometer according to claim 1, wherein the viscometer stores a history
- 20 of measured viscosity values.
17. A portable viscometer according to claim 1, wherein the viscometer is battery powered.

18. A portable viscometer according to claim 1, wherein the controller includes communication means to enable communication between the controller and a remote computer.
19. A portable viscometer according to claim 1, additionally including at least one  
5 temperature control device to control the temperature of the sample of liquid for which a measurement of viscosity is desired.
20. A portable viscometer according to claim 19, wherein the at least one temperature control device controls the temperature of the sample of liquid for which a measurement of viscosity is desired in the pipette prior to being forced into the viscosity sensor.
- 10 21. A portable viscometer according to claim 20, wherein the at least one temperature control device controls the temperature of the sample of liquid for which a measurement of viscosity is desired as the sample of liquid flows through the viscosity sensor.
22. A portable viscometer comprising:
- a dispensing pump mechanism;
  - 15 a viscosity sensor having a rectangular liquid flow channel and at least two pressure sensors positioned along the flow channel that measure a pressure drop of fully developed flow of the liquid flowing through the flow channel;
  - a mounting mechanism adapted to removably mount a positive displacement pipette adapted to contain a sample of liquid for which a measurement of viscosity is desired,
  - 20 said mounting mechanism adapted to mount the positive displacement pipette in position to cooperate with the dispensing pump mechanism so that operation of the dispensing pump mechanism dispenses test liquid from the positive displacement pipette at a known flow rate, and to cooperate with the viscosity sensor so that the liquid for which a

measurement of viscosity is desired is forced into the viscosity sensor when dispensed from the positive displacement pipette; and

a controller that controls operation of the viscometer and processes sensor data.

23. A portable viscometer according to claim 22, additionally including a display that

5 shows test results.

24. A portable viscometer according to claim 22, additionally including at least one temperature control device to control the temperature of the sample of liquid for which a measurement of viscosity is desired.

25. A portable viscometer according to claim 24, wherein the at least one temperature  
10 control device cooperates with the mounting mechanism to control the temperature of the sample of liquid for which a measurement of viscosity is desired in a pipette containing a sample of liquid for which a measurement of viscosity is desired when the pipette is mounted in the mounting mechanism prior to the sample being forced from the pipette into the viscosity sensor.

15 26. A portable viscometer according to claim 24, wherein the at least one temperature control device controls the temperature of the sample of liquid for which a measurement of viscosity is desired as the sample of liquid flows through the viscosity sensor.

27. A portable viscometer according to claim 22, wherein the dispensing pump includes a motor, a lead screw coupled to the motor so that operation of the motor results in rotation  
20 of the lead screw, and a push back coupled to the lead screw so that rotation of the lead screw results in linear movement of the push back, said push back adapted to mate with an end of a plunger extending from a positive displacement pipette when mounted in the mounting mechanism whereby linear movement of the push back moves the pipette plunger

in a dispensing direction at a known rate to dispense test liquid from the pipette at a known flow rate into the viscosity sensor.

28. A method of obtaining a measurement of viscosity of a sample of liquid for which a measurement of viscosity is desired, comprising the steps of:

5 obtaining portable viscometer comprising:

a dispensing pump mechanism;

a viscosity sensor having a rectangular liquid flow channel and at least two pressure sensors positioned along the flow channel that measure a pressure drop of fully developed flow of the liquid flowing through the flow channel;

10 a mounting mechanism adapted to removably mount a positive displacement pipette adapted to contain a sample of liquid for which a measurement of viscosity is desired, said mounting mechanism adapted to mount the positive displacement pipette in position to cooperate with the dispensing pump mechanism so that operation of the dispensing pump mechanism dispenses test liquid from the positive displacement pipette at a known flow rate, and to cooperate with the viscosity sensor so  
15 that the liquid for which a measurement of viscosity is desired is forced into the viscosity sensor when dispensed from the positive displacement pipette; and

a controller that controls operation of the viscometer and processes sensor data;

20 obtaining a positive displacement pipette containing a sample of liquid for which a measurement of viscosity is desired;

placing the positive displacement pipette containing the sample of liquid for which a measurement of viscosity is desired in the mounting mechanism; and

operating the portable viscometer to obtain a measurement of the viscosity of the sample of liquid for which a measurement of viscosity is desired contained in the positive displacement pipette.

29. A positive displacement pipette for use in a portable viscometer including a
- 5 mounting mechanism adapted to removably mount a positive displacement pipette in position to cooperate with a dispensing pump mechanism so that operation of the dispensing pump mechanism dispenses from the positive displacement pipette a sample liquid for which a measurement of viscosity is desired at a known flow rate, comprising:
- a pipette barrel; and
- 10 a pipette plunger sealingly and slidably positioned within the pipette barrel and movable in two opposite directions with respect to the pipette barrel, movement in a filling direction providing for filling of the pipette barrel with a liquid and movement in a dispensing direction providing for dispensing of the liquid from the pipette barrel, wherein the pipette plunger includes a plunger end portion that extends from the pipette barrel and is
- 15 cooperable with the dispensing pump mechanism when the pipette is mounted in the mounting mechanism of the portable viscometer so that the pipette plunger can be slidingly moved in dispensing direction in the pipette barrel by the dispensing pump mechanism to dispense the sample liquid for which a measurement of viscosity is desired.

1/4

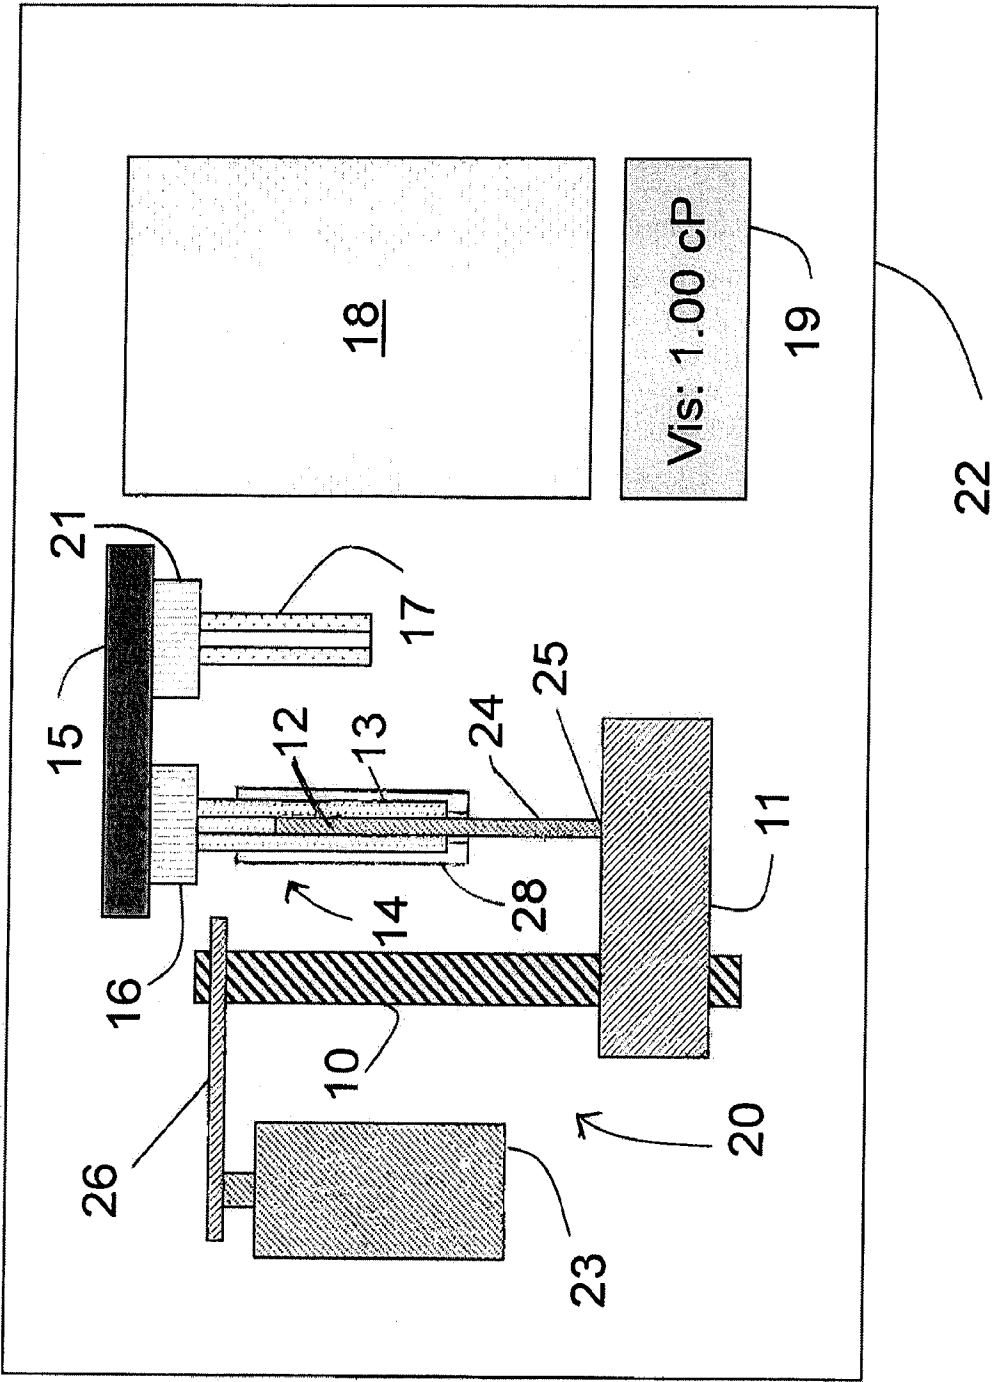


Figure 1



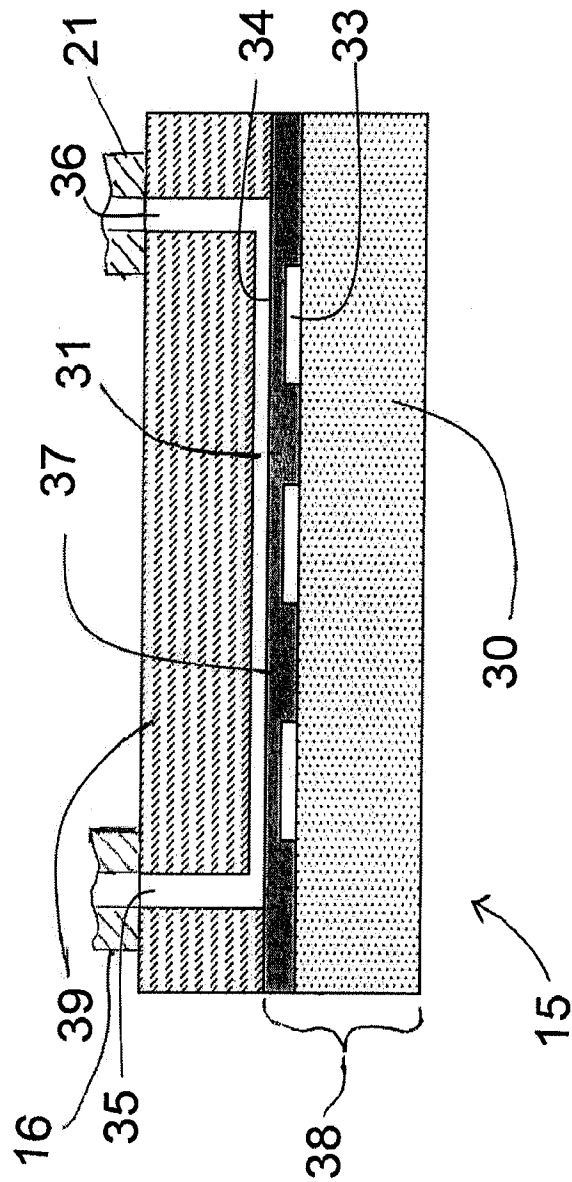


Figure 2

3/4

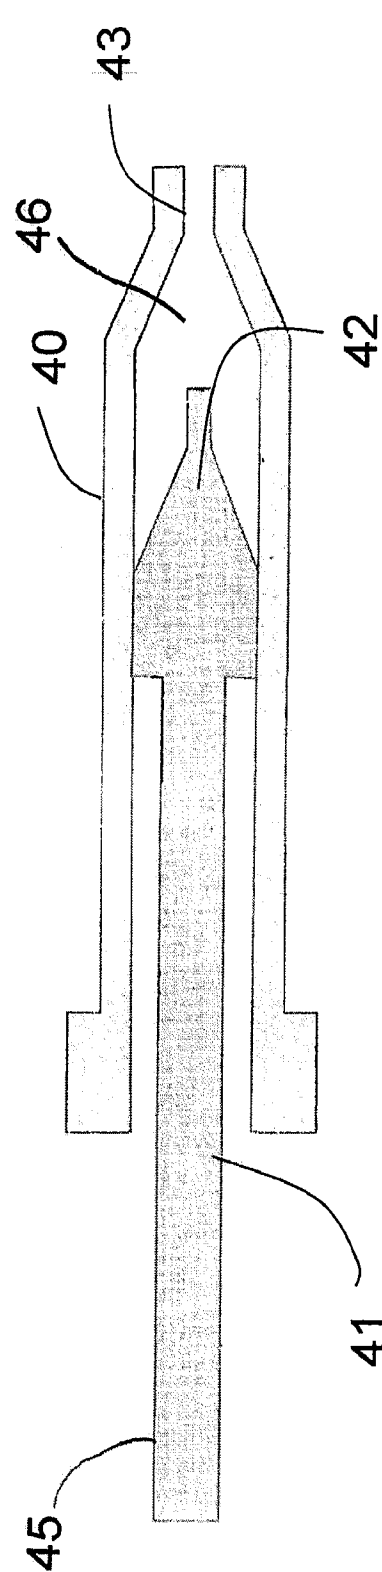


Figure 3

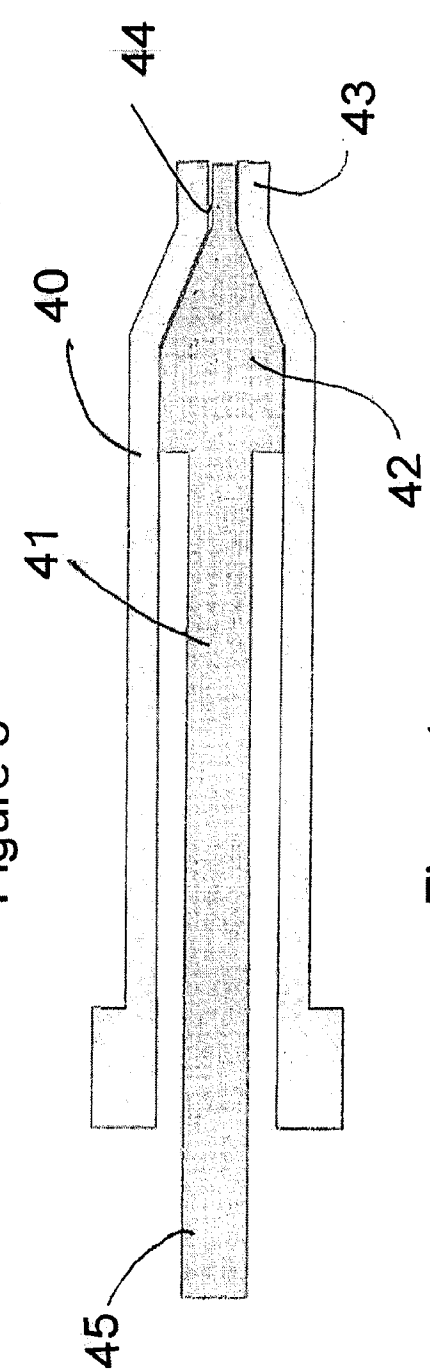


Figure 4

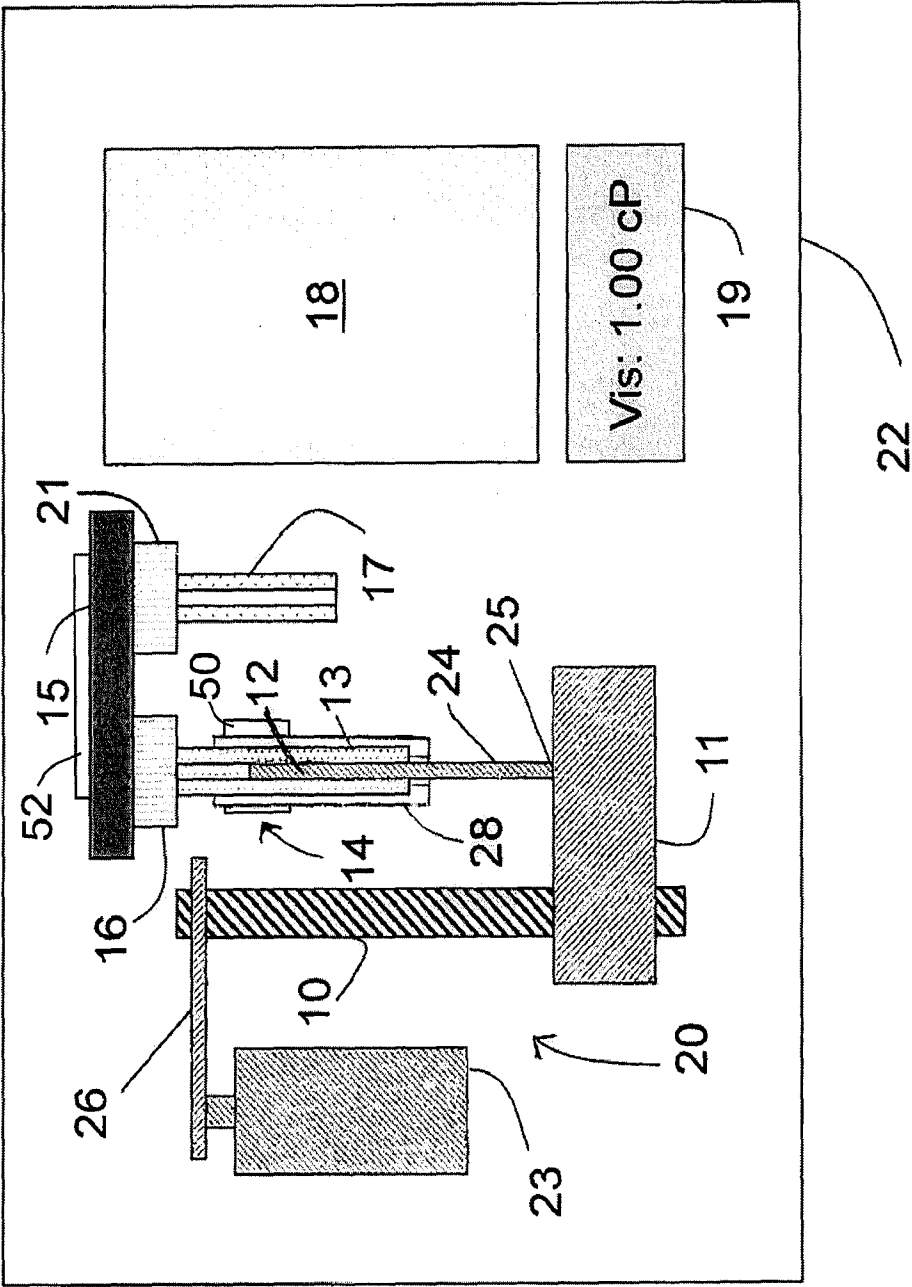


Figure 5