

**(12) STANDARD PATENT  
(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 2008234283 B2**

(54)	Title <b>Melt metallurgical method for the production of metal melts, and transition metal-containing charge for use therein</b>		
(51)	International Patent Classification(s) <b>C21C 7/00</b> (2006.01) <b>C22B 3/00</b> (2006.01) <b>C21C 5/00</b> (2006.01) <b>C22B 3/08</b> (2006.01) <b>C21C 5/32</b> (2006.01)		
(21)	Application No:	<b>2008234283</b>	(22) Date of Filing: <b>2008.03.04</b>
(87)	WIPO No:	<b>WO08/119317</b>	
(30)	Priority Data		
(31)	Number <b>10 2007 015 585.0</b>	(32) Date <b>2007.03.29</b>	(33) Country <b>DE</b>
(43)	Publication Date:	<b>2008.10.09</b>	
(44)	Accepted Journal Date:	<b>2010.12.23</b>	
(71)	Applicant(s) <b>M.K.N. Technologies GmbH</b>		
(72)	Inventor(s) <b>Meyn, Ulrich</b>		
(74)	Agent / Attorney <b>Watermark Patent and Trade Marks Attorneys, Level 2 302 Burwood Road, Hawthorn, VIC, 3122</b>		
(56)	Related Art <b>WO 2005 / 098054 A1</b> <b>US 4919714 A</b> <b>EP 0583164 A1</b> <b>WO 2006 / 131764 A1</b> <b>JP 05 - 125425 A</b> <b>WO 2003 / 018850 A1</b> <b>WO 1997 / 020954 A1</b>		

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
9. Oktober 2008 (09.10.2008)

PCT

(10) Internationale Veröffentlichungsnummer  
**WO 2008/119317 A1**

(51) Internationale Patentklassifikation:  
*C21C 7/00* (2006.01)      *C22B 3/00* (2006.01)  
*C21C 5/00* (2006.01)      *C21C 5/32* (2006.01)  
*C22B 3/08* (2006.01)

(71) Anmelder (*für alle Bestimmungsstaaten mit Ausnahme von US*): M.K.N. TECHNOLOGIES GMBH [DE/DE]; Pempelfurtstr. 1, 40880 Ratingen (DE).

(21) Internationales Aktenzeichen: PCT/DE2008/000389

(72) Erfinder; und

(75) Erfinder/Anmelder (*nur für US*): MEYN, Ulrich [DE/DE]; Heidmühlenweg 8, 25336 Elmshorn (DE).

(22) Internationales Anmeldedatum:  
4. März 2008 (04.03.2008)

(74) Anwalt: LIPPERT, STACHOW & PARTNER; Frankenforster Strasse 135-137, 51427 Bergisch Gladbach (DE).

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch


(30) Angaben zur Priorität:  
10 2007 015 585.0      29. März 2007 (29.03.2007) DE

(81) Bestimmungsstaaten (*soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DO, DZ, EC, EE,

[Fortsetzung auf der nächsten Seite]

(54) **Title:** MELT METALLURGICAL METHOD FOR THE PRODUCTION OF METAL MELTS, AND TRANSITION METAL-CONTAINING CHARGE FOR USE THEREIN

(54) **Bezeichnung:** SCHMELZMETALLURGISCHES VERFAHREN ZUR HERSTELLUNG VON METALLSCHMELZEN UND ÜBERGANGSMETALLHALTIGER ZUSCHLAGSTOFF ZUR VERWENDUNG IN DIESEN

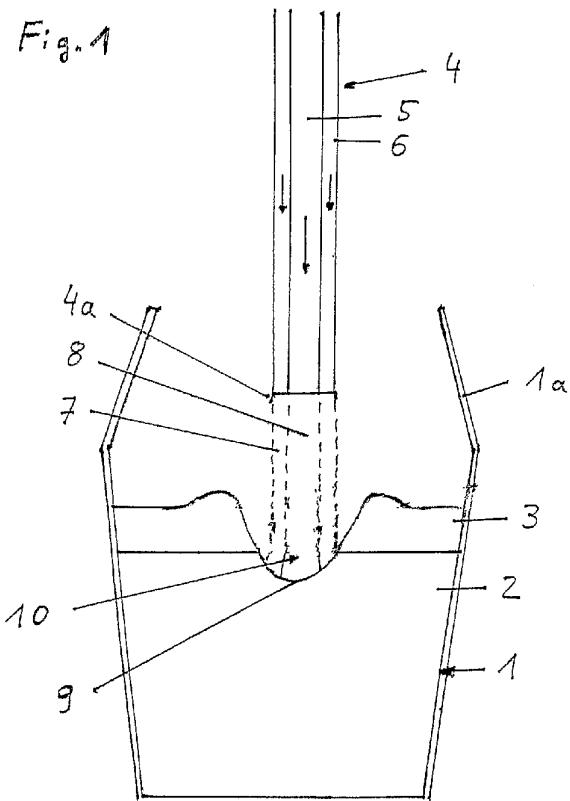

**(57) Abstract:** The invention relates to a method for the production of a metal melt containing at least one base metal and at least one additional alloying component, wherein the production takes place in a smelting vessel with slag covering the melt. According to the invention, in order to increase the alloying component content of the melt, a charge which contains the alloying component is added to the melt, wherein the charge contains  $\geq 5-10\%$  by weight of the alloying component;  $\geq 5-10\%$  by weight of the melt metallurgically safe volatile components;  $\leq 5\%$  by weight of sulfur; and, optionally, further alloying components and/or slag-forming agents. The charge can be obtained by the leaching of ores and precipitation in the form of hydroxides and/or carbonates. The invention further relates to such a charge.

**(57) Zusammenfassung:** Die Erfindung betrifft ein Verfahren zur Herstellung einer Metallschmelze enthaltend zumindest ein Basismetall und zumindest einen weiteren Legierungsbestandteil, wobei die Herstellung in einem Schmelzgefäß mit die Schmelze abdeckender Schlacke erfolgt. Erfindungsgemäß wird zur Erhöhung des Gehaltes des Legierungsbestandteils der Schmelze ein den Legierungsbestandteil enthaltender Zuschlagstoff mit einem Gehalt von  $\geq 5-10$  Gew.-% des Legierungsbestandteils,  $\geq 5-10$  Gew.-% schmelzmetallurgisch unbedenkliche flüchtige Bestandteile,  $\leq 5$  Gew.-% Schwefel und gegebenenfalls Anteile an weiteren Legierungsbestandteilen und/oder Schlackebildnern der Schmelze zugeführt. Der Zuschlagstoff ist durch Auslaugung von Erzen und Fällung in Form

**WO 2008/119317 A1**

[Fortsetzung auf der nächsten Seite]



EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Bestimmungsstaaten** (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW,

**Veröffentlicht:**

— mit internationalem Recherchenbericht

**Melting metallurgical process for producing metal melts  
and transition metal-containing additive for use in this process**

The invention relates to a melting metallurgical process for producing a melt, with at least one base metal and at least one additional alloy constituent in a melting vessel, wherein the melt is covered with a slag. The invention further relates to a transition metal-containing, especially nickel and/or cobalt-containing, additive for producing alloys containing a transition metal, especially nickel and/or cobalt, wherein said additive is present in the form of a solid and has a transition metal content of  $\geq 10$  percent by weight. Furthermore the invention is related to the use of such an additive in the process.

For the production of iron alloys or steels which are enriched by certain alloy constituents, it is mostly required to add alloy constituents to the melt, in order to adjust the composition of the melt. Such constituents may be in particular nickel, cobalt, but also vanadium, molybdenum etc. For adjusting the composition of the melt ferroalloys like ferronickel, ferrocobalt etc. are used, but also oxidic components like NiO or also nickel ores like laterite which have a corresponding nickel content. However, the addition of these components respectively includes certain drawbacks.

For instance the provision of ferroalloys for the adjustment of the content of the alloy constituents in the melt is relatively expensive and requires high amounts of energy. The use of oxidic minerals for the adjustment of the composition of the melt includes the drawback that high efforts are often required for removing undesired impurities like undesired trace elements such as phosphorus, tin, arsenic, or in particular steels also cobalt, molybdenum etc. from the ores. Even by enrichment processes like flotation processes such impurities cannot always be removed to the desired extent. If undesired constituents like phosphorus, sulfur etc. are

introduced into the melt through said ores, this will result in high efforts for removing the same from the melt, for instance by a suitable slag treatment, by using several different slags and the like. Moreover, the introduction of ores into the metal melts also leads to other problems, especially with regard to kinetics and to the extent of the formation of crystallization germs, because when using ores the particles of the additives are not always dissolved in the melt fast enough and completely, so that the same may have negative effects on the melting metallurgy. Furthermore, the introduction of oxidic ores into the melt causes a negative contribution to the energy balance, because the melting of the ores is strongly endothermic. This may lead to considerable process-technological and metallurgical problems, for instance also to an increased slagging of alloy constituents like chromium. Which elements will become slagged, essentially depends on the thermal conditions at the time of carrying out the process.

It is further known to directly add oxides like nickel oxide, but the above-mentioned problems will arise also in this case. In addition, nickel oxide is toxic and cancer-causing, so that the use thereof should be avoided.

WO 97/20954 discloses a melting metallurgical process for producing ferronickel, stainless steel or the like, wherein nickel, nickel ores or calcinated nickel compounds are fed to a metal melt being covered by a slag.

EP 583 164 A1 discloses a process for producing stainless steel, wherein finely divided oxides being mixed with finely divided reduction agents are reacted under generation of agglomerates.

US 4,919,714 discloses a steel refining process in which a melt is agitated and a gas is injected into the melt, wherein simultaneously heat is

applied to the melt surface by means of a burner, wherein metal oxides are fed into the melt.

WO 03/018850 A1 discloses a process for producing stainless steel, wherein a solidified hydroxide sludge containing metals being obtained in a steel pickling process and containing at least fluoride-comprising compounds are fed to a melt.

WO 2005/098054 A1 discloses a process for producing a flux agent which can be applied in a steelmaking process, wherein the flux agent is a fluoride-containing, calcinated hydroxide sludge.

WO 2006/131764 A1 discloses a process for making ferroalloys, wherein chromium metal, chromium containing alloys and chromium ores are fed to a slag covered melt.

In view the above, the invention is based on the problem of providing a simple and inexpensive process, which allows a simple metallurgical control, for producing metal melts which are enriched by alloy constituents and which are preferably covered with a slag and perform a mass transfer with said slag. The problem of the invention further resides in the provision of an additive which may be used particularly advantageously in such process and which can be produced at low cost.

This problem is solved in one aspect by the provision of a process for producing a metal melt containing at least one base metal and at least one further alloy constituent, wherein the production takes place in a melting vessel with slag covering the melt, wherein at least one alloy constituent-containing additive is fed to the melt for enriching the melt by the alloy constituent, the alloy constituent being a transition metal and the additive being in the form of a solid, the additive having a content of  $\geq$  10 percent by weight of said further alloy constituent, characterize

d i n that the additive contains  $\geq 20$  percent by weight of melting metallurgically harmless matter being volatile by calcination when feeding the additive to the melt by means of a feeding device,  $\leq 5$  percent by weight of sulfur and possibly fractions of further alloy constituents and/or slag formers, and in that preferably the additive which contains the alloy constituent is directly supplied to the metal melt by means of a gas stream under the formation of a slag-free burn spot of the slag-covered melt.

5 10 In another aspect, there is provided a transition metal-containing additive for the production of transition metal-containing alloys in melting metallurgical processes, wherein the additive is present as a solid material with a transition metal content of  $\geq 10$  percent by weight, characterized in that the additive comprises a fraction of melting metallurgically harmless volatile matter in the form of  $\text{H}_2\text{O}$  and/or  $\text{CO}_2$ , inclusive of chemically bound water in the form of crystal water and/or hydroxide groups, of  $\geq 20$  percent by weight, a sulfur content of  $\leq 5$  percent by weight and a content of further alloy constituents of  $\geq 1$  percent by weight and/or a content of slag formers of  $\geq 0,5$  percent by weight and that is obtainable by processing of ores, waste materials or other products containing the alloy constituents by transferring the respective alloy constituent into a dissolved state, precipitation of it and, where appropriate, further processing steps.

15 20 25 30 In yet another aspect, there is provided use of a transition metal containing additive for producing a transition metal alloy in a melting metallurgical process, wherein the additive is fed to a metal melt containing at least one base metal to enrich the melt with the alloy constituent, wherein the production of the alloy takes place by feeding the additive to a melting vessel containing a slag covered melt or wherein the process in general is a AOD-process, CLU-process, VOD-process, BOP-process or Q-BOP process or an electro-steel process, and wherein

the additive is a solid comprising a transition metal content of  $\geq 10$  percent by weight, characterized in that the additive contains melting metallurgically harmless matter in the form of  $\text{H}_2\text{O}$  and/or  $\text{CO}_2$ , inclusive of chemically bound water in the form of crystal water and/or hydroxide groups, of  $\geq 20$  percent by weight, a sulfur content of  $\leq 5$  percent by weight and a content of further alloy constituents of  $\geq 1$  percent by weight and/or a content of slag formers of  $\geq 0,5$  percent by weight.

In accordance with the method of the invention additives are used which contain the alloy constituent to be enriched and a high content of volatile matter that is harmless from the melting metallurgical aspect, such as especially water and/or carbonate having low sulfur contents and compared to the use of ores low contents of slag formers such as calcium and/or magnesium oxide etc. as well as high contents of the respective alloying constituent. The water may be present especially and at least substantially or practically exclusively as a chemically bound water in the form of crystal water and/or hydroxide groups. Such additives may be obtained especially by the processing of ores, for instance by leaching laterite ores, provided that the constituents to be alloyed are nickel and/or cobalt. If necessary, these leachings can be reworked, in order to separate further undesired constituents, and where appropriate the desired alloy constituents may also be separated from these leaching by precipitation. The respective precipitates may then be separated and dried, especially for obtaining additives which may be transported pneumatically or by gravity. If necessary, the additives that have been obtained in this way may be calcinated or pre-calcinated in a separate step for reducing the content of the constituents volatilizing during adding the additive to the melt, such as chemically bound water, e.g. in the form of crystal water, and/or hydroxide groups and/or carbonate, without this being necessary all the time. The content of undesired constituents which are neither alloy constituents nor constituents which volatilize during adding the additive to the melt nor slag formers may be  $\leq$

4b

15-20 percent by weight,  $\leq$  5-10 percent by weight or also  $\leq$  2-3 percent by weight , referred to the additive which is used.

5

weight of chromium, wherein the carbon content of the melt in the process step of adding the additive according to the invention or of the final product may be  $\geq$  2-3 percent by weight,  $\geq$  3.5-4 percent by weight or  $\geq$  4.5-5 percent by weight, and wherein the melt is preferably produced in a converter process. The carbon content mostly amounts to  $\leq$  8-10 percent by weight. Through the method according to the invention mostly a decarburization of the melt takes place. Hence, the additive addition according to the invention is mostly effected during a decarburization process performed by means of a blowing lance or during a refining process or directly before or after the same.

Normally the additive addition according to the invention is preferably effected during a main decarburization phase of the respective process of steelmaking or of making the respective alloy. Accordingly, the additive that is used in accordance with the invention is preferably supplied to melts which still have to be decarburized, with a partial decarburization taking place during the additive supply.

Preferably, the additive to be alloyed is introduced into the respective upper space of the melting vessel or converter, i.e. from above the slag which covers the melt, with the additive outlet of the feeding device being preferably spaced from the slag, so that the additive has to take its way through the atmosphere towards the slag or towards the melt.

Preferably, the additive which is present as a solid material is directly supplied inside the metal melt, by means of a gas stream under the production of a slag-free burn spot of the metal melt. This particularly applies to the use of Ni and/or Co-containing additives, but in case also to other transition metals, especially V, Mo. Accordingly, the burn spot of the metal melt (melting bath surface) is produced by the fact that the

slag is completely displaced by the gas stream on the place where it impinges, so that the additive – in consideration of its calcination during feeding from the feeding device to the melt – can directly contact the metal melt, without being required to pass through the slag. In this case

5 it proved advantageous with regard to the melting metallurgical transformation of the additive and the alloy for the burn spot to have temperature which is as high as possible, for example from  $\geq 1,750^\circ$  to  $1,800^\circ\text{C}$ , preferably  $\geq 2,000^\circ$  to  $2,200^\circ\text{C}$  or  $\geq 2,400^\circ$  to  $2,500^\circ\text{C}$ , and even more preferably temperatures of  $\geq 2,600^\circ\text{C}$ . Due to these very high

10 burn spot temperatures (i.e. temperatures of the melt in the burn spot) the incorporation of the alloy constituents from the additive into the melt is extremely fast.

The calcination of the additive can be controlled especially by the conveying speed of the additive towards the melt in such a way, that the same takes place only at the time of or after the discharge from the feeding device which is mostly designed as a lance. In this case, the calcination may take place partially or predominantly during the transfer of the lance to the melting surface, but also for a significant part or a

20 predominant part in the burn spot (i.e. the melting surface that has been exposed by the nozzle-injection) or in the impact zone of the supplied additive on the melting bath where the melting bath forms a hollow. The endothermic calcination processes of the additive accordingly take place prior to the entry of the additive into the melt or directly in

25 the burn spot or in the impact zone, so that an extremely fine dispersion of the additives takes place during the calcination and prior to their absorption by the melt. Thus the calcination gases penetrate into the metal melt only to a very small extent or practically not at all, and a calcination of the additive in the nozzle region, i.e. before leaving the

30 lance nozzle or the like is avoided. All in all, the energy budget of the

production process is controllable much better, which fact also provides advantages concerning the process management, especially also with regard to the avoidance of slagging of certain alloy constituents like for instance chromium and with regard to the metallurgy of the melt in terms of crystallization germs introduced through the calcination of the additive. This is true for instance also with regard to a possible nozzle-injection of the additives by below-bath-nozzles which penetrate into the melt below the slag.

10 The additive containing the alloy elements is supplied to the melt preferably in a solid material stream which is surrounded by a gas stream. It is possible thereby to effectively prevent the formation of a burn spot in the melt and an interaction or a chemical reaction with the slag. At the same time the solid material stream may be focused or adjusted in its diameter. Further, due to the gas jacket the penetration depth of the additive into the metal melt or the location of the calcination can be controlled independently of the solid material supply, and/or the escaping of dusts like for instance nickel oxide dusts from the solid material stream can be prevented. Moreover, volatile constituents like  $H_2O$ ,  $CO_2$  and the like which are produced during the calcination are prevented from escaping, which fact is desired in certain process managements. The surrounding of the solid material stream by the gas or the conveying gas stream accordingly takes place preferably from the feeding device, especially a gas lance, up and into the burn spot. Preferably, the conveying device or the lance is cooled, especially water-cooled. If need be, the surrounding gas may simultaneously be the conveying gas for the solid material stream. Preferably, the conveying gas is inert with respect to the additive, at least until it exits from the feeding device, e.g. a lance, or it is completely inert under the conditions of the process. The conveying gas may be air, preferably air that is enriched by nitrogen or

other inert gases, or it may be directly nitrogen or a different inert gas like argon. Preferably, the conveying gas does not exhibit an oxygen content which is increased compared to air.

- 5 The lance may include in a manner known per se a central tube for feeding solid materials and on the radial outside thereof a further tube which is arranged coaxially and has a larger diameter, or it may include a preferably substantially circular arrangement of several outlet nozzles for the enveloping gas. The outlet nozzles of the solid material stream and/or the enveloping gas may be formed in particular as Laval nozzles.
- 10 The conveying gas which is possibly used leaves the central tube together with the solid materials. The lance may also include a water-cooled jacket.
- 15 The device for feeding or nozzle-injecting the additives according to the invention by nozzles may be constructed in the fashion of a closed system, so that any human contact with the material is avoided. This is important above all in the case of nickel-containing additives. In a pneumatic system a silo may be loaded by a conveying means assisted by pressurized air, and the dusts may be further fed by pressure vessels of the feeding device or the lance. The additives leaving the lance are enveloped by a gas stream, in order to minimize losses of additives also in this case.
- 20
- 25 Besides, due to the fact that the calcination of the additives is controlled in such a way that the same takes place at the time of or after leaving the feeding device or lance (but preferably not before), the existing exhaust heat from rising exhaust gases and radiation heat from the bath as well as from the surrounding walls of the melting vessel or the converter may be utilized for the calcination of the additives.
- 30

In certain metallurgical manufacturing processes the endothermic effect which results from the calcination may be selectively utilized also deliberately, in order to reduce the bath temperature. To this end, the oxygen-containing enveloping gas and/or the conveying gas for instance 5 may be replaced partially or entirely by inert gases. The strongly exothermic decarburizing reaction which takes place as a result of the reaction of the oxygen-containing gases with the carbon of the melt, will then remain partially or completely undone. It will be understood, that the gas supply may be performed also in a way such as to thereby effect 10 a control of the temperature of the melt in a predetermined process, in which process the oxygen content of the enveloping gas and/or of the conveying gas is varied in a different location, in dependence of process parameters of the manufacturing process, such as for example the burn spot temperature and/or the temperature of the melt. According to demand, the oxygen content of the conveying and/or enveloping gas may 15 be increased and the contents of inert gases decreased or vice versa. Hence, the additive to be used in accordance with the invention may be supplied to the melt during the refining phase of the metallurgical process, especially during the main refining phase.

20 The enveloping gas stream may contain  $\geq 25$  percent by weight or  $\geq 50$  percent by weight or  $\geq 75$  percent by weight of oxygen, in certain variants of the process permanently or temporarily also  $\geq 80$  percent by weight,  $\geq 90$  percent by weight or  $\geq 95$  percent by weight or also  $\geq 98$  25 percent by weight of oxygen, or the enveloping gas stream may practically be pure oxygen. The oxygen content of the enveloping gas stream may be  $\leq 95$  to 98 percent by weight, where appropriate  $\leq 80$  to 90 percent by weight or also  $\leq 60$  to 70 percent by weight, where appropriate also  $\leq 50$  or  $\leq 25$  percent by weight. The oxygen content of the enveloping gas and also of the conveying gas may be adjusted by the use of in- 30

ert gases for example to  $\leq$  10 to 20 percent by weight or  $\leq$  5 percent by weight of the gas, or practically pure inert gases may be used. The inert gas to be used is dependent on the respective conditions of the process; it may be nitrogen for instance, preferably argon. Since also the bath

5 temperature decreases due to the strongly endothermic calcination reaction of the used additives including high fractions of volatile calcination components and since the volatile calcination products like e.g. water steam and/or CO<sub>2</sub> or reaction products of the same like oxygen, hydrogen and CO cause a reduction of the partial pressure of the oxygen  
10 and/or of the reaction products in the burn spot, it is possible in accordance with the process of the invention to also dispense with the admixing of inert gases for controlling the bath and/or burn spot temperature.

15 Preferably, the conveying gas and/or the enveloping gas have a composition such that the same is inert also with respect to the calcination of the intermediate substance, i.e. that no or only a secondary reaction of the conveying and/or enveloping gas with the intermediate substance and/or with its calcination products takes place or that no or practically no reaction heat is released. This should preferably generally apply  
20 to the time period prior to the exit of the additive from the feeding device, e.g. a lance.

25 Together with the at least one additive which contains at least one further alloy constituent, additional solid materials may be fed to the melt if needed, for instance further alloy constituents which may be of the conventional type like ferroalloys, and/or slag-forming substances like calcium and/or magnesium compounds (e.g. CaO, MgO, dolomite etc.), silicates or quartz, without being limited thereto. The content of these  
30 further solid materials in the additive stream may be  $\leq$  50 percent by

weight, preferably  $\leq$  20-25 percent by weight or  $\leq$  10-20 percent by weight, in particular also  $\leq$  5-9 percent by weight or  $\leq$  2-4 percent by weight. Where appropriate the additive stream may be free of such additional solid materials.

5

The stream of additives supplied to the melt may include further solid materials or constituents like for instance carbons, hydrocarbons in a solid, liquid or gaseous form or other reduction agents like for instance ferrosilicon, aluminium, ferroaluminium etc. Preferably however, the additive to be alloyed contains  $\leq$  10 percent by weight or  $\leq$  5 percent by weight of such solid materials or reduction agents, preferably  $\leq$  2 to 3 percent by weight or  $\leq$  1 percent by weight. The stream of additives, in case inclusive of gaseous components contained therein, and/or the enveloping gas stream may also be free of (particle-shaped) carbon, hydrocarbons and/or other reduction agents. Hence, the lance which is used for feeding the additives does not act or act only to a minor extent as a kind of a burner, and possible reactions shall take place outside of the lance.

20 The additive which is used and which may exhibit a high content of chemically bound water may be suitably prepared for the pneumatic conveyance and/or conveyance by gravity. The content of free, merely physically bound water (residual humidity) may in this case amount to  $\leq$  5 percent by weight, preferably  $\leq$  2-3 percent by weight or  $\leq$  1 percent by weight, referred to the total weight of the additive. Where appropriate other ways may be chosen for implementing the conveying or feeding to the melt.

30 The additive may consist for  $\geq$  60-70 percent by weight,  $\geq$  75-80 percent by weight or  $\geq$  85-90 percent by weight or also  $\geq$  95 percent by weight

from the constituents (1) alloy constituents desired for the intended use, (2) volatile matter without melting metallurgical properties, and (3) slag formers.

5 The additive which is used and which is present in the solid form may have an average or maximum grain size of  $\leq$  10 mm,  $\leq$  3-5 mm or the like, and where appropriate it may also be present in a more finely dissipated form like in the form of a powder, e.g. with grain sizes of  $\leq$  0.5-1 mm, or in the form of dusts. If necessary, the additive may be also present in the compacted or agglomerated form, e.g. in a briquetted, pellet or granulated form, wherein the briquettes, pellets etc. are able to burst and to finely dissipate unaided, due to the calcination reaction and the vaporization of water and/or CO<sub>2</sub> during feeding thereof to the burn spot.

10

15 The method according to the invention may particularly be an AOD process. The melting vessel may be an argon-oxygen-decarbonizer, a Creusot-Loire-Uddeholm (CLU) converter, a vacuum-oxygen (VOD) converter, or a Cr-converter. Where appropriate the melting vessel may be a BOP or Q-BOP converter. Possibly, though less preferably, the process may be an electro-steel-process, for instance an electro light arc furnace process.

20

25 The alloy constituents that must be brought in for adjusting the composition of the melting bath may be supplied for  $\geq$  5-10 percent by weight or  $\geq$  20-25 percent by weight,  $\geq$  30-35 percent by weight or  $\geq$  40-50 percent by weight through the additives in accordance with the invention which include high fractions of chemically bound water or calcinating constituents. Where appropriate also  $\geq$  75 percent by weight or approx

100 percent by weight of the alloy constituents may be supplied through the additives which are used in accordance with the invention.

Depending on the size of the melting vessel or converter, the stream of

5 additives may amount to  $\geq 100$  kg/min, preferably 200-500 kg/min or even more, respectively referred to a melt of 100 to 120 tons metal weight (i.e. without slag weight), which analogously applies also to higher melting masses.

10 Supplying highly water-containing additives in accordance with the invention has proved particularly with regard to nickel and/or cobalt-containing additives, without being limited to the same. Accordingly, the following description refers to Ni-containing additives. It will be understood that, unless otherwise stated, this analogously applies to Co-containing or other additives containing different main alloy constituents, for instance Mn, Mo or Cr.

15

Accordingly, the additive which has to be used in the process according to the invention may be obtained by dissolving or leaching-out the relevant alloy constituents, particularly transition metals, from an ore, from a suitably processed ore or generally from a product which contains the alloy constituents and which may for instance be a waste material. After having transferred the respective alloy constituent, of which the content has to be increased in the metal melt, into the dissolved state the same may be precipitated by appropriate agents, for instance by alkaline agents such as MgO, CaO, dolomite etc., which may be used as a slurry where appropriate, ammonia or ammonium salts and/or carbonate or the like. Depending on the respective application, the precipitation may take place at increased temperatures or at room temperature and in exceptional cases also under cooling. Accordingly, the resulting precipitate

20

25

30

may be a water-containing hydroxide, carbonate or a mixed hydroxide/carbonate. Normally the precipitation of the transition metal forming the alloy constituent takes place without the use of S-containing precipitation agents or without agents which lead to an S-introduction

5 into the precipitate to be obtained. Accordingly, the alloy constituent is normally precipitated in such a form that the resulting additive overwhelmingly or practically exclusively consists of constituents which during the calcination of the additive when the same is transferred to the upper space of the melting vessel release apart from the alloy constituent overwhelmingly or practically exclusively volatile components such as H<sub>2</sub>O, CO<sub>2</sub> etc., which are harmless compared to S-containing gases like SO<sub>2</sub> from the melting metallurgical aspect, and/or slag-forming components.

15 Where appropriate the solution containing the alloy constituent may be processed after dissolving or leaching the ore or another suitable material, in order to remove certain components like impurities. It will be understood, that the enrichment of the transition metal from the respective source may in case be effected in a different way, for example  
20 by extraction processes, though the same are less preferred.

Thereafter, the additive may be treated in such a way that it can be conveyed pneumatically or by gravity. To this end, the additive may include a residual humidity in physically bound water of ≤ 5 percent by weight, preferably ≤ 1 to 3 percent by weight. It will be understood, that the residual humidity to be adjusted is dependent on the respective conditions of the process.

30 The additive which is ready for being used may have a content of ≥ 10-15 percent by weight, ≥ 15-20 percent by weight or also ≥ 25-30 percent

by weight of metallurgically harmless components such as  $H_2O$  and/or  $CO_2$  which are volatile during the calcination, for instance also  $\geq 30-35$  percent by weight or  $\geq 35-40$  percent by weight. The content of these components preferably is  $\leq 65-70$  percent by weight, e.g.  $\leq 60-65$  percent by weight,  $\leq 55-60$  percent by weight or  $\leq 55-60$  percent by weight. Here, the chemically bound water may be present particularly in the form of crystal water and/or hydroxide groups. Where appropriate, the additive may be pre-calcinated for already removing for instance a part of the chemically bound crystal water, although such a step is not necessarily required. The aforementioned facts may respectively apply also generally within the scope of the present invention.

Particularly preferred is an essentially metallic constituent or main constituent of the additive, of which the content has to be increased in the metal melt, at least one or more transition metals. The transition metal with the highest content or the transition metals may be present individually or altogether at an amount of  $\leq 60-70$  percent by weight, referred to the total metal content of the additive, wherein in this case all the metals, inclusive of Fe and slag-forming metals like Ca, Mg etc. are comprised. The transition metal or metals are preferably those metals which represent reducible oxides under the present conditions of the process when in contact with the melt or after the introduction into the melt, so that the at least one transition metal merges into the melt in a metallic form, by a melting metallurgical reaction with the melt. Accordingly, the melt acts reductively on the transition metal oxide which is generated by the calcination of the additive, or possibly it acts reductively on the additive itself. Preferably, the transition metal which is present in an oxidic and/or metallic form exhibits a steam pressure which is not excessively high or which may practically be neglected, so that losses caused by evaporating metal and/or metal oxide are avoided or

kept small. This also comprises losses which are caused by a material discharge of the metal oxide or also of the additive itself due to the escaping calcination gases. An essential constituent or a main constituent of the additive may be at least one transition metal like for instance Ni,

5 Co, V, Mo, Mn, Cr, Ti, Zr, W, Nb, Ta or combination thereof, and preferably the transition metal is Ni, Co, Mo or V, especially Ni or Mo. Where appropriate, Ni and Co may be present in combination, wherein Ni or Co can be the main constituent.

10 For the production of nickel and/or cobalt-containing additives it is particularly advantageous to apply leaching of laterite ores or laterite-like ores, e.g. saprolite. But preferred is the product which is weathered the most, namely laterite. In lateritic nickel ores two kinds may be differentiated, namely Ni-limonite ore which is very rich in iron with 1 to 2 percent by weight of nickel, bound to goethite, or nickel-silicate ores which frequently contain more than 2 percent by weight of nickel which in silicates is especially bound to serpentine. It will be understood that also other transition metals, other suitable sources and particularly also ores may be used.

15

20 For leaching Ni/Co, acids may be used in particular, for instance sulfuric acid. The leaching is effected preferably by heap leaching. The leaching may be normally performed at atmospheric pressure or at an increased pressure, for instance by high pressure acid leaching. Where appropriate also other processes such as biological leaching processes, ammonium/ammoniac leaching and the like may be used. This may generally apply also to other transition metals which are obtained from ores or other sources. Preferably, the leaching is performed without the use of sulfides and/or chlorides, which fact may also apply to other

25

30 method steps for the production of the additive.

From the resultant solution or leach cobalt may be separated before by suitable methods, for example by means of suitable complexing agents like phosphonic acids etc. This generally applies also to the separation 5 of other undesired components as well as undesired alloy constituents, both for the production of Ni-containing additives or also other additives containing transition metals. If necessary, nickel and cobalt may thereafter be leached also in common, for producing so-called mixed precipitates (MHP). This analogously applies to other mixed transition metal 10 precipitates.

The nickel-containing additive may have a nickel content of  $\geq$  5-10 percent by weight, for instance  $\geq$  15 to 17 percent by weight or  $\geq$  20 to 23 percent by weight, where appropriate also  $\geq$  25 to 27 percent by weight, 15 inclusive of the content of residual humidity or respectively referred to a substance having a residual humidity of approx 0 percent by weight. The nickel content typically is  $\leq$  50-55 percent by weight or also  $\leq$  40-45 percent by weight, but it may also amount up to approx 60-65 percent by weight or higher. These specifications relate to the additive which is 20 to be used in the melting metallurgical process. This may correspondingly apply also to Co-containing additives or other additives with transition metals of the first transition metal period like V etc., inclusive of mixed additives with two or more alloy constituents like No/Co additives, and corresponding facts apply to transition metals of higher periods like for instance Mo, in consideration of the relationship of the 25 atomic weights of the transition metal of the higher period to that of the first period like for instance Ni.

The following specifications particularly relate to a Ni/Co-containing 30 additive which is produced especially by laterite leaching. But these

specifications may also be generally valid within the scope of the invention.

The additive may be chemically bound water in the form of crystal water and/or hydroxide groups at a fraction of  $\geq 5$ -10 or up to 11 percent by weight or  $\geq 15$  to 21 percent by weight, possibly also  $\geq 25$  to 30 percent by weight or  $\geq 35$ -40 percent by weight, which may also generally apply to additives that can be used within the scope of the invention. Preferably, the additive does not contain more than 50-55 percent by weight or 10 60-65 percent by weight of water (inclusive of water in the bound form). If the additive is present as a carbonate or mixed hydroxide/carbonate, the respective content is correspondingly valid for the content of  $\text{CO}_2$  and/or chemically bound water.

15 The sulfur content of the additive preferably amounts to  $\leq 5$ -10 percent by weight, in particular  $\leq 4$  percent by weight or  $\leq 2$ -3 percent by weight. Preferably the sulfur content is  $\leq 0.5$ -1 percent by weight or  $\leq 0.2$ -0.3 percent by weight. This may analogously apply also to the content of Cl and may also be generally true within the scope of the invention.

20

If the additive shall serve alone for alloying nickel, vanadium and/or molybdenum in the melt, the Co-content preferably amounts to  $\leq 2.5$ -2 percent by weight,  $\leq 1.75$ -1.5 percent by weight or  $\leq 1.25$ -1 percent by weight. This especially applies where the additive serves for alloying nickel and where e.g. nickel is present as a main constituent. The Co-content is therefore noncritical with regard to other Co-sources of the melt, so that with respect to the amount at which the additive may be used in the respective process no restrictions are given for avoiding undesirably high Co-contents.

25

30

Preferably the content of P, Cu, Sn, Pb, Nb, As, Cd and/or Pd in the additive is limited to such values that the amount of the additive to be added to the respective melt is not limited, in order to be able to keep  
5 the upper limits of the specified components in the melt. If it is only Ni which is to be alloyed by the additive, this will also apply to the components Co, V, Mo and vice versa. Due to the fact that the additive may be obtained through an aqueous solution of the respectively desired transition metal, the contents of the stated components may be comparatively  
10 easily controlled by known measures.

In addition to the main alloy constituent the additive may contain further alloy constituents such as e.g. cobalt (in the case of a Ni additive) or nickel (in the case of a Co additive), manganese etc., if these elements  
15 are desired for the respective intended use or are not disturbing. In the case of a Ni and/or Co-containing additive obtained from leaching laterite there may be further contained manganese (e.g.  $\geq 0.25$  to 5 percent by weight or  $\geq 1$  to 2 percent by weight), where the content may be  $\leq 7.5$  to 10 percent by weight or  $\leq 5$  percent by weight, cobalt at fractions of  $\geq 0.1$  to 0.25 percent by weight or  $\geq 0.75$  percent by weight, where the cobalt content may be  $\leq 3$  to 5 percent by weight or  $\leq 2$  percent by weight. The content of alloy formers including iron may in this case be  $\geq 1$  to 2 percent by weight or  $\geq 3$  percent by weight and may be  $\leq 15$  percent by weight,  $\leq 10$  to 12 percent by weight or also  $\leq 8$  to 10 percent by  
20 weight. This may also be generally true within the scope of the invention.  
25

The additive may further contain slag-forming constituents like Ca, Mg. The content of the slag-forming constituents or the content of Ca  
30 and/or Mg in the additive may be  $\geq 0.5$  to 1 percent by weight or 1.5 to

2 percent by weight, for instance  $\geq$  3 to 5 percent by weight, referred to the additive which is free of residual humidity and respectively referred to the weight of the metal. The slag-forming constituents or Ca and/or Mg may be present in a form suitable for the melting metallurgical process, e.g. as an oxide, hydroxide and/or carbonate, but also silicate. The content of slag-forming constituents may be  $\leq$  25 percent by weight or  $\leq$  15 to 20 percent by weight, particularly  $\leq$  10 to 12 percent by weight or  $\leq$  6 to 8 percent by weight, referred to the additive without residual humidity that is to be used in the process. The stated contents may be respectively inclusive or exclusive Mn, Cr, Si, Ti, Si and/or Fe. The aforementioned facts may also generally apply within the scope of the invention.

In the following the invention will be explained by way of a preferred embodiment, and the drawing figure is a schematic illustration of the melting vessel (converter) including a feeding device for the additive in the form of a lance.

Figure 1 shows an arrangement for carrying out the process according to the invention, wherein a metal melt 2 is provided in a melting vessel 1 which is e.g. in the form of a converter, and wherein the metal melt 2 is covered with a slag 3. The melt may represent an iron alloy, e.g. one for the production of a Ni-alloyed steel having a Ni content of 1.5 to 30 percent by weight, especially for the production of usual Ni or Cr/Ni steels like 18/8 Cr/Ni steel and/or steels having a P and S content respectively of  $< 0.005$  percent by weight or  $< 0.0035$  percent by weight, which may apply independently of the embodiment. Here, the slag represents a slag which is usual for the production of the respective alloy, for instance containing high fractions of chromium oxide, MgO,

CaO and/or SiO<sub>2</sub>, and which in addition to covering the melt may interfere in the metallurgy of the melt.

As a feeding device for introducing the additive into the melt a preferably water-cooled lance 4 is provided above the slag which penetrates preferably into the upper part of the melting vessel 1. Said lance 4 consists of a central tube 5 for nozzle injecting the solid additive into the melt, which central tube is surrounded on the outside thereof by an external tube 6 or by a plurality of single tubes, for instance  $\geq 2\text{-}3$  or  $\geq 4\text{-}6$  single tubes, circumferentially arranged around the said central tube. The tube ends may be provided with nozzle-like discharge openings, e.g. in the form of Laval nozzles, in order to be able to inject the additive through nozzles into the melt at a high speed, preferably supersonic speed. Accordingly, the solid, pneumatically conveyable additive is injected in case by means of a suitable conveying gas such as oxygen through the central tube into the melt, through the external tubes 6 a gas stream is ejected towards the metal melt, which gas stream surrounds and focuses the solid material stream leaving the central tube 5. Here the gas jacket 7 serves on one side for materially shielding the solid material stream against the surroundings and further to focus the same especially with regard to the high fraction of volatile matter which is produced during the calcination of the additive. In particular, the gas stream also serves for completely or almost completely penetrating through the slag, thereby producing a slag-free burn spot 9 where the metal melt 2 is hence exposed. The temperature of the melt in the region of the burn spot may be for example 2,400 to 2,600°C.

The additive is injected through the nozzles into the melt at a speed which is high to an extent that a calcination of the additive takes place at the time of or after the exit of the additive from the lance, under

separation of  $H_2O$ ,  $CO_2$  and in case also of other volatile matter. Because of the high ambient temperatures, e.g. the radiation heat from the wall 1a of the melting vessel, from the metal melt and the like, the decomposition of the additive takes place predominantly or completely 5 on the way from the lance nozzle 4a to the melting bath. Possible non-calcinated fractions of the additive are calcinated in the burn spot 9 or in the impact zone 10 on the metal melt. Accordingly, during the calcination all the volatile matter such as  $H_2O$ ,  $CO_2$  and the like are volatilized, so that only the non-volatile substances like metal oxides enter 10 into the melt and become absorbed by the melt.

The gas which is passed along with the solid material stream through the central tube 5 may be air, a gas which is oxygen-deriched compared to air, or an inert gas. The enveloping gas passed through the external 15 tubes 6 may represent air, a gas which is oxygen-enriched compared to air, or pure oxygen or an inert gas or mixtures thereof. The oxygen content has to be adapted to the respective conditions of the process like for instance the heat budget of the melting metallurgical process. Where appropriate, further solid materials like alloy constituents, slag formers 20 or the like may supplied to the melt along with the additive stream, though this is not necessarily required. Preferably, the additive stream does not contain reduction agents like carbon, ferrosilicon, aluminium or the like. The process according to the invention may represent particularly an AOD process, where appropriate also an electro metallurgical 25 process.

Surprisingly it turned out that the supply of additives for the adjustment of the alloy content of the melt is possible under the use of highly water-containing substances, whereby the production cost of the 30 respective alloy can be clearly reduced, especially as the additive can be

produced at low cost and additional expensive steps like a treatment of the slag for reducing the sulfur content of the melt etc. can be avoided. Such a process management is given especially by the fact that the additive is directly injected through nozzles into the very hot, slag-free  
5 burn spot.

The additive may be obtained in particular by laterite leaching, for instance by leaching by means of sulfuric acid at atmosphere pressure or at an increased pressure, but in case also by other leaching processes.  
10 From the acidic leach the nickel-containing additive may then be precipitated through suitable precipitation agents like a MgO and/or CaO-slurry, by the addition of carbonates like sodium carbonate, calcium carbonate, dolomite etc., by the addition of ammoniac or ammonium compounds to produce essentially a nickel hydroxide, nickel carbonate  
15 or mixed nickel hydroxide/carbonate. The conversion with the precipitation agent may take place at increased temperatures, for instance at 30-80°C or higher, in suitable time periods from e.g. some minutes up to 1 hour. Where appropriate, cobalt may be separated by suitable processes such as for instance extraction processes in a preceding step  
20 of the process.

The additive may be pre-dried for a residual humidity which permits a pneumatic conveyance of the additive. In this case, the residual humidity is understood to be physically bound water which may be removed  
25 at temperatures of  $\leq$  120 to 150°C within a suitable period of time, for instance within one to two hours. The additive may be treated so that it is suitable for conveyance by gravity.

If need be, the additive may be mechanically treated in order to obtain a suitable grain size or dissipation, and in case it may also be compacted or agglomerated.

- 5 In the case of a nickel-containing additive the nickel content thereof is typically approx 15 to 55 percent by weight, especially approx 20 to approx 40 percent by weight, referred to the pre-dried additive (without residual humidity). The content of chemically bound water in the form of crystal water and/or hydroxide groups typically is 30 to 50 percent
- 10 by weight or also 40 to 50 percent by weight. It will be understood that the additive may possibly be pre-calcinated at higher temperatures, in order to decrease the water and/or carbonate content, though this is not necessarily required.
- 15 In the following two typical analyses of the nickel-containing additive are given. The products were each obtained by laterite leaching by means of an 80% sulfuric acid at 90°C for 0.5 hours (approx 20 g of ore, suspended in 80g of water; 100 g of sulfuric acid). Leaching times < 1 or < 0.75 hours generally proved advantageous. The leach was partially
- 20 neutralized by means of dolomite and thereafter mixed with a MgO-slurry to produce a nickel hydroxide precipitate.

The precipitate that was filtered off was dried for a residual humidity of approx 1.5 percent by weight (at 120°C for 2 hours), the content of chemically bound water was 55 percent by weight (composition 1) respectively 45 percent by weight (composition 2), each calculated as the weight loss of the material dried for a residual humidity of approx 0 percent by weight after a thermolysis at 750°C for 4 hours until weight constancy. It will be understood that the thermolized material may still

contain a content of carbonate or other constituents which decompose only at higher temperatures.

It will be understood that the composition of the additive may vary depending on the ore that is used or the nickel-containing base product.

5 The following analysis details are related to a material which was dried at 120°C for two hours to obtain a residual humidity of approx 0 percent by weight (i.e. crystal water inclusive).

10 Composition 1 (data in percent by weight)

Ni	24
Al	0.75
Ca	0.75
Co	1.5
Cr	< 0.05
Fe	0.75
Mn	4.0
Mg	6.0
Water content (crystal water)	50

Composition 2 (data in percent by weight)

Ni	38
Al	< 0.05
Ca	2
Co	0.5
Cr	< 0.05
Fe	2.5

Mn	1.5
Mg	2.5
Water content (crystal water)	40

It will be understood that except of ores also other substances may be generally used for the production of the additives used in accordance

5 with the invention, from which nickel-containing or generally transition metal-containing additives can be produced in a corresponding manner and with which the transition metals can be obtained by a suitable leaching on the basis of a water-containing leaching agent.

10 Further, it will be understood that the process according to the invention is not limited to the use of Ni/Co-containing additives, but that also other alloy constituents, especially transition metals like Mo, V or the like may be added to the melt in a corresponding form. In this case, the additives are respectively injected through nozzles into the melting  
15 vessel and the metal melt having a very high temperature preferably from the upper side of the melting vessel and, in the case of melts which are covered with a slag, into a slag-free burn spot.

**EDITORIAL NOTE**

**APPLICATION NUMBER – 2008234283**

**This specification does not contain page 27**

CLAIMS:

1. Process for producing a metal melt containing at least one base metal and at least one further alloy constituent, wherein the production takes place in a melting vessel with slag covering the melt, wherein at least one alloy constituent-containing additive is fed to the melt for enriching the melt by the alloy constituent, the alloy constituent being a transition metal and the additive being in the form of a solid, the additive having a content of  $\geq 10$  percent by weight of said further alloy constituent, characterized in that the additive contains  $\geq 20$  percent by weight of melting metallurgically harmless matter being volatile by calcination when feeding the additive to the melt by means of a feeding device,  $\leq 5$  percent by weight of sulfur and possibly fractions of further alloy constituents and/or slag formers, and in that preferably the additive which contains the alloy constituent is directly supplied to the metal melt by means of a gas stream under the formation of a slag-free burn spot of the slag-covered melt.

2. Process according to claim 1, characterized in that the additive is supplied to the melt in such a way that a calcination or decomposition of the additive takes place at least substantially only at the time of or after exiting from a feeding device that is provided and prior to or during impinging upon the metal melt or within an impact zone.

3. Process according to one of the claims 1 to 2, characterized in that the additive is supplied to the melt in a solid material stream which is surrounded by a gas stream.

4. Process according to one of the claim 1 to 3,  
characterized in that the burn spot has a temperature of  
 $\geq 1,750^{\circ}\text{C}$ .

5 5. Process according to one of the claims 1 to 4,  
characterized in that the enveloping gas stream has an  
oxygen content of  $\geq 25$  percent by weight or that it is oxygen at  
least for the most part of it.

10 6. Process according to one of the claims 1 to 5,  
characterized in that the enveloping gas contains for  $\geq 75$   
percent by weight at least one inert gas or consists of one or more  
inert gases at least for the most part of it.

15 7. Process according to one of the claims 1 to 6,  
characterized in that the solid material stream which  
contains the alloying additive contains  $\leq 10$  percent by weight of  
reduction agents, inclusive of carbon, carbon hydroxides and  
ferrosilicon.

20 8. Process according to one of the claims 1 to 7,  
characterized in that  $\geq 5$  to 10 percent by weight of the  
alloy constituent which is the main constituent of the additive is  
supplied to the melt via the additive.

25 9. Process according to one of the claims 1 to 8,  
characterized in that the additive contains nickel and/or  
cobalt as the main alloy constituent.

10. Process according to one of the claims 1 to 9,  
5 characterized in that the additive is for the most part of it crystal water-containing salt, hydroxide, carbonate or mixed hydroxide/carbonate.
11. Process according to one of the claims 1 to 10,  
10 characterized in that the additive consists for  $\geq$  70 to 80 percent by weight of the constituents (1) alloy constituents desired for the intended use, (2) volatile matter without negative melting metallurgical properties and (3) slag formers.
12. Process according to one of the claims 1 to 11,  
15 characterized in that the process is an AOD process, CLU-process, VOD-process, BOP-process or Q-BOP process or an electro-steel process.
13. Transition metal-containing additive for the production of transition metal-containing alloys in melting metallurgical processes, wherein  
20 the additive is present as a solid material with a transition metal content of  $\geq$  10 percent by weight, characterized in that the additive comprises a fraction of melting metallurgically harmless volatile matter in the form of  $\text{H}_2\text{O}$  and/or  $\text{CO}_2$ , inclusive of chemically bound water in the form of crystal water and/or hydroxide groups, of  $\geq$  20 percent by weight, a sulfur content of  $\leq$  5 percent by weight  
25 and a content of further alloy constituents of  $\geq$  1 percent by weight and/or a content of slag formers of  $\geq$  0,5 percent by weight and that is obtainable by processing of ores, waste materials or other products containing the alloy constituents by transferring the respective alloy constituent into a dissolved state, precipitation of it  
30 and, where appropriate, further processing steps.

14. Additive according to claim 13, characterized in that the transition metal is nickel, cobalt, vanadium or molybdenum or a combination of two or more of the same, especially nickel and/or cobalt.

5

15. Additive according to one of the claims 13 to 14, characterized in that the content of nickel, cobalt, vanadium and/or molybdenum individually or in combination in the additive amounts to 15 to 60 percent by weight.

10

16. Additive according to one of the claims 13 to 15, characterized in that the additive includes  $\geq$  20 percent by weight of chemically bound water in the form of crystal water and/or hydroxide groups.

15

17. Additive according to one of the claims 13 to 16, characterized in that the sulfur content is  $\leq$  2 percent by weight and/or that content of further alloy constituents is  $\geq$  3 percent by weight.

20

18. Additive according to one of the claims 13 to 17, characterized in that the content of slag formers is  $\leq$  20 percent by weight.

25

19. Additive according to one of the claims 13 to 18, characterized in that the additive is present in a state suitable for pneumatic conveying or for conveying by gravity or in a compacted state.

30

20. Additive according to one of the claims 13 to 19,  
characterized in that the additive is obtainable or is obtained by leaching laterites or laterite-like ores, preferably by means of acids.

5

21. Additive according to one of the claims 13 to 20,  
characterized in that the additive is obtainable or is obtained by the precipitation of hydroxide and/or carbonate from an aqueous solution, if necessary after a preceding treatment of the solution.

10

22. Additive according to one of the claims 13 to 21,  
characterized in that after a thermal treatment at 750°C the additive is subject to a loss of weight of 20 to 60 percent by weight until weight constancy.

15

23. Use of a transition metal containing additive for producing a transition metal alloy in a melting metallurgical process, wherein the additive is fed to a metal melt containing at least one base metal to enrich the melt with the alloy constituent, wherein the production of the alloy takes place by feeding the additive to a melting vessel containing a slag covered melt or wherein the process in general is a AOD-process, CLU-process, VOD-process, BOP-process or Q-BOP process or an electro-steel process, and wherein the additive is a solid comprising a transition metal content of  $\geq$  10 percent by weight, characterized in that the additive contains melting metallurgically harmless matter in the form of H<sub>2</sub>O and/or CO<sub>2</sub>, inclusive of chemically bound water in the form of crystal water and/or hydroxide groups, of  $\geq$  20 percent by weight, a sulfur content of  $\leq$  5 percent by weight and a content of further alloy constituents of  $\geq$  1 percent by weight and/or a content of slag formers of  $\geq$  0,5 percent by weight.

20

25

30

24. Use of a transition metal containing an additive according to claim 23 in a process according to one of the claims 1 to 13.

Fig. 1

