



US010791862B2

(12) **United States Patent**
Schwab

(10) **Patent No.:** **US 10,791,862 B2**

(45) **Date of Patent:** **Oct. 6, 2020**

(54) **SUPPORT DEVICE FOR AN ARTICLE**

(71) Applicant: **Dovrat Schwab**, Hadar-Am (IL)

(72) Inventor: **Dovrat Schwab**, Hadar-Am (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/791,430**

(22) Filed: **Oct. 24, 2017**

(65) **Prior Publication Data**

US 2018/0084935 A1 Mar. 29, 2018

Related U.S. Application Data

(63) Continuation of application No. PCT/IL2017/050172, filed on Feb. 12, 2017.

(60) Provisional application No. 62/295,532, filed on Feb. 16, 2016.

(51) **Int. Cl.**

A47G 29/087 (2006.01)

A47G 29/08 (2006.01)

A47K 5/04 (2006.01)

(52) **U.S. Cl.**

CPC **A47G 29/087** (2013.01); **A47G 29/083** (2013.01); **A47K 5/04** (2013.01)

(58) **Field of Classification Search**

CPC **A47G 29/087**; **A47G 29/08**; **A47G 29/083**; **A47G 29/093**; **A47J 45/02**; **A47K 5/04**; **A47K 5/05**

USPC **248/301**, **303**, **304**, **305**, **322**, **339**, **340**, **248/914**, **309.1**, **465.1**, **112**; **D6/536**, **537**, **D6/678.4**; **211/106**, **106.1**, **119.003**; **4/628**, **654**, **656**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,361,056 A * 12/1920 Hickman A45F 5/04 248/215

2,064,133 A * 12/1936 Von Schroeder A47G 29/083 248/214

2,473,086 A * 6/1949 Montero A47G 29/083 211/86.01

2,532,255 A * 11/1950 Davis A47G 29/083 248/215

2,615,576 A * 10/1952 Dahlgren B42F 9/00 211/50

(Continued)

FOREIGN PATENT DOCUMENTS

AT 504778 8/2008

OTHER PUBLICATIONS

Etsy, One Whale Tail Hook, Dec. 2015, <https://www.etsy.com/listing/606220373/one-whale-tail-hook-beach-decor-nautical>. (Year: 2015).*

(Continued)

Primary Examiner — Jonathan Liu


Assistant Examiner — Guang H Guan

(74) *Attorney, Agent, or Firm* — The Roy Gross Law Firm, LLC; Roy Gross

(57) **ABSTRACT**

A support device configured to be placed on a horizontal surface and configured to hold an article. The support device includes a weight member, a rod extending laterally offset from the weight member and extending downwards from an edge of the horizontal surface and ending in an upward curve. A holder extends upwards from the upward curve and is configured to hold the article laterally from the horizontal surface. The weight member is configured to weigh more than an accumulated weight of the rod, holder and article.

6 Claims, 5 Drawing Sheets

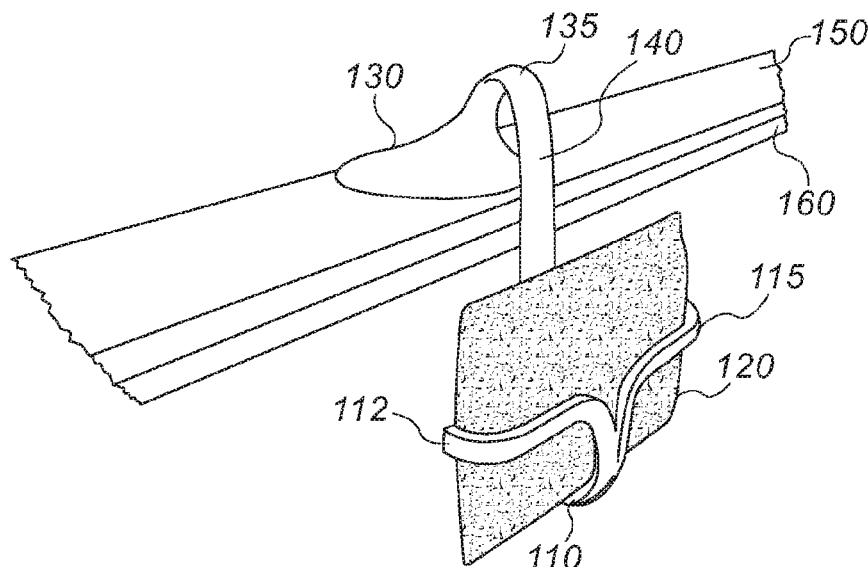

(56)

References Cited




U.S. PATENT DOCUMENTS

3,058,258	A *	10/1962	Barth	A47B 13/16 211/119.005	7,182,304	B2 *	2/2007	Adams	A47G 29/083 248/205.5
3,321,166	A	5/1967	Gordon		7,322,554	B2	1/2008	Caroselli et al.	
D256,745	S *	9/1980	Figuered	A47K 3/281 D6/537	7,389,966	B1	6/2008	Hunter	
D278,875	S *	5/1985	Beard	B42F 9/00 D6/566	7,464,911	B1	12/2008	Yen	
4,577,751	A *	3/1986	St-Jacques	A47K 3/281 108/27	7,847,692	B2 *	12/2010	Schuller	G08B 25/10 248/346.03
4,978,093	A	12/1990	Kennedy		9,115,845	B2 *	8/2015	Madigan	F16M 13/02
5,301,912	A *	4/1994	Chang	F16B 21/165 248/221.11	2004/0195484	A1 *	10/2004	Sheeran	A47G 29/083 248/304
5,620,105	A	4/1997	Macek		2006/0108496	A1	5/2006	Miranda	
D384,505	S	10/1997	Stewart		2006/0108497	A1 *	5/2006	Miranda	A47G 29/083 248/690
5,924,579	A *	7/1999	DuPont	A45D 44/02 211/106	2008/0087618	A1	4/2008	Laney	
D435,733	S	1/2001	Osterholt		2009/0109027	A1	4/2009	Schuller	
6,530,548	B2 *	3/2003	Pizzirusso	A47G 29/083 248/304	2016/0029852	A1	2/2016	Ljung	
					2018/0084935	A1 *	3/2018	Schwab	A47G 29/087

OTHER PUBLICATIONS

German Office Action for Application No. 11 2017 000 844.1, dated Dec. 10, 2018, 9 pages.

* cited by examiner

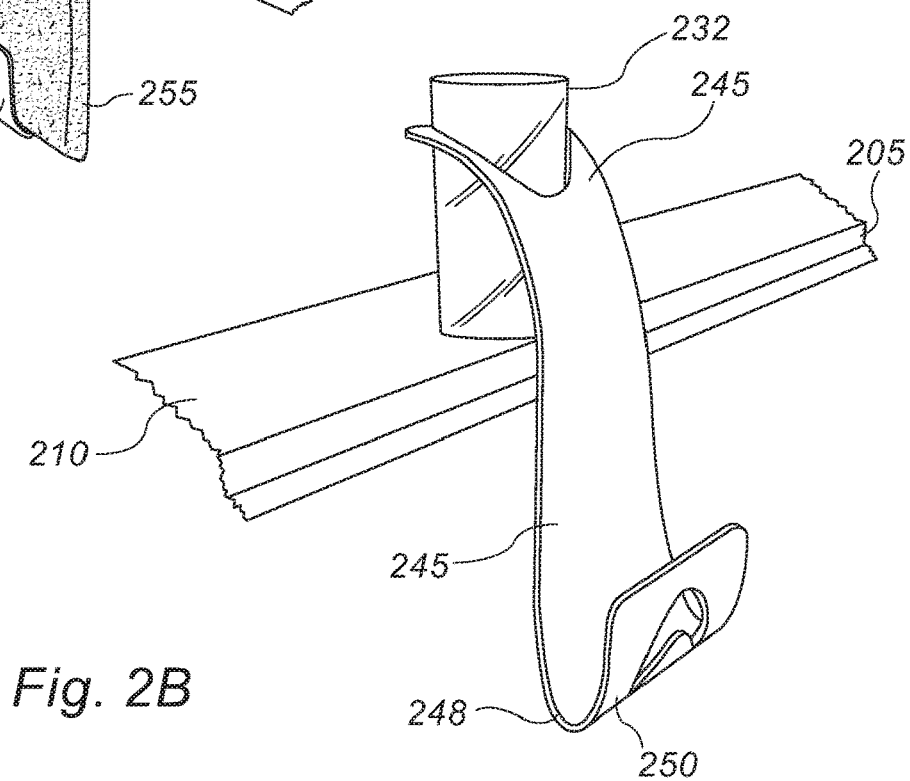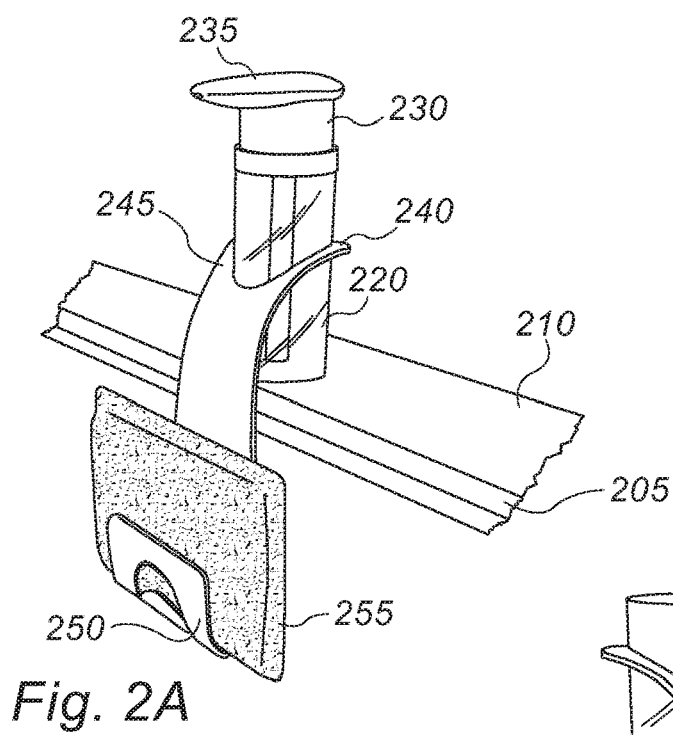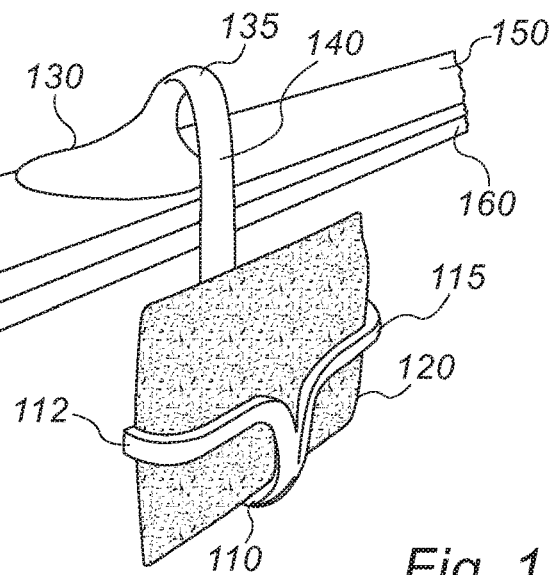

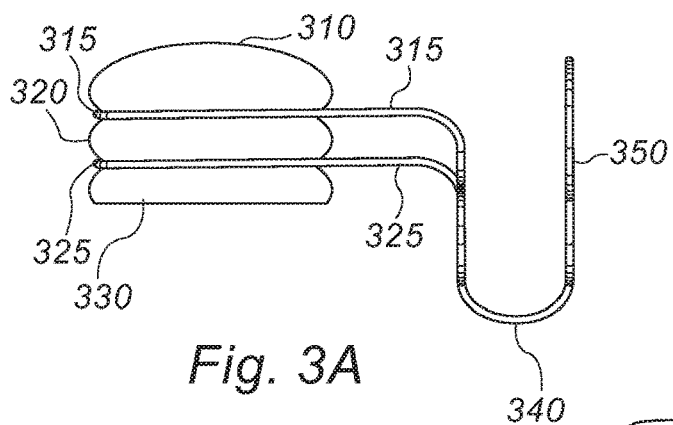


Fig. 3A

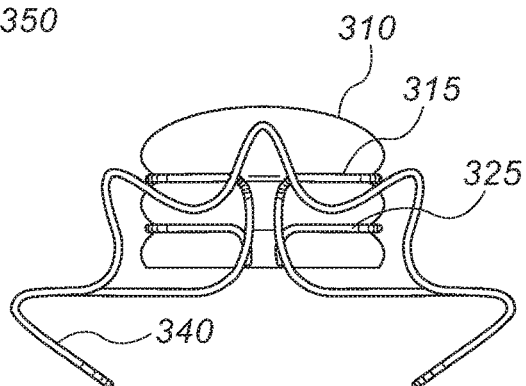


Fig. 3B

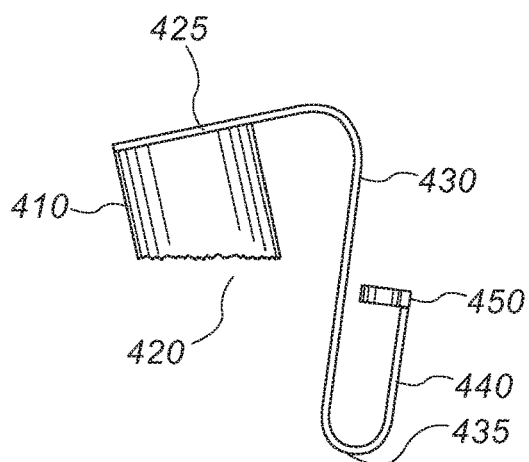


Fig. 4A

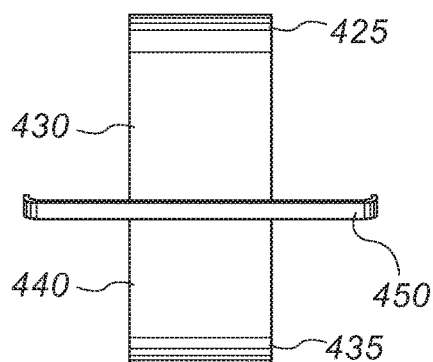


Fig. 4B

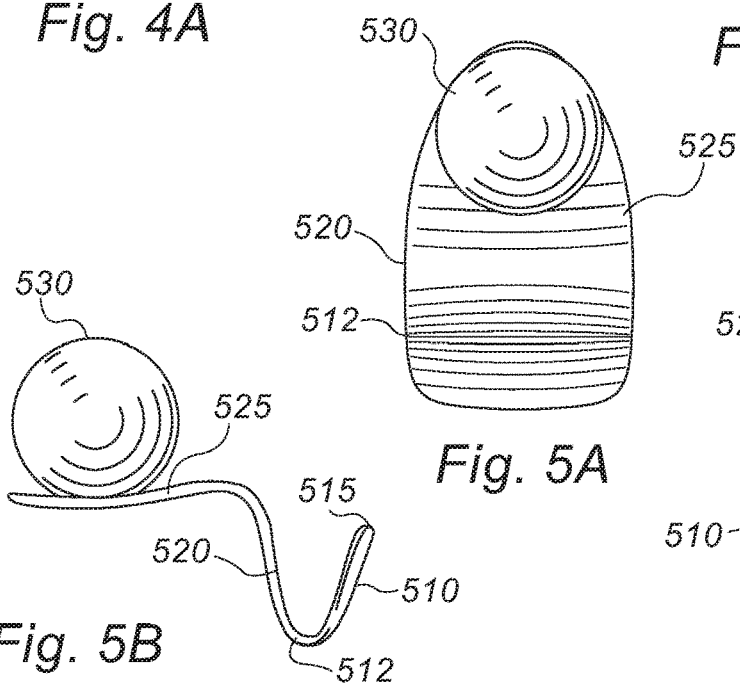


Fig. 5A

Fig. 5B








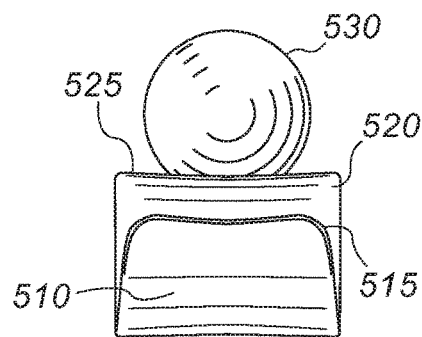


Fig. 5C

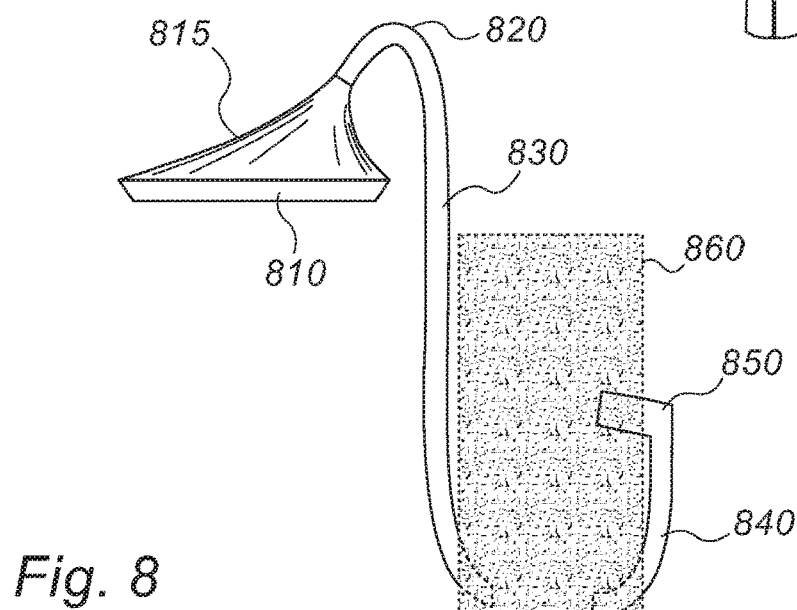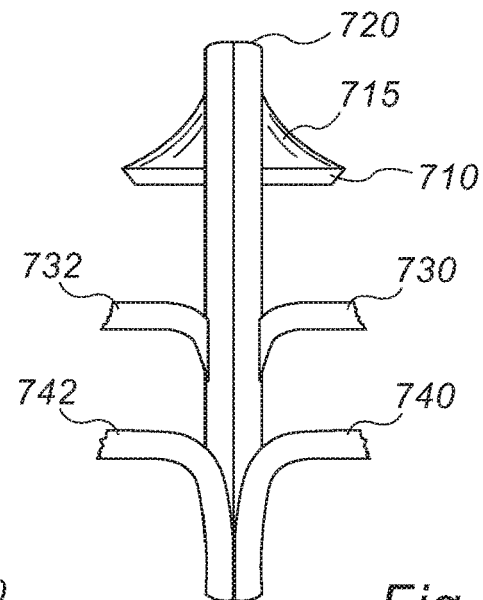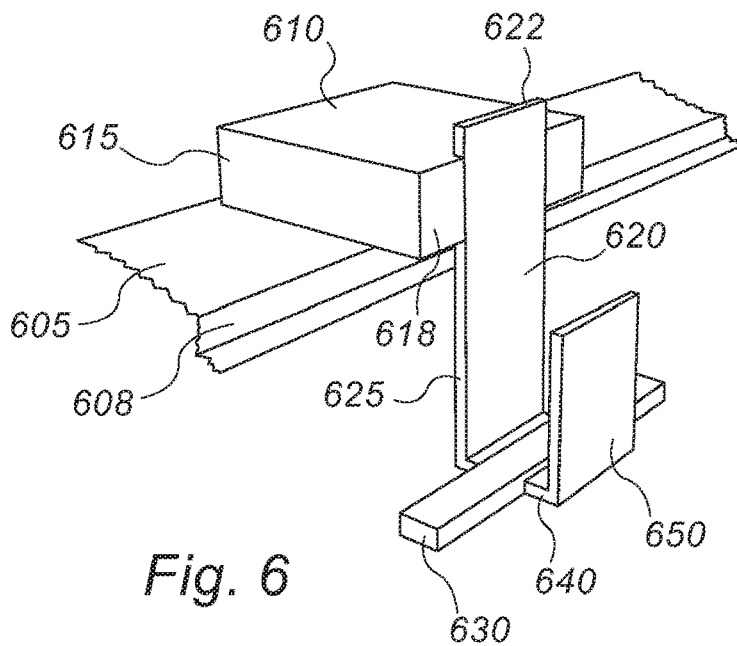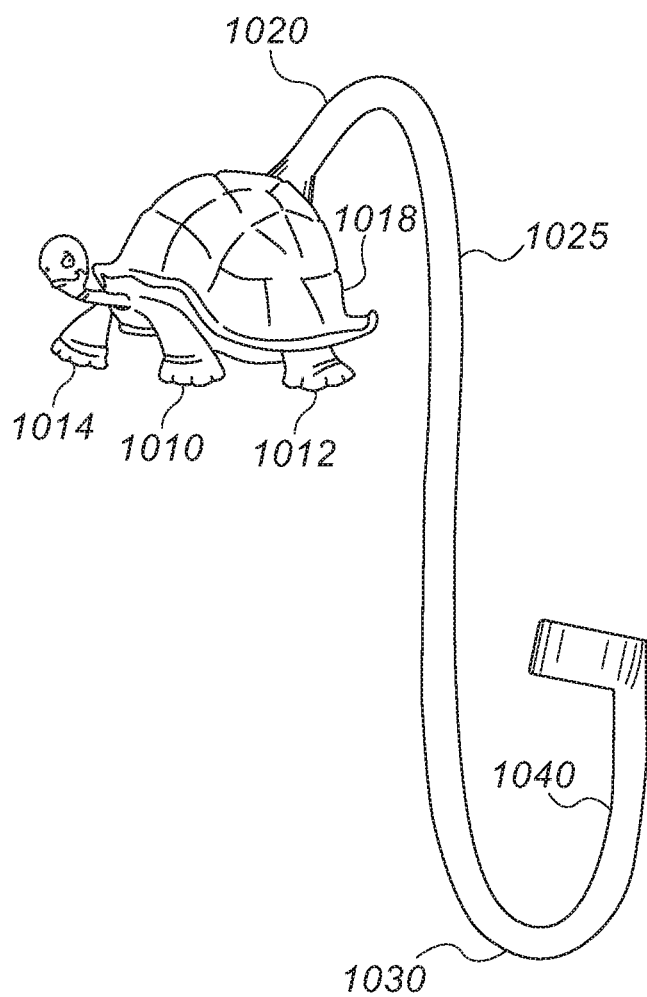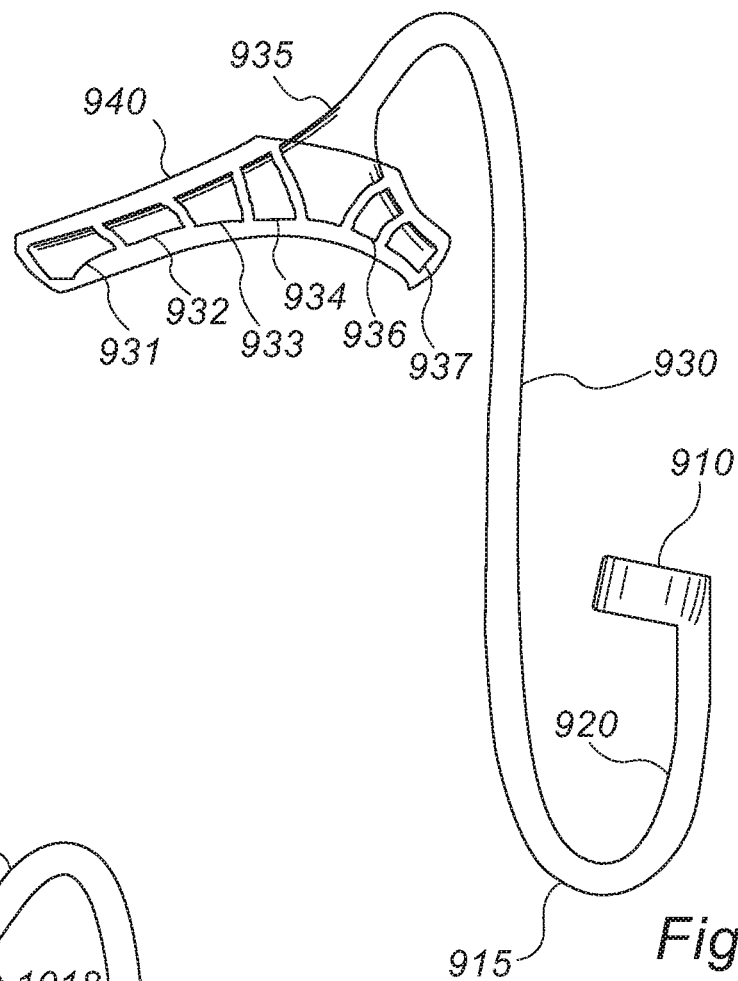

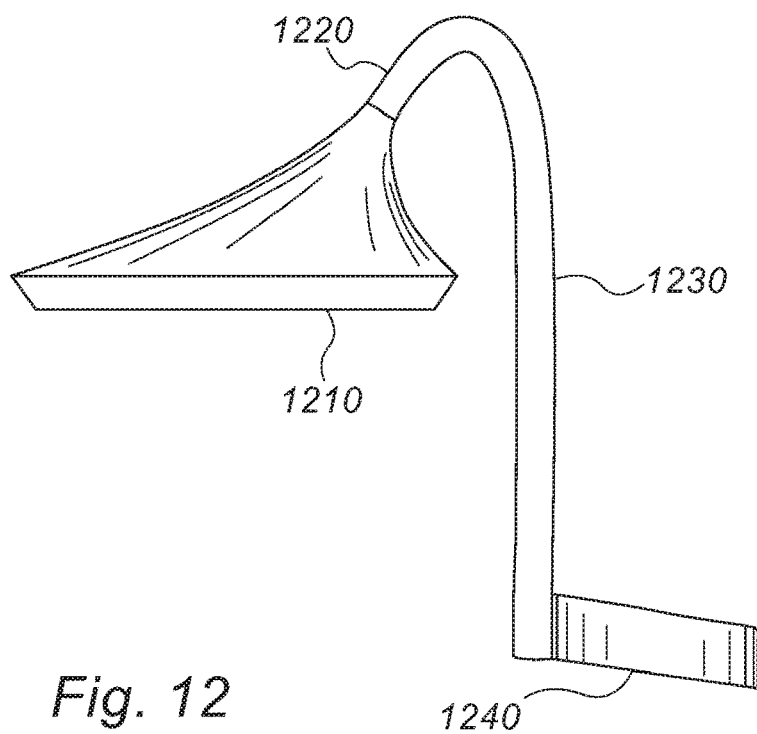

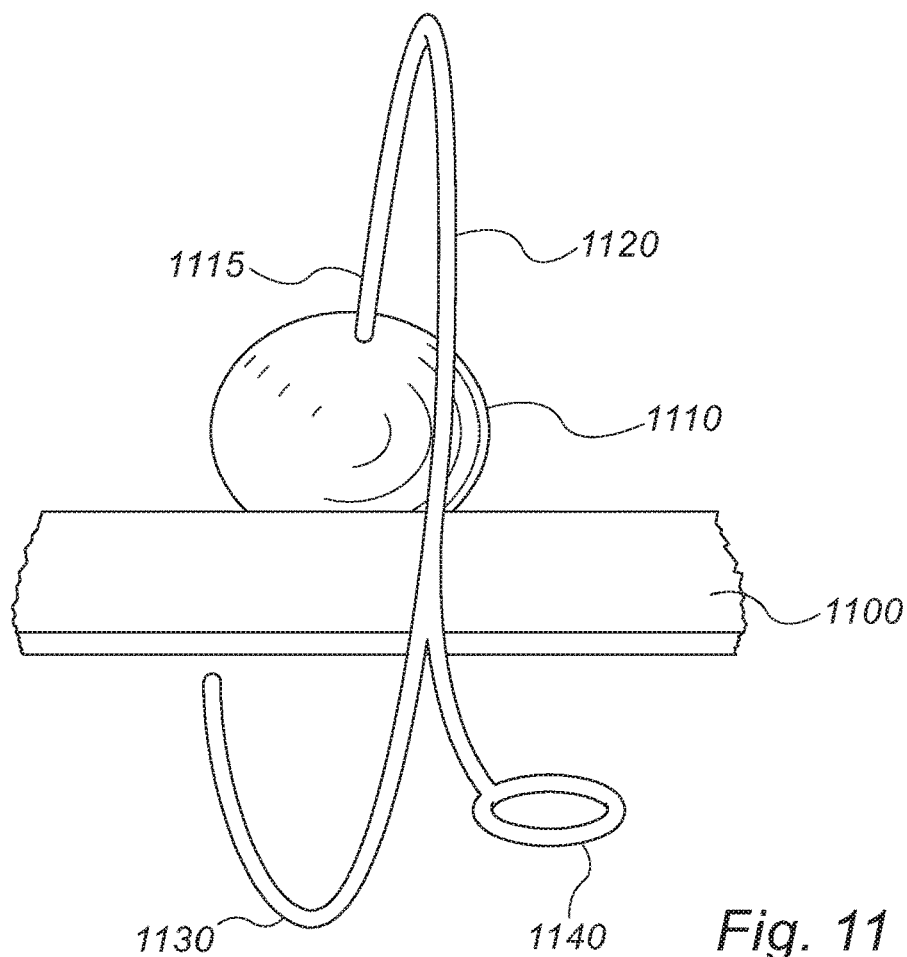

1

SUPPORT DEVICE FOR AN ARTICLE**FIELD OF THE INVENTION**

The present invention relates generally to a support for an article. More specifically, the present invention relates to a support device that removably engages a base horizontal surface.

BACKGROUND OF THE INVENTION

Cleaning handheld utensils become more popular and varied over time in performing functions in the house, specifically in the toilet room and the kitchen. These utensils are commonly left throughout the kitchen countertop area. In many cases, the cleaning utensils are disposed in or above a container filled with soap or dishwashing liquid. Further, awareness to cleaning level of the cleanings utensils rises, especially when mounted on central spaces such as the kitchen countertop. Many times, hence, the cleaning utensils are placed in the sink.

The cleaning utensils are usually placed upon the countertop, consuming expensive real estate in the kitchen and leaving a sticky mess to be cleaned. Holders for those cleaning utensils are often connected using a mechanism to a wall or to the sink. The mechanisms make the holders hard to be moved from one room to another, or from one space in the kitchen to another.

What is needed is a low cost, compact, and easy to install article support device that supports an article in the form of a cleaning utensil.

SUMMARY OF THE INVENTION

The present invention discloses a support device of an article, comprising a weight member configured to be mounted on a horizontal surface, a rod extending laterally from the weight member and then extending downwards, a curve on which the article is mounted, wherein the curve extends from the rod, wherein the curve is located under the horizontal surface and laterally from the weight member and a holder extending upwards from the curve, such that the article is held between the rod and the holder.

The support device does not require a physical connection or fixation to a surface, such as screws or vacuum pads, as the weight member provides the required stability. The support device is not limited to a specific surface, as opposed to other holders, for example vacuum pads which only apply to a specific surface type. The support device of the present invention is easily removed from one point to another, as the weight member is not affixed and there is no damage to the surface when the support device is removed therefrom.

In some cases, the weight member weighs more than the accumulated weight of the rod, the curve, the holder and the article.

In some cases, the support device may be made of a single sheet of material, for example a stainless still mold. In some cases, at least a portion of the weight member is covered by a synthetic material. In some cases, at least a portion of the rod is covered by a synthetic material. In some cases, a bottom surface of the weight member is flat.

In some cases, the support device further comprises multiple holders extending from the rod. In some cases, the multiple holders extend from the rod at different heights. In some cases, the multiple holders extend from the rod at the same height; wherein at least two of the multiple holders extend laterally from the rod.

2

In some cases, the curve is wider than the rod. In some cases, the rod comprises wires surrounding the weight member at multiple heights. In some cases, the rod is removable from the weight member.

In some cases, the weight member is a cup filled with liquid, or an empty cup. The cup may have a thick base, or thick sidewalls, to form the weight member. In some cases, the cup's base may be made of metal while the sidewalls are made of glass or plastic. In some cases, the rod is connected to an extension surrounding the cup. In some cases, the rod is attached to weight member via adhesive. In some cases, the rod is attached to top surface of weight member. In some cases, the rod is attached to bottom surface of weight member. In some cases, the support device further comprises a cover extending from the holder, said cover is configured to cover the article from above.

In some cases, the weight member has a bottom portion comprises multiple distinct legs. In some cases, the weight member is assembled of multiple rigid weight connected together by one or more connectors. In some cases, the one or more connectors are made of an elastic material.

BRIEF DESCRIPTION OF THE DRAWINGS

Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

In the drawings:

FIG. 1 shows a support and an article carried by a holder, according to exemplary embodiments of the subject matter;

FIG. 2A shows a support comprising a liquid container and an article carried by a holder, according to exemplary embodiments of the subject matter;

FIG. 2B shows a support comprising a cup and an article carried by a holder, according to exemplary embodiments of the subject matter;

FIG. 3A shows a lateral view of a support comprising a weight member and a rod surrounding the weight member, according to exemplary embodiments of the subject matter;

FIG. 3B shows a back view of a support comprising a weight member and a rod surrounding the weight member, according to exemplary embodiments of the subject matter;

FIG. 4A shows a side view of a support comprising a weight member and a rod attached thereto, according to exemplary embodiments of the subject matter;

FIG. 4B shows a front view of a support comprising a weight member and a rod attached thereto, according to exemplary embodiments of the subject matter;

FIGS. 5A-5C show a support comprising a weight member and a rod connected to a bottom surface of the weight member, according to exemplary embodiments of the subject matter;

FIG. 6 shows a support and an article carried by a holder, according to exemplary embodiments of the subject matter;

FIG. 7 shows a support comprising multiple holders, according to exemplary embodiments of the subject matter;

FIG. 8 shows a holder comprising a weight member covered by nylon and a holder, according to exemplary embodiments of the subject matter;

FIG. 9 shows a holder comprising a weight member assembled of multiple connected sections, according to exemplary embodiments of the subject matter;

3

FIG. 10 shows a holder comprising a weight member comprising multiple bottom surfaces, according to exemplary embodiments of the subject matter;

FIG. 11 shows a holder comprising a weight member connected to multiple holders, according to exemplary embodiments of the subject matter; and,

FIG. 12 shows a holder comprising a weight member connected to a flat holder, according to exemplary embodiments of the subject matter.

DETAILED DESCRIPTION OF THE INVENTION

The present invention discloses a support for an article. The article may be a cleaning utensil such as a cleaning pad, toilet paper rolls, toothbrush, paper trash, stationery, Light kitchen accessories, hand towels, cosmetics, and the like. The holder is configured to be placed on a horizontal surface located above the floor, such as a shelf, table, kitchen countertop, upper surfaces of sinks and others. The support comprises a weight member located on the horizontal surface and a rod extending laterally from the weight member. The rod is extended downwards and ends with a holder for holding the article. The weight member may have a flat base being in contact with the flat surface of the shelf or the kitchen worktop. The holder is located downwards and sideward from the weight member. That is, the holder is not located right below the weight member, but both beneath and sideward. For example, the weight member is mounted on the kitchen worktop and the holder is located inside the sink.

FIG. 1 shows a support and an article carried by a holder, according to exemplary embodiments of the subject matter. The support comprises a weight member **130** mounted on a horizontal surface **150**. The horizontal surface **150** may be a top surface of a shelf or a table, having also a lateral surface **160**. The lateral surface may be high, such as a kitchen countertop or short as a shelf. The holder is located below the horizontal surface **150**. The weight member **130** may be made of a plastic material, wood, metal or any other material or a combination of materials desired by a person skilled in the art. The weight member **130** may be shaped as a cube or a box as shown in FIG. 6. In some other cases, the weight member **130** may be shaped elliptically. The weight member may be embedded in an object, such as forming a base of a container.

The weight member **130** is connected to a first rod **135**. The rod first **135** may be connected mechanically to the weight member **130** or be molded with the weight member **130** as a single unit. The first rod **135** extends upwards, away from the horizontal surface **150**. The first rod **135** is connected to a second rod **140** extending downwards, below the horizontal surface **150**. In some other cases, the first rod **135** extends laterally without extending upwards, such that the weight member **130** is the upmost element in the support.

The second rod **140** extends downwards until a curve **110** that defines the lowest point of the support. The article **120** rests on the curve **110** and held between the second rod and lateral holders **112**, **115** extending from the curve **110**. The lateral holders **112**, **115** split from the curve **110** and extend upwards (toward the horizontal surface **150**) and then laterally, to opposite directions.

The first rod **135**, the second rod **140** and the lateral holders **112**, **115** may be made of plastic material. The rods and lateral holders may be covered by a thin layer of a plastic material such as polyethylene, polypropylene and others.

4

The weight of the weight member **130** may be at least the accumulated weight the rest of the support, namely the first rod **135**, the second rod **140** and the lateral holders **112**, **115**, as well as the article **120**. In some cases, the weight member **130** may be less than the accumulated weight the rest of the support, depending on the friction between the weight member **130** and the horizontal surface **150**. The bottom surface of the weight member may be covered with a slip resistance material.

FIG. 2A shows a support comprising a liquid container and an article carried by a holder, according to exemplary embodiments of the subject matter. The liquid container **220** may comprise water, liquid soap, dishwashing liquid and the like. The liquid container **220** functions as weight member **130** and the weight of the liquid container **220** should also carry the rest of the support as well as article **255** held between holder **250** and rod **245**, on curve **248** shown in FIG. 2B. The holder **250** and rod **245** may be substantially perpendicular to the horizontal surface **210** on which the liquid container **220** rests. Lateral surface **205** may be parallel to the holder **250** and rod **245**. Lateral surface **205** may be an inner wall of a sink, or a lateral surface of a shelf, extending away from the wall to which the shelf is attached. The rod **245** may be attached to a ring-like extension **240** surrounding the liquid container **220** for carrying the rod **245**. The ring-like extension **240** may be removable from the liquid container **220**, for example when wishing to clean the rod **245** and holder **250**. The ring-like extension **240** may surround only a portion of the liquid container **220**.

The liquid container **220** is activated by a person pressing on handle **235** connected to pump **230** which extracts the liquid from the liquid container **220** via an aperture. The liquid container **220** may function as the weight member also when empty or partially empty.

FIG. 2B shows a support comprising a cup and an article carried by a holder, according to exemplary embodiments of the subject matter. The cup **232** may be empty and used by a person for carrying items such as dish cleaning brushes, decorative element such as a flowerpot and the like.

FIG. 3A shows a lateral view of a support comprising a weight member and a rod surrounding the weight member, according to exemplary embodiments of the subject matter. The weight member comprises a single unit having one more niche along its peripheral surface, where the rod surrounds the weight member. The weight member comprises a bottom portion **330**, middle portion **320** and top portion **310**. Two niches are formed—first niche in the peripheral section between bottom portion **330** and middle portion **320** and second niche in the peripheral section between middle portion **320** and top portion **310**. The rod surrounding the niches may be a metal wire. For example, first wire **325** surrounds the first niche and second wire **315** surrounds the second niche. After surrounding the niches, the first wire **325** and the second wire **315** extend laterally, for example in the length of 2-20 centimeters. Then, the wires extend downwards until curve **340**, and then upwards as holder **350**. The curve **340** is located lower than bottom portion **330**. FIG. 3B shows a front view of a support comprising a weight member and a rod surrounding the weight member, according to exemplary embodiments of the subject matter.

FIG. 4A shows a side view of a support comprising a weight member and a rod attached thereto, according to exemplary embodiments of the subject matter. The weight element **410** rests on a surface **420** as the base of the weight element **410** may be flat. The base of the weight element **410** may be covered in a layer of material characterized with a

5

high friction, to increase the stability of the support. A rod **425** is attached to the top surface of the weight element **410**, for example using an adhesive material, screws and the like. The rod **425** extends laterally, further then the tip of the weight element **410** and then extends via second rod **430** downwards until curve **435**. The curve **435** is located under the surface **420**. Holder **440** extends from the curve **435**. Lateral pole **450** is attached to the holder **440**. Lateral pole **450** may extend laterally further than the width of the weight member **410**.

FIG. **4B** shows a front view of a support comprising a weight member and a rod attached thereto, according to exemplary embodiments of the subject matter. In the front view, the holder **440** is located under the lateral pole **450** while the second rod **430** is shown above the lateral pole **450**.

FIGS. **5A-5C** show a support comprising a weight member and a rod connected to a bottom surface of the weight member, according to exemplary embodiments of the subject matter. FIG. **5A** shows a top view, FIG. **5B** shows a side view and FIG. **5C** shows a front view. Weight member **530** is connected to a first rod **525**. The first rod **525** may be attached to the weight member **530** using adhesive material, using a screw, a nut and the like. The first rod **525** extends laterally and connects to a second rod **525** extending downwards, until curve **512**, on which an article (not shown) rests. Curve **512** is connected to holder **510** extending to the tip **515** of the support. In some cases, the first rod **525**, second rod **525**, curve **512** and holder **510** are made of a single sheet of material, for example aluminum, plastics, glass, stainless steel, wood, and the like. The rods may be made of a rigid material.

FIG. **6** shows a support and an article carried by a holder, according to exemplary embodiments of the subject matter. Weight member **615** is mounted on horizontal surface **605**. The lateral surface **618** of the weight member **615** extends further than the lateral surface **608** of the surface **605** on which the weight member **615** rests. Plate **620**, **625** is attached to the distal end of the weight member **615** and extends downwards until reaching base **640**. In some cases, the top end **622** of the plate **620**, **625** is higher than the top end **610** of the weight member **615**. Shelf **630** is attached to base **640** and extends laterally from the base **640**, to enable more space and stability for the article held between the holder **650** and the plate **620**.

FIG. **7** shows a support comprising multiple holders, according to exemplary embodiments of the subject matter. The weight member has a flat bottom surface **710** mounted on a horizontal surface. The body **715** of the weight member may be coated or otherwise covered by a plastic material such as silicone, polyethylene, polypropylene and others. A rod **720** extends downwards from the body **715** of the weight member. Pairs of holders extend laterally from the rod **720**. Each holder is configured to hold a separate article. In some cases, the holders may extend upwards after they extend laterally, for example for carrying toilet paper rolls. The first pair comprises holders **730** and **732** and the second pair comprises holders **740** and **742**. The pairs may be of the same height, or from the same distance from the body **715**. In some other cases, more than two holders from each height of the rod **720**.

FIG. **8** shows a holder comprising a weight member covered by nylon and a holder for holding a container, according to exemplary embodiments of the subject matter. The weight member has a flat bottom surface **810** and a body **815** covered by nylon. Rod **820** extends from the body **815**.

6

The rod **820** extends laterally and then downwards to second rod **830**. At least a portion of the rod **820** may be covered by the same sheet of nylon covering the body **815** of the weight member. The second rod **830** extends to holder **840** that extends upwards until it meets a portion **850**, and afterwards it extends rearwards towards the weight member. A container **860** is in contact with the second rod **830** and the holder **840**. The container **860** may be removable or replaceable, and may be of various sizes, colors, and for multiple uses.

FIG. **9** shows a holder comprising a weight member assembled of multiple connected sections, according to exemplary embodiments of the subject matter. The multiple sections **931**, **932**, **933**, **934**, **935**, **936** and **937** are connected to each other via elastic or semi-elastic connectors, for example by wires. This structure enables placing the holder on other surfaces, as the plurality of sections increase the stability of the entire holder. Each of the multiple sections **931**, **932**, **933**, **934**, **935**, **936** and **937** is connected to at least one other section. The multiple sections may be connected in series, or connected in a star-like manner, in which one section is connected to all the other sections. One of the section, for example section **935** is connected to rod **930** that extends downwards from the weight member **940**. The rod **930** is connected to curve **915**, which extends to holder **920**. The holder **920** extends to cover **910** as disclosed above.

FIG. **10** shows a holder comprising a weight member comprising multiple bottom surfaces, according to exemplary embodiments of the subject matter. The weight member **1018** is connected to multiple elements **1010**, **1012**, **1014** interfacing the weight member **1018** to the surface on which the weight member **1018** is mounted. The multiple elements **1010**, **1012**, **1014** may be of a flat bottom surface. The multiple elements **1010**, **1012**, **1014** and the weight member **1018** may be made of a single mold. The weight member **1018** is connected to a first rod **1020** extending upwards and laterally. The first rod **1020** is connected to a second rod **1025** extending downwards, until curve **1030**. The curve **1030** extends to holder **1040**.

FIG. **11** shows a holder comprising a weight member connected to multiple holders, according to exemplary embodiments of the subject matter. The weight member **1110** is connected to a first rod **1115** extending upwards and laterally. The first rod **1115** is connected to a second rod **1120**, extending below a lateral surface **1100** connected to the surface on which the weight member **1110** is mounted. The second rod **1120** is split to two holders **1130** and **1140**. The holders **1130** and **1140** may be of different size and shape, as desired by a person skilled in the art.

FIG. **12** shows a holder comprising a weight member connected to a flat holder, according to exemplary embodiments of the subject matter. The weight member **1210** is connected to a first rod **1220** extending upwards and laterally. The first rod **1220** is connected to a second rod **1230**. The second rod is connected to a flat holder **1240**. The flat holder **1240** is defined as having no sidewalls other than the second rod **1230**. The flat holder **1240** may be of an elliptical shape, similar to holder **1140** of FIG. **11**. In some cases, the holder's **1240** width may be at least three times the width of the weight member **1210**. In some cases, the holder's **1240** width may be in the range of 5-8 centimeters.

While the disclosure has been described with reference to exemplary embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or

7

material to the teachings without departing from the essential scope thereof. Therefore, it is intended that the disclosed subject matter not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but only by the claims that follow.

The invention claimed is:

1. A support device configured to be placed on a horizontal surface and to hold an article, the support device comprising:

a weight member configured to be placed on the horizontal surface;

a rod extending from the weight member, wherein the rod comprises a first rod portion extending frontwards from the weight member and a second rod portion extending downwards from the first rod portion, said first rod portion and said second rod portion form a first curve with a downward concavity, wherein the second rod portion is configured to extend downwards beyond an edge of the horizontal surface;

a second curve extending frontwards from a distal end of the second rod portion with an upward concavity, wherein the second curve is configured to be located lower than the horizontal surface and offset from the weight member along a frontward-rearward axis;

a support element extending upwards from the second curve and configured to hold the article at a distance from the horizontal surface along the frontward-rearward axis, wherein the second rod portion is configured to secure a first side of the article above the second curve and the support element is configured to secure a second side of the article above the second curve;

8

wherein the support element comprises a first lateral holder and a second lateral holder, each of the first and second lateral holders includes a first portion extending upwards from the second curve, a second portion extending from the first portion, and a third portion extending rearwards from the second portion, the first portion of each of the first and second lateral holders has a first end and a second end, the first portions of the first and second lateral holders extend divergently from the second curve with the first ends split from the second curve and the second ends spaced apart from each other, and the second portions of the first and second lateral holders extend in opposite lateral directions away from each other; and

wherein the weight member is configured to weigh more than an accumulated weight of the rod, the support element, and the article.

2. The support device according to claim 1, wherein at least a portion of the weight member is covered by a synthetic material.

3. The support device according to claim 1, wherein the rod is connected to the weight member.

4. The support device according to claim 1, wherein the rod is molded with the weight member as a single unit.

5. The support device according to claim 1, wherein the weight member is made of plastic, wood, or metal.

6. The support device according to claim 1, wherein the rod extends upwards and frontwards from the weight member.

* * * * *