



- (51) **International Patent Classification:**
C09K 8/524 (2006.01) *E21B 43/34* (2006.01)
E21B 37/06 (2006.01)
- (21) **International Application Number:**
PCT/US2015/055992
- (22) **International Filing Date:**
16 October 2015 (16.10.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/081,164 18 November 2014 (18.11.2014) US
- (71) **Applicant** (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; Corp-URC-E2.296, P.O. Box 2189, Houston, TX 77252-2189 (US).
- (72) **Inventors; and**
- (71) **Applicants** (for US only): **ESMAEILI, Payman** [CA/—]; 207, 7 Westpark Common, SW, Calgary, AB, T3H 0Y4 (CA). **LACHANCE, Jason, W.** [US/US]; 30803 Carrington Drive, Magnolia, TX 77354 (US). **KEINATH, Brendon, L.** [US/US]; 122 E. 13th Street, Houston, TX 77008 (US).
- (74) **Agents:** **JENSEN, Nathan O.** et al.; Exxonmobil Upstream Research Company, Corp-URC-E2.4A.296, P.O. Box 2189, Houston, TX 77252-2189 (US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** SEPARATION OF ASPHALTENES USING A FLOCCULATING AGENT

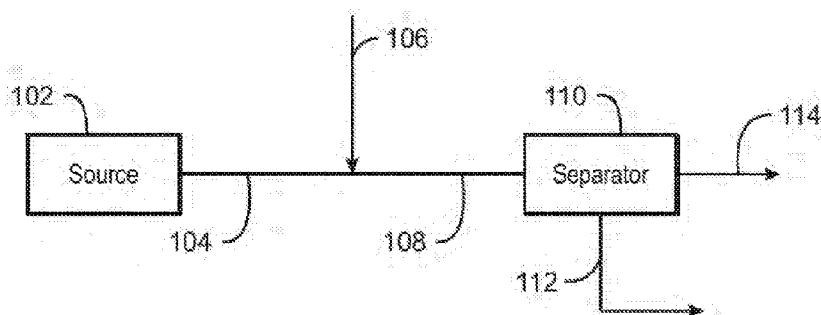

100
FIG. 1

(57) **Abstract:** An asphaltenes separation system comprising a flocculant feed system configured to add a flocculant to a production fluid to flocculate asphaltenes in the production fluid, and an asphaltenes separator configured to remove flocculated asphaltenes from the production fluid.



SEPARATION OF ASPHALTENES USING A FLOCCULATING AGENT

CROSS SECTION TO RELATED APPLICATIONS

[0001] This application claims the priority benefit of United States provisional patent
5 application number 62/081164 filed November 18, 2014 entitled SEPARATION OF
ASPHALTENES, the entirety of which is incorporated by reference herein.

FIELD

[0002] Disclosed techniques relate to oil and gas production, and more particularly, to
subsea oil and gas production. Still more particularly, the disclosed techniques relate to the
10 removal of asphaltenes from oil and gas production operations.

BACKGROUND

[0003] This section is intended to introduce various aspects of the art, which may be
associated with exemplary embodiments of the present techniques. This discussion is
believed to assist in providing a framework to facilitate a better understanding of particular
15 aspects of the present techniques. Accordingly, it should be understood that this section
should be read in this light, and not necessarily as admissions of prior art.

[0004] Asphaltenes may be problematic in oil in production fluids. Asphaltenes are
generally dissolved in production fluids at typical reservoir pressures and temperatures.
However, the asphaltenes may precipitate and drop out of production fluid as pressure is
20 reduced in the conveyance and processing of the production fluid. Asphaltene deposits may
foul piping and equipment, including wellhead equipment, pipelines, surface facilities,
process piping, downstream refining operations, and so forth. Conventional remediation
includes solvent washing or mechanical treatment of piping and equipment to remove the
deposited asphaltenes. Remediation may alternately or additionally include the addition of
25 chemical dispersants to the production fluid to hinder precipitation of the asphaltenes. These
solutions carry certain disadvantages, for example, a solvent wash may require several hours
of downtime and may introduce significant cost and environmental concerns associated with
the solvents. Further, it may be difficult to consistently add chemical dispersants to the
production fluid to avoid deposition because the operating region of precipitation of the
30 asphaltenes may vary and, in some instances, may occur prior to addition of the chemical
dispersant. In part due to this lack of consistent asphaltenes, the efficiency of the treatment
may vary as process factors such as composition, pressure/temperature profiles, etc., change.

[0005] As a result of the above, a need exists for a technique to minimize or eliminate asphaltene deposits that does not suffer the drawbacks of the conventional remediation approach of adding chemical dispersants.

SUMMARY

5 [0006] This disclosure includes an asphaltenes separation system comprising a flocculant feed system configured to add a flocculant to a production fluid to flocculate asphaltenes in the production fluid, and an asphaltenes separator configured to remove flocculated asphaltenes from the production fluid.

10 [0007] This disclosure also includes a separation system comprising a flocculating agent feed system configured to add a flocculating agent to a conduit conveying production fluid from a subsea wellhead, wherein the production fluid comprises hydrocarbon, and an asphaltenes separator operationally coupled to the conduit and configured to receive the production fluid, remove flocculated asphaltenes from the production fluid, discharge an asphaltenes stream comprising the flocculated asphaltenes, and discharge a product
15 comprising the production fluid.

[0008] This disclosure further includes a method for separating asphaltenes from a production fluid comprising receiving the production fluid from a wellhead, the production fluid comprising hydrocarbon and asphaltenes, adding a flocculation stream to the production fluid, mixing the flocculation stream with the production fluid to precipitate asphaltene flocs
20 flowing in the production fluid, and separating the asphaltene flocs from the production fluid.

DESCRIPTION OF THE DRAWINGS

[0009] The advantages of the present techniques are better understood by referring to the following detailed description and the attached drawings, in which:

[0010] Fig. 1 is a schematic diagram of a hydrocarbon production system;

25 [0011] Fig. 2 is a schematic diagram of a hydrocarbon production system;

[0012] Fig. 3 is a schematic diagram of an embodiment of a hydrocarbon production configuration having a flocculant addition system and an asphaltenes separation system;

[0013] Fig. 4 is a schematic diagram of an example of the flocculant feed system of Fig. 3;

30 [0014] Fig. 5 is a block flow diagram of a method of separating asphaltenes from

production fluid;

[0015] Fig. 6 is a schematic diagram of the asphaltenes separator of Fig. 3; and

[0016] Fig. 7 is a phase diagram of asphaltenes in production fluid as a function of temperature and pressure.

5

DETAILED DESCRIPTION

[0017] In the following detailed description section, specific embodiments of the present techniques are described. However, to the extent that the following description is specific to a particular embodiment or a particular use of the present techniques, this is intended to be for exemplary purposes only and simply provides a description of the exemplary
10 embodiments. Accordingly, the techniques are not limited to the specific embodiments described below, but rather, include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

[0018] As used herein, the term “exemplary” means serving as an example, instance, or illustration. Any embodiment described herein as “exemplary” is not to be construed as
15 preferred or advantageous over other embodiments.

[0019] As used herein, the term “gas” is used interchangeably with “vapor,” and means a substance or mixture of substances in the gaseous state as distinguished from the liquid or solid state. Likewise, the term “liquid” means a substance or mixture of substances in the liquid state as distinguished from the gas or solid state. As used herein, “fluid” is a generic
20 term that may include a liquid, a gas, or vapor, or any combination thereof.

[0020] As used herein, the term “hydrocarbon” is an organic compound that primarily includes the elements hydrogen and carbon although nitrogen, sulfur, oxygen, metals, or any number of other elements may be present in small amounts. As used herein, hydrocarbons generally refer to organic materials that are transported by pipeline, such as any form of
25 natural gas or oil. A “hydrocarbon stream” is a stream enriched in hydrocarbons by the removal of other materials such as water, solids, and/or any additive.

[0021] As used herein, the term “natural gas” refers to a multi-component gas obtained from a crude oil well (associated gas) or from a subterranean gas-bearing formation (non-associated gas). The composition and pressure of natural gas can vary significantly. A
30 typical natural gas stream contains methane (C_1) as a significant component. Raw natural gas will also typically contain ethane (C_2), higher molecular weight hydrocarbons, which may be

collectively referred to herein as “heavy hydrocarbons,” one or more acid gases (such as carbon dioxide, hydrogen sulfide, carbonyl sulfide, carbon disulfide, and mercaptans), and minor amounts of contaminants such as water, nitrogen, and crude oil.

[0022] As used herein, the term “pressure” is the force exerted per unit area by the gas on the walls of the volume. Pressure can be shown as pounds per square inch (psi). “Atmospheric pressure” refers to the local pressure of the air. “Absolute pressure” (psia) refers to the sum of the atmospheric pressure (14.7 psi at standard conditions) plus the gauge pressure (psig). “Gauge pressure” (psig) refers to the pressure measured by a gauge, which indicates only the pressure exceeding the local atmospheric pressure (i.e., a gauge pressure of 0 psig corresponds to an absolute pressure of 14.7 psia). The term “vapor pressure” has the usual thermodynamic meaning. For a pure component in an enclosed system at a given pressure, the component vapor pressure is essentially equal to the total pressure in the system.

[0023] As used herein, the term “production fluid” refers to a liquid and/or gaseous stream removed from a subsurface formation, such as an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. For example, production fluids may include, but are not limited to, oil, natural gas and water.

[0024] As used herein, the term “substantial” when used in reference to a quantity or amount of a material, or a specific characteristic thereof, refers to an amount that is sufficient to provide an effect that the material or characteristic was intended to provide. The exact degree of deviation allowable may in some cases depend on the specific context.

[0025] As used herein, the term “well” or “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. The terms are interchangeable when referring to an opening in the formation. A well may have a substantially circular cross section, or other cross-sectional shapes (for example, circles, ovals, squares, rectangles, triangles, slits, or other regular or irregular shapes). Wells may be cased, cemented, open-hole well, etc., and may be any type, including, but not limited to, a producing well, an experimental well, an exploratory well, or the like. A well may be vertical, horizontal, or any angle between vertical and horizontal (a deviated well), for example a vertical well may include a non-vertical component.

[0026] In subsea oil and gas production operations, asphaltenes in production fluids can cause flow assurance issues, such as the fouling of flow lines and process equipment. Prior art approaches to solving the problem of asphaltenes included using dispersants to prevent

agglomeration. Techniques described herein including using flocculants to encourage or promote the flocculation of asphaltenes in comparatively small agglomerations rather than dispersal. When flocculated, asphaltene “stickiness” may be decreased. Advantageously, such techniques may accommodate size and weight restrictions imposed on deep-water processing units. In general, the techniques described herein may achieve removal of flocculated asphaltenes molecules from production fluids. The flocculated asphaltene removal may improve the flow assurance aspect of the production fluid by reducing asphaltenes fouling of piping and equipment.

[0027] Asphaltenes are polar colloidal particles typically with relatively large surface area. Asphaltene particles may agglomerate. In the presence of a flocculant, asphaltene particles may bond and form flakes or clusters having a reduced surface area in comparison to agglomerated asphaltenes. Therefore, the flocculated asphaltenes may have a reduced activity or a reduced tendency to stick to pipewall or process equipment. Including sand in the production fluid of the flocculated systems may increase the effectiveness of asphaltene flocculation, e.g., by providing a site for flocculation to occur.

[0028] In some embodiments, the production fluid having the flocculated asphaltenes may be conveyed to surface facilities where the flocculated asphaltenes are separated from the production fluid. The motive force for transport to the surface may be, for example, wellhead pressure. In other embodiments, the flocculated asphaltenes may be separated from the production fluid at the subsea level such as near the subsea wellhead. In such examples of subsea separation, a production fluid substantially free of asphaltenes may discharge from the subsea separation system and may be transported (e.g., in a conduit) from the subsea wellhead area to surface facilities. Prior to reaching the surface facilities, the production fluid may be subjected to additional subsea processing, such as water removal. The motive force for conveyance of the processed production fluid to the surface may be, for example, the wellhead pressure. As discussed below, the separated and removed asphaltenes from the production fluid may be transported (e.g., in another conduit) from the subsea separation to the surface facilities. In particular examples, water or a hydrotransport may be employed to facilitate conveyance of the separated solid asphaltenes particles or clusters to the surface.

[0029] Fig. 1 is a schematic diagram of an asphaltenes separation system **100** operationally coupled to a source **102**, e.g., a subsea wellhead, of a fluid **104**, e.g., a production fluid, having asphaltenes. The fluid **104** may comprise some sand. In another

example, the source **102** is a high-pressure storage of oil, and the fluid **104** is oil. The fluid **104** may generally discharge from the source **102** through a conduit to a downstream separator.

[0030] In the illustrated embodiment, the asphaltenes separation system **100** adds a
5 flocculation stream **106** comprising a flocculation agent to the fluid **104**, e.g., via the conduit conveying the fluid **104**. Therefore, the interface for the addition of the flocculation stream **106** to the fluid **104** may be, for example, a conduit tee.

[0031] In certain embodiments, the flocculation stream **106** is a flocculant or flocculating
agent, such as a polymeric flocculating agent, that promotes flocculation and agglomeration
10 of asphaltenes in the fluid **104**. The flocculating agent may be anionic cationic, or nonionic. The flocculating agent may comprise an oil-soluble polymer, a water-soluble polymer, or both. Suitable water-soluble flocculants include high-molecular weight polyacrylamides (PAM), hydrolyzed polyacrylamide (HPAM), etc., and nonionic polyethylene oxide homopolymer. Water-soluble flocculant(s) may be dissolved in water before addition or
15 injection. In embodiments using oil-soluble flocculants, the oil-soluble flocculants may be mixed with oil prior to addition or injection to the production fluid. The mixing of the flocculant with oil or water may be performed in a flocculant feed system or upstream of the flocculant feed system.

[0032] Further, another production fluid (e.g., having oil and gas) may be added to the
20 flocculation stream **106** to assist in blending the fluid **104**. Such gas may be natural gas, methane, inert gas, or other gas. Such additions may change the overall oil composition in the production fluid, for example, to promote precipitation and/or flocculation of asphaltenes. However, while adding gas may facilitate asphaltene precipitation, the addition of gas to the production fluid may increase the bubble point and asphaltenes onset pressure (AOP) of the
25 production fluid in certain instances. In certain examples, the composition of the injection gas may be adjusted to reduce an associated increase in production-fluid bubble point and AOP, and to advance precipitation of the asphaltenes.

[0033] Sand may be added along with flocculant to promote the flocculation of
asphaltene molecules or “flocs.” The sand may be selected to obtain various performance
30 characteristics, e.g., varying the sand grain size and/or quantity of the added sand to reduce sedimentation or plugging in the flowline, to improve flocculation, etc. The sand content should generally not be too high which may degrade or break the flocs due to the friction

between large particles, for example. Further, excessive amounts of sand could adversely affect flow of the production fluid. Further, in cases with the fluid **104** having greater amounts of sand that inhibit the asphaltenes from precipitating or dropping out of suspension, sand may be removed.

5 [0034] Stickiness of asphaltenes can be due to high surface activity, which may be proportional to the surface area of the asphaltenes particles. The activity of the solid asphaltenes and likelihood that asphaltenes stick to walls of conduits or equipment may be decreased by reducing the available surface area of the asphaltenes particles. The flocculant may facilitate formation of larger particles or clusters of the asphaltenes by binding
10 asphaltene particles to itself, thereby reducing the available surface area, and thus stickiness, of the asphaltenes. Any sand present may provide anchor sites to further promote agglomeration and reduction of surface area and stickiness of the asphaltenes particles.

 [0035] In some examples, the addition rate of the flocculation stream **106**, in some embodiments a portion thereof, e.g., flocculant, sand, gas, etc., may be modulated or
15 regulated by a control system when adding the flocculation stream **106** to the fluid **104**. The control system may include control valves, instrumentation, computers, computer memory, a processor, and so forth. The control system may adjust the flow rate or addition rate of the flocculation stream **106** in response to the effectiveness of the separation **110** operation, the level of any asphaltenes fouling of piping and equipment, and so on. The addition rate of the
20 flocculation stream **106** may be adjusted to promote the desired morphology of the formed solids having asphaltenes, e.g., to reduce the active surface area of the asphaltenes, to provide voids (for production fluid) in the asphaltenes clusters, to promote a density difference between the solid asphaltenes versus the production fluid, etc. Mixing the fluid **104** and the flocculation stream **106** may create a mixture **108**.

25 [0036] In concert with, or in lieu of, the addition of a flocculation stream **106**, a controlled pressure drop of the fluid **104** may be implemented (not shown) to induce precipitation of asphaltenes. The pressure reduction may place the fluid **104** into an operating “unstable” region with respect to asphaltenes and thus promote precipitation of solid asphaltenes particles in the fluid **104**. The pressure reduction may be implemented by a
30 reduction in diameter of the conduit conveying the fluid **104**. The pressure reduction may be implemented via a restriction orifice, valve, and so forth. In examples of a valve employed to provide for a pressure drop of the fluid **104**, the valve may be a choke valve. In cases with

the source **102** as a wellhead, the choke valve may be a second choke valve in addition to a choke valve typically employed at the wellhead.

[0037] The mixture **108** is conveyed to a separator **110**. Flow shear forces in the conduit transporting the mixture **108** may advance mixing of components in the mixture **108** to further promote formation of asphaltenes particles from solution or suspension. Additionally, an inline mixer (not shown) such as a static mixer or agitated vessel may further promote mixing of the mixture **108** in route to the separator **110**. In general, a unit operation such as an inline mixer, vessel, agitated vessel, and the like, may optionally be applied to give additional residence time and mixing of the mixture **108** in route to the separator **110**. Further, the separator **110** may serve as a pressure reduction device to provide for a controlled pressure drop, as discussed above.

[0038] The separator **110** removes asphaltenes **112** from the mixture **108** and fluid **104**. The separator **110** may be a hydrocyclone or other type of separator that separates asphaltenes **112** solid particles or clusters from the fluid **104**. Also, the separator **110** may include more than one separator. Further, the separator **110** may also remove sand with the asphaltenes. Thus, the asphaltenes **112** may include sand. Whether performed subsea or at the surface, the separation may be promoted by differences between density of the flocculated asphaltenes clusters versus density of the production fluid. Further, certain sizes of the flocculated asphaltenes may promote separation from the production fluid. The asphaltenes clusters can be engineered to have a particular density and size. Indeed, the types and dosages of the flocculant may be selected to give a desired morphology of the flocculated asphaltenes clusters. Exemplary values and ranges of specific gravity for components in the production fluid include about 0.8 to about 1.1 for oil, about 0.8 to about 1.1 or about 1.0 for water, about 1.5 to about 3 or about 2.5 for sand, and about 0.8 to 1.1 for asphaltenes. Such exemplary values and ranges for specific gravity are not intended to limit embodiments of the present techniques.

[0039] The product **114** from the separator **110** may be a more purified fluid **104**, or a fluid **104** substantially free of asphaltenes or with a reduced amount of asphaltenes. In cases of the fluid **104** as production fluid, the product **114** from the separator **110** may be a more purified production fluid, or a production fluid substantially free of asphaltenes or with a reduced amount of asphaltenes. The separator product **114** as production fluid may include oil, gas, other hydrocarbons, water, and so on. In the example of the source **102** as a subsea

wellhead, the separator **110** may be disposed, located, or placed subsea near the wellhead, or the separator may be disposed at surface facilities. The motive force to and through the separator **110** may include source **102** pressure, a pump or other motive device, or other motive forces.

5 [0040] Fig. 2 is a schematic diagram of an asphaltenes separation system **200**, e.g., the asphaltenes separation system **100** of Fig. 1, coupled to a subsea wellhead **202** discharging production fluid **204**. Like numbered items are as described with respect to Fig. 1. In the example of Fig. 2, the wellhead **202** may be analogous to the source **102** of Fig. 1, the production fluid **204** may be analogous to the fluid **104** of Fig. 1, and the separation feed **206**
10 may be analogous to the mixture **108** of Fig. 1.

[0041] The asphaltenes separation system **200** receives the production fluid **204** from the subsea wellhead **202**. The separation system **200** adds a flocculation stream **106** to the production fluid **204** to form asphaltenes particles in the production fluid **204**. The mixture of production fluid **204** having solid asphaltenes and any residual flocculation stream **106** is
15 sent as a separation feed **206** to a separator **110** to remove the precipitated or flocculated asphaltenes from the production fluid **204**. In the illustrated embodiment, the separator **110** is located on a collection platform **208**, such as a floating production storage and offloading (FPSO) unit, at the surface **210**. The collection platform **208** may be anchored to the sea floor by a number of tethers, and may receive production fluid from multiple subsea
20 wellheads on the ocean floor. In alternate embodiments, the separator **110** may optionally be disposed subsea within the scope of this disclosure.

[0042] Onboard the collection platform **208**, the separator **110** removes asphaltenes from the separation feed **206** and production fluid **204**. The wells underlying the wellheads may include single wellbores or multiple, branch wellbores. The collection platform **208** may
25 have equipment for dehydration, purification, and other processing, such as liquefaction equipment to form purified hydrocarbons for storage in vessels. The collection platform **208** may transport processed production fluid and hydrocarbon to shore facilities by pipeline (not shown).

[0043] Fig. 3 is a schematic diagram of a separation system **300**, e.g., the separation
30 system **200** of FIG. 2, operationally coupled to a wellhead **202**. Like numbered items are as described with respect to Fig. 2. The separation system **300** receives a production fluid **204** through a conduit from the wellhead **202**. The separation system **300** may include a

flocculant feed system **302**, e.g., comprising a flocculation stream **106** of FIGS. 1 and 2, that adds a flocculating agent or flocculant **304** to the conduit (e.g., pipe) conveying the production fluid **204** from the wellhead **202**. The conduit conveying the production fluid from the wellhead **202** may have an optionally selected nominal diameter, e.g., between
5 about 6 inches to about 24 inches, between about 8 inches to about 12 inches, or about 10 inches, and the conduit conveying the flocculant **304** to the production fluid **204** may have an optionally selected nominal diameter, e.g., between about 0.5 inches to about 8 inches, between about 1 inch to about 4 inches, or about 2 inches. Thus, a conduit tee of 10-inch by 2-inch, or a 2-inch tap on the 10-inch line, may be employed as the interface of the flocculant
10 **304** addition to the production fluid **204**.

[0044] The flocculant feed system **302**, which may be referred to as a flocculant feed structure, a flocculant feed apparatus, a flocculant feed complex, or a flocculant feed arrangement, may receive a flocculant **304'** from intermediate storage on a collection platform **306** (e.g., a FPSO unit), e.g., residing on a surface **308**. In some embodiments, the
15 flocculant **304'** may be substantially the same as the flocculant **304** or may comprise a premix flocculant solution. In other embodiments, the flocculant feed system **302** may perform some mixing, processing, or addition, e.g., of water, oil, and/or sand, to the flocculant **304'** to produce the flocculant **304**.

[0045] Adding the flocculant **304** to the production fluid **204** creates a separation mixture
20 or feed **310** that may be sent to an asphaltene separator **312**. Flow shear forces in the conduit conveying the separation feed **310** to the separator **312** may advance mixing of the production fluid **204** with the flocculant **304**. In addition, the separation feed **310** may optionally (depicted with dashed lines) flow through a mixer **314** to further advance mixing of the production fluid **204** with the flocculant **304**. The mixer **314** may be an agitated vessel
25 or an inline mixer such as a static mixer, and so forth. The flow shear forces and the optional mixer **314** may provide mixing energy of flocculation, thereby impacting the number of particle collisions between asphaltene and the efficiency of the collisions. In some examples, the mixing can be adjusted to produce a desired amount of asphaltene flocculated particles. An insufficient mixing of the production fluid stream **204** and flocculant **304** can
30 impair the formation of flocs because there will be fewer contacts between asphaltene particles. Conversely, over-mixing the particles may impair the formation of flocs due to excessive collisions.

[0046] As a result of the asphaltenes flocs having voids filled with production fluid **204**, and the clusters having a similar density to the production fluid **204**, the production fluid **204** stream may optionally bypass or avoid subsea separation and instead be processed to remove the solid asphaltenes at surface facilities. However, at separation, whether subsea or at a surface facility, a density difference between the asphaltenes solids versus the production fluid **204** may be beneficial.

[0047] The separator **312** may be a separation system, a separator system, a plurality of separators, a separator structure, a separator apparatus, a separator complex, a separator arrangement, and so forth, and may comprise a hydrocyclone, a filter or filtration system, a clarifier, or a settling system. The product discharging from the separator **312** may be a wet product **316** having production fluid including water and a reduced amount of or substantially no asphaltenes. The removed asphaltenes stream **318** may include sand and may be conveyed to the platform **306** for additional processing and/or storage.

[0048] The wet product **316** may be optionally sent to a water separator **320**. The water separator **320** may be an oil/water separator that removes a water stream **322** from the production fluid and discharges an at least partially dehydrated product **324** including the production fluid with less or substantially no water. Examples of the water separator **320** include a cyclone, centrifugal system, filter, and so on. The at least partially dehydrated product **324** (e.g., production fluid) may be conveyed to the platform **306** or other surface facilities for additional processing and/or storage. In particular, the water stream **322** may be a water source for a hydrotransport of the particles and clusters of asphaltenes stream **318** (and, in some embodiments, sand) from the asphaltenes separator **312** to the platform **306** or to other surface facilities for additional processing and/or storage. The combined stream of asphaltenes stream **318** and water stream **322** is indicated by the reference numeral **326**.

[0049] Fig. 4 is a schematic diagram of the flocculant feed system **302** of Fig. 3. The flocculant feed system **302** may include a feed vessel **400**, pump **402**, e.g., a centrifugal pump, positive displacement pump, etc., and a control valve **404**, and may rely on a control system **406** to provide control signals to the control valve **404** and/or the pump, e.g., to modulate addition of the flocculant **304**. The control valve **404** may actuate in response to a control signal from the control system **406** based on reaching a predetermined feed set point, a back pressure, or another sensed parameter. The control system **406** may be a distributed control system (DCS), programmable logic controller (PLC), or other type of computing

system and instrumentation. The control system **406** may facilitate management and control of other subsea and platform operations in addition to the flocculant feed system **302**.

[0050] A level **408** of flocculant **304** may be maintained in the feed vessel **400**, e.g., as controlled by the control system **406**. The feed vessel **400** may be one or more feed vessels
5 that receive one or more flocculant **304'** types from the platform **306** of Fig. 3.

[0051] In some embodiments, oil and/or water may be added to the feed vessel **400**, as indicated by the arrow **410**, to mix with flocculant **304'** in the vessel **400**. If so, the vessel **400** may have an agitator (not shown) to promote mixing of the oil and/or water with the flocculant. In another example, the contents of the feed vessel **400** having the added oil
10 and/or water may be circulated through a recirculation loop (not shown) from the pump **402** discharge to the vessel **400** to mix the oil and/or water with the flocculant.

[0052] In examples where more than one flocculant **304'** is utilized, the different flocculant **304'** types may be added together from the feed vessel **400** to the downstream production fluid **204**. On the other hand, the different flocculant **304'** types may be added
15 separately from respective feed vessels **400** to the downstream production fluid **204**. If so, the different flocculant **304** types may be added at different locations of the conduit conveying the production fluid **204**. These and other variations will be apparent to those of skill in the art and are considered within the scope of the present disclosure.

[0053] Fig. 5 is a block flow diagram of a method **500** for separating asphaltenes from a
20 production fluid. In various embodiments, the systems **200** and **300** discussed above with regard to Figs. 2 and 3, respectively, may be used to implement the method **500**. At block **502**, the method includes receiving a production fluid discharging from a wellhead. The production fluid may including hydrocarbon, such as oil and natural gas, and also asphaltenes, sand, water, and so forth. The wellhead may be a subsea wellhead, an on-shore
25 wellhead, and so on. At block **504**, a flocculating agent or flocculant is added to the flowing production fluid. The flocculant may be added via a flocculant conduit (e.g., umbilical, tubing, small piping, etc.) conveying the flocculant to a relatively large conduit flowing the production fluid. At block **506**, the flocculating agent or flocculant is mixed with the production fluid. In some examples, adequate mixing may be provided via flow shear forces
30 of the fluid flowing in the conduit, one or more mixers, e.g., inline mixers, may be employed agitators, or combinations thereof. The separator may be disposed at a specified distance downstream from the flocculant injection point selected to permit adequate mixing time

and/or flow length.

[0054] The conduit and any mixer may be configured to give the level of mixing and residence time for the asphaltenes to reach a desired level of flocculation within the production fluid stream. For an in-line agitated vessel, the volume of the vessel and the speed
5 of the agitator, and the like, may be specified.

[0055] At block **508**, the asphaltenes are separated from the production fluid. The asphaltenes can be separated using many different techniques, including, for example, a hydrocyclone. This separation can be performed subsea or at the surface. If the separation is performed at the surface, the production fluid with flocculated asphaltenes is conveyed to
10 surface facilities. On the other hand, for subsea separation of the flocculated asphaltenes from the production fluid, a separator is disposed subsea to separate the flocculated asphaltenes from the production fluid stream. In general, the production fluid is processed to achieve separation of asphaltenes from the production fluid.

[0056] At block **510**, water can optionally be separated from the production fluid. This
15 separation can be performed, for example, also through a cyclone, or a filter, and so forth. This additional separation can occur subsea or at the surface. In certain embodiments, the water is separated from the production fluid already processed to remove asphaltenes, as at block **508**. In some examples, the separated water is utilized in the hydrotransport of asphaltenes.

20 [0057] At block **512**, the flocculated asphaltenes are transported. For subsea separation of flocculated asphaltenes, the asphaltenes may be transported to a floating platform at the surface. As indicated, the water separated at block **510** may be utilized in the hydrotransport of the asphaltenes. The flocculated asphaltenes may be transported to storage or additional processing.

25 [0058] At block **514**, the processed production fluid is transported. For subsea separation of flocculated asphaltenes from the production fluid, the production fluid with less or substantially no asphaltenes may be transported to the surface. For additional subsea separation of water from the production fluid, the production fluid with less or no water may be transported to the surface. The production fluid may be transported to surface facilities for
30 additional processing and storage. The wellhead pressure may be used as the motive force for conveying the production fluid. Further, pumps may be optionally employed to provide motive force for conveyance of the production fluid.

[0059] At block **516**, the addition rate of flocculant to the production fluid is adjusted in response to flocculation and separation performance. For example, in response to insufficient flocculation of asphaltenes and insubstantial agglomeration of asphaltenes, additional flocculating agent can be added to the system to induce more flocculation of asphaltenes.

5 Moreover, the addition rate of the flocculant may be adjusted to alter morphology of the flocculated asphaltenes, to increase efficiency of separation of the flocculated asphaltenes from the production fluid in a separator, and so forth. A control system, pump, control valve, and the like, may facilitate adjustment of the addition rate of the flocculant to the production fluid.

10 [0060] The process flow diagram of the method of Fig. 5 is not intended to indicate that the actions of the method **500** are to be executed in any particular order, or that all of the actions of the method **500** are to be included in every case. Further, any number of additional actions not shown in Fig. 5 may be included within the method **500**, depending on the details of the specific implementation.

15 [0061] Fig. 6 is a diagrammatical representation of an example of the separator **312** of Fig. 3. In this example, the separator **312** is a hydrocyclone. The separation feed **310**, e.g., the separation feed **310** of Fig. 3, having the production fluid **204** with flocculated asphaltenes enters the separator **312**. The entry of the separation feed **310** to the hydrocyclone separator **312** may be a tangential entry, as indicated by the curve **600**. In other
20 words, the hydrocyclone may have, for example, a feed nozzle configured to give a tangential entry. In the hydrocyclone, the flocculated and agglomerated asphaltenes (and any sand) are separated from the production fluid **204**, e.g., via centrifugal forces and the density difference of the asphaltenes and sand clusters versus the production fluid **204**. In the illustrated embodiment, a product **316** of the production fluid with less or substantially no asphaltenes
25 discharges overhead from the hydrocyclone. The flocculated and agglomerated asphaltenes and sand clusters may be discharged as a remove asphaltenes stream **318**, e.g., from a bottom portion of the hydrocyclone.

[0062] The diagram of Fig. 6 is not intended to indicate that the separator **312** is to include all of the features shown in Fig. 6. Further, any number of additional features may be
30 included within the separation system **600**, depending on the details of the specific implementation. Moreover, again, a hydrocyclone is only given as an example of a separator **312** in Fig. 6. Other types of separators and unit operations may be employed as the

separator **312** to remove flocculated and agglomerated asphaltenes (and sand) from the production fluid **204**.

[0063] The conditions for inducing precipitation and flocculation of asphaltenes in production fluid can be influenced and advanced by the techniques discussed herein. Placing
5 the production fluid into an unstable region of temperature and pressure for asphaltenes precipitation can encourage asphaltenes particles to precipitate in the production fluid.

[0064] Further, the addition of flocculant to the production fluid can promote precipitation via flocculation of asphaltenes particles, including with the production fluid in a traditional stable region of pressure and temperature not typically giving asphaltenes
10 precipitation, and/or in an unstable region of asphaltenes deposition. Furthermore, the flocculating agent or flocculant may beneficially promote formation of larger clusters of asphaltenes within the production fluid, thus promoting more effective removal of the asphaltenes. Such may also promote flow assurance, as fewer asphaltenes particles will adhere to conduit walls because floc clusters are formed.

15 [0065] Fig. 7 is an exemplary phase diagram **700** for asphaltenes in production fluid, depicting phases of asphaltenes as a function of pressure **702** and temperature **704** of the production fluid. The depicted pressure-temperature regions of the production fluid with asphaltenes indicates stability (or lack thereof) of the asphaltenes in the production fluid. In the illustrated example, the pressure **702** ranges linearly from about 300 pounds per square
20 inch absolute (psia) (about 2,068 kilopascals (kPa)) to about 6,000 psia (about 41,369 kPa). In this example, the temperature **704** ranges linearly from about 80 °F (about 27 °C) to about 220 °F (about 93 °C). Of course, other pressure and temperature values and ranges may be considered.

[0066] Further, differing asphaltenes compositions may behave differently than depicted
25 in Fig. 7. Indeed, the phase diagram **700** is only given as exemplary for discussion purposes of general concepts of asphaltenes phase behavior, and not intended to limit embodiments of the present techniques. Other asphaltenes phase diagrams, temperature ranges, pressure ranges, and so on, are applicable.

[0067] In the phase diagram **700**, an “unstable” region **706** represents conditions for the
30 asphaltenes molecules precipitating from the production fluid. The “stable” regions **710** represent conditions for asphaltenes particles remaining dissolved or suspended in the production fluid. The “potentially unstable” regions **708** represent conditions at which

asphaltenes molecules may begin to precipitate from the production fluid solution. The notation for the regions is given by a legend **712** of the exemplary phase diagram **700**.

[0068] Deposition of asphaltenes and associated fouling on equipment and piping is generally more likely to occur in the unstable region **706** and potentially unstable regions **708**, in comparison to a production fluid with asphaltenes operating in the stable region **710**. Evaluating asphaltenes stability can help to predict and avoid flow assurance issues. Production fluid in a reservoir at relatively high temperature and pressure upstream of a wellhead may typically be in the stable region **710**. As the production fluid passes through a wellhead from the reservoir, the production fluid may be subjected to a pressure drop and temperature drop across the wellhead that places the production fluid into unstable region **706**. In embodiments discussed herein, the flocculant addition and flocculating of asphaltenes may be implemented with the production fluid flowing in the stable region **710** and/or unstable region **706**. In examples, the asphaltenes react with the available flocculant while the production fluid is in the unstable region **706**.

[0069] While the present techniques may be susceptible to various modifications and alternative forms, the embodiments discussed above have been shown only by way of example. However, it should again be understood that the techniques are not intended to be limited to the particular embodiments disclosed herein. Indeed, the present techniques include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

CLAIMS

What is claimed is:

1. An asphaltenes separation system comprising:
a flocculant feed system configured to add a flocculant to a production fluid to
5 flocculate asphaltenes in the production fluid; and
an asphaltenes separator configured to remove flocculated asphaltenes from the
production fluid.
2. The system of claim 1, wherein the flocculant comprises an oil-soluble polymer or a
water-soluble polymer, or both.
- 10 3. The system of claim 1 or claim 2, wherein the flocculant is a water-soluble polymer,
and wherein the water-soluble polymer is selected from a group consisting of high-molecular
weight polyacrylamides (PAM), hydrolyzed polyacrylamide (HPAM), and nonionic
polyethylene oxide homopolymer.
4. The system of claim 1 or any of claims 2-3, wherein the flocculant feed system is
15 configured to add the flocculant to the production fluid in a pressure range from about 300
pounds per square inch absolute (psia) (about 2,068 kilopascals (kPa)) to about 6,000 psia
(about 41,369 kPa) and a temperature range from about 80 °F (about 27 °C) to about 220 °F
(about 93 °C).
5. The system of claim 1 or any of claims 2-4, wherein the flocculant feed system is
20 configured to add at least two different flocculants to the production fluid.
6. The system of claim 1 or any of claims 2-4, wherein the flocculant feed system is
configured to add sand.
7. The system of claim 6, wherein the sand grain size is selected to improve flocculation,
to reduce sedimentation, or both.
- 25 8. The system of claim 1 or of any of claims 2-7, comprising an in-line mixer to mix the
flocculant and the production fluid.
9. The system of claim 1 or any of claims 2-6, wherein the flocculant feed system
comprises a flocculant feed vessel and a flocculant feed pump.
10. The system of claim 1 or of any of claims 2-9, wherein the flocculant feed system is

configured to add the flocculant to a conduit that transports the production fluid from a wellhead to the asphaltenes separator.

11. A separation system comprising:

5 a flocculating agent feed system configured to add a flocculating agent to a conduit conveying production fluid from a subsea wellhead, wherein the production fluid comprises hydrocarbon; and

an asphaltenes separator operationally coupled to the conduit and configured to:

receive the production fluid;

remove flocculated asphaltenes from the production fluid;

10 discharge an asphaltenes stream comprising the flocculated asphaltenes; and

discharge a product comprising the production fluid.

12. The system of claim 11, wherein the asphaltenes stream comprises sand removed from the production fluid by the asphaltenes separator.

13. The system of claim 11 or claim 12, wherein the product comprising production fluid
15 discharged from the asphaltenes separator is substantially free of asphaltenes.

14. The system of claim 11 or any of claims 12-13, further comprising a water separator configured to receive the product and to remove water from the product.

15. The system of claim 14, comprising a hydrotransport system to convey the flocculated asphaltenes from the asphaltenes separator, wherein the hydrotransport system is configured
20 to utilize the water removed from the product by the water separator.

16. A method for separating asphaltenes from a production fluid comprising:

receiving the production fluid from a wellhead, the production fluid comprising hydrocarbon and asphaltenes;


adding a flocculation stream to the production fluid;

25 mixing the flocculation stream with the production fluid to precipitate asphaltene flocs flowing in the production fluid; and

separating the asphaltene flocs from the production fluid.


17. The method of claim 16, wherein mixing comprises providing sufficient residence time between the addition and the separation to obtain the desired asphaltene flocs, flowing the flocculation stream with the production fluid through a mixer, or both.
18. The method of any of claims 16-17, comprising reducing pressure of the production fluid to precipitate the asphaltenes to promote formation of the asphaltenes particles.
19. The method of any of claims 16-18, wherein the flocculation stream comprises an oil-soluble polymer or a water-soluble polymer, or both.
20. The method of claim 16-19, further comprising adjusting an addition rate of the flocculant stream.
21. The method of claim 20, wherein the addition rate is adjusted to promote a density difference between the asphaltene flocs and the production fluid.
22. The method of claim 20, wherein the addition rate is adjusted to maintain a flocculant level in a feed vessel or in response to performance of the separating of asphaltene flocs from the production fluid.
23. The method of any of claims 16-22, wherein the flocculation stream comprises an oil-soluble polymer or a water-soluble polymer, or both.
24. The method of any of claims 16-23, wherein the wellhead comprises at least one subsea wellhead, further comprising transporting the production fluid to a surface facility.
25. The method of claim 24, further comprising removing a first portion of water from the production fluid prior to the surface facility and removing a second portion of water from the production fluid at the surface facility.
26. The method of any of claims 16-25, further comprising pumping the production fluid to a surface facility when wellhead pressure does not provide sufficient motive force for conveying the production fluid to the surface facility.

1/7

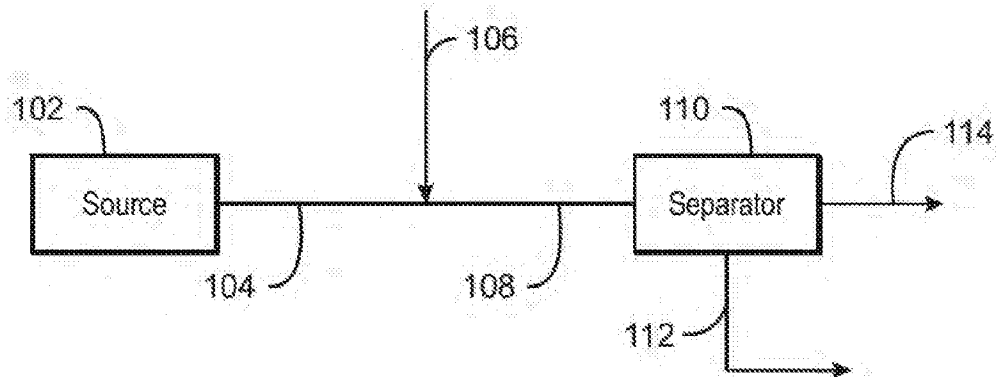


100
FIG. 1

2/7

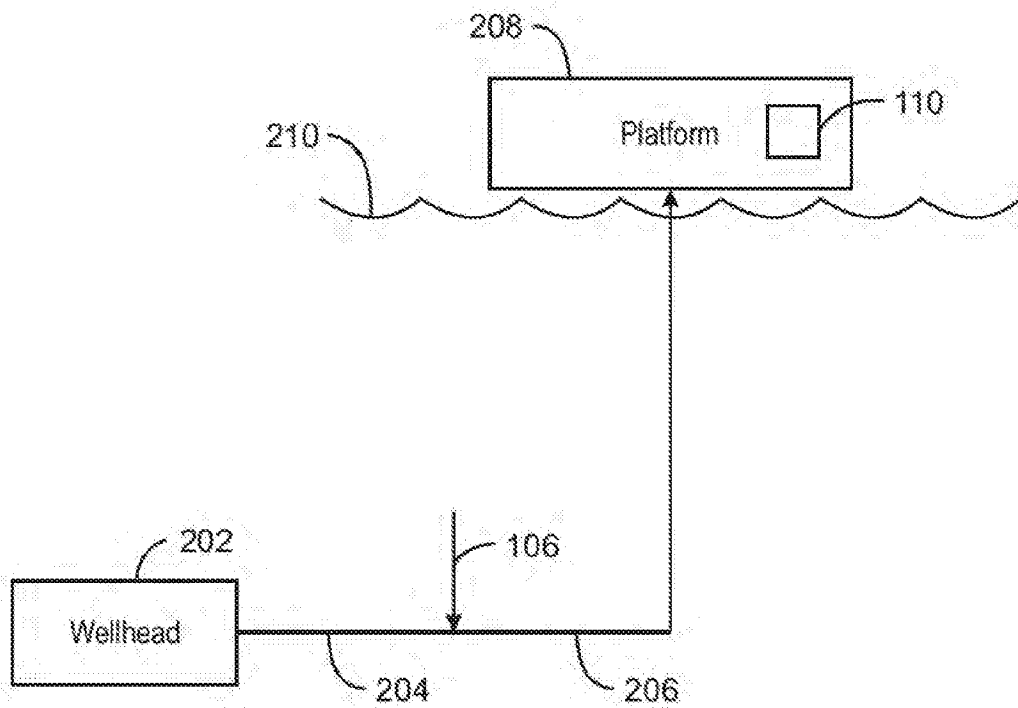


200
FIG. 2

3/7

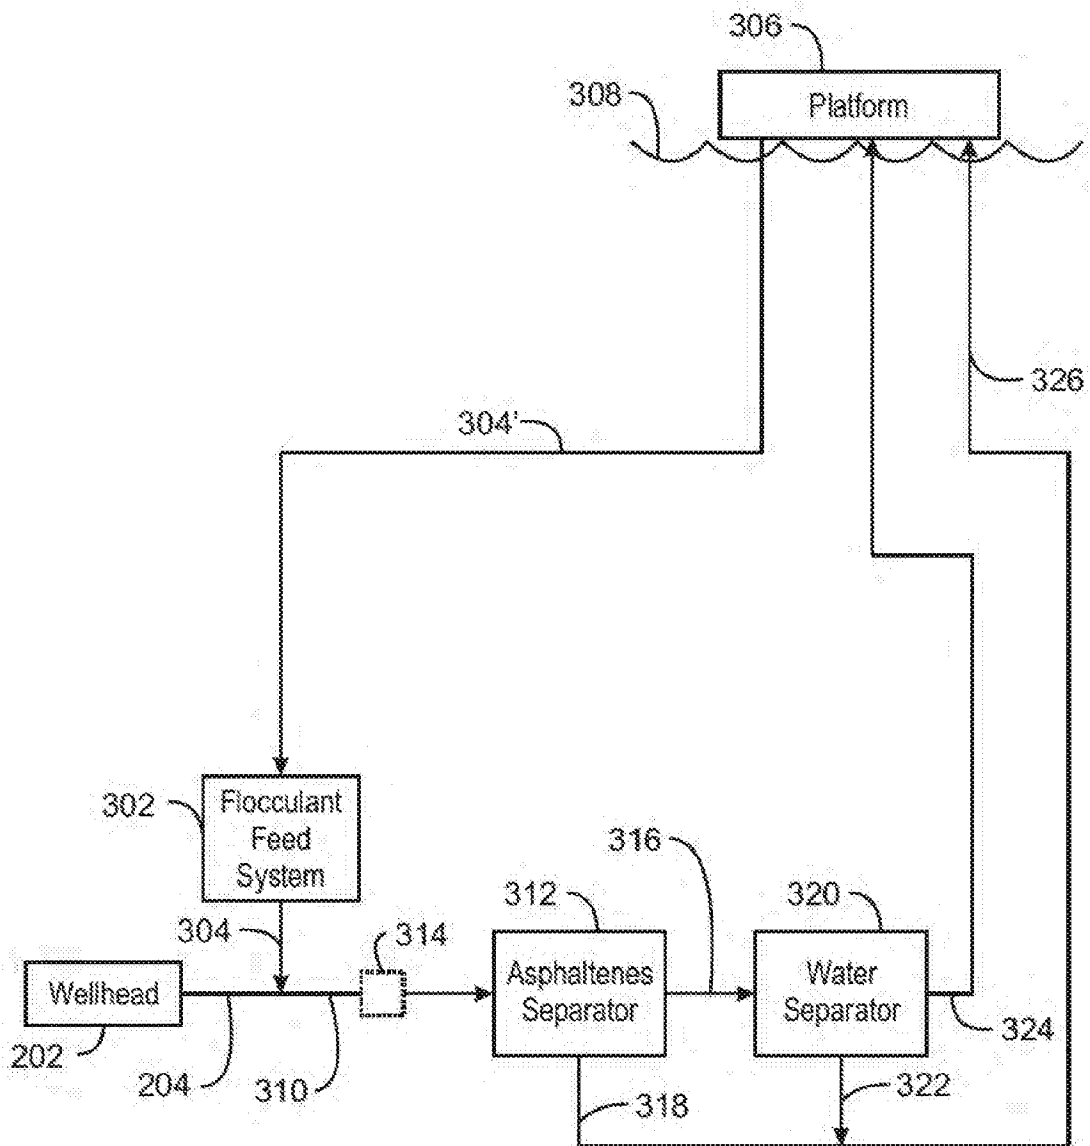


300
FIG. 3

4/7

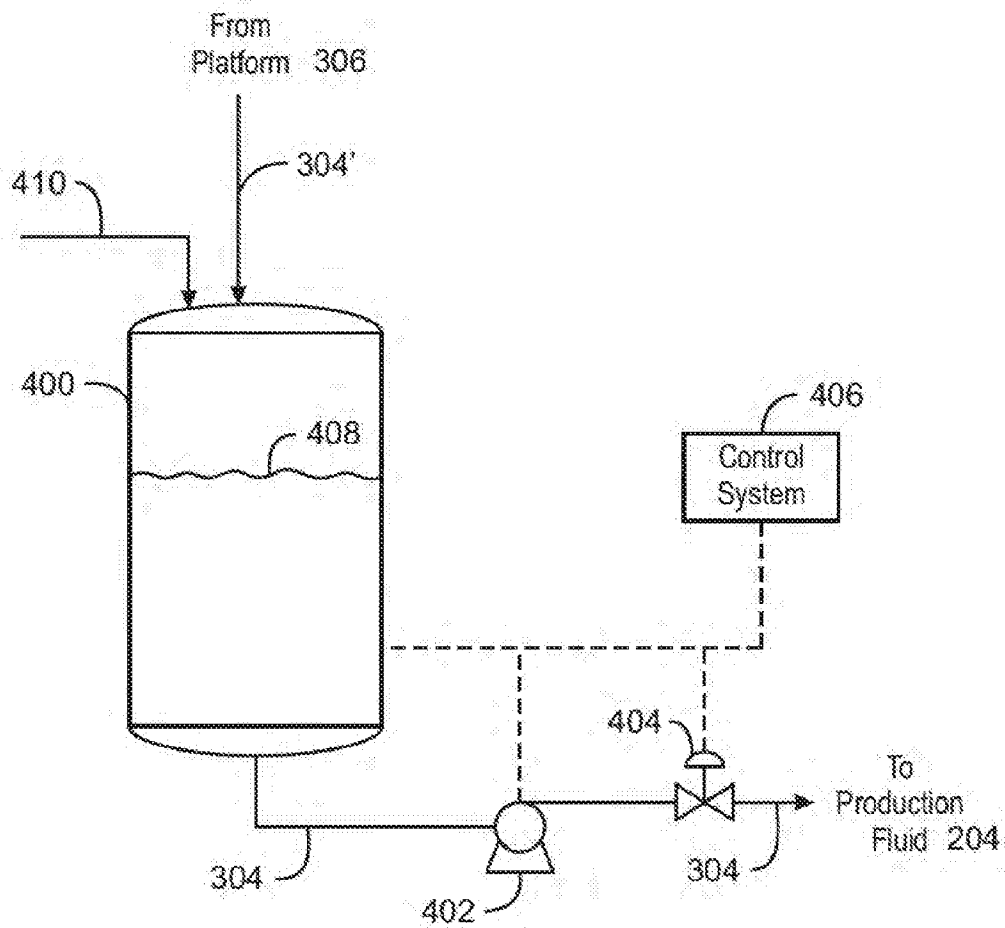


302
FIG. 4

5/7

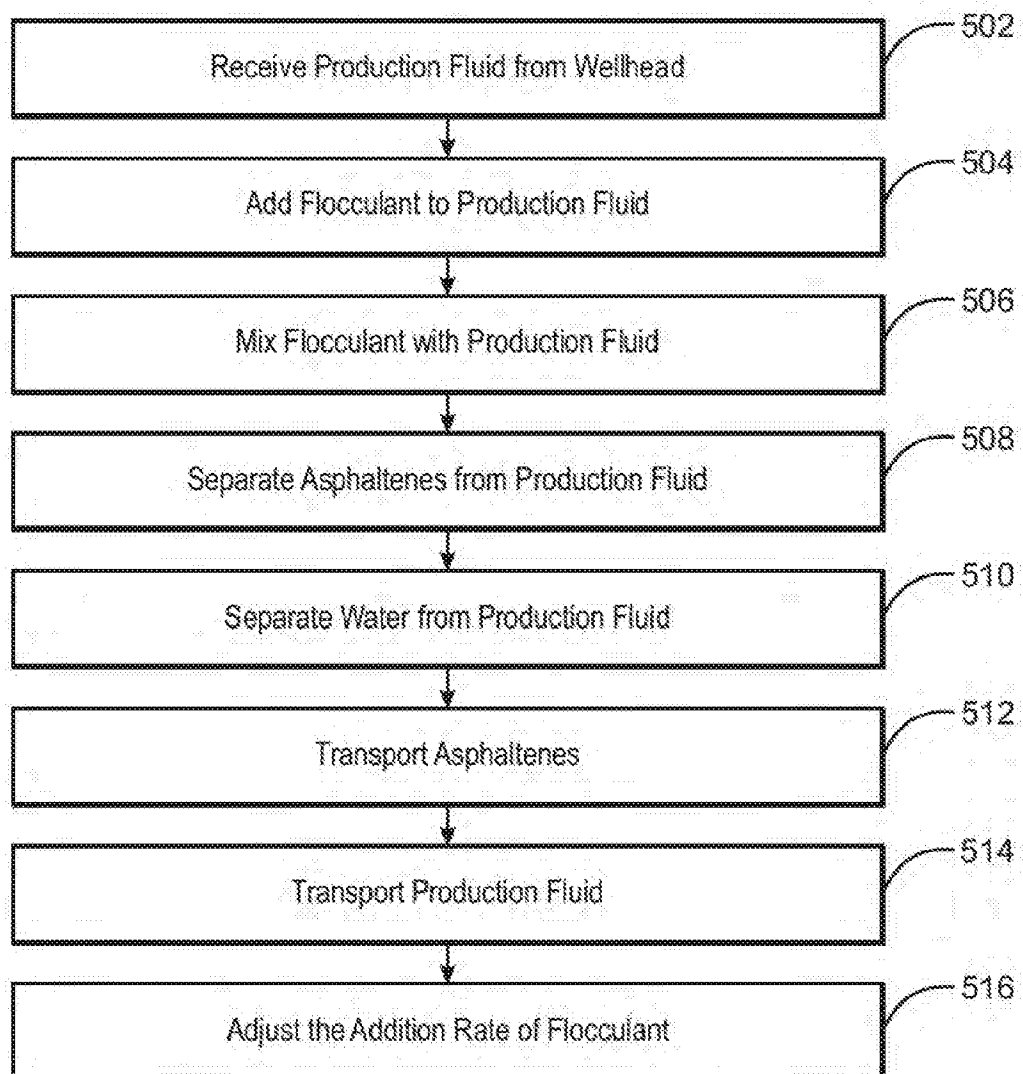



500
FIG. 5

6/7

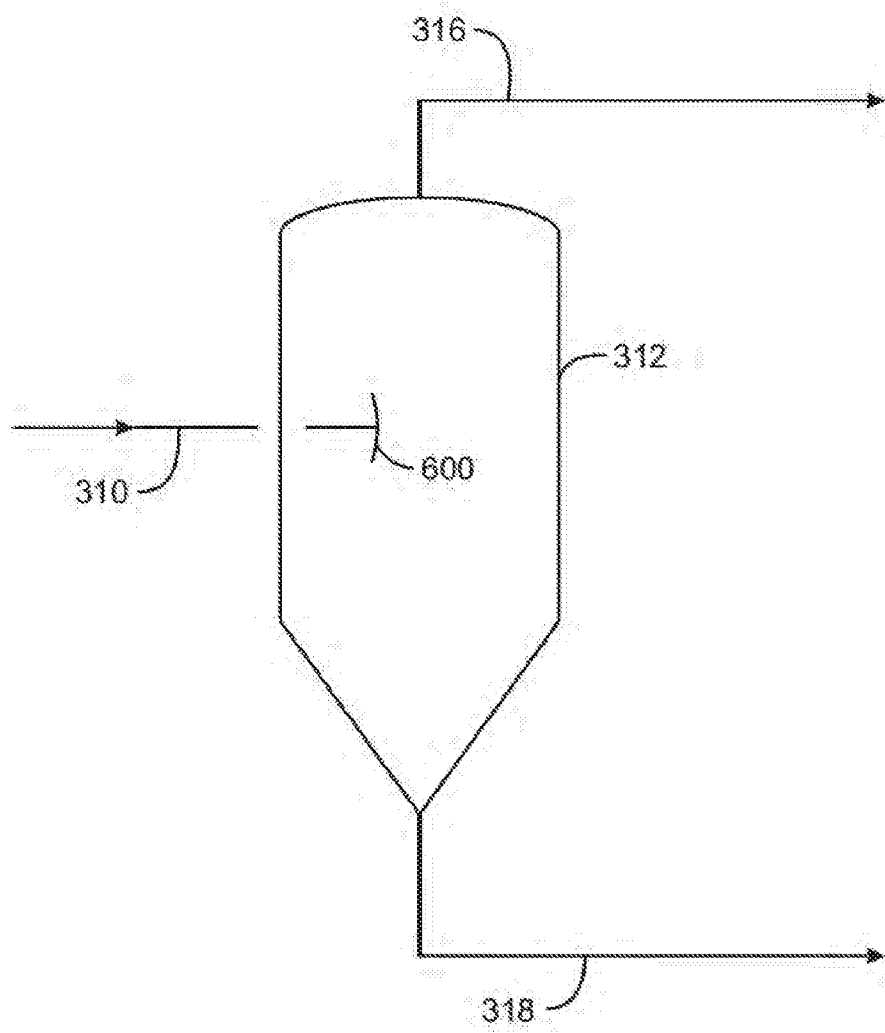

312
FIG. 6

717

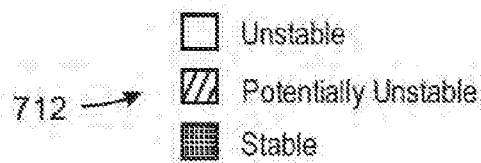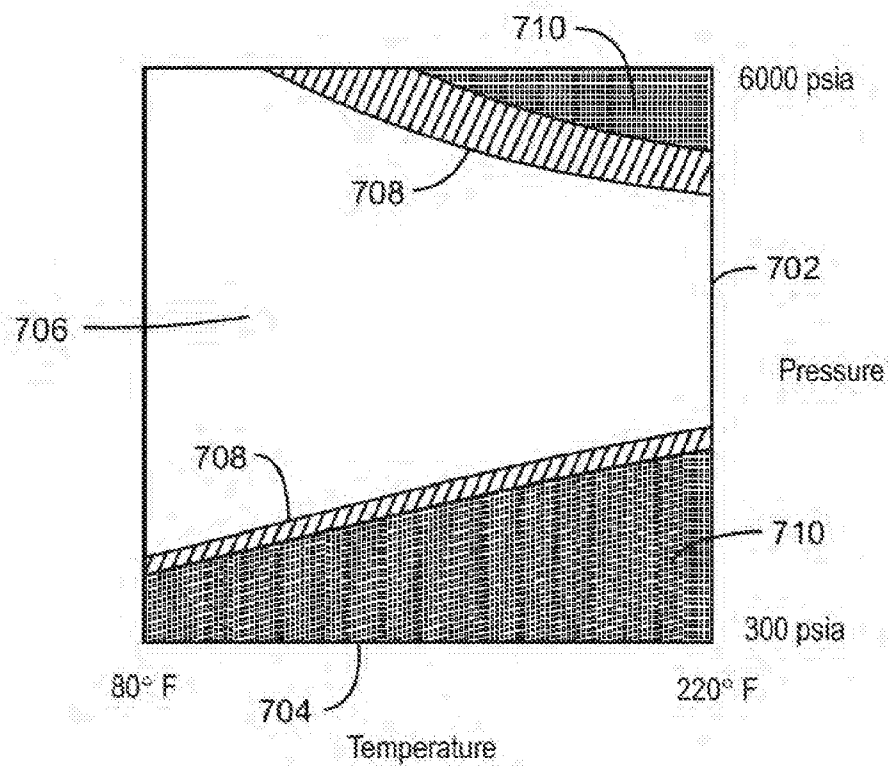

700
FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/055992

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09K8/524 E21B37/06 E21B43/34
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09K E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 380 521 A (FRIEDMAN ROBERT H) 30 April 1968 (1968-04-30) column 2, line 9 - column 3, line 25; claim 13	1-26
X	DE 100 27 415 A1 (ABB RESEARCH LTD [CH]) 6 December 2001 (2001-12-06) claims 1,3,7	1,11,16

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 December 2015

Date of mailing of the international search report

05/01/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Redecker, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/055992

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LILIANNA PILLON: "EFFECT OF DISPERSANTS AND FLOCCULANTS ON THE COLLOIDAL STABILITY OF ASPHALTENES", PETROLEUM SCIENCE AND TECHNOLOGY, vol. 19, no. 7-8, 1 January 2001 (2001-01-01), pages 863-873, XP55236350, US ISSN: 1091-6466, DOI: 10.1081/LFT-100106905 pages 867-868; table 3 -----	1-26
A	US 2008/156700 A1 (ABULNAGA BAH A [US] ET AL) 3 July 2008 (2008-07-03) claims 1,4,9; example 1 -----	1-26
A	US 6 656 366 B1 (FUNG GEE SENG [US] ET AL) 2 December 2003 (2003-12-02) column 8, line 26 - column 9, line 47; claim 1 -----	1-26
A	US 2 438 874 A (MEADOW JACOB R ET AL) 30 March 1948 (1948-03-30) column 3, lines 7-42; claim 1 -----	1-26
A	MOSCHOPEDIS S E ET AL: "Influence of certain metal salts on the solubility of petroleum asphaltenes", FUEL, IPC SCIENCE AND TECHNOLOGY PRESS, GUILDFORD, GB, vol. 53, no. 3, 1 July 1974 (1974-07-01), pages 222-223, XP023603466, ISSN: 0016-2361, DOI: 10.1016/0016-2361(74)90016-7 [retrieved on 1974-07-01] the whole document -----	1-26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/055992

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3380521	A	30-04-1968	NONE
DE 10027415	A1	06-12-2001	NONE
US 2008156700	A1	03-07-2008	BR PI0720629 A2 25-03-2014 CA 2673643 A1 10-07-2008 CN 101583405 A 18-11-2009 EA 200970659 A1 26-02-2010 EP 2111273 A1 28-10-2009 JP 5453108 B2 26-03-2014 JP 2010514557 A 06-05-2010 KR 20090095646 A 09-09-2009 US 2008156700 A1 03-07-2008 US 2010122938 A1 20-05-2010 WO 2008082911 A1 10-07-2008
US 6656366	B1	02-12-2003	AU 6210200 A 30-01-2001 BR 0012365 A 15-07-2003 EP 1418817 A1 19-05-2004 NO 20020162 A 21-02-2002 US 6656366 B1 02-12-2003 WO 0103514 A1 18-01-2001
US 2438874	A	30-03-1948	NONE