



- (51) International Patent Classification:
H01R 24/38 (2011.01) *H01R 9/05* (2006.01)
- (21) International Application Number:
PCT/US2011/046055
- (22) International Filing Date:
30 July 2011 (30.07.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12/951,466 22 November 2010 (22.11.2010) US
- (71) Applicant (for all designated States except US): **ANDREW LLC** [US/US]; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LOW, David** [US/US]; 22502 Hinspeter Dr., Frankfort, Illinois 60423 (US).
- (74) Agent: **BABCOCK, Andrew**; P.O. Box 488, Bridgman, Michigan 49106 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: COUPLING BODY WITH VISUAL INSTALLATION PORTAL

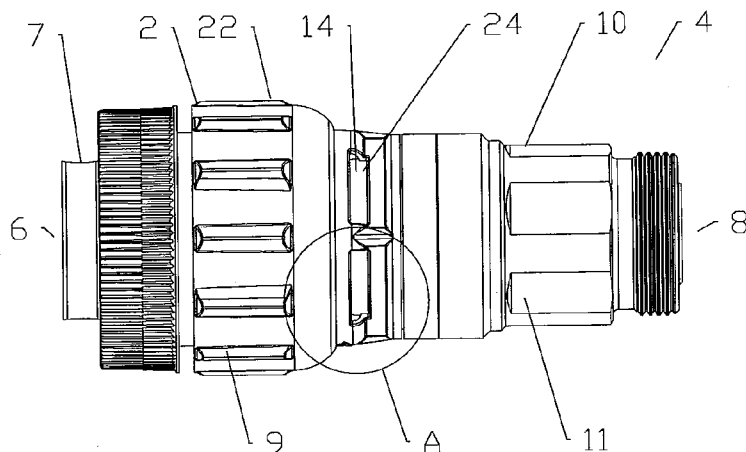


Fig. 1

(57) Abstract: A coupling body for a coaxial connector is dimensioned to couple with connector body at a connector end. An inner body of the coupling body is provided with a bore dimensioned to receive the coaxial cable. The inner body is formed of transparent material partially covered in an opaque material. An uncovered portion of the inner body functions as a visual installation portal. Methods of installation include inserting the coaxial cable into the cable end of the bore of the inner body until a desired portion of a prepared end of the coaxial cable is visible.



Published:

— *with international search report (Art. 21(3))*

Coupling Body with Visual Installation Portal

Background of the Invention

Field of the Invention

The invention relates to electrical connectors. More particularly, the invention relates to a lightweight and cost efficient electrical connector for a coaxial cable with a visual installation portal in the coupling body which provides feedback of correct installation to the user.

Description of Related Art

Installation errors may occur when a cable end is improperly inserted into an electrical connector, creating a less than optimal electro-mechanical interconnection, damaging the connector and/or cable. Visual installation feedback has been utilized in electrical connectors to ensure that a proper connection has been made and/or the desired insertion depth has been achieved when inserting the cable into the electrical connector. Prior visual installation feedback applied to electrical connectors typically required numerous additional parts and/or manufacturing operations, incurring significant additional expense. Examples in the art include open sections, which must be covered and sealed, and/or viewing windows made of transparent material, which must be sealed or bonded to the body of the connector. The corresponding sealing or bonding areas may create weak points susceptible to leakage and/or premature connector failure.

US 7717740 discloses an electric power connector with a viewing window that is sealed or bonded to a separately formed insulating cover. Providing a window assembly as a separate piece, seated within a further element of the connector, may significantly complicate the manufacturing process and add additional costs. Also, the coupling area between these separate elements may create an area of potential structural weakness.

Competition in the coaxial cable connector market has focused attention on improving electrical/mechanical performance and minimization of overall costs, including material costs, manufacturing costs, training requirements for installation personnel, reduction of dedicated installation tooling and the total number of required installation steps and/or operations.

Therefore, it is an object of the invention to provide an electrical connector and method of manufacture that overcomes deficiencies in the prior art.

Brief Description of the Drawings

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention, together with a general description of the invention given above, and the detailed description of the embodiments given below, serve to explain the principles of the invention. Like

reference numbers in the drawing figures refer to the same feature or element and may not be described in detail for every drawing figure in which they appear.

Figure 1 is a schematic side view of an exemplary embodiment of a coaxial connector with installation feedback in which a good interconnection with the attached coaxial cable is indicated.

Figure 2 is a close-up view of area A of Figure 1.

Figure 3 is a schematic end view of the coaxial connector of Figure 1.

Figure 4 is a schematic partial cut-away side view of the coaxial connector of Figure 1, taken along line E-E of Figure 3.

Figure 5 is an enlarged view of area B of Figure 4.

Figure 6 is a schematic side view of the coaxial connector of Figure 1 in which a bad interconnection with the attached coaxial cable is indicated.

Figure 7 is an enlarged view of area C of Figure 6.

Figure 8 is a schematic end view of the coaxial connector of Figure 6.

Figure 9 is a schematic cut-away side view of the coaxial connector of Figure 8, taken along line F-F.

Figure 10 is an enlarged view of area D of Figure 9 with the bad installation resulting in gap G.

Detailed Description

The inventor has recognized the difficulty of verifying that a coaxial cable has been correctly inserted into a coaxial connector to create a positive connector to cable interconnection. In particular, where the coaxial connector is an insertion coupling type coaxial connector, for example as disclosed in US Patent Application Publication No.: 2010-0112855, titled "Insertion Coupling Coaxial Connector" by Paynter et al, published May 6, 2010, hereby incorporated by reference in its entirety, because the insertion coupling type connector may be fully assembled prior to cable end insertion there is minimal feedback that insertion to the depth required for positive interconnection has been achieved. Absent insertion feedback, an installer may be led to believe that suitable insertion has occurred when in fact the coaxial cable has hung upon a coupling feature, such as the inner conductor contacting a side edge of an inner contact spring basket, rather than entering and fully seating against the bottom of the spring basket. Alternatively, even if correctly inserted to the proper depth, an installer unsure that proper insertion has been achieved may apply further

excessive insertion force, resulting in damage to the connector and/or coaxial cable.

In an exemplary embodiment of a coupling body 2 for a coaxial connector 4, as shown in Figures 1-10, the coupling body 2 has a cable end 6 for insertion of the coaxial cable 7 and a connector end 8 for coupling with a connector body 10.

One skilled in the art will appreciate that the cable end 6 and the connector end 8 are applied herein as identifiers for respective ends of both the overall assembly and also of discrete elements of the assembly described herein, to identify same and their respective interconnecting surfaces according to their alignment along a longitudinal axis of the coaxial connector 4 between a connector end 8 and a cable end 6.

As best shown in Figures 1 and 6, the coupling body 2 may be provided with protrusions 9 to facilitate gripping during installation. The connector body may be provided with tool flats 11 for mating with a tool to retain the connector body, for example while threading is performed with respect to an attaching connector interface.

The coupling body 2 may be configured to perform connector functions in concert with the connector body 10, such as electro-mechanical interconnection with an outer conductor 12 of a coaxial cable 7. Details of these functions and the associated coupling body 2 structures are well known in the art, dependent upon

the type of coaxial connector 4 the coupling body 2 is applied to, and as such are not further described in detail herein.

As best shown in Figures 4 and 9 an outer diameter of an inner body 14 of the coupling body 2 at the connector end 8 of the coupling body 2 may be provided with a thread 16. Similarly, the connector body 10 may be provided with a corresponding thread 16 on an inner diameter of the connector body bore 18. The inner body 14 can thus be threadably attached to the connector body 10. Alternatively, the coupling between the coupling body 2 and the connector body 10 may be via a snap interlock, such as tab into groove, or thread positions may be exchanged, such that the connector end 8 of the inner body 14 threads over the cable end 6 of the connector body 10, rather than into it.

As best shown in Figures 2 and 7, to provide visual installation feedback, the inner body 14 is formed of a transparent material, such as clear acrylic, polycarbonate, polystyrene or other polymer. The inner body 14 is dimensioned with a coupling body bore 20 dimensioned to receive the coaxial cable 7 therethrough. An outer surface 22 formed of opaque material partially covers the inner body 14, providing the coupling body 2 with a gripping surface. A portion of the inner body 14, corresponding to a prepared end of a coaxial cable 7 when inserted to a predetermined longitudinal position within the coupling body bore 20, is not covered by the outer surface 22, thereby forming a visual installation portal (VIP) 24. The VIP 24, preferably extending along an arc segment of the

coupling body outer diameter circumference, allows the installer to observe the longitudinal position of the prepared end of the coaxial cable 7 within the coupling body bore 20. Visual indicia of the cable end position within the coupling body 2 is manifested by which portion(s) of the prepared end are visible through the VIP 24. For example, the end portion of the coaxial cable 7 is typically prepared for interconnection by stripping back designated portions of the dielectric, outer conductor and jacket to expose a portion of the outer conductor 12 and the inner conductor 32 to the coupling and/or sealing mechanisms of the coaxial connector. By locating the VIP 24 longitudinally along the coupling body 2 at a position which corresponds to the location of a selected portion of the cable end, such as the edge of the coaxial cable outer jacket 26, when the coaxial cable 7 is inserted to the desired depth within the coaxial connector 4 an easily observed good/bad indicia appears in the VIP 24 depending upon the good or bad insertion status of the coaxial cable 7 into the coaxial connector 4, that is, the proper or improper longitudinal insertion extent.

In the present embodiment, when the prepared end of the coaxial cable 7 has been seated within the coaxial connector 4, the installer should, for example, observe only an outer jacket 26 of the coaxial cable 7 and not the outer conductor 12 within the VIP 24. Because the outer jacket 26 is typically formed as a solid black polymeric material and the outer conductor 12 is typically shiny copper or aluminum metal, the visual distinction between these two materials within the VIP 24 is readily discernable. If the installer can see the outer

conductor 12 through the VIP 24, a distinct visual feedback that the coaxial cable 7 may not be pushed far enough into the coaxial connector 4 is provided.

In further embodiments, the VIP 24 may be provided as multiple VIPs 24 to provide feedback both that insertion to a minimum desired position and less than an over-insertion position has been achieved. For example, a first uncovered portion operative as a minimum insertion indicating VIP 24 is applied as described herein above. Further, a second uncovered portion operative as an over-insertion VIP is applied spaced apart to the connector end side along the longitudinal axis to a location where the jacket 26 will not appear unless an over-insertion has occurred. At the proper insertion point, the first minimum insertion VIP 24 displays the jacket 26 when a coaxial cable 7 has been inserted into the coupling body bore 20, seating the coaxial cable 7 within the coaxial connector 4. Correspondingly, the over insertion VIP reveals an outer conductor 12 when the coaxial cable 7 has been inserted into the coupling body bore 20, seating the coaxial cable 7 within the coaxial connector 4. If the over-insertion VIP also shows the jacket 26, this is readily discernable visual indicia that an over-insertion installation error has occurred.

In a method for installing a coaxial cable 7 into the coaxial connector 4 of the first exemplary embodiment, the coaxial cable 7 may be inserted into the cable end 6 of the coupling body bore 20 until, for example, only the jacket 26 of the coaxial cable 7 can be seen through the VIP 24. Meanwhile, visibility of the outer

conductor 12 in the VIP 24 alerts the installer that the coaxial cable 7 has not been inserted far enough into the coupling body bore 20.

The jacket 26 will be visible through the VIP 24 when the desired insertion point has been reached, such as the inner conductor 32 of the coaxial cable 7 bottoming against a spring basket 36 of the inner contact 34, for example as shown in Figure 5. If insertion to the proper insertion point has not been reached, a gap "G" will exist, as best shown in Figure 10.

As a method for installing a coaxial cable 7 into a coaxial connector 4 according to the second exemplary embodiment, the coaxial cable 7 may be inserted into the coupling body bore 20 until the VIP 24 shows a jacket 26 and the over-insertion VIP reveals an outer conductor 12. Further, if the over-insertion VIP also shows the jacket 26, then an over-insertion error has occurred.

As best shown in Figures 4 and 9, where the outer conductor 12 is provided with annular corrugations, the corrugation peaks 38 may be keyed to their proper longitudinal location for interconnection when the coaxial cable 7 is properly inserted. Proper longitudinal location of internal contact points between the coaxial cable 7 and the electro-mechanical contacts of the coaxial connector 4 may be enabled by precision cutting the cable end, for example at a corrugation peak 38, for example using a sawguide/cable stripping tool configured to remove the desired lengths of the conductors, dielectric and jacket as a function of the

position along the annular corrugations at which the cable end is cut. Thereby, for example, when the coaxial cable is properly inserted into the coaxial connector 4, as indicated in the VIP 24 and over-insertion VIP, if present, at least one corrugation peak 38 will have been brought into contact with a spring contact 40 and an inner diameter of a grip ring 42 is seated atop a corresponding corrugation peak 38.

One skilled in the art will appreciate that the present invention adds significant interconnection assurance at minimal additional manufacturing expense and without any degradation of either the overall strength or environmental integrity of the resulting coaxial connector 4. Further, the addition of the interconnection assurance provided by the invention may be applied to the coupling body 2 of an existing coaxial connector 4 configuration with minimal design revision as the modified portion of the connector body is outside of the coaxial connector 4 electrical path and/or attachment mechanisms of the coupling body 2.

Table of Parts

2	coupling body
4	coaxial connector
6	cable end
7	coaxial cable
8	connector end
9	protrusion

10	connector body
11	tool flat
12	outer conductor
14	inner body
16	thread
18	connector body bore
20	coupling body bore
22	outer surface
24	visual installation portal
26	jacket
32	inner conductor
34	inner contact
36	spring basket
38	corrugation peak
40	spring contact
42	grip ring

Where in the foregoing description reference has been made to ratios, integers or components having known equivalents then such equivalents are herein incorporated as if individually set forth.

While the present invention has been illustrated by the description of the embodiments thereof, and while the embodiments have been described in

considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details, representative apparatus, methods, and illustrative examples shown and described. Accordingly, departures may be made from such details without departure from the spirit or scope of applicant's general inventive concept. Further, it is to be appreciated that improvements and/or modifications may be made thereto without departing from the scope or spirit of the present invention as defined by the following claims.

Claims

We claim:

1. A coupling body for a coaxial connector dimensioned to couple with a coaxial cable, the coaxial connector provided with a connector body, the coupling body comprising:
a transparent inner body partially covered with an opaque material;
the inner body provided with a bore;
a connector end of the inner body dimensioned to couple with a cable end of the connector body; and
an uncovered portion of the inner body operative as a visual installation portal providing a visual feedback of the insertion of the coaxial cable to a predetermined longitudinal position within the bore.
2. The coupling body of claim 1, further including a thread on an inner diameter of the cable end of the connector body and an outer diameter of a connector end of the inner body of the coupling body; the thread coupling the coupling body and the connector body to one another.
3. The coupling body of claim 1, wherein the visual installation portal is an arc segment along a circumference of the coupling body.

4. The coupling body of claim 1, wherein the visual feedback indicating a proper insertion is an appearance of an outer jacket of the coaxial cable in the visual installation portal.
5. A method for installing a coaxial cable into an electrical connector, comprising the steps of:
inserting a prepared end of a coaxial cable into a cable end of an electrical connector with a coupling body;
the coupling body provided with a transparent inner body covered by an opaque material;
the inner body provided with a bore; and
an uncovered portion of the inner body provided as a visual installation portal;
and
verifying that a desired portion of the prepared end can be seen through the visual installation portal.
6. The method of claim 5, wherein the desired portion is an outer jacket of the coaxial cable, visibility of the outer jacket of the coaxial cable indicating that an inner conductor of the coaxial cable has bottomed against the cable end of an inner contact within a spring basket of the inner contact.
7. The method of claim 5, wherein the desired portion is an outer jacket of a coaxial cable, visibility of the outer jacket of the coaxial cable indicating that at

least one of a plurality of peaks of a corrugated outer conductor touches a spring contact of the coaxial connector and that a grip ring within a bore of the coaxial connector is seated on at least one of the peaks of the outer conductor.

8. The method of claim 5, further including the step of preparing the cable end by stripping back a desired length of an outer conductor and an outer jacket from the cable end.
9. The method of claim 8, wherein the preparing of the cable end is via a saw guide.
10. The method of claim 8, wherein the cable end is cut with respect to a longitudinal location of a corrugation peak of an outer conductor of the coaxial cable.
11. The method of claim 8, wherein the coupling body is polymeric material.
12. A coupling body for a coaxial connector dimensioned to couple with a coaxial cable, the coaxial connector provided with a connector body, the coupling body comprising:
 - a transparent inner body partially covered with an opaque material;
 - the inner body provided with a bore; and

a connector end of the inner body dimensioned to couple with a cable end of the connector body via a thread on an inner diameter of the cable end of the connector body and an outer diameter of a connector end of the inner body of the coupling body;

wherein an uncovered portion of the inner body is operative as a visual installation portal providing a visual feedback of the insertion of the coaxial cable to a predetermined longitudinal position within the bore; and
the visual installation portal is an arc segment along a circumference of the coupling body and the visual feedback indicating a proper insertion is an appearance of an outer jacket of the coaxial cable in the visual installation portal.

1/6

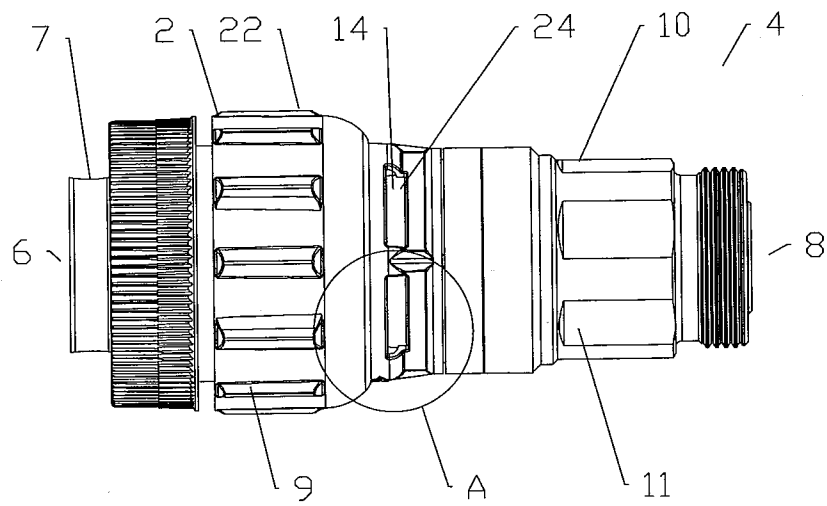


Fig. 1

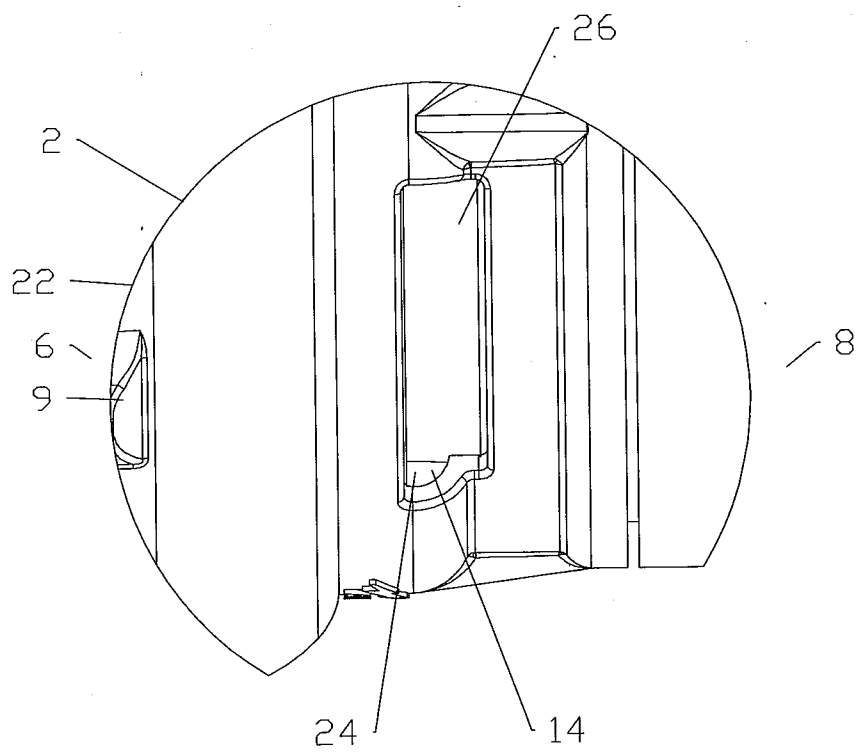


Fig. 2

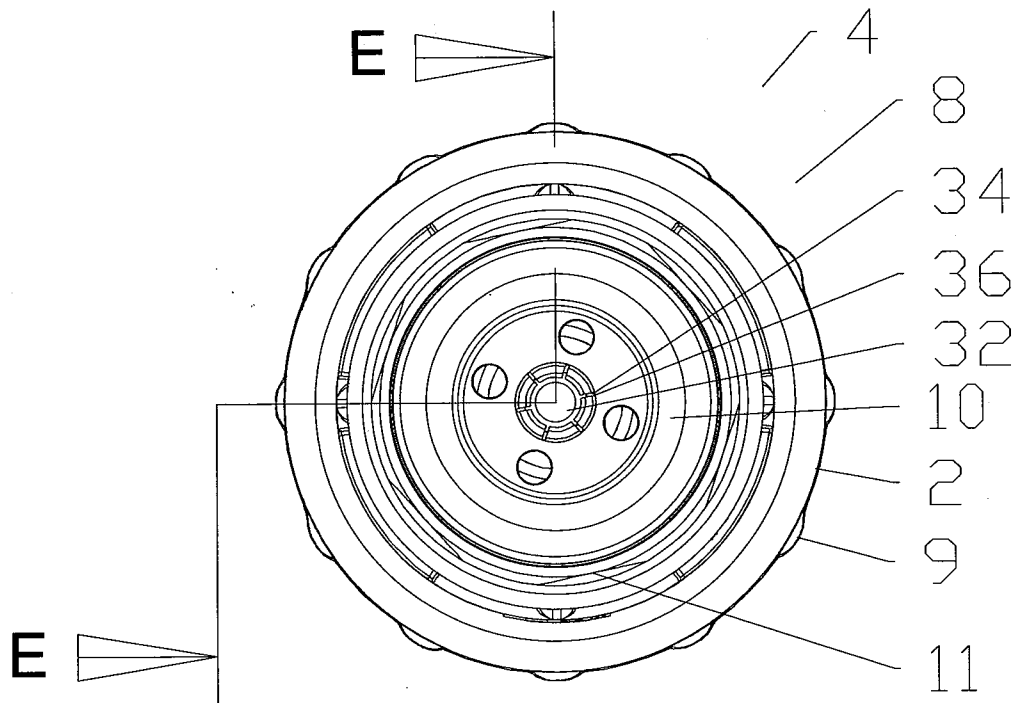


Fig. 3

3/6

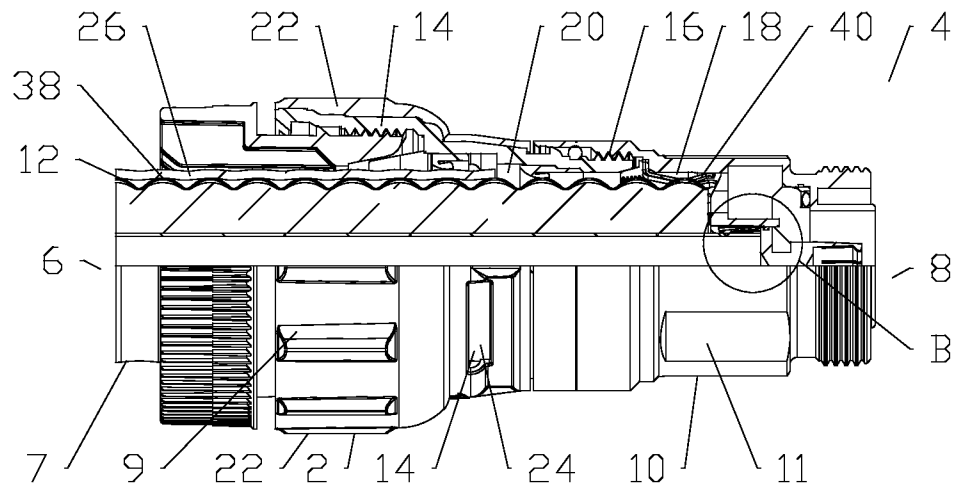


Fig. 4

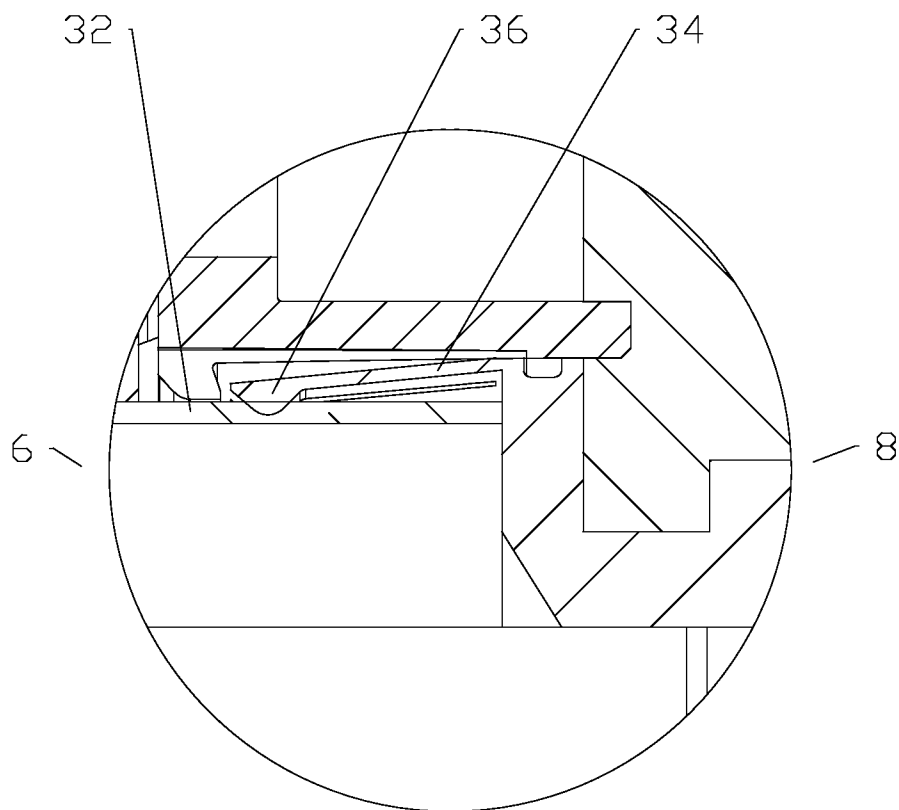


Fig. 5

4/6

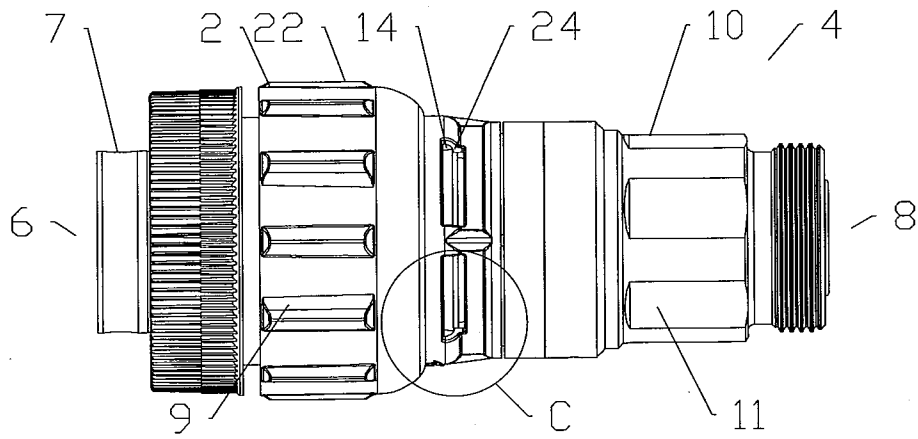


Fig. 6

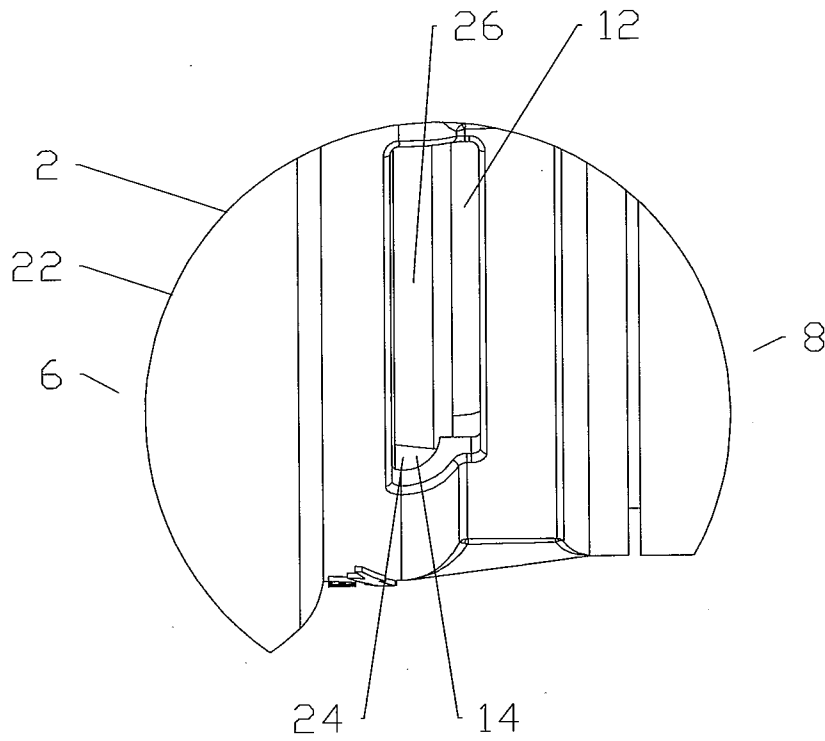


Fig. 7

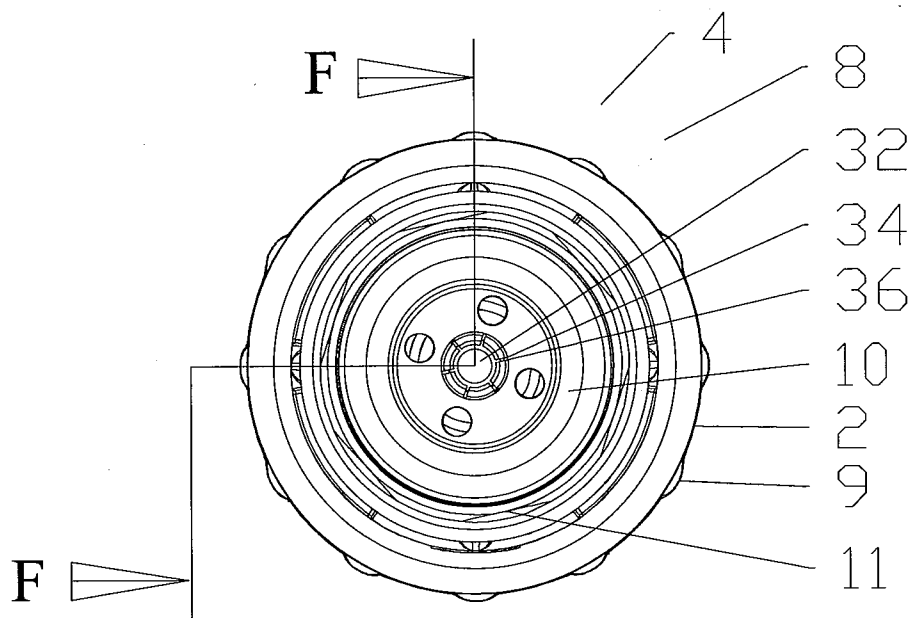


Fig. 8

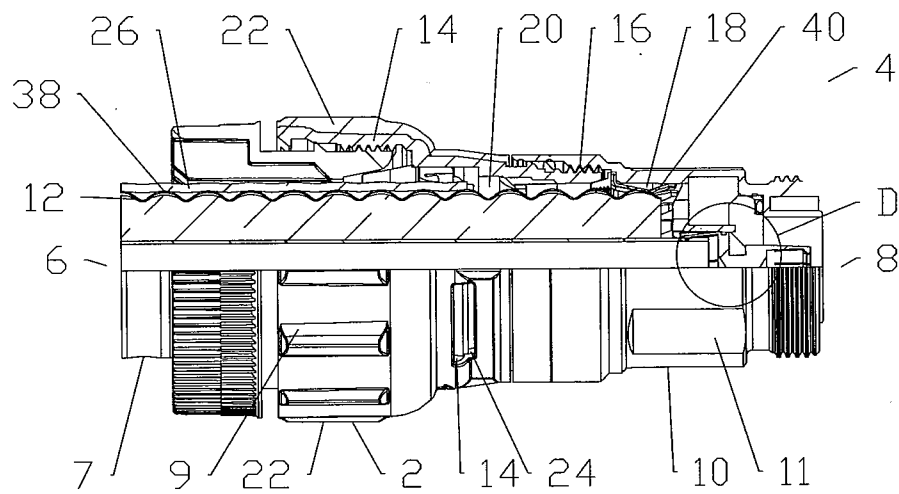


Fig. 9

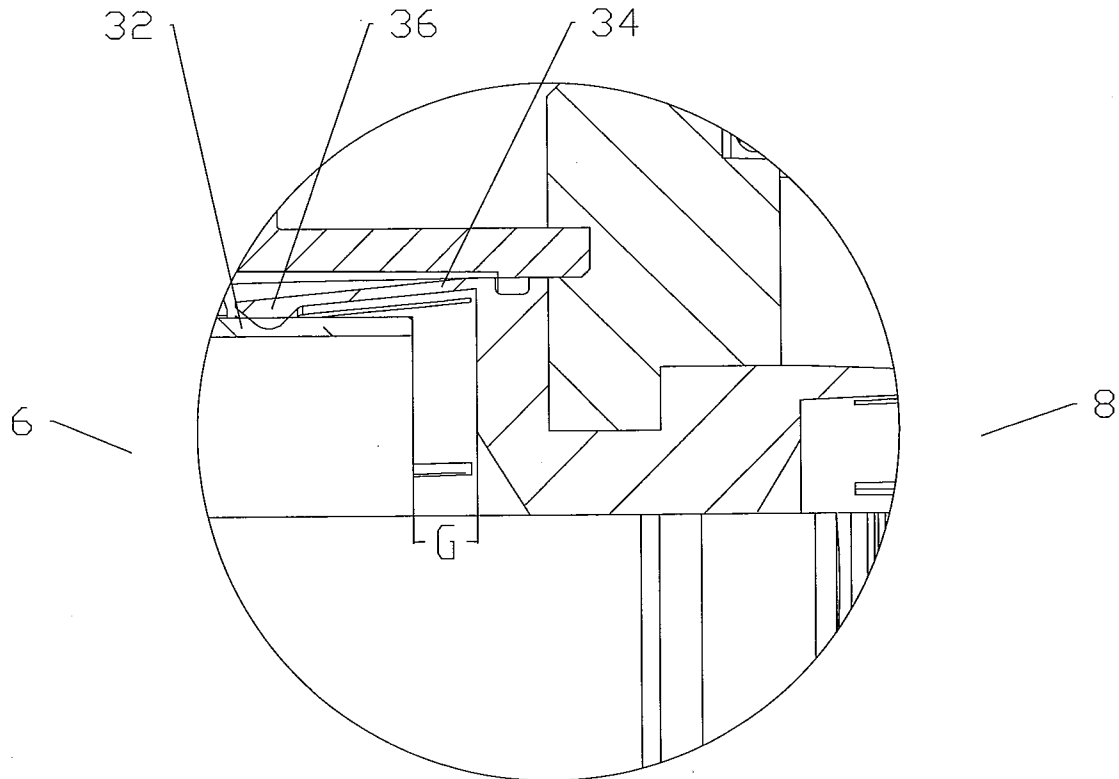


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/046055**A. CLASSIFICATION OF SUBJECT MATTER*****H01R 24/38(2011.01)i, H01R 9/05(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R 24/38; H01R 13/42; H01R 13/64; H01R 13/639; H01R 13/52; H05B 3/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: connect, install, visual, proper, correct, install

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 05756972A A (VRANICAR; ANTHONY et al.) 26 May 1998 See column 10, line 50 – column 12, line 41 and figures 1-2.	1-12
A	JP 2006-252806 A (TYCO ELECTRONICS AMP KK et al.) 21 September 2006 See paragraph [0012] - paragraph [0023] and figures 1a-1b.	1-12
A	JP 10-223296 A (YAZAKI CORP) 21 August 1998 See paragraph [0015] - paragraph [0021] and figures 1-3.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 FEBRUARY 2012 (24.02.2012)

Date of mailing of the international search report

24 FEBRUARY 2012 (24.02.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsu-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Sung Hee

Telephone No. 82-42-481-5889



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/046055

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 05756972A A	26.05.1998	AU 1995-40140 B2	28.01.1999
		CA 2203508 C	11.01.2005
		CN 1086850 C	26.06.2002
		CN 1161763 A	08.10.1997
		CN 1161763 C0	08.10.1997
		EP 0788671 A2	13.08.1997
		EP 0788671 A2	07.06.2000
		EP 0788671 B1	27.12.2000
		EP 1020960 A2	19.07.2000
		EP 1020960 A3	09.08.2000
		EP 1020960 B1	09.01.2002
		JP 03-692142 B2	07.09.2005
		JP 10-507865 A	28.07.1998
		KR 10-0383030 B1	16.07.2003
		US 05756972A A	26.05.1998
		WO 96-13080 A3	02.05.1996
JP 2006-252806 A	21.09.2006	DE 602006001129 D1	26.06.2008
		EP 1701414 A1	13.09.2006
		EP 1701414 B1	14.05.2008
		US 2006-0205268 A1	14.09.2006
		US 7303423 B2	04.12.2007
JP 10-223296 A	21.08.1998	None	