




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G01N 21/64</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/57150</b> (43) International Publication Date: 17 December 1998 (17.12.98)
<p>(21) International Application Number: PCT/EP98/03509</p> <p>(22) International Filing Date: 10 June 1998 (10.06.98)</p> <p>(30) Priority Data: 97109353.9 10 June 1997 (10.06.97) EP (34) Countries for which the regional or international application was filed: DE et al.</p> <p>(71) Applicant (for all designated States except US): EVOTEC BIOSYSTEMS GMBH [DE/DE]; Schnackenburgallee 114, D-22525 Hamburg (DE).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): KASK, Peet [EE/EE]; Uus 5-3, EE-3051 Harku (EE).</p> <p>(74) Agents: MEYERS, Hans-Wilhelm et al.; P.O. Box 10 22 41, D-50462 Köln (DE).</p>	<p>(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: A METHOD FOR CHARACTERIZING SAMPLES ON THE BASIS OF INTERMEDIATE STATISTICAL DATA

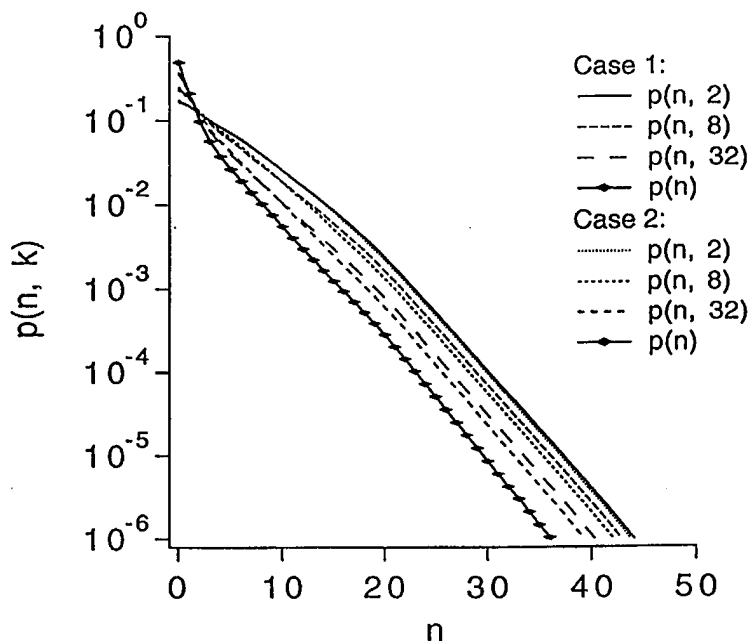

## (57) Abstract

A method for characterizing samples which contain units, comprising the steps of: a) monitoring intensity fluctuations of radiation emitted, scattered and/or reflected by the units in at least one measurement volume with at least one detection means which is capable of detecting radiation emitted, scattered and/or reflected by said units, b) determining from said intensity fluctuations intermediate statistical data comprising an at least two-dimensional joint statistical function, c) determining information related to a joint distribution of units out of said intermediate statistical data.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece			<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>ML</b>	Mali	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MN</b>	Mongolia	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MR</b>	Mauritania	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MW</b>	Malawi	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>MX</b>	Mexico	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NE</b>	Niger	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NL</b>	Netherlands	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NO</b>	Norway	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>NZ</b>	New Zealand		
<b>CM</b>	Cameroon		Republic of Korea	<b>PL</b>	Poland		
<b>CN</b>	China	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CU</b>	Cuba	<b>KZ</b>	Kazakstan	<b>RO</b>	Romania		
<b>CZ</b>	Czech Republic	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>DE</b>	Germany	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DK</b>	Denmark	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>EE</b>	Estonia	<b>LR</b>	Liberia	<b>SG</b>	Singapore		

A method for characterizing samples on the basis of intermediate statistical data

The present invention relates to a method for characterizing samples on the basis of intermediate statistical data.

The essence of a number of pharmacological, biological and chemical problems is to detect substances in a sample or to measure the interaction or reaction of these substances. In order to measure the substances in a sample more specifically, usually at least one of the reactants is radioactively or luminescently labelled. A convenient and sensitive type of labels are fluorescent labels.

Widely used methods to monitor interactions by fluorescence are the determination of changes in overall fluorescence intensity or in anisotropy of fluorescence. However, a number of side effects, such as surface binding or fluorescence from impurities, often lead to interpretation problems and artifacts. A second reason which has induced interest towards refined methods of analysis is the need to work with small amounts of a large number of samples in the field of high throughput screening and large capacity diagnostics.

New opportunities for assay development were opened when the technology for monitoring fluorescence from single fluorophore molecules became available. The first successful studies on fluorescence intensity fluctuations were performed by Magde, Elson and Webb (Biopolymers, Vol. 13, 29-61, 1974) who demonstrated the possibility to detect number fluctuations of fluorescent molecules and established a research field called fluorescence correlation spectroscopy (FCS). FCS was primarily developed as a method for determining chemical kinetic constants and diffusion coefficients. The experiment consists essentially in measuring the variation of the number of molecules of specific reactants in time in a defined open volume of solution. Microscopic

fluctuations of the concentration of the reactant are detected as fluorescence intensity fluctuations from a small, open measurement volume. The measurement volume is defined by a focussed laser beam, which excites the fluorescence, and a pinhole in the image plane of the microscope collecting fluorescence. Intensity of fluorescence emission fluctuates in proportion with the changes in the number of fluorescent molecules as they diffuse into and out of the measurement volume and as they are created or eliminated by the chemical reactions. Technically, the direct outcome of an FCS experiment is the calculated autocorrelation function of the measured fluorescence intensity.

An important application of FCS is to determine concentrations of fluorescent species having different diffusion rates in a mixture. In order to separate the two terms corresponding to translation diffusion of two kinds of particles in the autocorrelation function of the fluorescence intensity, at least about a two-fold difference in diffusion time is needed, which corresponds generally to an eight-fold difference in the mass of the particles. Furthermore, if one succeeds in separating the two terms in the autocorrelation function of fluorescence intensity, it is yet not sufficient for determining the corresponding concentrations except if one knows the relative brightness of the two different types of particles.

The international patent application WO-A-98/16814 describes a method for characterizing samples by measuring a number of photon counts emitted, scattered and/or reflected by units in said sample in a repetitive mode per time interval of defined length, and determining a function of the number of photon counts per said time interval, characterized in that a function of specific brightness of said units is determined on basis of said function of the number of photon counts. This method can also be applied to study fluorescent samples. This special embodiment is the so called fluorescence intensity distribution analysis (FIDA). While FCS distinguishes between different species according to their diffusion time, FIDA distinguishes between them according to their specific brightness. Both FCS and FIDA rely on a single specific physical property. In principle, however, one-dimensional statistical functions obtained by FCS or FIDA can be used for determining distributions of

particles in more than one specific physical property (e.g. distribution of particles according to both translational and rotational diffusion coefficient), but this option is limited and may be of low reliability.

The European patent application EP-A-0 359 681 discloses modulated dynamic light scattering methods which utilize time and space modulations of the incident or scattered light as well as modulations caused by random Brownian motions of the particles to measure particular properties.

A further method which utilizes fluorescence is Fluorescence Analysis in Cell Sorting (FACS). In FACS machines, the intensity of light emitted by a single particle is measured with a relatively high precision, and intensities corresponding to different wavelengths, scattering or polarization angles can be plotted simultaneously. United States Patent 3,824,402 to Mullaney et al. discloses such a photometric apparatus and method for measuring light responsive characteristics of appropriately stained biological cells. At least two light responsive characteristics are measured and compared to eliminate spurious light induced noise. More particularly, light scattering produced by the cells and fluorescent light emitted by the cells in response to an incident light beam are detected. However, ordinary FACS cannot be applied in cases when the particles under study arrive and leave the measurement volume at random pathways, so that a lot of them do not pass through the centre of the focus. Also, the set of procedures used in FACS is not applicable in cases when light intensity corresponding to individual particles is so weak that the stochastic error of its measurement exceeds differences in intensities corresponding to different species of particles. Furthermore, FACS is applicable only at extremely low concentrations of particles, corresponding to much less than one particle per measurement volume.

One object of the invention is to increase the reliability of analysis of samples and reduce risk of misinterpretation of the measured data.

Another object of the invention is to considerably broaden the field of applicability of multidimensional analysis of samples.

The objects of the present invention are solved with the method having the features of claim 1.

It is to be understood that the following description is intended to be illustrative and not restrictive. Many embodiments will be apparent to those of skill in the art upon reviewing the following description. By way of example, the invention will be described primarily with reference to monitoring numbers of photon counts from light emitted by fluorescently labelled particles in a sample. This is because fluorescence is a very sensitive means allowing to monitor single molecules, and still rather selective allowing to distinguish between different species. However, in some embodiments it may be desirable to monitor numbers of photon counts of other origin than fluorescence.

The term "unit of a sample" refers, in general, to subparts of a sample which are capable of emitting, scattering and/or reflecting radiation. A sample might contain a number of identical units or different units which preferably can be grouped into species. The term "different species" refers also to different states, in particular different conformational states, of a unit such as a molecule. Fluorescently labelled or naturally fluorescent molecules, molecular complexes, vesicles, cells, beads and other particles in water or other liquids may be examples of fluorescent units in liquid samples, while examples of fluorescent units of a solid sample are impurity molecules, atoms or ions, or other fluorescence centers.

What is meant by the term "specific physical property" is generally a physical measurable property having a certain value or interval of values or distribution of values for one species and, in general, another value or interval of values or distribution of values for another species. Examples of specific physical properties are: diffusion coefficient, absorption cross-section, quantum yield of fluorescence, specific brightness, anisotropy of fluorescence, fluorescence decay time, ratio of fluorescence intensity passing through different optical filters, etc.

The specific brightness in the sense of the present invention is a physical characteris-

tic which expresses in what extent a unit of given species is able to emit, scatter and/or reflect radiation. It is thought to characterize single units and therefore the value of specific brightness is neither depending on concentration of the units, nor on the presence of other units. Thus, a change of the total count rate of photons emitted, scattered and/or reflected from the measurement volume, if only due to a change in concentration of the total number of units, does not influence the value of specific brightness. Specific brightness of a unit is usually expressed in terms of the mean count rate per unit which is a weighted average of the count rate over coordinates of the unit in the measurement volume.

What is meant by the term "at least two-dimensional joint statistical function" is a function of two or more arguments which can be determined from sequences of photon counts detected by a single, two or more photon detectors. The adjective "statistical" means that the function is determined as an average over time or realizations, while its expectation is thought to be a non-trivial function, expressing sensitive information about the sample. The adjective "joint" is meant to denote that the multidimensional statistical function can be generated out of a sequence or group of sequences of photon counts without the requirement to generate at least one one-dimensional statistical function for each of several separately detected sequences or groups of sequences of photon counts and assemble the multidimensional statistical function out of these one-dimensional functions. Separately detected is meant to denote that the sequence or groups of sequences of photon counts are detected with separate detectors or groups of detectors, respectively, or detected by the same detector or group of detectors, respectively, in consecutive measurements. For example, if a correlation function of light intensity is determined at different conditions (e.g. at different angles of a polarization cube), then the resulting two-dimensional function  $G(t, \alpha)$  (with its arguments delay time and angle) is considered not to be a joint statistical function, while the probability  $p(n_1, n_2)$  to count  $n_1$  photons by detector 1 and  $n_2$  photons by detector 2 is a typical example for a joint statistical function. Other examples of intermediate two-dimensional joint statistical functions are as follows: number of events versus number of counts and time delay from an incident count; two-dimensional Fourier spectrum of the photon detection function by two

photon detectors; two-dimensional moments of the two-dimensional joint distribution of the number of photon counts; probability versus number of photon counts in a counting time interval and (versus) width of counting time interval  $p(n, T)$ . Correlation function and distribution function may be regarded as seeds for a number of different types of multidimensional joint statistical functions, mathematical transformations being responsible for their great variety.

The importance of the present invention for the characterization of samples may be illustrated by the following, non-limiting example: Assuming that a solution contains relatively small labelled ligand molecules and beads bearing two receptors, then one has to distinguish between three fluorescent species: free ligand molecule (L), one ligand molecule bound to a bead (BL), and two ligand molecules bound to a bead (BLL). The assumption is made that no quenching of fluorescence occurs upon binding.

FCS would separate at best two terms: the first with the diffusion time of L, and the second with the diffusion time of both BL and BLL, which are practically equal because the bead has a much larger molecular weight than the ligand. The outcome of FIDA would be two values of specific brightness: that of BLL being two times higher than that of BL or L. The conclusion of these analyses could be that the sample contains two species, and in case of about 1:1 ratio of amplitudes, one could not decide which value of the diffusion time corresponds to which value of the specific brightness.

The method of the present invention, however, can be applied to distinguish all three species, because they differ between each other in at least one out of the two specific properties of analysis.

According to the invention, a new quality of characterization of samples containing units which emit, scatter and/or reflect radiation becomes possible. In the first step, intensity fluctuations of radiation emitted, scattered and/or reflected by units in at least one measurement volume are monitored with at least one detection means which is



capable to detect said radiation. In a second step of the method according to the invention, intermediate statistical data comprising an at least two-dimensional joint statistical function are determined from the detected intensity fluctuations. It might be preferred to additionally consider other data than the joint statistical function as part of the intermediate statistical data set. In particular, it might be preferred that said intermediate statistical data additionally comprise one-dimensional statistical functions. In a third step, information related to a joint distribution of units is determined out of said intermediate statistical data.

An important step of the method according to the invention is the determination of a set of intermediate statistical data, comprising at least one at least two-dimensional joint statistical function, out of the measured stochastic data of radiation intensity fluctuations. Which set of intermediate data is to be determined depends on the specific physical properties of interest. If the diffusion coefficient and the specific brightness are chosen as the two specific properties to distinguish between different species in the sample, then the two-dimensional joint statistical function has to depend somehow both on specific brightness of said species and the speed at which the species enter and leave the measurement volume. In this particular case, a suitable selection is  $p(n, k)$  which is the conditional probability to count  $n$  photons in the  $k$ -th time interval provided an occasional photon of incidence was counted in the 0-th time interval. Other selections are also possible, as for example  $p(n, T)$  which is the probability distribution of the number of counts as a function of the width of the counting time interval.

Another example is the characterization of samples on basis of the two specific brightnesses corresponding to parallel and perpendicular polarizations. (It should be noted that different species differ not only by brightness of fluorescence, but also by anisotropy of polarization, i.e. by ratio of the two brightnesses.) In this case, it is adequate to use two detection means, one for the parallel and the other for the perpendicular polarization. As an intermediate statistical data set, one can select  $p(n_1, n_2)$  which is the joint probability to count  $n_1$  photons by the detection means for parallel polarization and  $n_2$  photons by the other detection means during the same

counting interval. From the joint distribution  $p(n_1, n_2)$ , one can determine characteristic polarization ratios for two or more fluorescent species at a time without the need to prepare and measure solutions of single species which is often difficult or even impossible.

In a preferred embodiment, the fluctuating intensity of radiation is monitored in terms of determining numbers of photon counts in, preferably consecutive, time intervals of given length. In a further preferred embodiment, said intensity fluctuations of radiation are monitored in terms of determining time of arrival of photons and/or length of time intervals between a given number of consecutive photon counts.

It might be preferred to select intermediate statistical data from a group consisting of unconditional and conditional distributions of the number of photon counts, distributions of time intervals between consecutive photon counts, auto-correlation functions, cross-correlation functions, and combinations thereof.

At least one of the arguments of the joint statistical function might be time. In another embodiment, at least one of the arguments of said joint statistical function is the number of photon counts in time intervals of given length or length of time intervals between a given number of consecutive photon counts. It might further be preferred that at least one of the arguments belongs to the class of arguments of mathematical transforms of either probability or correlation functions.

It might be preferred to determine in step c) the presence or absence or concentration of at least one unit or species of units with a specific combination of at least two physical properties. At least two species might be separated based on at least two physical properties.

It might also be preferred to include into the method the separation of at least one species from any background influence based on at least one physical property and/or to derive at least one one-dimensional statistic after performing a separating operation based on at least one physical property.

With regard to step c) in a further embodiment, a joint distribution of units as a function of at least two specific physical properties is determined out of said intermediate statistical data.

According to a further embodiment, the intermediate statistical data in step b) are derived from the intensity fluctuations directly or from fluctuations of local statistical functions of intensity.

According to a further preferred embodiment, the units are particles, molecules, aggregates, vesicles, cells, viruses, bacteria, centers, or mixtures thereof in solids, liquids or gases. It might be preferred to group units into species which can be distinguished by at least one of their specific physical properties. At least one of the species can be luminescent, preferably fluorescent, and/or can be luminescently labelled.

It might be preferred to monitor the intensity fluctuations of fluorescence with the help of only one detection means. If one is interested in characterization of species according to more than one specific brightness corresponding, for example, to different polarizations or spectral sensitivities of fluorescence detection, then it might be preferred to use more than one detection means. Any detector which is capable to detect radiation emitted, scattered and/or reflected by units of the sample may be used. Appropriate detection means such as an avalanche photo-diode, a photomultiplier or conventional photodiodes are well known to those of skill in the art. It might also be preferred to use a multidetector consisting of a monolithic configuration of a plurality of detectors, especially if one wants to measure a set of samples in parallel as it is the case in miniaturized high throughput screening. It might further be preferred to use a two-dimensional multiarray detector.

In one preferred embodiment, at least one of the specific physical properties characterizing said units is the diffusion coefficient, or correlation time of radiation intensity fluctuations, or any other property expressing how fast or slow Brownian motion of given units is.

In a further preferred embodiment, at least one of the specific physical properties characterizing a unit is the specific brightness. More details about the determination of specific brightness as well as applications are disclosed in the international patent application WO-A-98/16814 which is herein incorporated by reference.

It may further be preferred that at least one of the specific physical properties characterizing fluorescent units is the polarization ratio of their fluorescence, or fluorescence anisotropy, or any other property expressing the extent of polarization of fluorescence. For example, a solution of two fluorescent species is described not only by the polarization ratio of fluorescence of the whole sample, but also by two specific polarization ratios characterizing the two species. Usually, these last two properties are determined by studying fluorescence of pure solutions of given species. According to the present invention, these properties can also be determined from monitoring fluorescence intensity fluctuations of the mixture of said species.

In one embodiment, at least one of the specific physical properties characterizing the fluorescent units is the ratio of fluorescence intensities corresponding to different excitation wavelengths and/or different spectral sensitivities of fluorescence detection, or any other property expressing the dependence of fluorescence intensity on the wavelength of excitation and/or detection.

In a preferred embodiment, at least one of the specific physical properties characterizing said fluorescent units is lifetime of fluorescence.

The specific physical properties, in particular luminescence properties like fluorescence lifetime or fluorescence anisotropy, of the units can be varied by conjugating them with a specific luminophore via different linker molecules. It may be preferred to use polymeric linker molecules consisting of a varying number of equal or different monomers.

The luminescence properties of the units may also be varied by conjugating them with a first molecule, as e.g. biotin, which binds a luminescently labelled second molecule,

as e.g. luminescently labelled avidin or streptavidin.

The luminescence properties of a unit can also be changed by energy transfer. Energy absorbed by a donor unit is transferred upon close contact to a luminophore of an acceptor unit and subsequently emitted.

The method according to the present invention is particularly well suited for high throughput screening, diagnostic purposes, monitoring polymerization, aggregation or degradation processes, for particle sorting, nucleic acid sequencing, or for general analytical purposes, such as environmental analytics or process control.

In screening procedures, substances that are possibly pharmacologically active can be analyzed through their interaction with specific receptors by examining said interaction with binding of a luminescently labelled ligand to receptors wherein natural receptors on their carrier cells as well as receptors on receptor-overexpressing carrier cells or receptors on vesicles or receptors in the form of expressed molecules or molecular complexes may be used. Moreover, the interaction of substances with enzymes in solution or in their genuine cellular environment can be detected by monitoring a change of the substrate of the enzyme, e.g. a change in size, brightness, rotational diffusion, or any other of the above mentioned fluorescence properties. Another means of determining enzyme activity is to add a fluorescently labelled molecule, which binds to either educt or product of the enzymatic reaction. Another method for investigating pharmacological activity of substances is the measurement of reporter systems such as Green Fluorescent Protein (GFP) expresssion, and of the properties of molecules to which GFP is attached. Further applications, especially concerning the performance of assays, are disclosed in WO-A-94/16313 (herein incorporated by reference).

For the detection of specific recognition reactions, potential active substances can be present in complex natural, synthetic or semisynthetic mixtures which are subjected to separation prior to analysis. These mixtures can be separated first e.g. by chromatography to test the individual fractions for the presence of functional

compounds preferably "on line" in a capillary at the end of a separation matrix. The coupling of fractionating methods with FCS detection is described in detail in WO-A-94/16313 (herein incorporated by reference).

With respect to the determination of interactions between antigens and antibodies, the antigen is often presented in a crude biological matrix which may be a source of high background signals such as autofluorescence, or can otherwise distort the "pure" signal, e.g. by absorption of fluorescence photons or unspecific binding of the labelled probe to other particles of the sample. By identifying the antigen-antibody complexes via, for example, the size of the molecular complex and its brightness, they can be separated from the signal caused by artifacts.

Another task in diagnostics is to identify nucleic acid strands by a labelled probe molecule, such as an specific oligomer. With the use of a primer "cocktail", which e.g. can exist of primers labelled with dyes of different brightness, a target nucleic acid can be identified by the diffusion time and the number of primers having bound to it. A method for direct identification of few nucleic acid strands with a primer cocktail, which preferably consists of a mixture of different, short primers each with a so-called antisense-sequence complementary to a section of the target molecule and marked with one or more dye molecules, is disclosed in DE-A-195 08 366 (herein incorporated by reference).

Often, aggregation and degradation are phenomena to be monitored. Aggregates display brightnesses and diffusion times different from the monomers. In determining both properties, the measurements become more precise and do not exhibit a bias due to different molecular brightnesses, as it would be the case with FCS alone.

In sequencing according to the method of Sanger, oligomers of different length, of which the terminating nucleic acid is labelled with a dye, are identified. Advanced techniques, as e.g. the one described in DE-A-38 07 975, use dyes which exhibit different properties, such as fluorescence lifetime, according to the type of base they are attached to. The determination of a base is much more secure if several

properties, such as fluorescence lifetime and brightness, or any other specific physical property, are determined according to the invention and cross checked for consistency. In a preferred embodiment, the sample to be sequenced is separated by gel or capillary electrophoresis, or a separation step is conducted by capillary electrochromatography, electrohydrodynamic migration or related electrokinetic methods.

In particle sorting, especially in cell or bead sorting, the task is to separate cells or beads according to their biological or chemical properties which can be monitored by their fluorescence properties. Prior state of the art just monitors fluorescence intensity or intensity of scattered light in a measurement volume much larger than the size of the cell or of comparable size to the bead. Thus, cells or beads binding only partly a ligand which is also present unbound in the surrounding solution cannot be monitored by prior art. The current invention solves this problem even for relatively large measurement volumes by determining fluorescence and/or molecular parameters different from mere intensity, and thus enables the separation of both contributions, that of the bound and the one of the unbound ligand.

The importance of the present invention for the characterization of samples may be further illustrated by the following, non-limiting example: Assuming that a solution contains relatively small luminescent ligand molecules which tend to form aggregates as well as beads with multiple binding sites for these luminescent ligand molecules. Then one might want to distinguish between aggregates of a particular number of luminescent ligand molecules (A) and beads to which the same number of luminescent ligand molecules is bound (B). The two-dimensional analysis according to the present invention allows distinguishing species A, which is a fast diffusing component with a specific brightness, from species B, which is a slower diffusing component with the same specific brightness as A.

In one embodiment, said intermediate statistical data are fitted using a priori information on said sample. In a further embodiment, said statistical data are processed applying multidimensional inverse transformation with linear regularization (ITR) or inverse transformation with constraints (ITC) or inverse transformation with

regularization and constraints (ITRC). Inverse transformation can be used to determine which composition of the sample would yield the theoretical values of the intermediate statistical data set closest to the experimental data. Because of statistical errors and limited sizes of measured data, inverse transformation is often an ill-posed mathematical problem, characterized by wild oscillations in its outcome. ITR, ITC and ITRC stabilize the mathematical problem by looking for a "regular" (e.g. a smooth) or constrained solution, for example by minimizing the sum of squared deviations of statistical data and a function of the solution itself, penalizing "irregular", usually irreproducible structures in the outcome, or values having no physical meaning. An example of constraining is disallowing negative values for concentrations. (For the method of ITR, see, e.g., W. H. Press, S. A. Teukolsky, W. T. Vetterling, B. P. Flannery, Numerical recipes in C: the art of scientific computing, second edition, Cambridge University Press, 1992, p. 808).

In a preferred embodiment, the measurement volume is only a part of the total volume of the sample and said units are diffusing and/or being actively transported into and out of said measurement volume and/or said sample is actively transported and/or optically scanned. If said units, e.g. fluorescent particles, are sufficiently small, then diffusion is fast enough for data acquisition from a great number of counting intervals. However, if the characteristic time of diffusion is substantially longer than the time interval for measuring fluorescence intensity, then active transport (flow or scanning) can considerably save time of data acquisition.

In fluorescence studies, it may be advantageous to take measures for reducing the background count rate, arising from Raman scattering in the solute material and dark count rate of the detector, with respect to the count rate per unit. In particular, it is in some cases preferred to use measurement volumes smaller than  $10^{-12}$  l, more preferably smaller than  $10^{-14}$  l.

The measurement volumes can preferably be arranged on two-dimensional carriers, such as membranes or sheets having wells. Suitable carrier systems are described in WO-A-94/16313 as well as in the German patent application DE-A-196 53 766.5.



The latter discloses a polymeric disk with multiple wells. In particular, this disk has dimensions of known compact discs (CD) or mini CDs.

Advantageously, the high signal to background count rate and the small optical measurement volume may be achieved by using at least one microscope objective, preferably with a numerical aperture  $\geq 0.9$ , in a confocal manner for both focussing the incident laser beam and collecting radiation emitted, scattered and/or reflected by units in said sample. A suitable device is disclosed in WO-A-94/16313 (herein incorporated by reference).

In a further preferred embodiment, the measurement volume is restricted by the use of elements of near field optical microscopy. Near field optical microscopy means here that the light passes through an aperture with at least one of its dimensions being smaller than the wavelength of the light used and which is in direct contact to the measurement volume. The aperture may consist of an opaque layer with at least one hole of said diameter or at least one slit of appropriate width and/or a tapered glass fiber or wave guide with a tip diameter of said width, optionally coated with an opaque layer outside. Near field optical microscopy can be used for focussing the excitation light of the units, and/or collecting the light emitted by the units. A suitable device is disclosed in WO-A-96/13744 (herein incorporated by reference).

Another preferred embodiment combines near field optical microscopy for the excitation light path, and conventional optical microscopy for the emission light path, or vice versa. The present invention profits from such a realization in the sense that the size of the measurement volume is reduced compared to conventional confocal microscopy. Thus, the present invention can be used to measure higher concentration of particles as with other optical schemes.

In a preferred embodiment of the method, multiple photon excitation is used to excite a unit. Multiple photon excitation means that the sum, difference or any other combination of wave frequencies of two, three or more photons is used for excitation of e.g. luminescence. Such an excitation scheme has an advantage in the sense that

the excitation probability is not linearly dependent on excitation intensity, but on the second or higher power. Thus, the multiple photon excitation is mostly limited to the volume of the laser focus, whereas outside the laser focus no spurious excitation is generated. The present invention profits from such an excitation scheme in the sense that less background is generated compared to single photon excitation, and that there is no pinhole necessary to restrict the measurement volume. Appropriate laser sources of picosecond or subpicosecond pulses are well known to those of skill in the art.

The nature and the advantages of the invention may be better understood on the basis of the following figures.

Fig. 1. Illustration of the ability of FCS to analyze mixtures. The correlation function  $G(t)$  calculated for a mixture of two species having two times different diffusion coefficient is slightly different from  $G(t)$  calculated for single species. If the correlation function for a mixture is measured with a sufficient precision, then the analysis yields amplitudes and diffusion times of the terms corresponding to both species.

Fig. 2. Illustration of the ability of FIDA to analyze mixtures. The distribution function of the number of photon counts  $p(n)$  calculated for a mixture of two species with two times different specific brightness is obviously different from  $p(n)$  calculated for single species. Values of concentrations and specific brightnesses are selected to yield equal mean and variance of the count number for both cases. If the distribution function  $p(n)$  corresponding to the mixture is accurately measured, then the analysis yields concentrations (number of particles per measurement volume) and specific brightnesses (number of photon counts per particle) of both species.

Fig. 3. Illustration of the ability of the present invention to analyze mixtures. A set of intermediate statistical data,  $p(n, k)$  is theoretically calculated for two cases which yield identical correlation functions  $G(t)$  and distribution functions of photon count number  $p(n)$ , but in case 1 darker particles diffuse two times faster than brighter ones while in case 2 the darker particles are slower. The calculated curves  $p(n, k)$  for these

two cases differ from each other which means that the present invention can distinguish between the cases which are indistinguishable by both FCS and FIDA.

Fig. 4. Illustration of the ability of the present invention to analyze mixtures of two species. A set of intermediate statistical data,  $p(n_1, n_2)$ , is theoretically calculated for two cases. Both cases correspond to mixtures of two fluorescent species.

In case 1, fluorescence of one species is polarized: the mean count number per particle is 4.0 for the first and 2.0 for the second detector. Fluorescence of the second species is unpolarized: the mean count number per particle is 3.0 for both detectors.

In case 2, fluorescence of both species is moderately polarized: the mean count number per particle is 4.0 and 3.0 for species 1, but 3.0 and 2.0 for species 2.

These two cases would yield identical distribution functions of photon count numbers  $p(n_1)$  and  $p(n_2)$ . However, the two-dimensional analysis according to the present invention using  $p(n_1, n_2)$  can distinguish case 1 from case 2.

Fig. 5. Distributions  $p(n)$  and  $p(n, k)$  measured for a 0.5 nM tetramethylrhodamine solution in water. The width of the sampling time window is 40  $\mu$ s and the data collection time is 60 s.

Fig. 6. Distributions  $p(n_1, n_2)$  measured for aqueous solutions of 1.1 nM tetramethylrhodamine (Fig. 6a), 1.9 nM rhodamine red X (Fig. 6b) and 1.1 nM rhodamine red X (Fig. 6c).

Fig. 7. Distributions  $c(q_0, q_1)$  determined from experimental data graphed on Fig. 6. The distributions (a) and (b) corresponding to single species indeed have a single peak while the distribution (c) has two peaks corresponding to two kinds of molecules.

Fig. 8. Single-species resolution based on multicomponent analysis of global fit algorithm for the interaction of theophylline-TAMRA (Fig. 8a) and theophylline-spacer-TAMRA (Fig. 8b) with a polyclonal anti-theophylline antibody. The data were fit according to a model describing two identical and independent binding sites.

Example 1

This example represents a two-dimensional combination of FIDA and FCS.

The equipment consists of a confocal microscope (ConfoCor<sup>®</sup>, Carl Zeiss Jena, Germany) with a water immersion objective (60x, N.A. 1.2), a pinhole in the image plane, a He-Ne-laser of 543 nm emission line, an avalanche photodiode (SPCM-AQ-131, EG&G Optoelectronics, Canada) as a photon detector and a computer with appropriate data acquisition card. The beam was attenuated to about 200  $\mu$ W at the focus. Emission from samples was optically filtered by a bandpass filter with central wavelength of 580 nm. A sequence of the number of photon counts in consecutive time intervals of given length (20 or 40  $\mu$ s) was collected as raw data.

From the sequence of the number of counts, denoted as  $n_i$ , ( $i = 1, \dots, N$ ), the intermediate joint statistical function was determined according to the following formula:

$$P(n, k) = \frac{\sum_{i=k+1}^{N-k} (n_{i-k} + n_{i+k}) \delta(n_i, n)}{N - 2k}.$$

wherein  $k$  denotes the delay time divided by the width of the counting time interval. The intermediate data determined from experiments were further processed for achieving the best fit with a theoretical model. The theoretical model combines theories of FIDA and FCS. As the outcome of curve fitting, one gets estimated values of concentrations, brightnesses and correlation times of as many species as one assumes to be present.

Five experiments were performed on a 0.5 nM solution of tetramethylrhodamin (TMR, Molecular Probes) in PBS buffer, using the sampling time interval  $T = 20 \mu$ s. The

duration of each experiment was 40 s. In addition, five further experiments were performed at  $T = 40 \mu\text{s}$ , using a 0.2 nM solution of TMR. The third set of data files was created semi-artificially, summing pairs of the number of photon counts obtained at  $T = 20 \mu\text{s}$  and  $T = 40 \mu\text{s}$  to simulate a mixture of “darker” but “faster” particles with two times “brighter” but “slower” ones. The mixture of fluorescent species with twofold difference in the diffusion time is at the limit of resolution of FCS, whereas a twofold difference of specific brightness is at the limit of resolution of FIDA. The experimentally obtained data were analyzed assuming single species. The semi-artificial data were analyzed assuming two species. The results of analysis are presented in Table 1 below.

### Example 2

This example illustrates the principle of two-dimensional fluorescence intensity distribution analysis (2D-FIDA).

The equipment is nearly identical to that of example 1, except that fluorescence from the measurement volume is monitored with the help of two photon detectors. In this example, the two detectors differ by transmission spectra of the optical filters: one filter transmits light in the range of 555 to 590 nm while the transmission range of the other filter is 580 to 630 nm. The two specific physical properties characterizing different fluorescent species are count rates per molecule of given species corresponding to the two detection channels. The two-dimensional joint statistical function determined in this example is the (relative) number of events as a function of the number of counts by detectors 1 and 2,  $P(n_1, n_2)$ . Fig. 6a shows the experimental joint distribution  $P(n_1, n_2)$  of a 1.1 nM solution of tetramethylrhodamine (TMR, Molecular Probes). Analysis using inverse transform with regularization and constraints (ITRC) yields a single-peak distribution of specific brightnesses, as graphed in Fig. 7a. Similar results are obtained with a solution of another dye, Rhodamine Red X (RRX, Molecular Probes), see Figs. 6b and 7b. The two samples differ by values of the two specific properties: TMR is characterized by values of 51

and 71.5 kHz/molecule while RRX has values of the same properties of 15.6 and 48. The third sample is a mixture of TMR and RRX solutions, see Figs. 6c and 7c. As one can notice, two peaks, one corresponding to TMR and the other to RRX, are distinguishable in analysis. This kind of analysis can be used for the determination of concentrations of fluorescent species.

### Example 3


In this example a case is presented in which only two-dimensional fluorescence intensity distribution analysis (2D-FIDA) yields meaningful results while 1D-FIDA does not. A binding of two TMR-labelled theophyllines (theophylline-TAMRA and theophylline-spacer-TAMRA (EVOTEC BioSystems GmbH, Germany)) with a polyclonal antitheophylline antibody (Europa Bioproducts, The Netherlands) was studied at different antibody concentrations. All binding studies were performed using the following protocol:

The stock solutions of antibody and antigens are diluted in assay buffer (PBS=phosphate buffered saline + 0.05% Tween 20). After mixing the compounds, the mixture was incubated for 30 minutes at room temperature. Subsequently, the solution was measured using 1D- and 2D-FIDA approaches. Antibody dilution series were performed at a ligand concentration of 2 nM. All arbitrary antibody concentrations refer to effective dilutions. In FIDA studies the solution was diluted to single molecule conditions (0.5 - 1 particle) and rapidly analyzed after diluting. The system was excited at 543 nm using a 4 mW He/Ne laser (Uniphase, Great Britain). Solutions of free TAMRA dye and free ligand conjugates were used for alignment of the instrument. All measurements were corrected for water background which was found to be below 1kHz in each channel.

Reference apparent binding constants ( $K_d$ ) for antibody titration series were determined by fluorescence correlation spectroscopy (FCS) based on a simple one-site binding approximation. In 1D-FIDA studies two ligand molecules bound to a single

antibody molecule appeared as a component with nearly two-fold greater characteristic fluorescence brightness as compared to the free antigen or antibody molecules with a single ligand bound. The brightnesses of the ligand and the single-bound species are similar so that 1D-FIDA cannot be used to determine binding constants for the two-step binding.

In 2D-FIDA experiments, by the application of a FIT-mode procedure, individual species were separated, signals classified, and  $K_d$ 's were compared with FCS binding data using a model which assumes the existence of two identical, but independent binding sites:

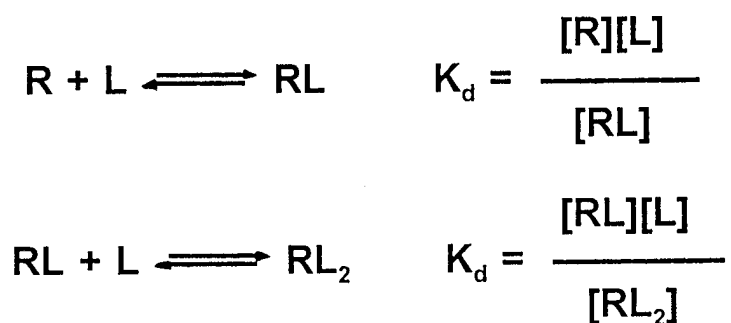

where L is the ligand and R the antibody with two binding sites. The following mass relations are valid:

$$[L] = [L_0] - [RL] - 2[RL_2]$$

$$[R] = [R_0] + [RL] - [RL_2]$$

The model was simulated and fit using MathCad (MathSoft, US) and Scientist (MicroMath, US) software packages. 2D-FIDA could distinguish (at least) three species with different brightnesses and their concentrations as determined from global fit analysis. Using 2D-FIDA, the appearance of intermediates can be demonstrated

very easily as is illustrated by examining the concentration of the doubly-bound ligand at different antibody concentrations (Fig. 8a, b).

The experimental data are in good agreement with simulations according to the model considering two identical and independent binding sites. Fitting of the data sets leads to binding constants which are consistent with brightness corrected FCS data for the different antigens used.



Table 1.

No.	Sample	Sampling time ( $\mu$ s)	Concentration (mean number of molecules per measurement volume)	Specific brightness (mean number of photon counts per molecule)	Diffusion coefficient (arbitrary units)
1	TMR	40	0.238 / -----	4.06 / -----	13.1 / -----
2	0.2 nM		0.236 / -----	4.12 / -----	13.2 / -----
3			0.237 / -----	4.12 / -----	12.8 / -----
4			0.240 / -----	4.10 / -----	12.7 / -----
5			0.235 / -----	4.09 / -----	12.6 / -----
6	TMR	20	----- / 0.593	----- / 2.00	----- / 6.82
7	0.5 nM		----- / 0.589	----- / 2.01	----- / 6.99
8			----- / 0.585	----- / 2.02	----- / 6.89
9			----- / 0.588	----- / 2.01	----- / 6.86
10			----- / 0.600	----- / 2.00	----- / 6.78
11	Mixture	---	0.265 / 0.567	3.98 / 1.92	13.8 / 6.6
12		---	0.291 / 0.536	3.92 / 1.90	12.6 / 6.9
13		---	0.254 / 0.568	4.04 / 1.99	11.5 / 7.6
14		---	0.280 / 0.544	3.94 / 1.96	13.5 / 5.8
15		---	0.251 / 0.589	4.02 / 1.97	13.2 / 6.2

CLAIMS

1. A method for characterizing samples which contain units, comprising the steps of:
  - a) monitoring intensity fluctuations of radiation emitted, scattered and/or reflected by the units in at least one measurement volume with at least one detection means which is capable to detect radiation emitted, scattered and/or reflected by said units,
  - b) determining from said intensity fluctuations intermediate statistical data comprising an at least two-dimensional joint statistical function,
  - c) determining information related to a joint distribution of units out of said intermediate statistical data.
2. The method according to claim 1, wherein in step c) the presence or absence or concentration of at least one unit or species of units with a specific combination of at least two physical properties is determined.
3. The method according to claim 1 and/or 2, wherein in step c) a joint distribution of units as a function of at least two specific physical properties is determined out of said intermediate statistical data.
4. The method according to at least one of claims 1 to 3, wherein in step c) a function of said joint distribution is determined.
5. The method according to at least one of claims 1 to 4, wherein the intermediate statistical data in step b) are derived from the intensity fluctuations directly or from fluctuations of local statistical functions of intensity.
6. The method according to at least one of claims 1 to 5, wherein said intensity

fluctuations are monitored in terms of determining numbers of photon counts in, preferably consecutive, time intervals of given length.

7. The method according to at least one of claims 1 to 6, wherein said intensity fluctuations are monitored in terms of determining time of arrival of photons and/or length of time intervals between a given number of consecutive photon counts.
8. The method according to at least one of claims 1 to 7, wherein said intermediate statistical data additionally comprise one-dimensional statistical functions.
9. The method according to at least one of claims 1 to 8, wherein at least one of the arguments of said joint statistical function is time.
10. The method according to at least one of claims 1 to 9, wherein at least one of the arguments of said joint statistical function is the number of photon counts in time intervals of given length or length of time intervals between a given number of consecutive photon counts.
11. The method according to at least one of claims 1 to 10, wherein at least one of the arguments of said joint statistical function belongs to the class of arguments of mathematical transforms of either probability or correlation functions.
12. The method according to at least one of the claims 1 to 11, wherein said intermediate statistical data are selected from a group consisting of unconditional and conditional distributions of the number of photon counts, distributions of the length of time intervals between photon counts, autocorrelation functions, cross-correlation functions, and combinations thereof.
13. The method according to at least one of the claims 1 to 12, wherein said units are particles, molecules, aggregates, vesicles, cells, viruses, bacteria, beads, centers, or mixtures thereof in solids, liquids or gases.

14. The method according to at least one of the claims 1 to 13, wherein said units can be grouped into species which can be distinguished by at least one of their specific physical properties.
15. The method according to at least one of the claims 1 to 14, wherein at least one species is luminescent, preferably fluorescent, and/or is luminescently labelled and at least one detection means monitors the fluctuations of luminescence intensity.
16. The method according to at least one of the claims 1 to 15, wherein at least one of the specific physical properties characterizing said units is the diffusion coefficient, or correlation time of radiation intensity fluctuations, or any other property directly related to said diffusion coefficient.
17. The method according to at least one of the claims 1 to 16, wherein at least one of the specific physical properties characterizing said units is the specific brightness.
18. The method according to at least one of the claims 1 to 17, wherein at least one of the specific physical properties characterizing fluorescent units is the polarization ratio of their fluorescence, or fluorescence anisotropy, or any other property expressing the extent of polarization of fluorescence.
19. The method according to at least one of the claims 1 to 18, wherein at least one of the specific physical properties characterizing fluorescent units is the ratio of fluorescence intensities corresponding to different excitation wavelengths and/or different spectral sensitivities of fluorescence detection, or any other property expressing the dependence of fluorescence intensity on the wavelength of excitation and/or detection.
20. The method according to at least one of the claims 1 to 19, wherein at least one of the specific physical properties characterizing fluorescent units is lifetime of fluorescence.

21. The method according to at least one of the claims 1 to 20, wherein the specific physical properties, in particular luminescence properties like fluorescence lifetime or fluorescence anisotropy, of the units are varied by conjugating them with a specific luminophore via different linker molecules.
22. The method according to at least one of the claims 1 to 21, wherein the luminescence properties of the units are varied by conjugating them with a first molecule, in particular biotin, which binds a luminescently labelled second molecule, in particular luminescently labelled avidin or streptavidin.
23. The method according to at least one of the claims 1 to 22, wherein the luminescence properties of a unit are changed by energy transfer, in which energy absorbed by said unit is transferred upon close contact to a luminophore of an acceptor unit and subsequently emitted.
24. The method according to at least one of the claims 1 to 23 for use in high throughput screening, diagnostics, monitoring of polymerisation, aggregation and degradation processes, particle sorting, or nucleic acid sequencing.
25. The method according to at least one of the claims 1 to 24, wherein said intermediate statistical data are fitted using a priori information on said sample.
26. The method according to at least one of the claims 1 to 25, wherein said statistical data are processed applying multidimensional inverse transformation with linear regularization and/or constraints.
27. The method according to at least one of the claims 1 to 26, wherein the measurement volume is only a part of the total volume of said sample and has a volume  $\leq 10^{-12}$  l, preferably  $\leq 10^{-14}$  l.

1/13

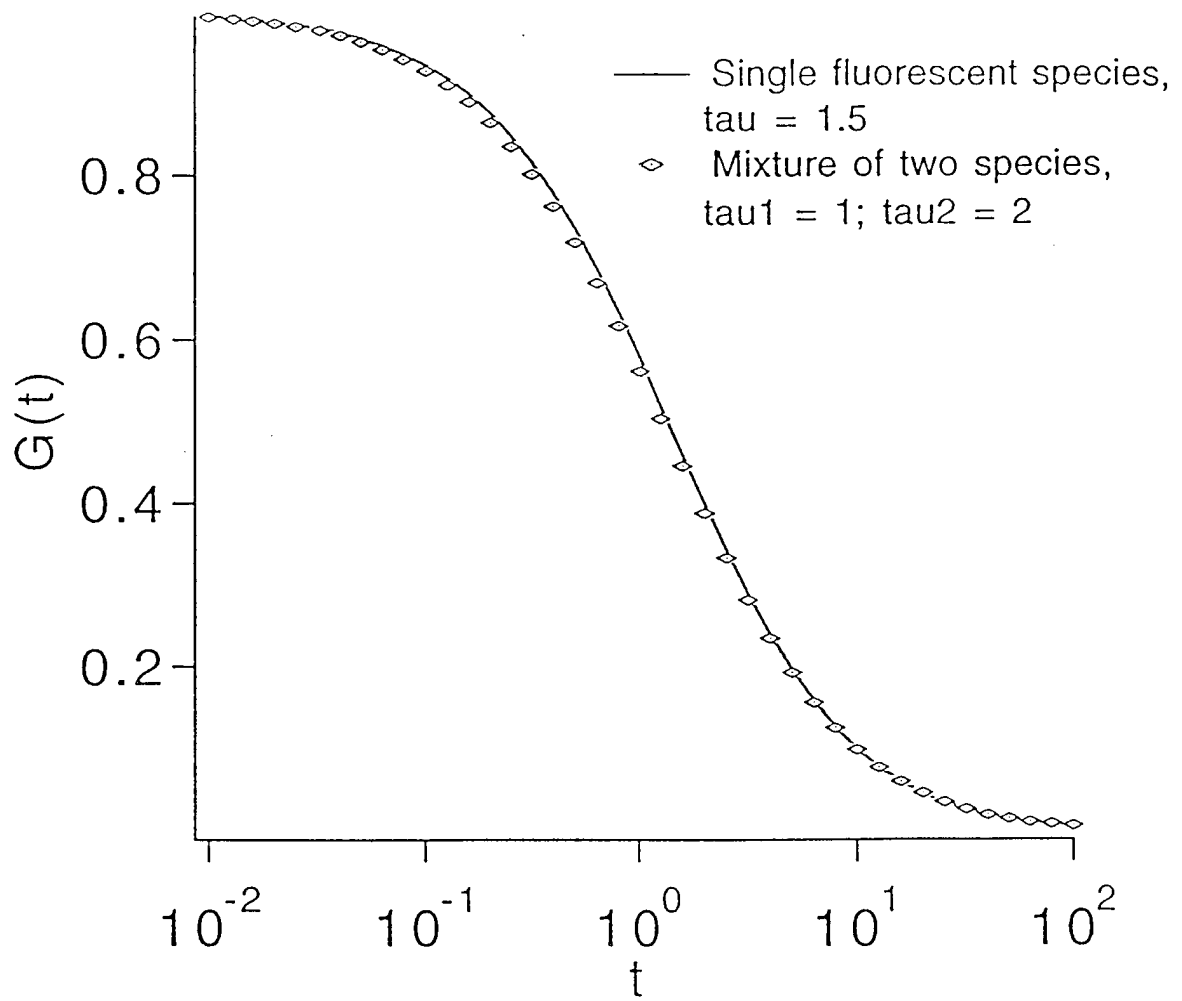


Fig. 1

2/13

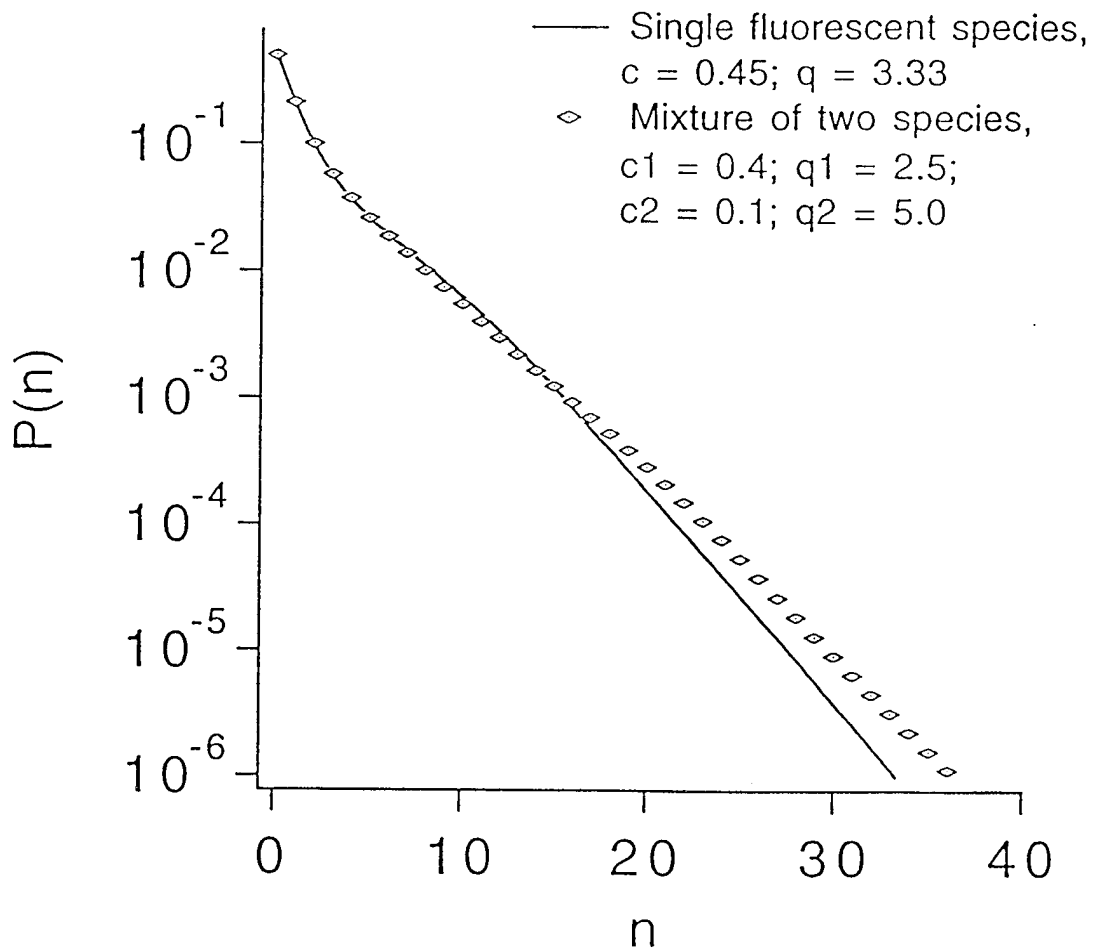


Fig. 2.

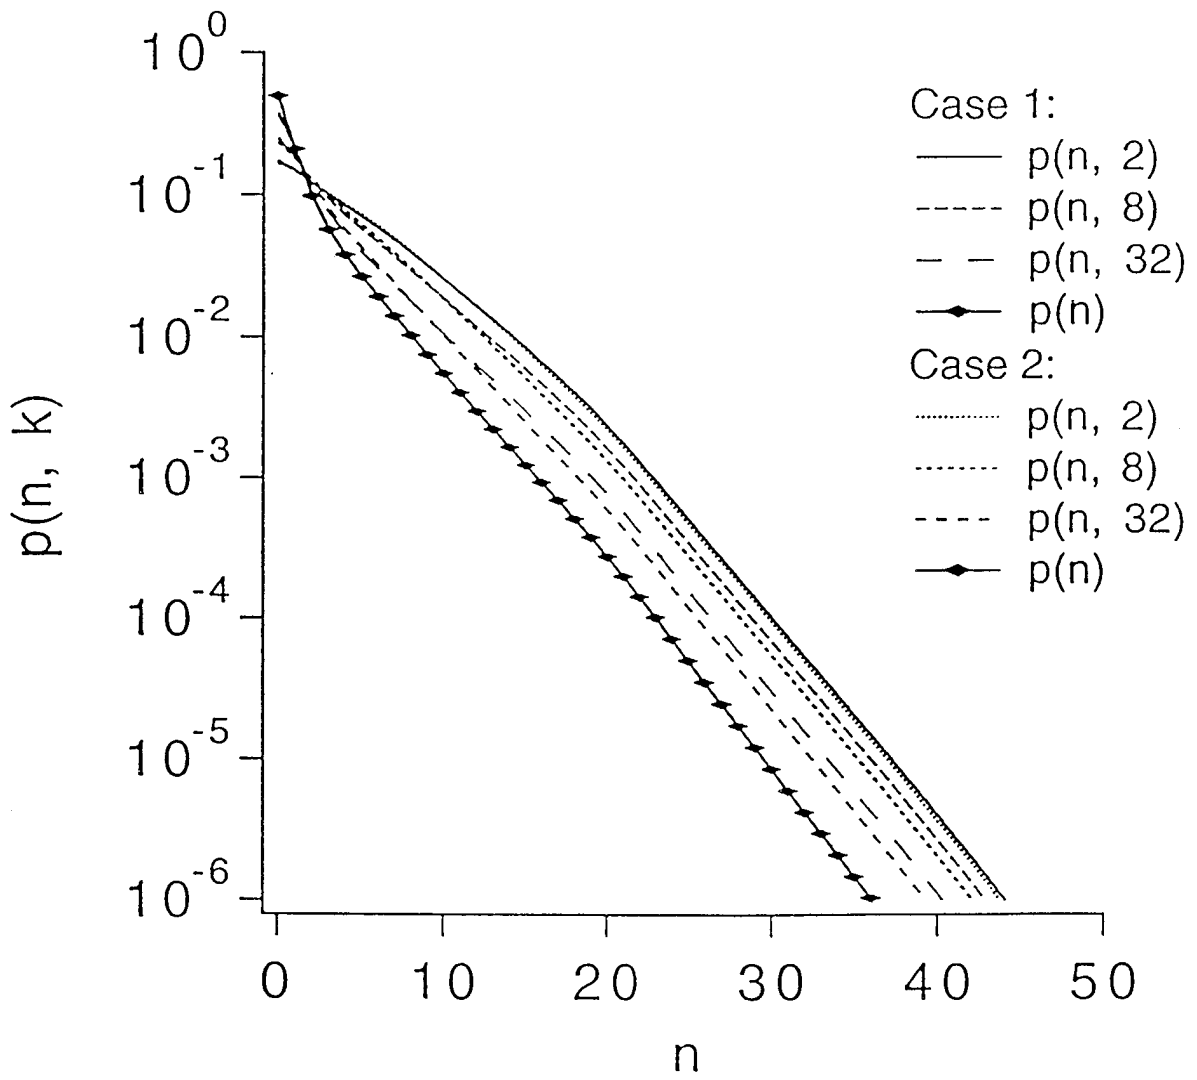


Fig. 3



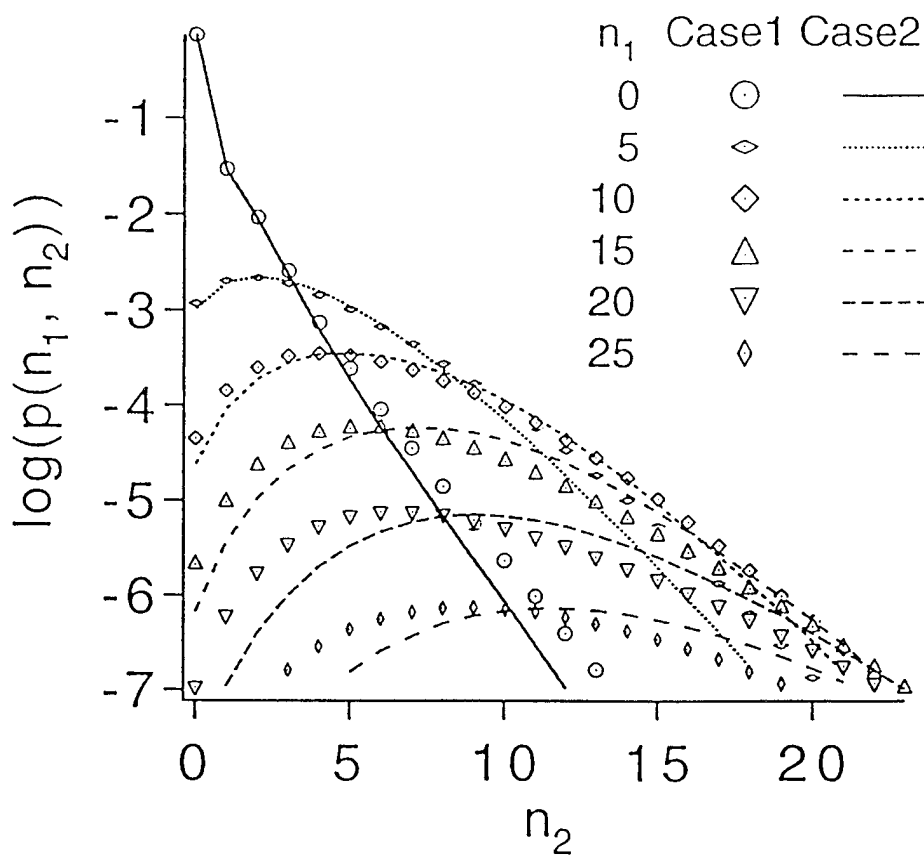


Fig. 4

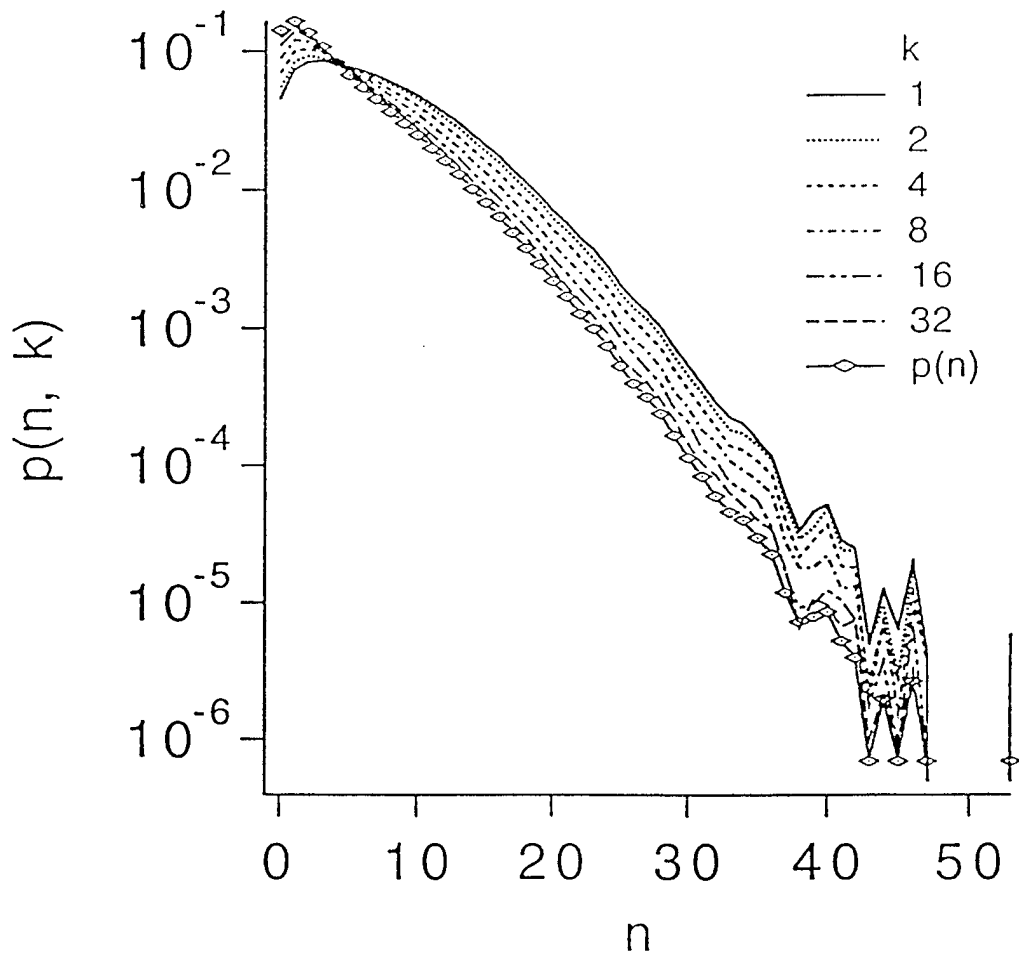


Fig. 5

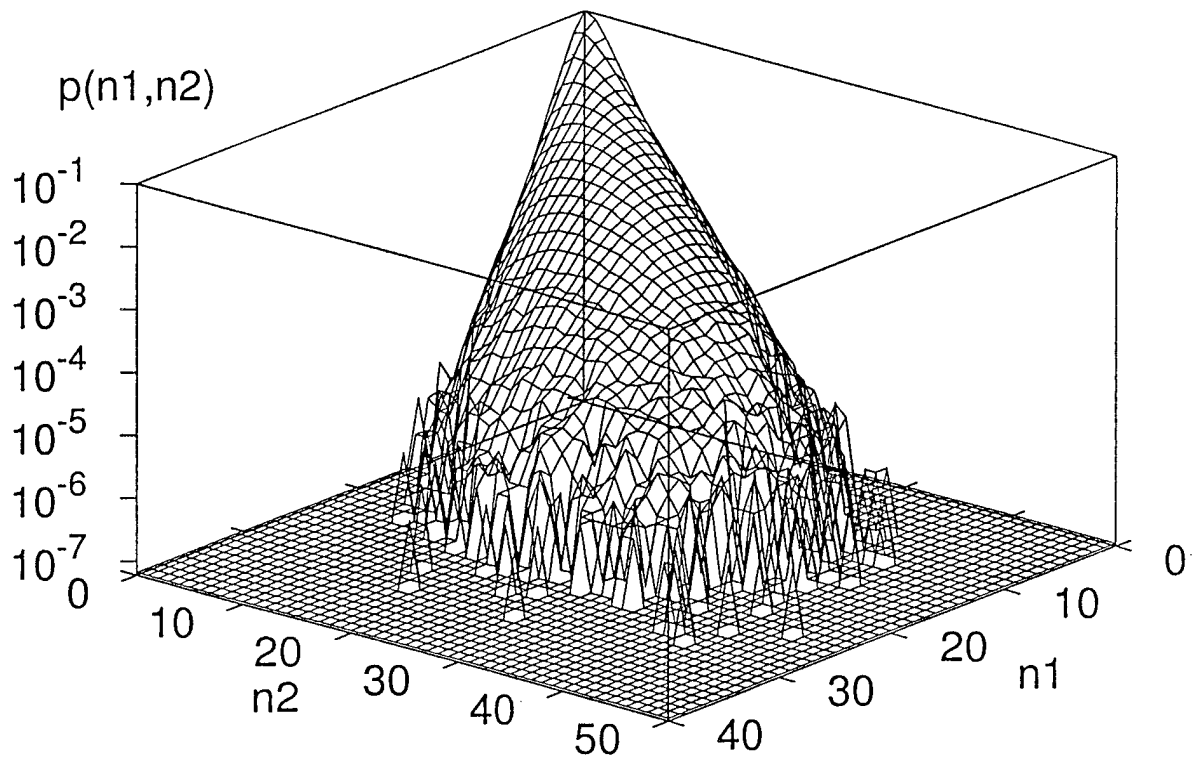


Fig. 6 a

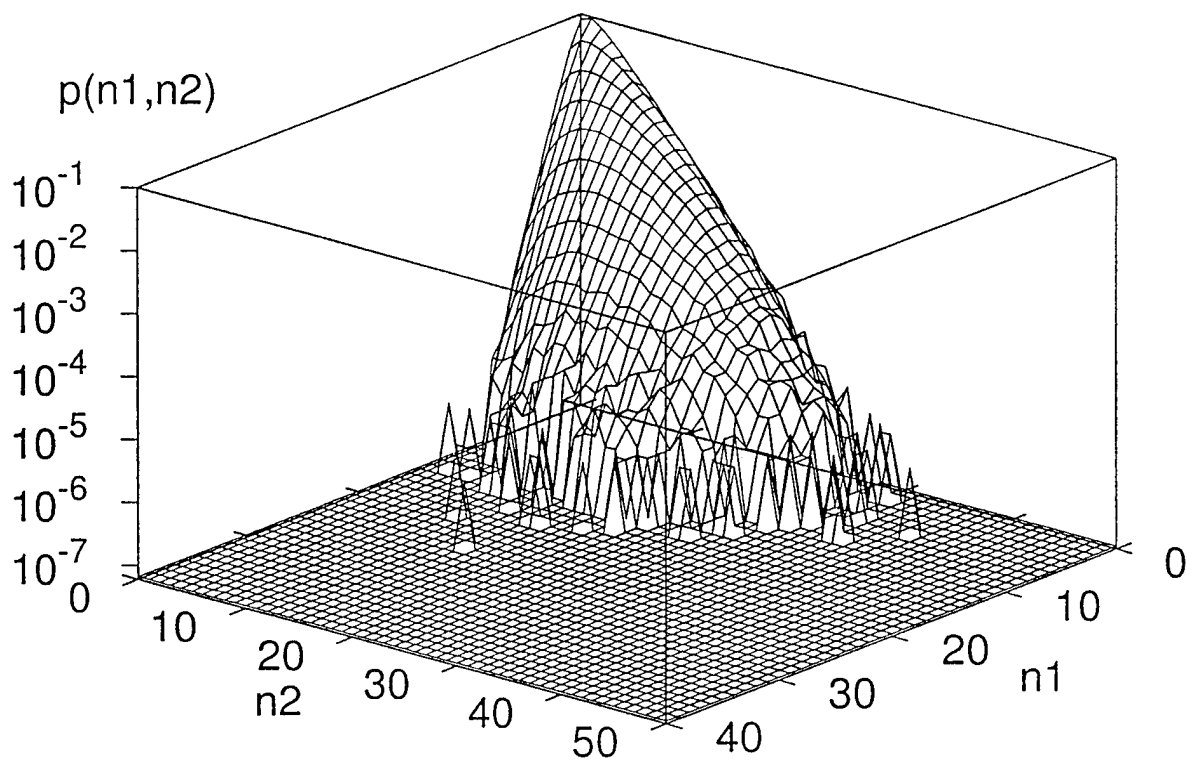


Fig. 6 b

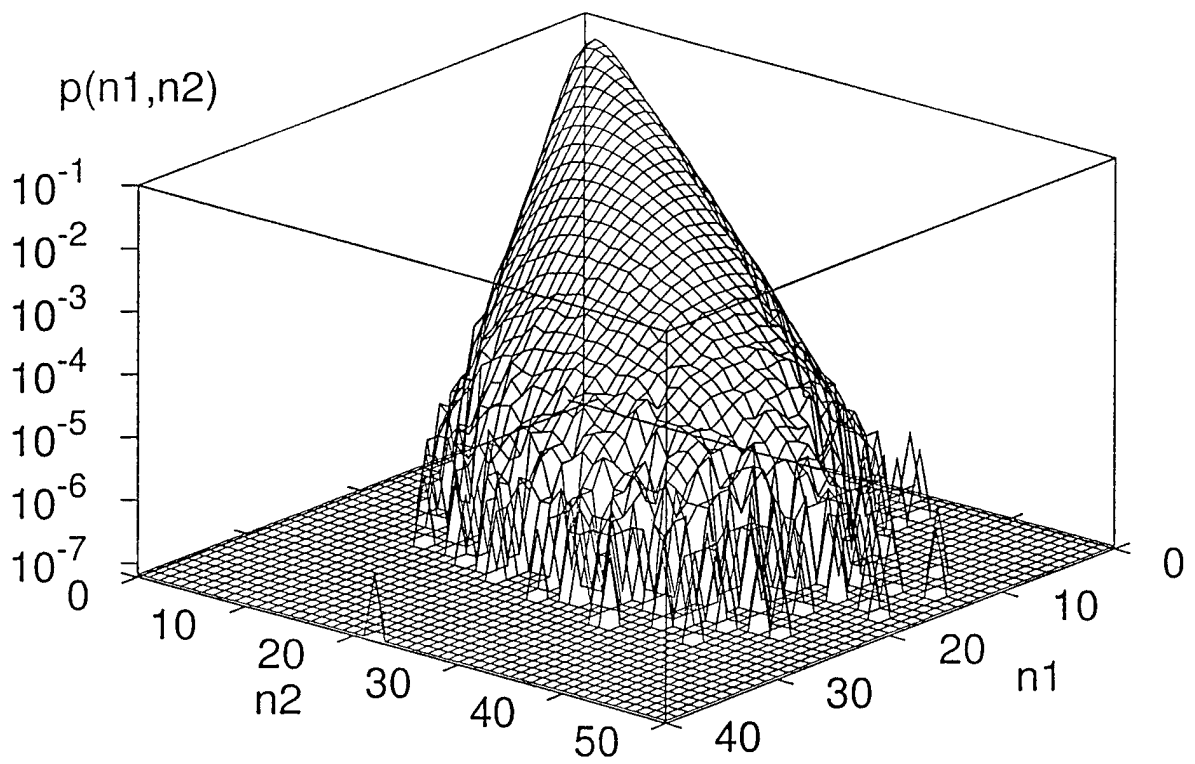


Fig. 6 c

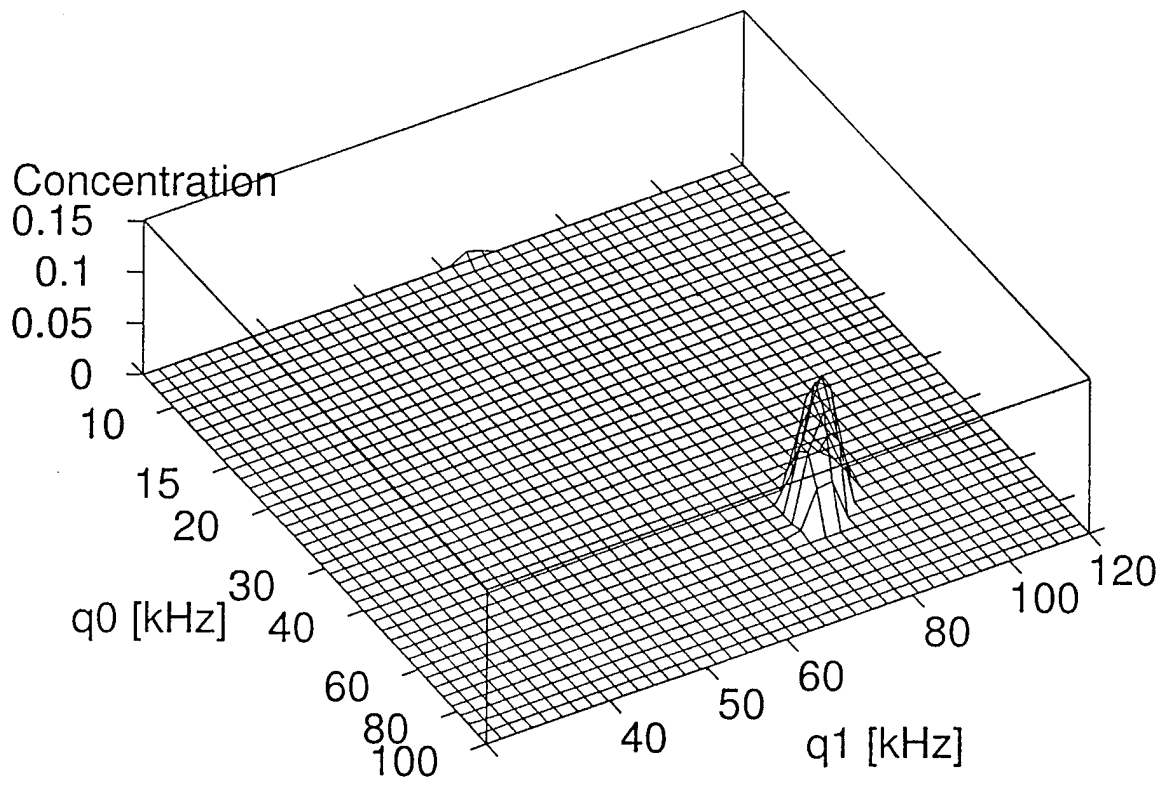


Fig. 7 a

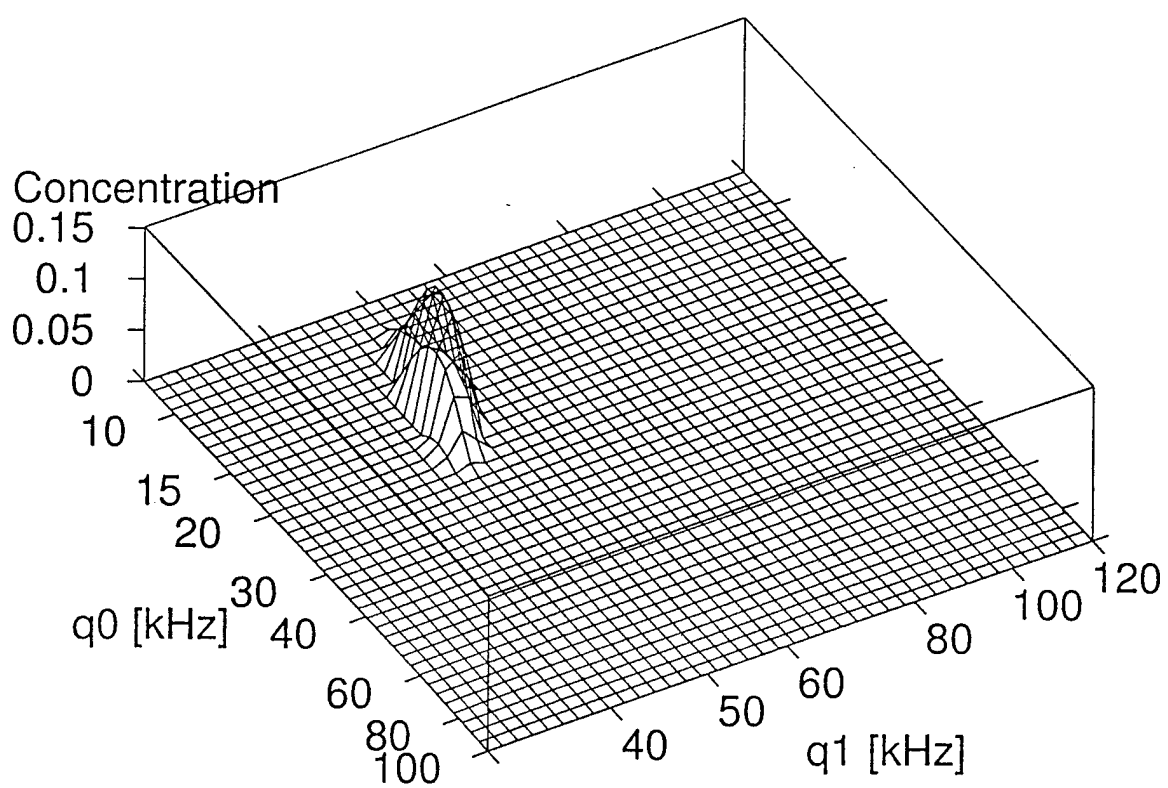


Fig. 7 b

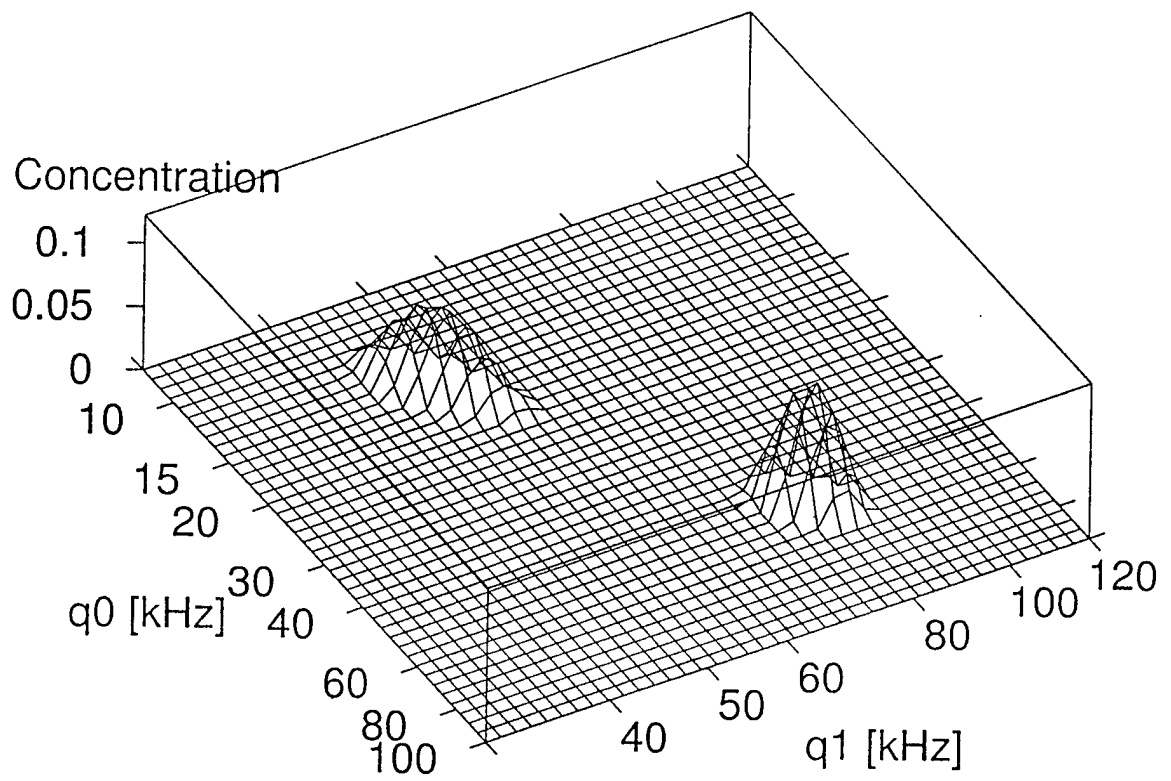


Fig. 7 c



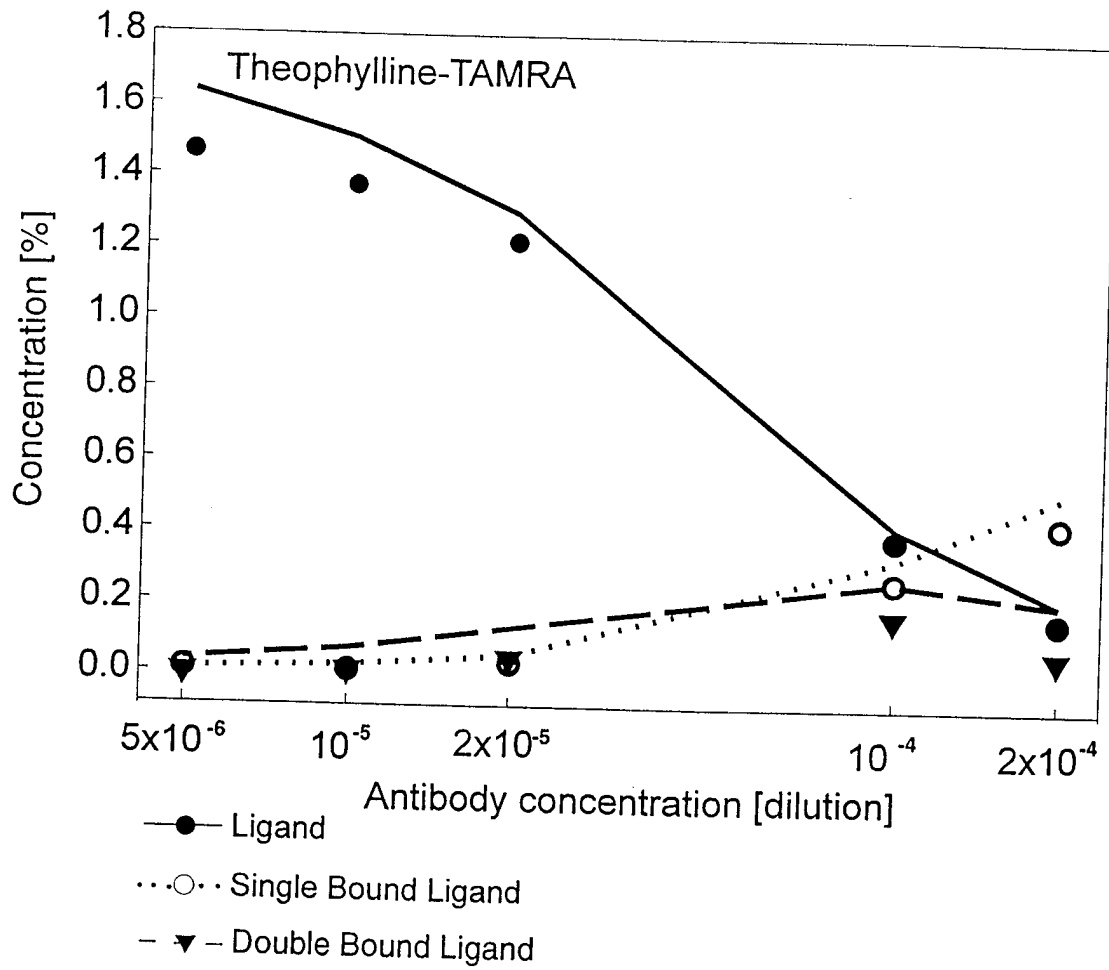


Fig. 8a

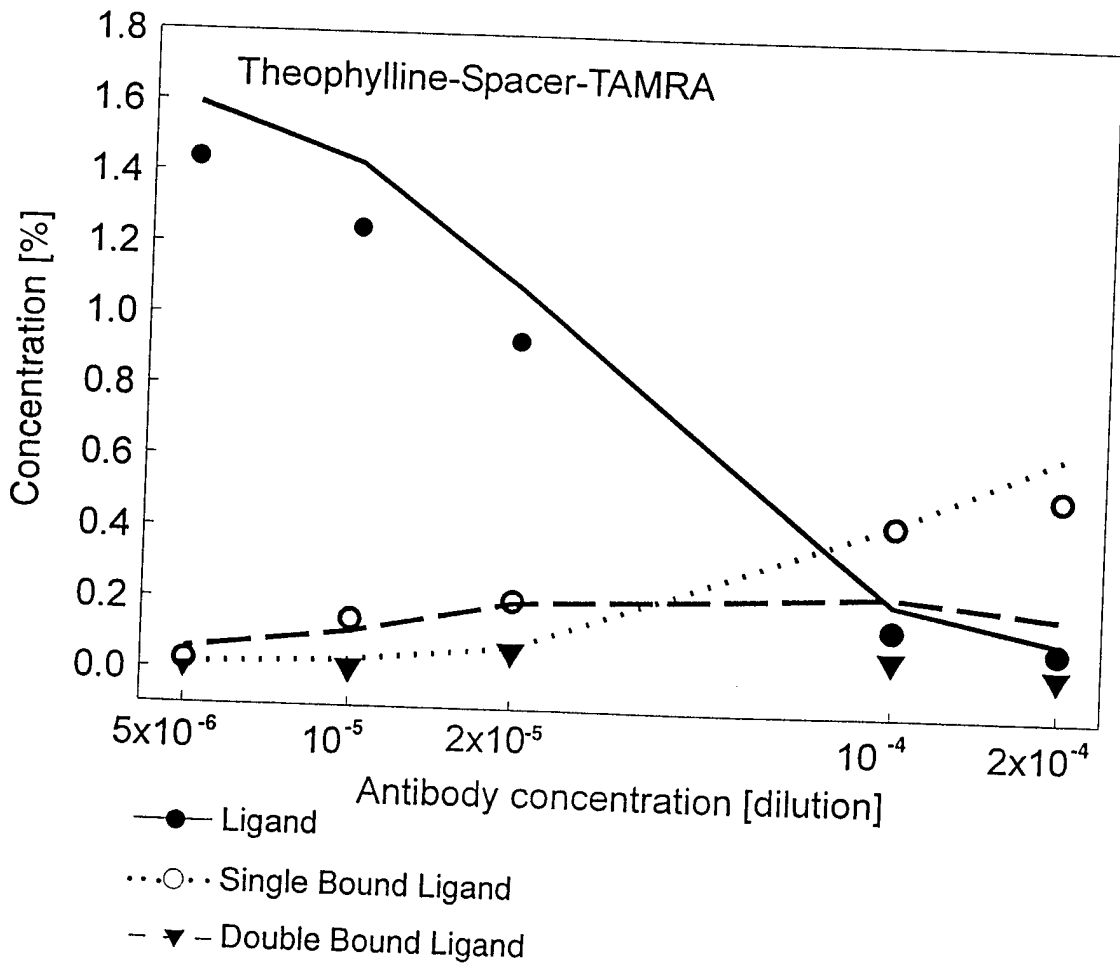


Fig. 8b

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/03509

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G01N21/64

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 359 681 A (UNIVERSITY OF ARKANSAS) 21 March 1990  see page 2, line 3 - line 9 see page 5, line 38 - line 40 see page 8, line 2 - line 6 see page 9, line 14 - line 23 see page 10, line 48 - line 54 ---	1,7,8, 12,13, 15,16,24
Y	US 3 824 402 A (MULLANEY) 16 July 1974  see abstract see column 3, line 58 - column 4, line 21 --- -/--	1,7,8, 12,13, 15,16,24

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

20 October 1998

Date of mailing of the international search report

28/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Thomas, R.M.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/03509

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 590 775 A (BECTON-DICKINSON)                      6 April 1994                      see abstract                      see page 4, line 40 - page 5, line 27                      see claim 1; figures 1,2; tables 1,2</p>	1
A	<p>DE 43 01 005 A (DIAGEN) 21 July 1994</p> <p>see column 1, paragraph 1                      see column 3, line 26 - line 37                      see column 5, line 22 - line 36                      see column 6, line 24 - line 34                      see column 9, line 66 - column 10, line 4                      &amp; WO 94 16313 A                      cited in the application</p>	1,7,8, 12,13, 15,16, 24,27
A	<p>DE 44 38 391 A (EVOTEC) 2 May 1996</p> <p>see column 1, paragraph 1                      see column 8, line 25 - line 43; figure                      &amp; WO 96 13744 A                      cited in the application</p>	1,7,8, 12,13, 15,16,24
A	<p>US 5 294 799 A (ASLUND) 15 March 1994                      see abstract                      see column 1, paragraph 1</p>	15,19,21
A	<p>EP 0 762 114 A (BASF) 12 March 1997</p> <p>see abstract</p>	1,7,8, 12,13, 15,16,24

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/03509

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0359681    A	21-03-1990	DE 68924749 D	14-12-1995
		JP 2193043 A	30-07-1990
		US 5502561 A	26-03-1996
		US 5434667 A	18-07-1995
US 3824402    A	16-07-1974	NONE	
EP 0590775    A	06-04-1994	US 5432061 A	11-07-1995
		AU 670104 B	04-07-1996
		AU 4445193 A	10-03-1994
		BR 9303618 A	22-03-1994
		CA 2101886 A	02-03-1994
		JP 6189740 A	12-07-1994
		MX 9305309 A	31-01-1995
DE 4301005    A	21-07-1994	AT 164943 T	15-04-1998
		AU 5884394 A	15-08-1994
		DE 59405644 D	14-05-1998
		WO 9416313 A	21-07-1994
		EP 0679251 A	02-11-1995
		ES 2116578 T	16-07-1998
DE 4438391    A	02-05-1996	WO 9613744 A	09-05-1996
		EP 0788615 A	13-08-1997
US 5294799    A	15-03-1994	AT 152519 T	15-05-1997
		DE 69402958 D	05-06-1997
		DE 69402958 T	11-12-1997
		EP 0681695 A	15-11-1995
		WO 9418547 A	18-08-1994
		JP 8506419 T	09-07-1996
		US 5418371 A	23-05-1995
EP 0762114    A	12-03-1997	DE 19533092 A	13-03-1997
		JP 9113448 A	02-05-1997
		US 5815262 A	29-09-1998