

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 June 2008 (19.06.2008)

PCT

(10) International Publication Number
WO 2008/071718 A1

(51) International Patent Classification:
D21C 9/153 (2006.01)

(74) Agents: VUILLERMOZ, Bruno et al.; Cabinet LAURENT & CHARRAS, 20 rue Louis Chirpaz, BP 32, F-69131 Ecully (FR).

(21) International Application Number:
PCT/EP2007/063743

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
11 December 2007 (11.12.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0655467 13 December 2006 (13.12.2006) FR

(71) Applicant (for all designated States except US): ITT MANUFACTURING ENTERPRISES, INC. [US/US]; 1105 North Market Street, Suite 1217, Wilmington, Delaware 19801 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PIPON, Guillaume [FR/FR]; 24 Place Alfred de Vigny, F-38400 Saint Martin d'Hères (FR). LACHENAL, Dominique [FR/FR]; 1 Place de la Commune, F-38130 Echirolles (FR). CHIRAT, Christine [FR/FR]; 12 Avenue Rochambeau, F-38100 Grenoble (FR). HOSTACHY, Jean-Christophe [FR/FR]; 99 Rue du Prieuré, F-69440 Taluyers (FR). RIED, Achim [DE/DE]; Weizenacker 3, 32549 Bad Oyenhausen (DE).

Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: METHOD FOR BLEACHING CHEMICAL PAPER PULPS BY FINAL OZONE TREATMENT AT HIGH TEMPERATURE

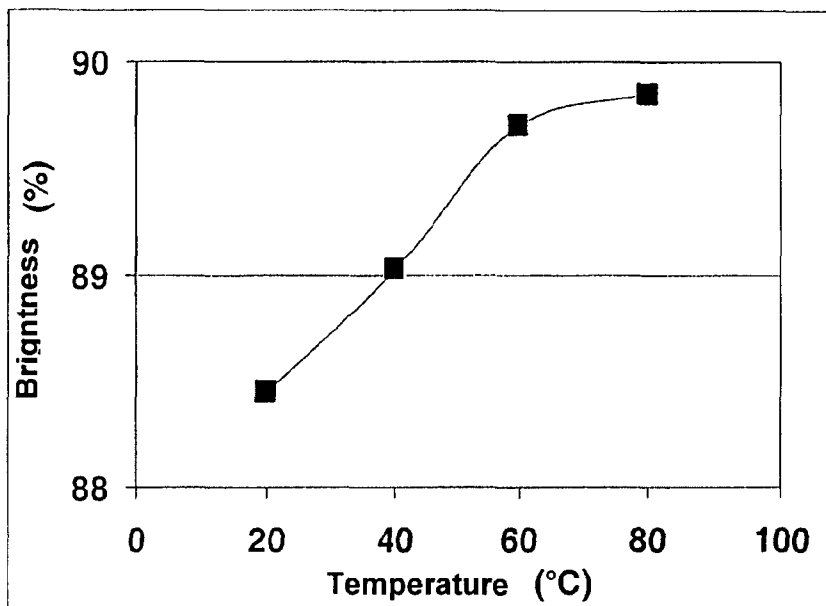

(57) Abstract: Method for treating a prebleached chemical pulp comprising a step of ozone treatment of the said pulp, carried out at a temperature above 60°C, advantageously above 65°C and even more advantageously above or equal to 70°C.

WO 2008/071718 A1

METHOD FOR BLEACHING CHEMICAL PAPER PULPS BY FINAL OZONE TREATMENT AT HIGH TEMPERATURE

TECHNICAL FIELD

5

The invention relates to the bleaching of chemical paper pulps, in particular kraft or sulphite pulps.

10

In the context of the present invention, it has been demonstrated that the implementation of an ozone treatment, carried out at high temperature at the end of the bleaching sequence, served in particular to increase the brightness of the pulp, without reducing its quality.

PRIOR ART

15

In the method for producing bleached chemical paper pulps, a first phase called delignification consists in removing most of the lignin present in the pulp. This operation, conventionally carried out by chemical treatment with oxygen (O), is inherently accompanied by a bleaching of the pulp, due to the depletion of brown lignin.

20

The next phase, called bleaching, consists in removing the residual lignin completely, so as to retain only the perfectly white "carbon hydrates" fraction (cellulose and hemicellulose).

25

In general, chemical paper pulps are bleached using a succession of treatments, called a bleaching sequence, employing reagents such as chlorine dioxide (D), hydrogen peroxide (P), caustic soda (E) and again oxygen (O).

30

For example, a modern and simple method for producing bleached chemical pulp may comprise all of the four ODED stages.

35

Bleaching performance can be improved either by adding further stages, or by reinforcing the E stages by adding oxygen (O) or hydrogen peroxide (P). Thus, methods for producing bleached chemical pulp of the type OD(EO)D, OD(EP)D, OD(EO)DED, OD(EO)DP, D(EO)D(EP)D etc. are also found in the industry.

Since 1992, ozone (Z) has been added to the list of reagents used in chemical pulp bleaching. Ozone is a highly effective oxidizing agent for lignin. However, it is a reagent

- 2 -

that decomposes rapidly in aqueous medium, and which may partially oxidize the cellulose, requiring very accurate control of the operating conditions of its use.

5 This has been done in the thirty plants in the world which have introduced ozone stages into their bleaching sequence. Various sequences are implemented, in which the ozone stage is always positioned at the start of the bleaching, that is in general after the delignification with oxygen as, for example, in the OZED, OZDED, OODDED methods. In other words, the ozone treatment takes place before alkaline extraction (E) which may assume the E or EOP or EO or EP form.

10 Several investigations have been conducted to identify the operating conditions promoting the bleaching action by ozone in this type of method.

15 Thus, in the review TAPPI JOURNAL of January 1992, an article entitled "*A survey of the use of ozone in bleaching pulps*" by N. Liebergott *et al.* summarizes the conditions in which ozone must be used for bleaching pulps. It is described therein in particular that to obtain the best bleaching, the pH of the medium must be acidic, preferably about 2, and above all, that the temperature must also be as low as possible, close to 20°C, to prevent excessive decomposition of the ozone, thereby achieving a better degradation of the lignin. According to this teaching, the ozone treatment is therefore carried out in the early
20 bleaching steps, called prebleaching, at a low temperature.

25 In more recent articles, like the one published in the review TAPPI JOURNAL of September 1997 (Vol. 80, No. 9, pp 209-14), it has been proposed to use ozone at the end of bleaching. The application of an ozone stage on an incompletely bleached pulp, and therefore containing residual lignin, causes the virtually instantaneous disappearance of this lignin, resulting in a rapid increase in the brightness of the pulp. Although the method described is spectacular, it only serves to gain 2 to 3 percentage points of brightness in most cases, if one wishes to avoid applying too much ozone and degrading
30 the quality of the cellulose. In light of the prior teachings, the experiments reported have been performed taking care to avoid raising the temperature excessively.

35 Document WO 2005/059241 also reports an ozone treatment carried out between 20 and 60°C, but before the alkaline extraction, and necessarily associated with a prior acidification step at very high temperature. It also discourages exceeding these temperatures, because above this level, a degradation of the pulp is reported (loss of viscosity) and a decrease in efficiency.

SUMMARY OF THE INVENTION

It is the object of the present invention to propose a more efficient ozone treatment, without increasing the quantity of ozone to be introduced nor damaging the material treated.

Thus, the present invention relates to a method for treating a prebleached chemical pulp, comprising a step of ozone treatment of the said pulp, carried out at high temperature.

In fact, it has been found surprisingly that if the temperature of the ozone treatment is raised above 20°C, the action of the ozone is more effective, contrary to the teachings of the prior art, which indicated that the higher the temperature, the lower the ozone activity.

According to the invention, this step is advantageously carried out at a temperature above 60°C, advantageously above 65°C and even more advantageously above or equal to 70°C.

According to a preferred embodiment, the ozone treatment is carried out at a temperature of between 80 and 90°C. In practice, a temperature of about 80°C is preferable, in order to take advantage of the invention without compromising the energy balances of the plant and without having to work under pressure.

Preferably, the ozone treatment is carried out at a temperature not exceeding 100°C.

Chemical paper pulps which are intended for treatment using the method according to the invention, are hardwood and softwood pulps, and also non-wood pulps such as annual plants. The method of the invention also serves to treat pulps after kraft, sulphite and soda cooking.

The method according to the invention is carried out after the delignification phase and after the first conventional steps of the bleaching sequence. It is therefore carried out on a pulp called a prebleached pulp.

More precisely, the fact that a chemical pulp is prebleached can be evaluated according to its level of brightness and/or its residual lignin content.

Thus, the inventive method is advantageously carried out on a pulp of which the brightness level is above 70%, advantageously above 80%, and preferably close to 85%. The brightness level is determined according to standard NF ISO 3688.

A second criterion concerning the choice of prebleached pulps to be treated with the inventive method is the residual lignin content. Advantageously, the inventive method is carried out on a pulp of which the kappa number, correlated with the residual lignin content of the pulp, is lower than 2.5, advantageously lower than 2, and preferably lower than 1. These values should be compared with the kappa number of unbleached pulps which is generally between 20 and 30. The standard used for the kappa number is standard NF ISO 302.

10 The inventive method is advantageously carried out on pulps meeting at least one of these two criteria (brightness and kappa number), or even both.

According to one embodiment, the ozone treatment is the only step of the inventive method and therefore the final step of the treatment of the pulp. The ozone treatment is accordingly part of a more complex production method, of the type of those mentioned previously, containing stages with oxygen, with chlorine dioxide, with caustic soda, with hydrogen peroxide and optionally with ozone. For example, a complete sequence integrating the inventive method is of the type ODEDZ*, ODEDPZ*, OZEDZ*, where Z* is the treatment according to the invention.

20 It clearly appears that the inventive method advantageously implementing on pulps at the end of treatment, and having in particular undergone an upstream alkaline extraction (E).

Contrary to the prior art, no requirement exists concerning a prior treatment of the pulp, particularly a prior high temperature acidification.

Alternatively, the inventive method comprises an ozone treatment step as described and at least one subsequent bleaching step. It then concerns a new ozone treatment (Z*) or a treatment with hydrogen peroxide (P), with chlorine dioxide (D), with caustic soda (E) and/or with oxygen combined with hydrogen peroxide (OP). The final bleaching treatments, which are the subject matter of the inventive method, may therefore be varied.

Due to the small quantity of residual lignin in the chemical pulp to be treated, the ozone treatment of the invention is only carried out with small quantities of ozone: less than 5 kg of ozone per tonne of dry pulp (or 0.5% by weight), preferably less than 2 kg of ozone per tonne (or 0.2% by weight). These moderate quantities reduce the risk of oxidizing the cellulose in a manner detrimental to its quality.

Advantageously, the minimum proportion of ozone introduced is 0.01% or 0.05% by weight of dry pulp (0.1 kg and 0.5 kg of ozone per tonne of pulp, respectively).

5 In the context of the invention, the pH of the pulp to be treated is not a problem because the ozone treatment step can take place at a pH of between 2 and 10. In particular, it has been demonstrated that the invention was equally advantageous at neutral pH, close to 7. Insofar as a prior acidification is not required, the inventive method may take place at a pH equal to or higher than 4. Due to the considerable advantage of being able to work at neutral pH (no addition of sulphuric acid, less corrosive liquor), the ozone treatment is
10 advantageously carried out at a pH of between 4 (natural pH of the pulp after treatment with chlorine dioxide) and 8 (pH close to that of pure water).

Particularly due to the wide range of acceptable pH, the ozone treatment of the invention can be carried out directly after the final step of the sequence used for the prior bleaching
15 (prebleaching), and therefore without intermediate washing. This may be the case, for example, when the final stage is a treatment with chlorine dioxide.

The method according to the invention, particularly the ozone treatment step, can be carried out on pulps having a wide range of consistency, corresponding to the mass ratio
20 between the pulp and the mixture (pulp + water). Advantageously, the ozone treatment is carried out on a pulp with a consistency of between 1 and 45%, and more precisely between 2 and 3% when the low consistency technology is used, between 3 and 12% when the medium consistency technology is used, and between 35 and 40% when the high consistency technology is used.

25 The ozone treatment method according to the present invention is particularly suitable for kraft pulps or sulphite pulps.

30 As already stated, a more efficient ozone treatment is observed in the conditions of the invention, without increasing the quantity of ozone to be introduced nor damaging the treated material.

Characteristically, it has been observed that for certain types of hardwood pulps (deciduous), this treatment further served to remove the residual compounds of the
35 "pitch" type, and thereby to improve the cleanliness of the bleached pulp.

EMBODIMENTS

The invention and its advantages will appear more clearly from the following exemplary embodiments, in conjunction with the appended figures. However, these are non-limiting.

5 Figure 1 shows the effect of temperature on the bleaching by ozone applied at the end of the bleaching sequence on a mixed hardwood kraft pulp.

Figure 2 shows the effect of the temperature of the final bleaching treatment by ozone on the degree of polymerization of the cellulose in the case of a mixed hardwood kraft pulp.

10 Figure 3 shows the effect of temperature on the bleaching by ozone applied at the end of a bleaching sequence on a softwood kraft pulp.

EXAMPLE 1

15 A softwood kraft pulp is treated in a known manner, having a residual lignin content corresponding to a kappa number close to 20, using a prebleaching D(EP)D sequence. The brightness obtained is 83.7% ISO.

20 This pulp, after washing with water and acidification with sulphuric acid up to pH 2.7, is subjected to an ozone treatment, with a consistency of 35%, in a conventional laboratory device consisting of a rotating glass reactor in a water bath having a variable temperature between 20 and 80°C.

A quantity of ozone close to 0.2% was progressively added to the pulp.

25 After this treatment, the pulp was washed and its brightness measured by the usual standard methods.

30 The results obtained are shown by the curve in Figure 1. They clearly show that the increase in the temperature of the Z stage improves the result of the bleaching, contrary to the teaching of the prior art, according to which, for example, the result at 80°C should be poorer than that at 20°C. However, it was observed that increasing the temperature above 80°C was not advantageous.

35 It is also interesting to observe in this example that the increase in efficiency of the ozone stage is not accompanied by a significant drop in the quality of the cellulose, of which the

degree of polymerization (measured according to standard NF ISO 5351 after reduction with sodium borohydride) remains at very good levels. This is illustrated in Figure 2.

EXAMPLE 2

5

A softwood wood kraft pulp is treated in a known manner, having a residual lignin content corresponding to a kappa number close to 27, with a DEDED bleaching sequence. The brightness obtained is 81.9% ISO.

10

This pulp, after washing with water, had a pH close to 7. It was then subjected to an ozone treatment, with a consistency of 35%, in the same device as in example 1.

A quantity of ozone of 0.19% was progressively added to the pulp. After this treatment, the pulp was washed and its brightness measured by the usual standard methods.

15

The results of the bleaching by this final ozone stage are shown in Figure 3. They are similar to those obtained in example 1. This is particularly remarkable because the pH of the treatment is 7, and this, according to the teaching of the prior art, should lead to a rapid decomposition of the ozone and hence its loss of efficiency.

20

In this example, it appears that the ozone treatment performance should be even better at a temperature above 80°C. However, the application of a temperature above 80°C may penalize the heat balance of the pulp plant.

25

EXAMPLE 3

The same pulp as in the previous example was partially bleached by the DEDED sequence, in order to obtain a brightness of 81.9.

30

Contrary to example 2, the pulp was not washed after the final D stage, but directly thickened to a consistency of 35%. Its pH was then close to 4.

The ozone treatment according to the invention at a temperature of 80°C was applied to this pulp up to an ozone consumption of 0.19%.

35

A brightness of 89% ISO was obtained, representing the same result as in example 2, in which washing had been carried out after the D stage.

CLAIMS

1. Method for treating a prebleached chemical pulp comprising a step of ozone treatment of the said pulp, carried out at a temperature above 60°C, advantageously above 65°C and even more advantageously above or equal to 70°C.
5
2. Method for treating a prebleached chemical pulp according to Claim 1, *characterized* in that the ozone treatment step is carried out at a temperature of between 80 and 90°C, advantageously close to 80°C.
10
3. Method for treating a prebleached chemical pulp according to either of Claims 1 and 2, *characterized* in that the prebleached chemical pulp has a brightness level above 70%, advantageously above 80%, and preferably close to 85%.
- 15 4. Method for treating a prebleached chemical pulp according to one of the preceding claims, *characterized* in that the prebleached chemical pulp has a residual lignin content corresponding to a kappa number lower than 2.5, advantageously lower than 2, and preferably lower than 1.
- 20 5. Method for treating a prebleached chemical pulp according to one of the preceding claims, *characterized* in that the quantity of ozone used in the ozone treatment step is between 0.01 and 0.5% by weight, advantageously between 0.05 and 0.2% by weight of dry pulp.
- 25 6. Method for treating a prebleached chemical pulp according to one of the preceding claims, *characterized* in that the ozone treatment step is carried out at a pH of between 2 and 10, advantageously between 4 and 8.
7. Method for treating a prebleached chemical pulp according to one of the preceding
30 claims, *characterized* in that the ozone treatment step is carried out on a pulp with a consistency of between 1 and 45%.
8. Method for treating a prebleached chemical pulp according to one of the preceding
35 claims, *characterized* in that the ozone treatment step is carried out directly after the final prebleaching step, without intermediate washing.
9. Method for treating a prebleached chemical pulp according to one of the preceding claims, *characterized* in that the chemical pulp is a kraft or sulphite pulp.

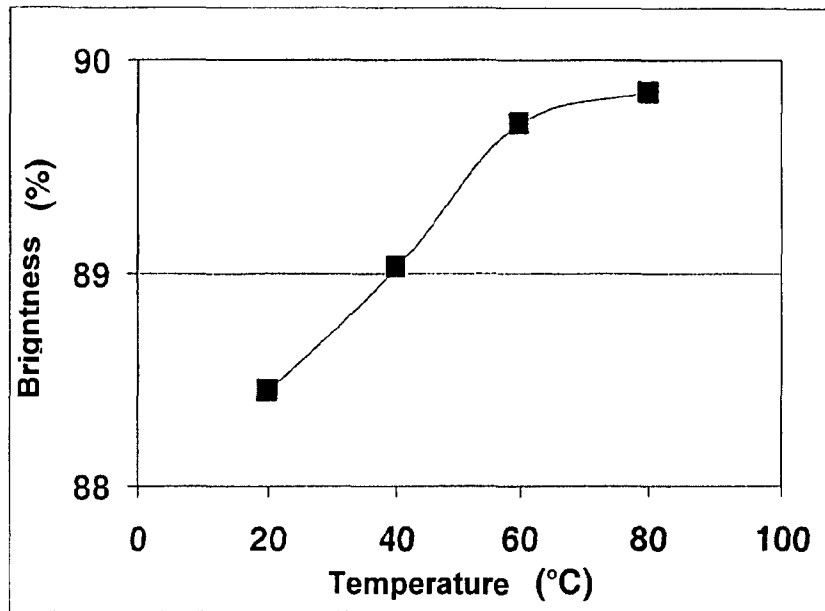


Figure 1

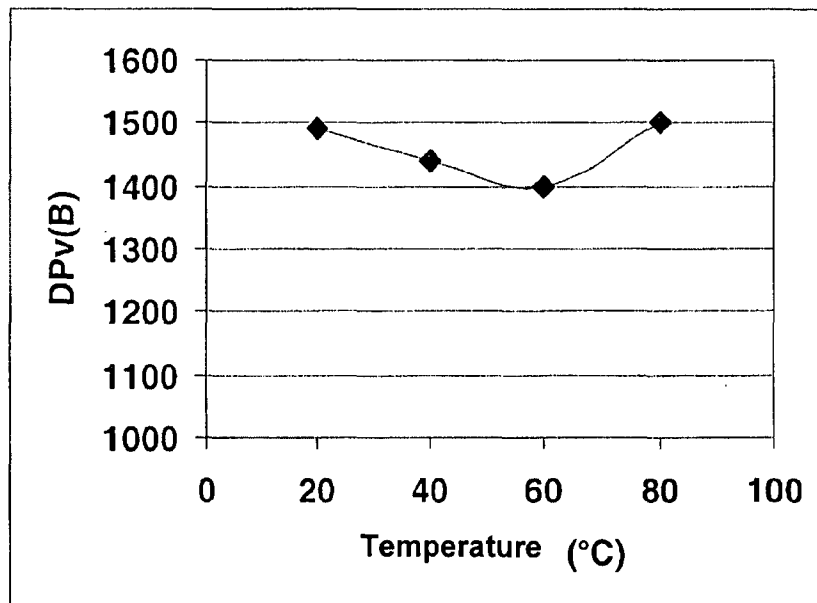


Figure 2

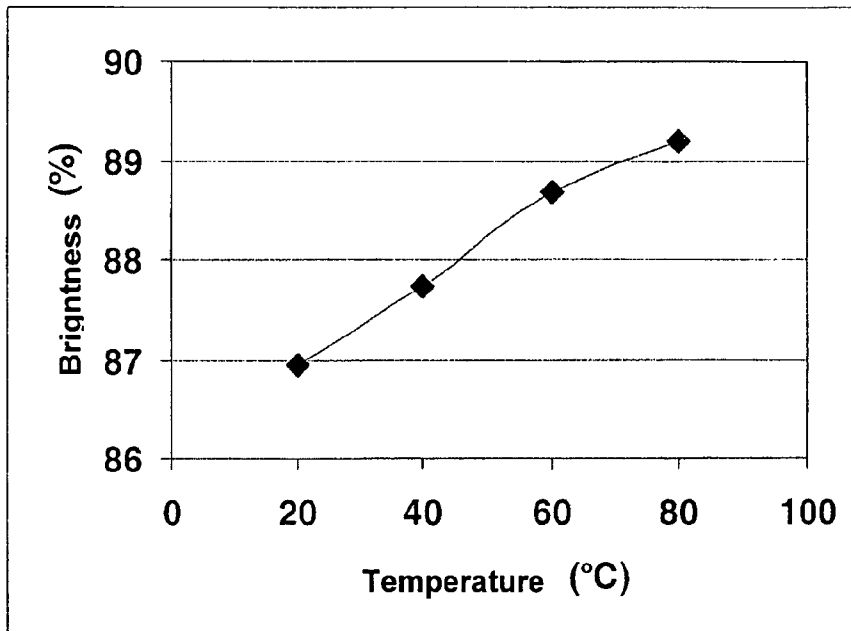


Figure 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/063743

A. CLASSIFICATION OF SUBJECT MATTER
INV. D21C9/153

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2005/059241 A (METSO PAPER INC [FI]; LINDSTROEM LARS-AAKE [SE]; LARSSON PAER-ERIK [BR] 30 June 2005 (2005-06-30) figure 2 figure 3 claims 1,4	1-9
Y	WO 96/01920 A (INGERSOLL RAND CO [US]; PULP PAPER RES INST [CA]) 25 January 1996 (1996-01-25) the whole document	1-9
Y	US 5 571 377 A (TIBBLING PETTER [SE] ET AL) 5 November 1996 (1996-11-05) the whole document	1-9
	----- -/-- -----	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

2 April 2008

Date of mailing of the international search report

08/05/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Naeslund, Per

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/063743

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 755 925 A (KOGAN JACK [US] ET AL) 26 May 1998 (1998-05-26) the whole document	1-9
A	WO 97/15713 A (AHLSTROM MACHINERY OY [FI]; HENRICSON KAJ [FI]) 1 May 1997 (1997-05-01)	
A	WO 96/34142 A (UNION CAMP PATENT HOLDING [US]) 31 October 1996 (1996-10-31)	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2007/063743

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2005059241	A	30-06-2005	SE 526241 C2	02-08-2005
			SE 0303436 A	19-06-2005
WO 9601920	A	25-01-1996	AT 189716 T	15-02-2000
			BR 9508388 A	14-07-1998
			CA 2194880 A1	25-01-1996
			CN 1176673 A	18-03-1998
			DE 69515066 D1	16-03-2000
			DE 69515066 T2	19-04-2001
			DE 797703 T1	19-02-1998
			EP 0797703 A1	01-10-1997
			ES 2107399 T1	01-12-1997
			FI 970104 A	10-03-1997
			JP 2787618 B2	20-08-1998
			JP 9508945 T	09-09-1997
			PT 797703 T	31-07-2000
			RU 2141016 C1	10-11-1999
ZA 9505290 A	27-12-1996			
US 5571377	A	05-11-1996	AT 136073 T	15-04-1996
			AU 677373 B2	24-04-1997
			AU 5824894 A	03-01-1995
			AU 6987294 A	03-01-1995
			BR 9306842 A	08-12-1998
			CA 2163985 A1	22-12-1994
			CN 1124988 A	19-06-1996
			CZ 9403022 A3	13-09-1995
			DE 69302020 D1	02-05-1996
			DE 69302020 T2	19-09-1996
			EP 0677124 A1	18-10-1995
			ES 2088701 T3	16-08-1996
			FI 950526 A	07-02-1995
			GR 3020235 T3	30-09-1996
			JP 2716104 B2	18-02-1998
			JP 8500154 T	09-01-1996
			MA 23215 A1	31-12-1994
			NO 954464 A	07-11-1995
			NZ 259440 A	27-08-1996
			RU 2120511 C1	20-10-1998
WO 9429511 A1	22-12-1994			
SE 500616 C2	25-07-1994			
SE 9301960 A	25-07-1994			
WO 9429515 A1	22-12-1994			
ZA 9403504 A	23-01-1995			
US 5755925	A	26-05-1998	NONE	
WO 9715713	A	01-05-1997	AT 203291 T	15-08-2001
			AU 7301696 A	15-05-1997
			BR 9611258 A	13-07-1999
			DE 69613989 D1	23-08-2001
			EP 0856080 A1	05-08-1998
			FI 960214 A	21-04-1997
			PT 856080 T	30-11-2001
			US 2001004005 A1	21-06-2001
WO 9634142	A	31-10-1996	CA 2219759 A1	31-10-1996
			EP 0823003 A1	11-02-1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2007/063743

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9634142	A	US 5656130 A	12-08-1997