




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B21J 15/02, 15/10	A1	(11) International Publication Number: WO 94/14554 (43) International Publication Date: 7 July 1994 (07.07.94)
(21) International Application Number: PCT/GB93/02608 (22) International Filing Date: 20 December 1993 (20.12.93) (30) Priority Data: 9226517.2 19 December 1992 (19.12.92) GB (71) Applicant (for all designated States except US): HENROB LIMITED [GB/GB]; Aber Park, Flint, Clwyd CH6 5EX (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): COTTERILL, Alf [GB/GB]; 24 Bramble Close, Buckley, Clwyd CH7 2BD (GB). BLACKET, Stuart, Edmond [AU/AU]; 18 Beaufort Street, Alderley 4051, Brisbane, QLD (AU). SINGH, Sumanjit [DE/DE]; Ahornweg 10, D-8074 Gaimersheim-Lippersthoefen (DE). (74) Agent: MOCK, Hans; Marks & Clerk, Suite 301, Sunlight House, Quay Street, Manchester M3 3JY (GB).		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: IMPROVEMENTS IN OR RELATING TO SELF-PIERCING RIVETING**(57) Abstract**

A method of riveting comprises inserting a self-piercing rivet (1) into sheet material (5, 6) without full penetration such that the deformed end of the rivet (1) remains encapsulated by an upset annulus of the sheet material. The sheet material (5, 6) is clamped with a substantial force during the riveting operation in the region around the rivet insertion location. The clamping force is maintained constant throughout at least the major part of the riveting operation and has a magnitude of up to 1.5 tonnes. A riveting machine for carrying out the method comprises a punch (10), means for feeding rivets successively to the punch (10) for insertion into sheet material (5, 6) to be riveted, a die (15) aligned with the punch (10) for deforming the rivet (1) inserted thereby, and clamping means (11) for clamping the sheet material (5, 6) with a substantial force during the riveting operation in the region around the rivet insertion location.

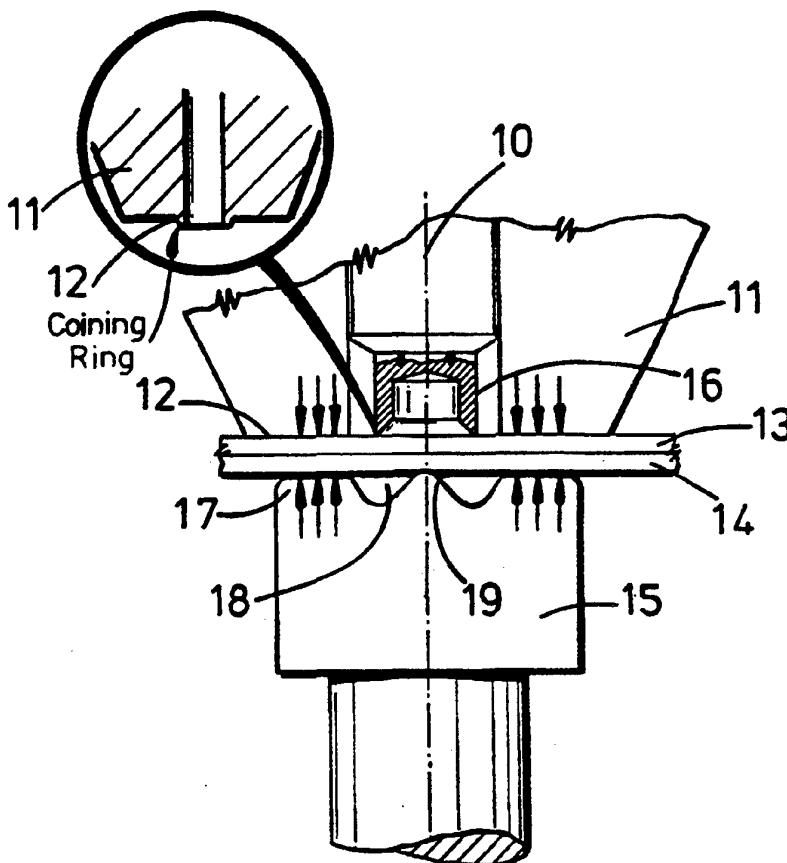

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

IMPROVEMENTS IN OR RELATING TO SELF-PIERCING RIVETING

This invention relates to self-piercing riveting and more particularly to a method of and apparatus for riveting of the kind in which a self-piercing rivet is inserted into sheet material without full penetration, such that the deformed end of the rivet remains encapsulated by an upset annulus of the sheet material.

Fig. 1 is a diagrammatic section of an example of a riveted joint made by such a riveting method in accordance with the invention. A rivet 1 has a head 2 and a shank 3 terminating in an annular edge 4. The shank 3 is initially cylindrical but is flared outwardly into the illustrated shape as the rivet is driven into two overlapping sheets 5, 6 located on a suitably shaped die. As shown, the shank 3 and the edge 4 of the rivet remain embedded in the sheet material 5, 6 after the rivet has been set.

Hitherto, riveted joints of the kind illustrated in Fig. 1 have had various imperfections. Desirably, the head 2 of the rivet 1 is flush with the surrounding surface of the sheet 5 which should remain undeformed, and the annular valley 7 between the sheet 5 and the rivet head 2 should be as shallow as possible. In reality, however, the riveting stresses may cause substantial deformation of the upper sheet 5, for example in the form of a circular depression or dimple around the rivet location, and the valley 7 may be unacceptably deep. Although unobjectionable in many applications, such surface distortions are often unacceptable, e.g. for visible joints of motor vehicle body panels, in particular the curved portions of said panels. On the concealed side of the joint, the appearance is immaterial but unevennesses in the thickness of the sheet material 6 encapsulating the rivet end 4 may affect the strength of the joint and permit breakthrough of the rivet end thereby encouraging corrosion.

It will be appreciated that self-piercing riveting is not confined to rivets of the kind shown in Fig. 1. Thus, for example, flat head and pan head style rivets may be used but riveted joints using such alternative rivets have hitherto suffered from at least some of the imperfections mentioned above.

It is an object of the present invention to provide a method of self-piercing riveting of the kind defined in which the aforesaid disadvantages are obviated or mitigated.

The invention also relates to a riveting machine for setting self-piercing rivets in the manner described. A known riveting machine for setting self-piercing rivets is described in European Patent Specification 172171 by Nietek Pty. Ltd. the disclosure of which is incorporated herein by reference.

It is a further object of the present invention to modify the known riveting machine so as to improve the riveted joint produced thereby.

According to a first aspect of the present invention there is provided a method of riveting comprising inserting a self-piercing rivet into sheet material without full penetration such that the deformed end of the rivet remains encapsulated by an upset annulus of the sheet material characterised in that the sheet material is clamped with a substantial force during the riveting operation in the region around the rivet insertion location.

According to a second aspect of the present invention there is provided a riveting machine for inserting a self-piercing rivet into sheet material without full penetration such that the deformed end of the rivet remains encapsulated by an upset annulus of the sheet material, said machine comprising a punch, means for feeding rivets successively to the punch for insertion into sheet material to be riveted, a die aligned with the punch for deforming the rivet inserted thereby, and clamping means for clamping the sheet material with a substantial force during the riveting operation in the region around the rivet insertion location.

The invention will now be further described by way of example only with reference to the accompanying drawings in which:-

Fig. 1 is a section of a riveted joint made by the riveting method of the invention;

Fig. 2 is a diagram showing the operative components of a riveting machine of the invention at the start of a riveting operation;

Fig. 3 is a part sectional side elevation of a rivet suitable for use in the riveting method of the invention;

Figs. 4 and 5 are longitudinal sectional views on mutually perpendicular planes of one embodiment of riveting machine according to the invention, and

Figs. 6 and 7 are corresponding views of a second embodiment of riveting machine according to the invention.

Referring now to the drawings, the riveted joint of Fig. 1 has already been described as an example of the kind of joint that is produced by the riveting method of the invention. The undeformed rivet is shown in Fig. 3 and is given the same reference numerals. It will be noted that the shank 3 is initially cylindrical and the free end 4 has an internal taper to define a cutting edge facilitating insertion and spreading of the rivet.

Fig. 2 shows a punch 10 of a riveting tool surrounded by a pre-clamping element 11 having an annular clamping surface 12 urging two overlapping sheets 13, 14 against a die 15. The surface 12 may have a rough finish provided for example by knurling or annular grooving in order to improve the grip on the sheet material and prevent material being pulled laterally into the joint. A coining ring may be provided on the surface 12 as shown in the inset to Fig. 2. The coining ring functions to prevent material flow and also to regulate distortion adjacent to the rivet head so as to give a uniform appearance. A rivet 16 of the kind shown in Fig. 3 is located at the end of the plunger 10 ready for insertion into the sheets 13, 14. The die 15 has an annular surface 17 (which may be roughened in the same way as the surface 12) cooperating with the clamping surface 12 and surrounding a semi-toroidal cavity 18 around a central projection 19 which is preferably above the level of the clamping surface 17 but may also be below or at the same level as said surface. The clamping element 12 exerts a constant clamping force on the sheets 13, 14. An electronic pressure switch senses the clamping pressure and main riveting process pressure and is used as a control device coordinated by a programmable logic controller. The clamping force, which remains constant during the riveting process, can be accurately set at any value up to approximately 1.5 tonnes. In a hydraulically operated riveting machine the control of the clamping force may involve topping up of the oil in the clamping cylinder to maintain the clamping pressure as the riveting process takes place. This is required because the frame of the riveting machine, which is a C-Frame in the machine shown in European Patent Specification No. 172171, deflects during the

riveting operation and the clamp cylinder must therefore advance to maintain the clamping force constant.

The tapered end 4 of the rivet 1 provides a cutting ring which shears the top sheet 13 with minimal draw of the sheet material as a result of the clamping force. The taper angle on the end of the rivet provides a taper surface which can be thrust radially outwards by the reaction of the die and punch giving reliable spreading of the rivet as it is forced into the die by the punch. The rivet is preferably heat treated to improve its self-piercing quality.

The riveting machine is preferably constructed as shown in the aforesaid European Patent Specification. Alternative designs of the clamping and punching part of the machine are shown in Figs. 4, 5 and Figs. 6, 7. Referring to Figs. 4, 5, a punch 20 is carried by a plunger 21 terminating in a double-acting piston 22 slidable in a main cylinder 23 having inlet/outlet connections 24, 25 at opposite sides of the piston 22. The lower part of the plunger 21 (to the left in Figs. 4 and 5) is slidable in a guide bush 26 which carries an actuator 27 and terminates in a nose 28 the end face of which provides the clamping surface 12 of Fig. 2. The mode of operation of the actuator 27, plunger 21 and punch 20 is fully described in the aforesaid European Patent Specification. The machine of Figs. 4 and 5 differs from that described in the European Patent Specification by virtue of the fact that the head 29 of the guide bush 26 has a shoulder which is engaged by a clamping sleeve 30 which is slidable in a hydraulic cylinder 31 having an inlet/outlet connection 32 for hydraulic fluid.

In use, the nose 28 of the tool is advanced to contact the workpiece by introducing fluid under pressure through the connection 32. A predetermined clamping force is then exerted on the nose 28 by pressurising the cylinder 31 so as to advance the sleeve 30. A constant clamping force is pre-set in the manner already described and the punch 20 is then operated to insert the rivet in the manner fully described in the aforesaid European Patent Specification. Because the central projection 19 of the die 15 (Fig. 2) is above the level of the annular surface 17 of the die 15 the clamping force exerted on the workpiece, i.e. sheets 13, 14, before insertion of the rivet 16 results in pre-indentation of the lower sheet 14 causing improved geometry of material flow during rivet setting.

In the more compact design of riveting machine shown in Figs. 6 and 7, a plunger 40 is connected at one end to a punch 41 and at its other end to a piston 42 slidable in a main cylinder 43 having hydraulic fluid inlets 44, 45 at opposite sides of the piston 42. A guide bush 46 is connected by a cross member 47 to the pistons of a pair of clamping piston-and-cylinder devices 48, 49 flanking the main cylinder 43. In this case, in contrast to the embodiment of Figs. 4 and 5 and the design shown in the aforesaid European Patent Specification, the rivet feed to the head of the machine is pneumatic rather than mechanical.

The clamping function is identical in both tools - the nose of the tool is advanced forward to contact the work piece and clamp the work between the nose and the die of the riveting tool at a pre-set pressure. Next, the primary hydraulic cylinder operates to set the rivet during which time the pre-clamping is maintained. As the punch retracts by means of the primary cylinder then the clamp cylinder(s) are also retracted. The signal that the pre-clamping operation has occurred is generated by a pressure switch which monitors the clamping pressure. As soon as the pre-set pressure is reached the pressure switch signals the main cylinder to advance for the riveting operation. In the case of the standard stroke tool the forward movement of the clamp pulls forward the plunger and piston of the main hydraulic cylinder. There is no positive pressure on the main hydraulic cylinder as this occurs. On both versions the clamping pressure is maintained by a check valve and the circuit componentry allows for a topping-up of the volume of hydraulic fluid that is maintained under pressure by the check valve. This top-up is to compensate for the small additional advance movement that the clamp components must make in order to maintain pressure on the workpiece as the C-Frame deflects during the riveting process.

A riveted joint may be strengthened by use of an adhesive between adjacent surfaces of the joint, e.g. between the sheets 5, 6 in Fig. 1. The adhesive may be applied in the form of a strip which is then spread evenly over the mating surfaces by application of pressure by means of the pre-clamping mechanism which is adjusted to deliver a low initial pressure for this purpose.

The strength of the riveted joint may be further enhanced by increasing the clamping pressure at the end of the riveting operation. This may be achieved by using the rear (right hand in Fig. 4) end of the clamping sleeve 30 as an abutment for the stop ring 21a on the plunger 21 at the end of the riveting stroke. The clamping force is thus momentarily increased e.g. to about 5 tonnes. A similar effect may be achieved by making the coining ring (shown in Fig. 2 as an integral part of the clamping surface 12) a separate component which is urged by suitable actuating means (e.g. mechanical actuating means operated by the plunger mechanism) into its operative position at or towards the end of the riveting operation with an insertion pressure which effectively enhances the clamping pressure acting on the workpiece.

It has been found that clamping of the workpiece, particularly when using a die having a raised central projection for pre-indenting the workpiece, results in greatly improved strength and appearance characteristics of the riveted joint.

CLAIMS:

1. A method of riveting comprising inserting a self-piercing rivet into sheet material without full penetration such that the deformed end of the rivet remains encapsulated by an upset annulus of the sheet material characterised in that the sheet material is clamped with a substantial force during the riveting operation in the region around the rivet insertion location.
2. A method as claimed in claim 1, wherein the clamping force is maintained constant throughout at least the major part of the riveting operation.
3. A method as claimed in claim 1 or 2, wherein the clamping force has a magnitude of up to 1.5 tonnes.
4. A method as claimed in any one of the preceding claims, wherein the clamping force is initially low to assist uniform spread of adhesive in a joint to be riveted.
5. A method as claimed in any one of the preceding claims, wherein the clamping force is momentarily increased at the end of the riveting operation.
6. A method as claimed in claim 6, wherein the momentary increase in the clamping force is achieved by a coining operation.
7. A method as claimed in any one of the preceding claims, wherein the riveting is carried out using a die having a semi-toroidal cavity in a die surface against which the sheet material is clamped, the cavity surrounding a central projection extending above said surface for the purpose of pre-indenting the sheet material during initial clamping prior to rivet insertion.

8. A riveting machine for inserting a self-piercing rivet into sheet material without full penetration such that the deformed end of the rivet remains encapsulated by an upset annulus of the sheet material, said machine comprising a punch, means for feeding rivets successively to the punch for insertion into sheet material to be riveted, a die aligned with the punch for deforming the rivet inserted thereby, and clamping means for clamping the sheet material with a substantial force during the riveting operation in the region around the rivet insertion location.

9. A machine as claimed in claim 8, wherein a riveting punch is guided in a clamping head having an annular clamping surface coacting with a die surface to clamp the sheet material in use.


10. A machine as claimed in claim 9, wherein said annular clamping surface and the die surface are knurled or otherwise roughened to improve the grip on the sheet material during clamping.

11. A machine as claimed in claim 9 or 10, wherein separate fluid-pressure operated actuating means are provided for exerting a clamping force on the clamping head and for driving the punch in the rivet insertion direction, and the clamp actuating means provides a stop for the punch actuating means so as to cause a momentary increase of the clamping force at the end of the riveting operation.

12. A machine as claimed in claim 9 or 10, wherein a displaceable coining ring has actuating means for carrying out a coining operation at the end of the riveting operation thereby causing a momentary increase of the clamping force at the end of the riveting operation.

13. A machine as claimed in any one of claims 8 to 12, wherein the die has a semi-toroidal cavity in a die surface against which the sheet material is clamped, the cavity surrounding a central projection extending above said surface for the purpose of pre-indenting the sheet material prior to rivet insertion.

14. A machine as claimed in any one of claims 8 to 13, wherein separate fluid-pressure operated means for exerting the clamping force and for driving the punch are arranged in side-by-side relationship to reduce the overall length of the machine.

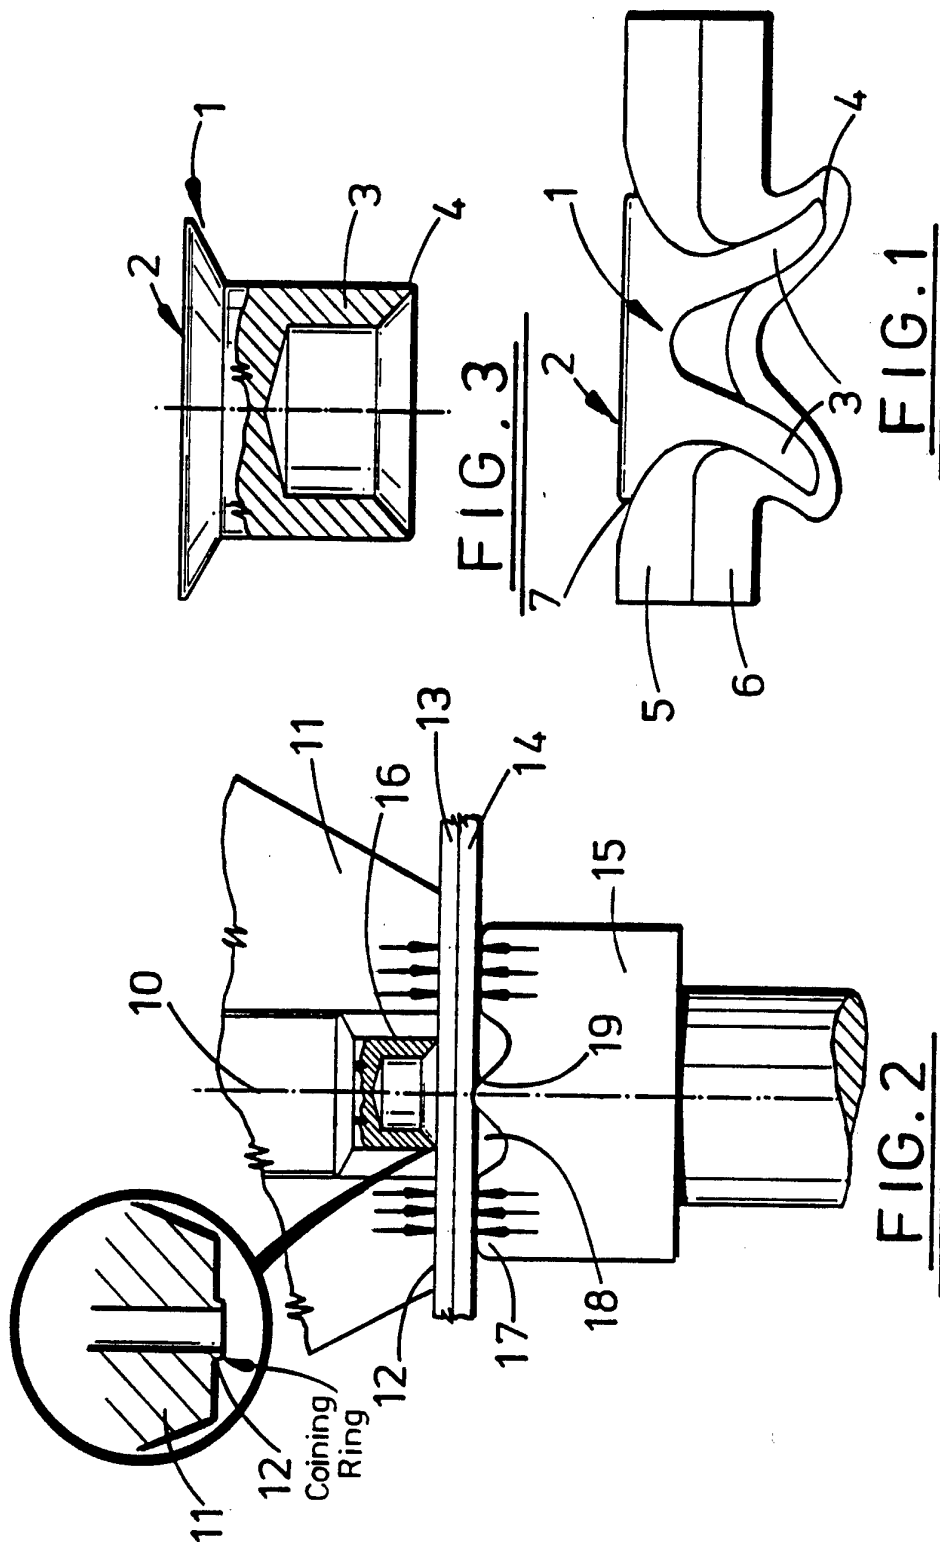

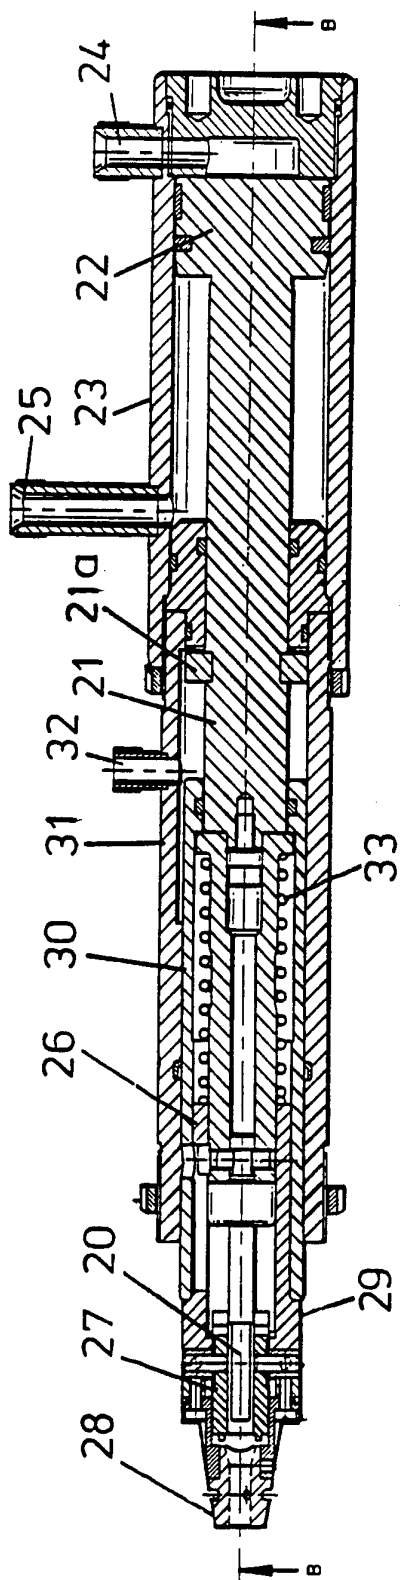


FIG. 4

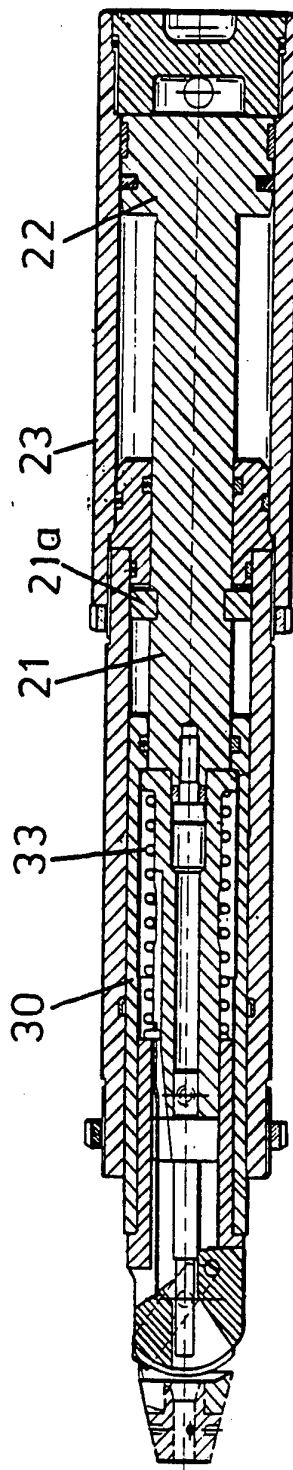


FIG. 5

3/3

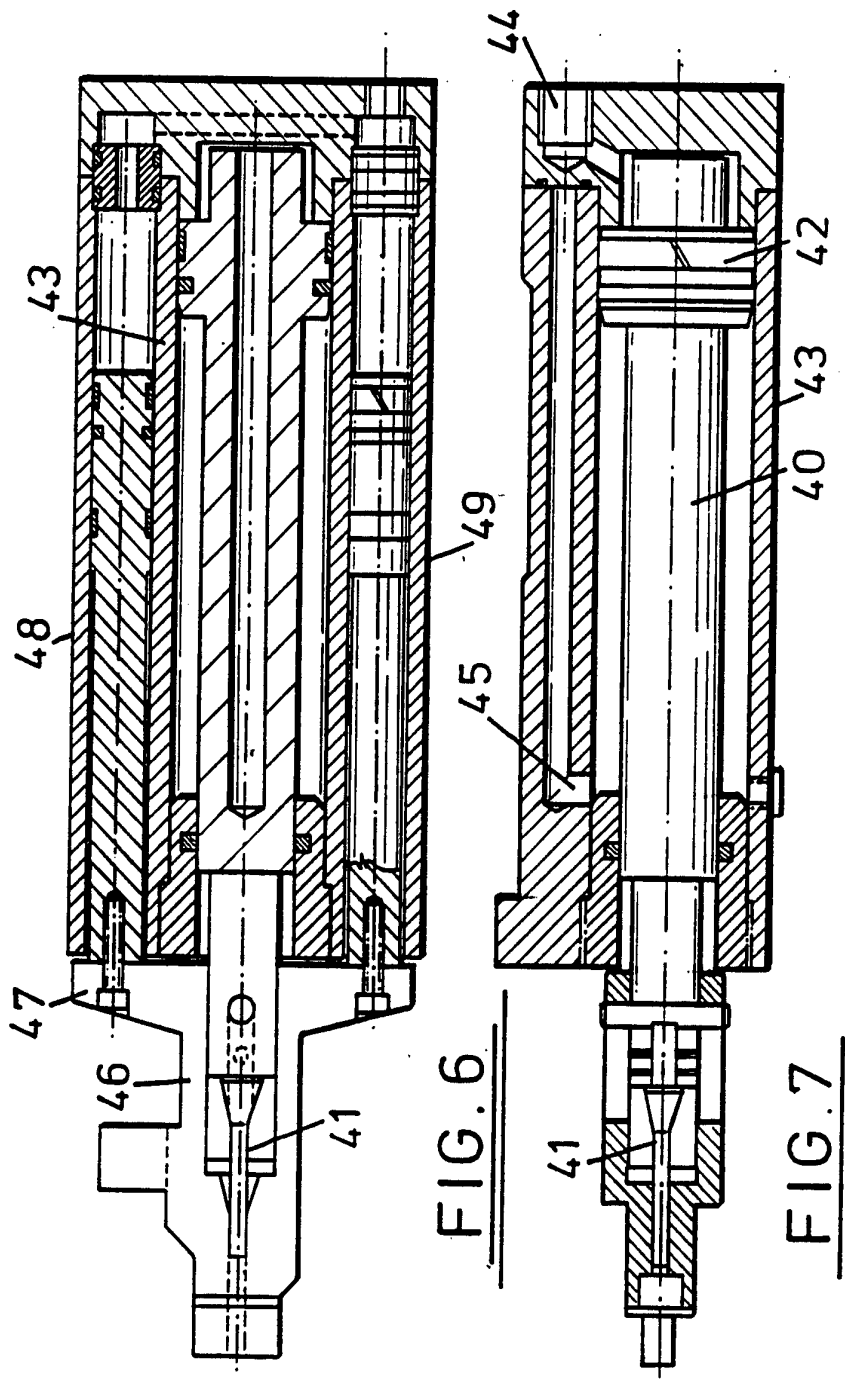


FIG. 6

FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/02608

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 5 B21J15/02 B21J15/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 B21J B23P F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ENGINEERING vol. 222, no. 9, September 1982, LONDON, GB pages 634 - 635 'TRENDS IN FASTENER DESIGN' JOINING ALUMINIUM see page 635, middle column; figure 3 ---	1-3,7-9, 14
Y	FR,A,2 350 901 (GARGAILLO) 9 December 1977	1-3,7-9, 14
A	see claim 1; figures ---	11
A	EP,A,0 129 358 (BL TECHNOLOGY LTD) 27 December 1984 see page 3, paragraph 1 - page 4, paragraph 1; figures ---	1,8
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 April 1994

Date of mailing of the international search report

16.05.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Barrow, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/02608

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 096 727 (GARGAILLO) 27 June 1978 see column 1, line 9 - line 16 see column 2, line 21 - column 3, line 68; figures ---	1-3,7-9, 11,14
A	US,A,1 611 876 (BERGER) 28 December 1926 see page 2, line 35 - line 39; figures 10-13 ---	7
P,A	DE,A,42 37 621 (TOKAI METALLIC MFG CO) 5 August 1993 see figures -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 93/02608

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2350901	09-12-77	NONE	
EP-A-0129358	27-12-84	GB-A- 2141369	19-12-84
US-A-4096727	27-06-78	NONE	
US-A-1611876		NONE	
DE-A-4237621	05-08-93	NONE	