

(43) **Pub. Date:** **Aug. 20, 2009**

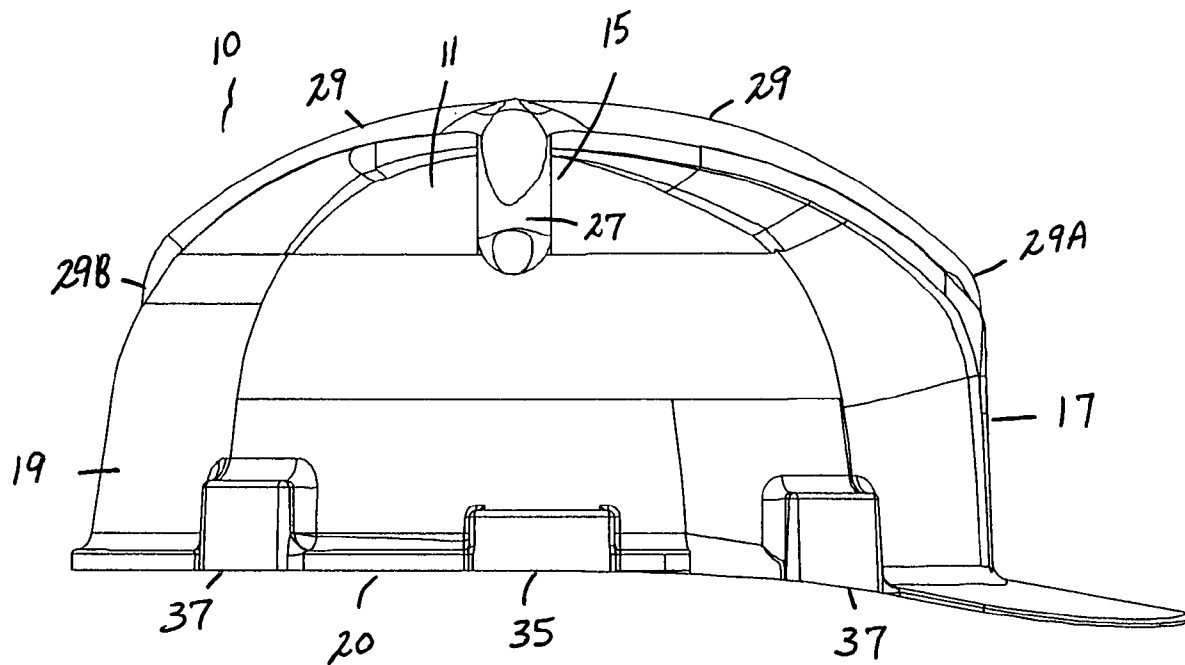


Fig. 1


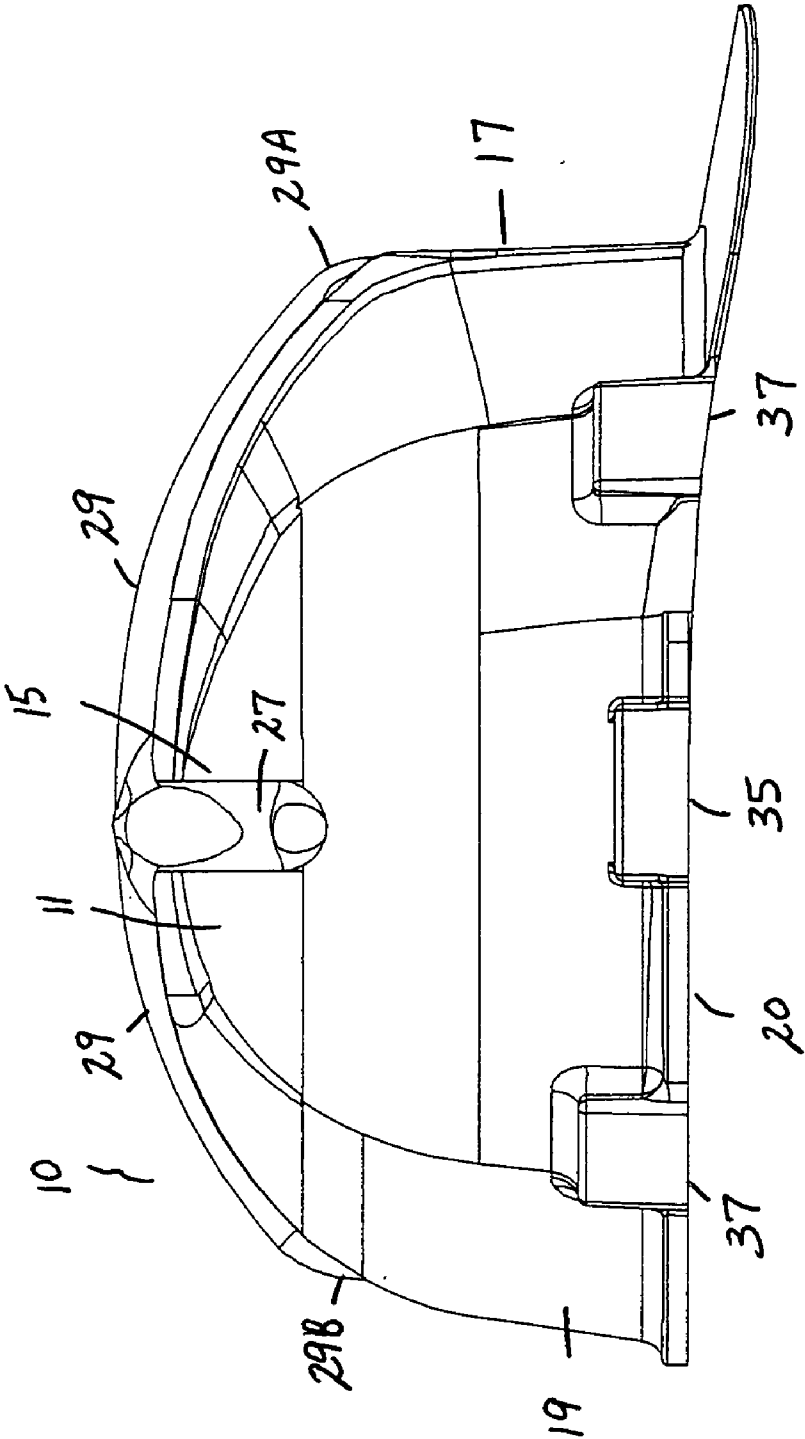


Fig. 2

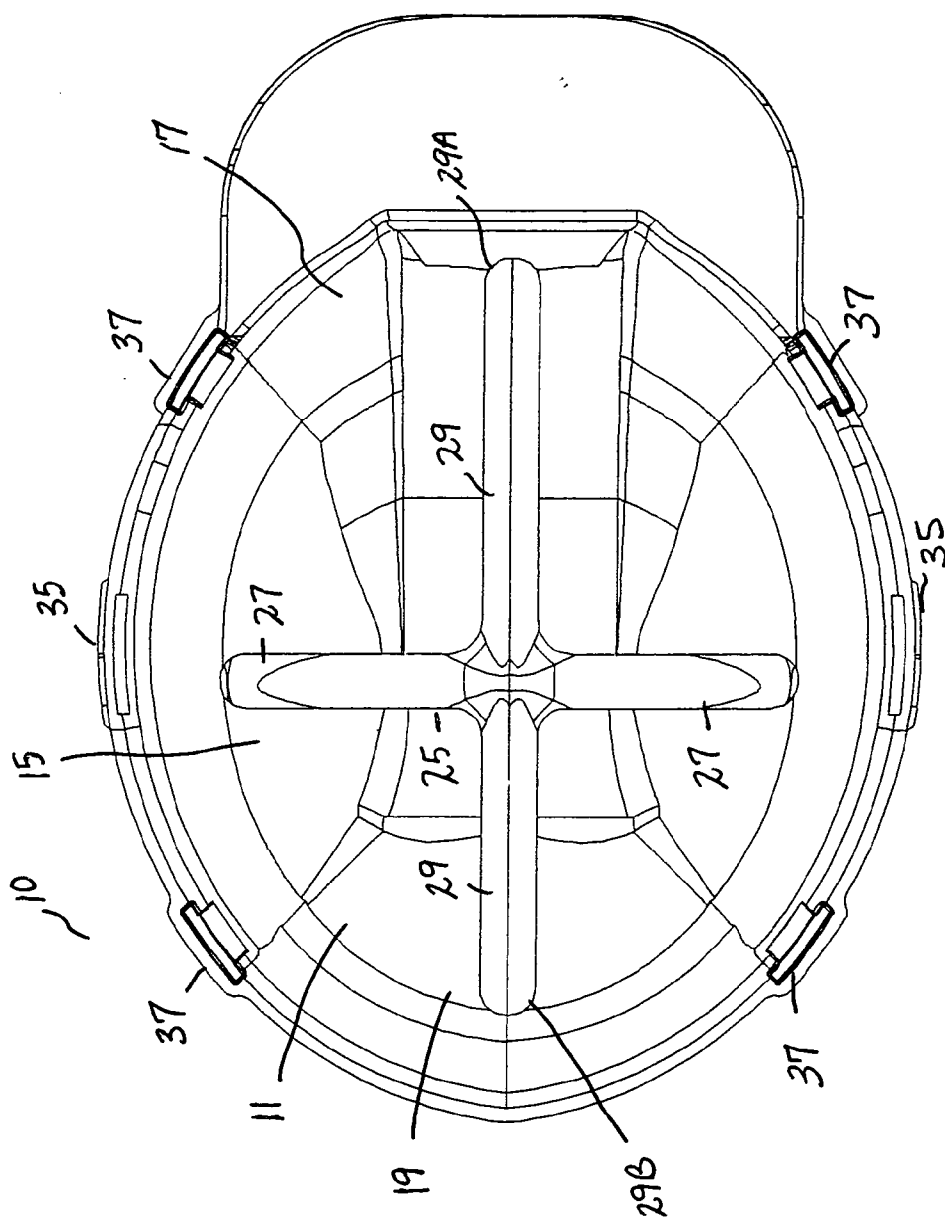

LOW PROFILE PROTECTIVE HELMET**CROSS REFERENCES TO RELATED APPLICATIONS**

[0001] U.S. Provisional Application for Patent No. 61/009,368, filed Dec. 28, 2007, with title "Low Profile Protective Helmet" which is hereby incorporated by reference. Applicant claim priority pursuant to 35 U.S.C. Par. 119(e)(i).

STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT

[0002] Not Applicable

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] This invention relates generally to protective helmets and more particularly, to a low profile helmet that incorporates safety design for miners.

[0005] 2. Brief Description of Prior Art

[0006] The use of safety helmets (hard hats) in hazardous areas in industry and mines is widespread. Prior art helmets are generally heavy and because the shell of the helmet is spaced an appreciable distance from the wearer's head, they are often unstable on the head. In addition, the bulk of these helmets seriously limit head movement by the wearer in the often confined space within the mine.

[0007] As will be seen from the subsequent description, the preferred embodiments of the present invention overcome disadvantages of the prior art.

SUMMARY OF THE INVENTION

[0008] The present invention is a low profile helmet suitable for use in hazardous areas in industry and mines. The invention comprises a helmet embodying a rigid shell that is best described as being made up of integral portions joined together to permit the helmet to be fitted closely to the top of the wearer's head. The close fit of the helmet minimizes the weight of the helmet itself, and provides excellent stability of the helmet on the head. Because of its close fit, low profile fitting with the wearer's head, the helmet of the present invention further includes integral shock absorbing means in order to protect the head of the wearer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a side view of a preferred embodiment of the present invention, a low profile protective helmet.

[0010] FIG. 2 is a top view of the protective helmet of FIG. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0011] The low profile protective helmet of the present invention is primarily directed to a close fit helmet that minimizes the weight of the helmet itself, and provides excellent stability of the helmet on the head. In the broadest context, the low profile protective helmet of the present invention consists of components configured and correlated with respect to each other so as to attain the desired objective.

[0012] The basic idea of the present invention is to provide a low profile helmet suitable for use in hazardous areas in industry and mines and that embodies a low profile, close fit

in order to both minimize the weight of the helmet itself, and to provide excellent stability of the helmet on the wearer's head.

[0013] Referring to FIGS. 1-2, a low profile protective helmet **10** made in accordance with the present invention is disclosed. The protective helmet **10** includes an outer shell **11** of a substantially rigid impact resistant material.

[0014] As is the case with prior art protective helmets, the current invention may include various attachments such as a mounted lamp, protective visor, ear pads, as well as shock absorbing internal padding disposed within the helmet **10** for both protection and comfort. Again these attachments are known in the art and therefore not apart of the present inventive disclosure.

[0015] As illustrated, the outer shell **11** having generally spherical contours to encompass the upper part of the wearer's head. The shell **11** is preferably made of a dense, relatively light weight, impact absorbing material such as for example, a polycarbonate plastic.

[0016] The outer shell **11** is integrally formed by three sections, a center principal section **15**, a front section **17** and a rear section **19**. The center section **15** covers the central portion of the top of the wearer's head from a point above the ear on one side of the head to a point above the ear on the other side of the head. The front section **17** is integral to the center section **15** and covers the upper frontal portion of the head. The rear section **19** is likewise integral to the center section **15** and covers the back of the head. The sides of all three sections are configured to closely fit the head of the wearer in order to better maintain firm contact with the area of the head while the helmet is being worn.

[0017] The outer shell **11** includes an interior surface **20** that is immediately adjacent the top of the wearer's head while the helmet is being worn. The interior surface **20** includes a distal point (not shown) which represents the furthest distance between the top of the wearer's head and the interior surface **20** when the helmet **10** is being worn. The distal point of the low profile helmet **10** is approximately 1.3 inches from the top of the wearer's head which is at least one (1) inch closer to the top of the wearer's head than with prior art hard hats. In particular, the height of the low profile helmet **10** is approximately 4.7 inches in height which is considerably less than prior art hard hats. As a result, the design permits the helmet **10** to fit closer to the top of the wearer's head. The close fit of the helmet **10** minimizes the weight of the helmet itself, and provides excellent stability of the helmet on the head.

[0018] As best shown in FIG. 2, the outer shell **11** further includes added shock absorbing means **25** that is preferably integral to the outer shell **11**. The added shock absorbing means **25** includes a first extension **27** and a second extension **29** in perpendicular relationship with the first extension **27**. Like the outer shell **11**, the added shock absorbing means **25** is constructed of a substantially rigid impact resistant material and disposed on the outer shell **11** in order to give added protection to the head of the wearer such that the low profile helmet **10** is suitable for use in hazardous areas in industry and mines. In the preferred embodiment the added shock absorbing means **25** is the same material used to manufacture the outer shell **11** with relatively greater depth along the defined extensions **27**, **29**.

[0019] As illustrated, the first extension **27** horizontally extends along the central portion of the center section **15**. The second extension **29** is disposed in perpendicular relationship

to the first extension 27. The second extension 29 vertically extends along the central portion of the center section 15 and extends such that a first end 29A is approximately adjacent the front section 17 and a second end 29B is approximately adjacent the rear section 19. As stated, the extensions 27, 29 forming the added shock absorbing means 25 give added protection to the head of the wearer during use.

[0020] As shown in the drawings, the shell 11 further includes a pair of slots 35 for attaching hearing protection pads known in the art and further includes side channels 37 for attaching internal suspension padding known in the art.

[0021] The inventor has found that the design of the protective helmet 10 as described represents the only ANSI Z89.1 Type I Class G certified hard hat having the “low profile” characteristics described.

[0022] While the best mode for carrying out the invention has been described, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention. Thus, the above-described preferred embodiment is intended to be illustrative of the invention which may be modified within the scope of the appended claims.

I claim:

1. A low profile protective helmet comprising:

an outer shell of a substantially rigid impact resistant material, said outer shell having generally spherical contours to encompass the upper part of a wearer's head, wherein said outer shell is integrally formed by a center section, a front section and a rear section, wherein said outer shell further includes an interior surface that is immediately adjacent the top of the wearer's head when the helmet is being worn, said interior surface having a distal point and wherein said distal point is approximately 1.3 inches to the top of the wearer's head, a pair of side slots, each of said side slots for attaching a hearing protection pad, side channels for attaching an internal suspension padding and, a shock absorbing means integral to the outer shell, said shock absorbing means including a first extension and a second extension in perpendicular relationship with said first extension, wherein said first extension horizontally extends along a central portion of the center section and the second extension vertically extends along the central portion of the center section and extends such that a first end of said second section is approximately adjacent the front section and a second end of said second section is approximately adjacent the rear section.

2. A low profile protective helmet comprising:

an outer shell having generally spherical contours to encompass the upper part of a wearer's head, wherein said outer shell further includes an interior surface that is immediately adjacent the top of the wearer's head when the helmet is being worn, said interior surface having a distal point and wherein said distal point is approximately 1.3 inches to the top of a wearer's head,

a pair of side slots, each of said side slots for attaching a hearing protection pad,

side channels for attaching an internal suspension padding and,

a shock absorbing means integral to the outer shell, said shock absorbing means including a first extension and a second extension in perpendicular relationship with said first extension.

3. The low profile protective helmet as recited in claim 2, wherein said outer shell is constructed of a substantially rigid impact resistant material.

4. The low profile protective helmet as recited in claim 3, wherein the height of the low profile helmet is approximately 4.7 inches.

5. A low profile protective helmet comprising:

an outer shell having generally spherical contours to encompass the upper part of a wearer's head,

wherein said outer shell further includes an interior surface that is immediately adjacent the top of the wearer's head when the helmet is being worn, said interior surface having a distal point and wherein said distal point is approximately 1.3 inches to the top of a wearer's head,

a shock absorbing means integral to the outer shell, said shock absorbing means including a first extension and a second extension in perpendicular relationship with said first extension.

6. The low profile protective helmet as recited in claim 5, wherein said outer shell is constructed of a substantially rigid impact resistant material.

7. The low profile protective helmet as recited in claim 5, wherein said shock absorbing means is constructed of a substantially rigid impact resistant material.

8. The low profile protective helmet as recited in claim 5, wherein the height of the low profile helmet is approximately 4.7 inches.

9. The low profile protective helmet as recited in claim 8, wherein said outer shell is integrally formed by a center section, a front section and a rear section, and wherein said first extension horizontally extends along a central portion of the center section and the second extension vertically extends along the central portion of the center section and extends such that a first end of said second section is approximately adjacent the front section and a second end of said second section is approximately adjacent the rear section.

10. The low profile protective helmet as recited in claim 9, wherein said outer shell is of a relatively greater depth along said first and second extensions.

11. The low profile protective helmet as recited in claim 10, further comprising side channels for attaching an internal suspension padding.

12. The low profile protective helmet as recited in claim 11, further comprising a pair of side slots, each of said side slots for attaching a hearing protection pad.

* * * * *