

(43) International Publication Date
18 December 2014 (18.12.2014)

(51) International Patent Classification:

F01D 11/02 (2006.01) F01D 25/00 (2006.01)
F01D 11/18 (2006.01)

(21) International Application Number:

PCT/US2014/040792

(22) International Filing Date:

4 June 2014 (04.06.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/833,544 11 June 2013 (11.06.2013) US

(71) Applicant: GENERAL ELECTRIC COMPANY
[US/US]; 1 River Road, Schenectady, NY 12345 (US).(72) Inventors: MONDAL, Bhaskar, Nanda; John F Welch
Technology Centre, Whitefield Road Hoodi Village,
Whitefield Road, Bangalore, Karnataka (IN). RAHAIM,
John, Joseph; 1 Neumann Way, Cincinnati, OH 45215
(US). MONIZ, Thomas; 1 Neumann Way, Cincinnati, OH
45215 (US). ROSS, Steven, A.; 1 Neumann Way, Cincin-
nati, OH 45215 (US). KIRK, Joel; 1 Neumann Way, Cin-
cinnati, OH 45215 (US). HUNTER, Scott; 1 Neumann
Way, Cincinnati, OH 45215 (US). FUSINATO, Daniel; 1
Neumann Way, Cincinnati, OH 45215 (US).(74) Agents: CONKLIN, Mark A. et al.; General Electric
Company, Global Patent Operation, 2 Corporate Drive,
Suite 648, Shelton, CT 06484 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CLEARANCE CONTROL RING ASSEMBLY

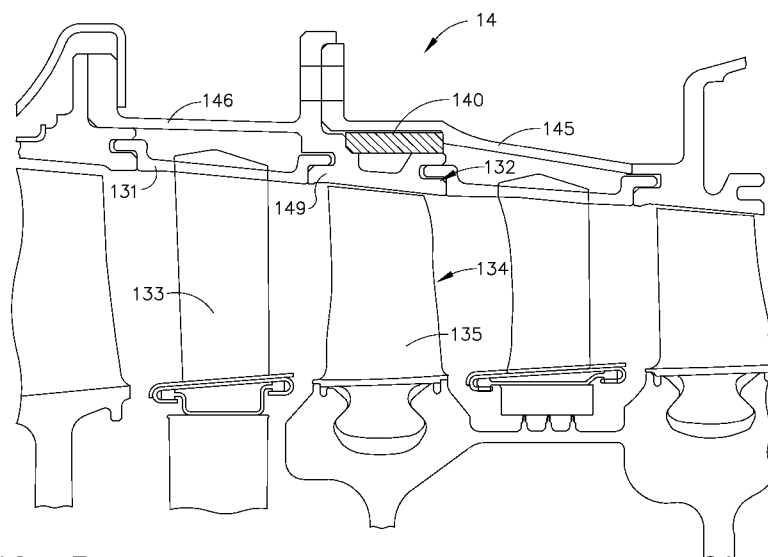


FIG. 3

(57) **Abstract:** A passive clearance control limits thermal expansion between stator components relative to rotor components. A control ring 40 controls clearance in a passive manner and is located on or adjacent to stationary components which thermally expand during engine operation. The control ring is formed of material having low coefficient of thermal expansion such as CMCs (Ceramic Matrix Composites) and therefore limits, inhibits or restrains expansion of the adjacent stator components 32 as temperatures increase. Limiting expansion of the stator component reduces rotor/stator clearances and limits parasitic leakage of fluid along the flowpath through the engine core.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

CLEARANCE CONTROL RING ASSEMBLY

CLAIM TO PRIORITY

[0001] This PCT utility application claims priority to and benefit from currently pending provisional application having U.S. Patent Application Serial No. 61/833,544, titled “Passive Control of Gas Turbine Clearances Using Ceramic Matrix Composites Inserts” and having filing date June 11, 2013, all of which is incorporated by reference herein.

BACKGROUND

[0004] Present embodiments relate generally to a gas turbine engine. More specifically, the present embodiments relate, but are not limited, to clearance control structures for stator components disposed opposite or at radially outward areas on rotating portions of the gas turbine engine.

[0005] A typical gas turbine engine generally possesses a forward end and an aft end with its several core or propulsion components positioned axially therebetween. An air inlet or intake is located at a forward end of the engine. Moving toward the aft end, in order, the intake is followed by a fan, a compressor, a combustion chamber, and a turbine. It will be readily apparent from those skilled in the art that additional components may also be included in the engine, such as, for example, low-pressure and high-pressure compressors, and low-pressure and high-pressure turbines. This, however, is not an exhaustive list.

[0006] The compressor and turbine generally include rows of airfoils that are stacked axially in stages. Each stage includes a row of circumferentially spaced stator vanes and a row of rotor blades which rotate about a center shaft or axis of the turbine engine. A multi-stage low pressure turbine follows the multi-stage high pressure turbine and is typically joined by a second shaft to a fan disposed upstream from the compressor in a typical turbo fan aircraft engine configuration for powering an aircraft in flight.

[0007] The stator is formed by a plurality of nozzle segments which are abutted at circumferential ends to form a complete ring about the axis of the gas turbine engine. Each nozzle segment may comprise a single vane, commonly referred to as a singlet. Alternatively, a nozzle segment may have two vanes per segment, which are generally referred to as doublets. In a third embodiment, additional numbers of vanes may be

disposed on a single segment. In these embodiments, the vanes extend between an inner band and an outer band.

[0008] A typical gas turbine engine utilizes a high pressure turbine and low pressure turbine to maximize extraction of energy from high temperature combustion gas. The turbine section typically has an internal shaft axially disposed along a center longitudinal axis of the engine. The blades are circumferentially distributed on a rotor causing rotation of the internal shaft. The internal shaft is connected to the rotor and the air compressor, such that the turbine provides a rotational input to the air compressor to drive the compressor blades. This powers the compressor during operation and subsequently drives the turbine. As the combustion gas flows downstream through the turbine stages, energy is extracted therefrom and the pressure of the combustion gas is reduced.

[0009] In operation, air is pressurized in a compressor and mixed with fuel in a combustor for generating hot combustion gases which flow downstream through turbine stages. These turbine stages extract energy from the combustion gases. A high pressure turbine first receives the hot combustion gases from the combustor and includes a stator nozzle assembly directing the combustion gases downstream through a row of high pressure turbine rotor blades extending radially outwardly from a supporting rotor disk. The stator nozzles turn the hot combustion gas in a manner to maximize extraction at the adjacent downstream turbine blades. In a two stage turbine, a second stage stator nozzle assembly is positioned downstream of the first stage blades followed in turn by a row of second stage rotor blades extending radially outwardly from a second supporting rotor disk. The turbine converts the combustion gas energy to mechanical energy.

[0010] During such operation of the gas turbine engine, it is desirable to minimize seal leakages or leakage between moving rotor components and the opposed stator component radially outward of the rotor component. Limiting clearance in these areas improves performance of the engine. During operation, the large differences in the thermal and mechanical growth of the rotating and stator components make it difficult to match rotor/stator deflections. When relative deflections increase, rotor/stator clearances increase allowing leakage or increase parasitic flow. Transient mismatch also results in clearance opening during takeoff acceleration. Reducing engine air flow leakage results in improved fuel efficiency and reduced fuel burn.

[0011] It would be desirable to overcome these and other deficiencies in order to reduce clearances between rotor and stator components as well as lower exhaust gas temperature overshoot.

SUMMARY

[0012] According to some embodiments, a passive clearance control limits thermal expansion between stator components relative to rotor components. A low coefficient of thermal expansion passive clearance control ring may be located on or adjacent to stationary components which thermally expand during engine operation. The control ring is formed of material with low coefficient of thermal expansion such as CMCs (Ceramic Matrix Composites) and therefore inhibits or restrains expansion of the adjacent stator components as temperatures increase. Limiting expansion of the stator component reduces rotor/stator clearances and limits parasitic leakage of fluid along the flowpath through the engine core.

[0013] A clearance control ring assembly comprises a stator component disposed opposite a rotor component within a gas turbine engine, a clearance control ring being formed of a single structure and extending circumferentially disposed radially outward of at least a portion of said stator component, the clearance control ring having a coefficient of thermal expansion which is lower than the at least a portion of the stator component and, the said at least a portion of the stator component is limited from thermal expansion and limited from growth from the rotor component.

[0014] A clearance control ring assembly comprises a compressor discharge pressure seal stator, a honeycomb abradable opposite a compressor discharge pressure seal rotor, a ceramic matrix composite control ring extending circumferentially about the compressor discharge pressure seal stator, the ceramic matrix composite control ring being a one-piece structure and, the ceramic matrix composite control ring limiting thermal expansion of the compressor discharge pressure seal stator and maintaining tight seal clearance between the seal stator and the seal rotor.

[0015] All of the above outlined features are to be understood as exemplary only and many more features and objectives of the passive clearance control in a gas turbine engine may be gleaned from the disclosure herein. Therefore, no limiting interpretation of this summary is to be understood without further reading of the entire specification, claims, and drawings included herewith.

BRIEF DESCRIPTION OF THE ILLUSTRATIONS

- [0016] The above-mentioned and other features and advantages of these exemplary embodiments, and the manner of attaining them, will become more apparent and the clearance control feature will be better understood by reference to the following description of embodiments taken in conjunction with the accompanying drawings, wherein:
- [0017] FIG. 1 is a side section view of an exemplary gas turbine engine;
- [0018] FIG. 2 is a side section view of a control ring near an exemplary interface at the compressor discharge pressure seal;
- [0019] FIG. 3 is an exemplary control ring arrangement within a compressor;
- [0020] FIG. 4 is a further exemplary embodiment of control rings;
- [0021] FIG. 5 is a still further exemplary embodiment of a control ring;
- [0022] FIG. 6 is a further embodiment with a retaining shoulder arrangement;
- [0023] FIG. 7 is a further embodiment having a ring at radially outward position of case flanges;
- [0024] FIG. 8 is a further embodiment having a plurality of control wraps;
- [0025] FIG. 9 is a control ring embodiment having an angled surface for engagement with the casing;
- [0026] FIG. 10 is a control ring with flanges to capture vane platforms and/or case structures;
- [0027] FIG. 11 is an embodiment of a movable control ring which closes a gap as an adjacent case structure expands;
- [0028] FIG. 12 is an alternate embodiment of FIG. 11;
- [0029] FIG. 13 is a control ring which serves as a blade shroud ring;
- [0030] FIG. 14 is an alternate embodiment of a control ring serving as a blade shroud ring;
- [0031] FIG. 15 is a further alternate embodiment of a control ring and integral blade shroud ring;
- [0032] FIG. 16 is side section view of an alternate embodiment having a biasing mechanism;
- [0033] FIG. 17 is a partial isometric view of the embodiment of FIG. 16;
- [0034] FIG. 18 is a side section view of a further alternate embodiment having multiple biasing mechanisms;
- [0035] FIG. 19 is an isometric view of one embodiment of a biasing mechanism of FIG. 18;
- [0036] FIG. 20 is an isometric view of an alternate biasing mechanism of FIG. 19; and,

[0037] FIG. 21 is an isometric view of the embodiment of FIG. 18 with schematic representations of the biasing mechanisms of FIGS. 19 and 20.

DETAILED DESCRIPTION

[0038] Reference now will be made in detail to embodiments provided, one or more examples of which are illustrated in the drawings. Each example is provided by way of explanation, not limitation of the disclosed embodiments. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present embodiments without departing from the scope or spirit of the disclosure. For instance, features illustrated or described as part of one embodiment can be used with another embodiment to still yield further embodiments. Thus it is intended that the present invention covers such modifications and variations as come within the scope of the appended claims and their equivalents.

[0039] Referring to Figures 1-21, various embodiments of a gas turbine engine are depicted having a passive clearance control ring. The control ring inhibits thermal growth of itself and adjacent stator hardware to preclude increased spacing between a stator component and a rotor component. As used herein the term stator component refers to a stationary structure and the term rotor component refers to a rotating component rotating relative to the stator component.

[0040] As used herein, the terms “axial” or “axially” refer to a dimension along a longitudinal axis of an engine. The term “forward” used in conjunction with “axial” or “axially” refers to moving in a direction toward the engine inlet, or a component being relatively closer to the engine inlet as compared to another component. The term “aft” used in conjunction with “axial” or “axially” refers to moving in a direction toward the engine nozzle, or a component being relatively closer to the engine nozzle as compared to another component.

[0041] As used herein, the terms “radial” or “radially” refer to a dimension extending between a center longitudinal axis of the engine and an outer engine circumference. The use of the terms “proximal” or “proximally,” either by themselves or in conjunction with the terms “radial” or “radially,” refers to moving in a direction toward the center longitudinal axis, or a component being relatively closer to the center longitudinal axis as compared to another component. The use of the terms “distal” or “distally,” either by themselves or in conjunction with the terms “radial” or “radially,” refers to moving in a

direction toward the outer engine circumference, or a component being relatively closer to the outer engine circumference as compared to another component. As used herein, the terms “lateral” or “laterally” refer to a dimension that is perpendicular to both the axial and radial dimensions. The term “low coefficient of thermal expansion material” refers to a material which grows relatively less as the temperature increases.

[0042] All directional references (e.g., radial, axial, proximal, distal, upper, lower, upward, downward, left, right, lateral, front, back, top, bottom, above, below, vertical, horizontal, clockwise, counterclockwise) are only used for identification purposes to aid the reader’s understanding of the present invention, and do not create limitations, particularly as to the position, orientation, or use of the invention. Connection references (e.g., attached, coupled, connected, and joined) are to be construed broadly and may include intermediate members between a collection of elements and relative movement between elements unless otherwise indicated. As such, connection references do not necessarily infer that two elements are directly connected and in fixed relation to each other. The exemplary drawings are for purposes of illustration only and the dimensions, positions, order and relative sizes reflected in the drawings attached hereto may vary.

[0043] Referring initially to FIG. 1, a schematic side section view of a gas turbine engine 10 is shown. The function of the gas turbine engine is to extract energy from high pressure and temperature combustion gases and convert the energy into mechanical energy for work. The gas turbine engine 10 has an engine inlet end 12 wherein air enters the core or propulsor 13 which is defined generally by a compressor 14, a combustor 16 and a multi-stage high pressure turbine 20. Collectively, the propulsor 13 provides thrust or power during operation. The gas turbine engine 10 may be used for aviation, power generation, industrial, marine or the like.

[0044] In operation, air enters through the air inlet end 12 of the engine 10 and moves through at least one stage of compression where the air pressure is increased and directed to the combustor 16. The compressed air is mixed with fuel and burned providing the hot combustion gas which exits the combustor 16 toward the high pressure turbine 20. At the high pressure turbine 20, energy is extracted from the hot combustion gas causing rotation of turbine blades which in turn cause rotation of the shaft 24 about engine axis 26. The shaft 24 passes toward the front of the engine to continue rotation of the one or more compressor stages 14, a turbofan 18 or inlet fan blades, depending on the turbine design.

The turbofan 18 is connected by the shaft 28 to a low pressure turbine 21 and creates thrust for the turbine engine 10. A low pressure turbine 21 may also be utilized to extract further energy and power additional compressor stages.

[0045] Referring now to FIG. 2, a side section view of the interface between the compressor 14 and the combustor 16 is depicted. Downstream of the combustor 16, a first stage of the high pressure turbine 20 is shown as well. In the depicted embodiment, a shaft 24 extends from the turbine 20 to the compressor 14 such that rotation of the turbine 20 causes rotation of the high pressure rotor blades within the compressor 14. Along the shaft 24 is a compressor discharge pressure seal 30. The seal 30 includes a stator component 32 and a rotor component 34. The rotor component 34 of the instant embodiment is depicted as a labyrinth seal 35 having a plurality of seal teeth 36 extending generally radially outward. The stator component 32 is disposed opposite the rotor component 34 and according to the instant embodiment, comprises at least an abradable surface, such as a honeycomb material 38 and a support arm 39. The honeycomb structure 38 is disposed upon a support arm 39. Since this picture is shown in section, one skilled in the art will understand that the support arm 39 extends circumferentially about an engine center line 26 (FIG. 1). Likewise, the abradable material 38 also extends circumferentially. The circumferentially extending abradable material 38 may be formed in multiple circumferential segments or a unitary structure.

[0046] Disposed radially outward of the seal support 39 is a ceramic matrix composite control ring 40. The ceramic matrix composite control ring 40 provides a low alpha material circumferentially extending about the stator component of the seal 30. According to some embodiments, the control ring may be formed of ceramic matrix composite (CMCs). However, other materials may be utilized such as IN 909. The control ring 40 typically has a lower coefficient of thermal expansion than other materials about which the control ring 40 is disposed. Therefore, the control ring 40 limits thermal movement of the stator component or components 32. The clearance control ring 40 extends 360 degrees along an outer surface of the seal support arm 39. During normal operation, the seal support arm 39 and/or honeycomb material 38 expand radially outward. The control ring 40 limits thermal growth of the stator component 32 in the radially outward direction. This arrangement provides for a tighter clearance between the rotor component 34 and the stator component 32 at operating temperature and condition where thermal expansion normally increases clearance between rotor components 34 and stator components 32.

[0047] Referring now to FIG. 3, a side section view of a schematic high pressure compressor 14 is depicted in the instant embodiment. The control ring embodiment may be used alternatively to limit clearance between a rotating compressor blade 135 and an outer wall of the compressor to limit air leakage. An exemplary compressor 14 includes an aft case 146 associated with a pair of rotor and stator components 134, 132 which may be at any of various stages of the compressor 14. The exemplary aft case 146 is formed of a first portion 146 and a second portion 145. The first aft case 146 includes a blade shroud ring 149 which defines at least a portion of the stator component 132 and is opposite the compressor blade 135. The blade shroud ring 149 defines an outer wall of the airflow path within the compressor 14. Beneath the aft case 146 is a vane 133 and platforms 131. The vane 133 turns air in a desired manner to increase energy extraction at the adjacent downstream blade 135. The upper platform 131 is received in part by portions of the aft case 146. For example, the platform 131 may include a flange, rib or finger at axial ends to be received by grooves of the adjacent aft case members. Alternatively, the platform may have a groove which receives a flange or the like from the case 146. Other retaining embodiments may be utilized and these descriptions are not limiting.

[0048] The stator component 132 is depicted opposite a rotor component 134. As described in this embodiment, the stator component 132 is a blade ring 149 which is formed by the aft case 146. Opposite the stator component 132 is the rotor component 134, which according to the instant embodiment, is defined by the compressor blade 135. In order to inhibit thermal growth in a radially outward direction and limit clearance increase between the blade 135 and the blade shroud ring 149 a control ring 140 is disposed about the blade ring portion of the aft case 146. Positioned radially outward of the stator component 132 is a ceramic matrix component control ring 140. The control ring 140 may be of a unitary or one piece circumferential structure and may have various cross-sectional shapes. For example, according to the embodiment depicted, the cross-section of the structure is generally rectangular and may have curved or sharp corners. However, this is merely exemplary as will be seen, various shapes may be utilized. As with previous embodiments, the ceramic matrix composite control ring 140 limits the growth of the stator component 132 relative to the rotor component 134 at operating temperature which limits leakage of air flow around the rotor. In normal operation, the blade shroud ring 149 may generally grow outwardly away from the blade 135 due to thermal conditions. The instant control ring 140 inhibits such growth beyond desired amount thus

limiting increased clearance. The control ring 140 is surrounded by an aft case 145 providing an upper support and the adjacent aft case 146 providing a lower support for the control ring 140. Above the control ring 140, the aft cases 145, 146 may be bolted together.

[0049] Referring now to FIG. 4, a side section schematic view of an alternate embodiment of the high pressure compressor 14 is depicted. In this embodiment, a rotor component 234 is again disposed opposite a stator component 232. The stator component 232 is defined by a mid-case member 247 which has a generally I-shaped cross-section and is connected to and disposed between the aft case members 245, 246. The mid-case member 247 extends circumferentially about the engine center line. The lower portion of the mid-case member 247 is spaced from the aft case members 245, 246 and defines a blade shroud ring 249. Beneath the blade shroud ring 249 is a blade 235 which rotates about the engine center line. As with the previous embodiment, a platform 131 is disposed beneath aft cases 245, 246. Within this space between the blade shroud ring 249 and the cases 245, 246 is at least one ceramic matrix composite control rings 240, 241. According to the instant embodiment, two rings 240, 241 are utilized – one on each side of the web of the mid-case member 247. These control rings 240, 241 extend circumferentially about the axis of the engine 10 and are formed of generally L-shaped structures to fit within the confined space between the mid-case 247, the aft cases 245, 246 and vane platforms engaging the mid-case member 247 and the aft cases 245, 246. These rings 240, 241 inhibit thermal growth in radial outward direction of the stator component 232 relative to the rotor component 234. Thus, the function of limiting separation between the stator and rotor components provides improved sealing of air flow in this region of the engine 10.

[0050] Referring now to FIG. 5, a further alternative embodiment is depicted wherein aft cases 345, 346 provide a space wherein a ceramic matrix composite control ring 340 is located. In this embodiment, the aft cases 345, 346 are similar to those shown in FIG. 3. However, in this embodiment, the control ring 340 is generally rectangular shaped with one corner partially removed. This allows for positioning of a vane platform 131. In this embodiment also, a lower side 341 of the control ring 340 is not parallel with the opposite long edge but instead extends at an angle to the central axis of the engine 10. The control ring 340 is again captured between the case 346 on a lower surface and the case 345 on an upper surface and a portion of the adjacent vane platform 131.

- [0051] Referring now to FIG. 6, an alternate embodiment of assembly FIG. 5 is depicted in side section view. The aft case 445 includes a retaining shoulder 449. The control ring 440 includes a projection 443 which engages the retaining shoulder 449 of the aft case 445. These structures may be reversed.
- [0052] A second difference in the embodiment of FIG. 6 than that of FIG. 5 is a gap 447 between the bottom surface of the control ring 440 and the upper surface of aft case 446, which is positioned below the control ring 440. The gap 447 is provided between the ring 440 and the base ring of the aft case 446. The gap is used to delay contact between the shroud and control ring until a specific engine cycle condition is reached. By setting this gap, and the point where contact occurs, deflections are tuned to meet minimum clearances across all operating conditions. Minimum attainable average clearances will result in maximum performance for a given mission.
- [0053] Referring to FIG. 7, an embodiment of the ceramic matrix control ring 540 is depicted disposed about an upper interface or flange 541 between aft cases 546 and 545. The gap 547 is provided between the control ring and the aft cases so that contact is delayed. When the aft cases 545, 546 are bolted together, the control ring 540 is captured therebetween and limits radially outward growth of the cases 545, 546, such that blade shroud ring 549 cannot expand, or expand beyond a desired amount, due to thermal expansion.
- [0054] Referring now to FIG. 8, an alternate embodiment is depicted wherein a plurality of ceramic matrix composite wraps 640 are circumferentially positioned about the radially outer edge of at least one flange of one or both of the aft cases 645, 646. The circumferential position of the wraps 640 inhibits thermal growth of the cases 645, 646. In turn this limits clearance between the rotor component 634 and the stator component 632 as previously described. The wraps 640 may include one or more wraps which may be formed of various cross-sectional shapes. The cross-sectional shapes may all be the same or may differ. In the instant embodiment, the wraps are circular in cross-section and are of the same shape.
- [0055] Referring now to FIG. 9, the aft cases 746, 745 include flanges extending radially relative to the engine axis and include a gap 747 therebetween wherein a rib structure 748 of a control ring 740 extends into. One of the flanges of the cases 745, 746 may be at a slight angle relative to the radial direction so that the control ring 740 is slightly wedged

within the gap between the flanges of the cases 746, 745. The control ring 740 also defines a blade shroud ring 749 defining structure to maintain blade tip clearance.

[0056] Referring now to FIG. 10, an alternate embodiment is shown with aft cases 845, 846. A control ring 840 is interlocked between the cases 846, 845 and receives flanges of adjacent veined platform hangers 851, 853. Again, with the instant embodiment, the control ring 840 defines the blade shroud ring 849 and therefore the blade tip clearance is limited from expanding during operating conditions.

[0057] Referring now to FIGS. 11 and 12, views are depicted of aft cases 945, 946 and 1045, 1046 having oppositely oriented control rings 940, 1040. The cases 946 and 1045 have angled surfaces 947, 1047 which engage correspondingly angled surfaces of control rings 940, 1040. As the cases grow with temperature rise in an axial direction, the control rings 940, 1040 slide downwardly to maintain or reduce the blade shroud ring to blade tip gap. Again, the desired function being to reduce parasitic air flow leakage. These embodiments also depict the control rings 940, 1040 defining the blade shroud ring opposite the rotor component.

[0058] Referring now to FIG. 13, aft cases 1146, 1145 are positioned wherein a control ring 1140 is captured between axially extending flanges of each of the cases 1145, 1146. The control ring 1140 defines the blade shroud ring 1149 inhibiting thermal growth and leakage of air due to thermal expansion.

[0059] Referring now to FIG. 14, an embodiment is depicted having aft cases 1245, 1246 wherein the aft case 1246 is formed of ceramic matrix composite. Accordingly, the aft case 1246 defines the blade shroud ring 1249 and the material inhibits growth as well as leakage between the rotor and stator components 1234, 1232.

[0060] Referring now to FIG. 15, an embodiment is depicted wherein the aft case 1346 has a flange 1347 formed of ceramic matrix composite. The adjacent blade shroud ring 1349 is formed of material with higher coefficient of thermal expansion and grows more than the flange 1347. In operation, the flange 1347 functions as a growth limiter for the blade shroud ring 1349. This assembly also limits increase in the blade tip gap at the blade shroud ring 1349 and inhibits leakage.

[0061] Since the low alpha materials grow less than the adjacent hardware, and the need for an initial gap to maximize effectiveness, a biasing mechanism may optionally be utilized to keep the control ring positively located (concentric with adjacent stator components) at

all times and conditions. The biasing force may be provided by various forms of springs in order to provide bias in the radial direction, axial direction or both. The biasing force maintains either or both of radial and axial constraint at shutdown, then deflects as the hardware requires. The spring also enables lower stresses in the CMC rings due to delayed engagement, which otherwise would prevent usage of low strength CMC rings for clearance control.

[0062] Referring now to FIG. 16 a CMC ring 1440 is depicted between aft cases 1445, 1446. A gap 1442 is located between the cases 1446, 1445. This gap 1442 allows for growth of the CMC ring 1440 during operation of the engine. Located within the gap 1442 adjacent the CMC ring 1440 is a biasing mechanism 1444. The biasing mechanism 1444 is a spring according to the instant embodiment and provides an axial force and a radial force through the L-shaped shape having first leg and second leg. Each leg biases in one of an axial direction and a radial direction. Each leg may have one or more projections 1447 to engage an adjacent structure and provide a force on the ring 1440. The spring 1444 has a normal position when the engine is in a cool condition to locate the ring 1440. The spring 1444 inhibits the CMC ring 1440 from freely floating within the gap 1442.

[0063] Referring now to FIG. 17, an isometric view of a portion of the structure 1444 is depicted. The biasing mechanism 1444 has first and second legs which are joined at an angle, for example about 90 degrees, however other shapes or angles may be utilized. Each of the legs includes a one or more projections 1447 which engage adjacent surfaces and may work to provide spring force in whole or in part with the legs of the mechanism 1444. The biasing mechanism 1444 is shown engaging the ring 1440 (FIG. 16) and may be a fully circumferential part or may be formed of segments which design a full circumferential structure or segments which define a partial circular shape.

[0064] As opposed to the embodiment of FIG. 16 wherein the CMC ring is disposed closer to the flowpath, a biasing mechanism may also be utilized in an embodiment wherein the CMC ring is disposed radially away from the flowpath. For example, referring again to FIG. 7, the CMC ring 540 is located between flanges radially spaced from the flowpath. A biasing mechanism 1444 may be seated between the flanges and the CMC ring 540 to positively position the ring 540 relative to the flanges of cases 546, 545.

[0065] Referring now to FIG. 18, a further embodiment is depicted with alternative biasing mechanisms. Disposed between cases 1546, 1545 is a CMC ring 1540, which includes at

least one biasing mechanism 1544. In the instant embodiment, the CMC ring 1540 is biased in both axial and radial directions. The biasing mechanism 1544 is shown in perspective view in FIG. 19 and provides force in a radial direction. The biasing mechanism 1544 is a clip-like structure which wraps around the CMC ring 1540, in the instant embodiment, by spreading the ends of the spring 1544. Referring briefly to the perspective view of FIG. 21, the expander spring 1544 is disposed within channels along the radial outer surface of the CMC ring 1540. In the instant embodiment, two springs 1544 are utilized to provide biasing force in the radial direction of the engine.

[0066] Referring now to FIGS. 18, 20 and 21, an additional biasing mechanism 1543 is depicted which provides a biasing force in the axial direction of the engine. As with biasing mechanism 1544, the biasing mechanism 1543 may take various forms. However, the instant embodiment utilizes a spring 1543 which is generally cylindrical in shape. The spring 1543 further has a plurality of curved leaves with peaks and valleys which engage one another and provide biasing force or compensating for thermal expansion. In this way, the biasing mechanism 1543 positively positions the CMC ring 1540 but allows for some expansion in the axial direction. Similarly, the mechanism 1544 positively positions the CMC ring 1540 in the radial direction but compensates for expansion of the ring 1540 and biasing the ring 1540 once the engine cools. One skilled in the art will realize that these embodiments may be used with any of the previously described embodiments in the instant specification and others that may not be shown. Further, the biasing mechanisms 1543, 1544 may also function in radial, axial or other directions if so oriented.

[0067] While multiple inventive embodiments have been described and illustrated herein, those of ordinary skill in the art will readily envision a variety of other means and/or structures for performing the function and/or obtaining the results and/or one or more of the advantages described herein, and each of such variations and/or modifications is deemed to be within the scope of the invention of embodiments described herein. More generally, those skilled in the art will readily appreciate that all parameters, dimensions, materials, and configurations described herein are meant to be exemplary and that the actual parameters, dimensions, materials, and/or configurations will depend upon the specific application or applications for which the inventive teachings is/are used. Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, many equivalents to the specific inventive embodiments described

herein. It is, therefore, to be understood that the foregoing embodiments are presented by way of example only and that, within the scope of the appended claims and equivalents thereto, inventive embodiments may be practiced otherwise than as specifically described and claimed. Inventive embodiments of the present disclosure are directed to each individual feature, system, article, material, kit, and/or method described herein. In addition, any combination of two or more such features, systems, articles, materials, kits, and/or methods, if such features, systems, articles, materials, kits, and/or methods are not mutually inconsistent, is included within the inventive scope of the present disclosure.

[0068] Examples are used to disclose the embodiments, including the best mode, and also to enable any person skilled in the art to practice the apparatus and/or method, including making and using any devices or systems and performing any incorporated methods. These examples are not intended to be exhaustive or to limit the disclosure to the precise steps and/or forms disclosed, and many modifications and variations are possible in light of the above teaching. Features described herein may be combined in any combination. Steps of a method described herein may be performed in any sequence that is physically possible.

[0069] All definitions, as defined and used herein, should be understood to control over dictionary definitions, definitions in documents incorporated by reference, and/or ordinary meanings of the defined terms. The indefinite articles “a” and “an,” as used herein in the specification and in the claims, unless clearly indicated to the contrary, should be understood to mean “at least one.” The phrase “and/or,” as used herein in the specification and in the claims, should be understood to mean “either or both” of the elements so conjoined, i.e., elements that are conjunctively present in some cases and disjunctively present in other cases.

[0070] It should also be understood that, unless clearly indicated to the contrary, in any methods claimed herein that include more than one step or act, the order of the steps or acts of the method is not necessarily limited to the order in which the steps or acts of the method are recited.

[0071] In the claims, as well as in the specification above, all transitional phrases such as “comprising,” “including,” “carrying,” “having,” “containing,” “involving,” “holding,” “composed of,” and the like are to be understood to be open-ended, i.e., to mean including but not limited to. Only the transitional phrases “consisting of” and “consisting

essentially of' shall be closed or semi-closed transitional phrases, respectively, as set forth in the United States Patent Office Manual of Patent Examining Procedures, Section 2111.03.

[0072] What is claimed is:

CLAIMS

1. A clearance control ring assembly, comprising:
 - a stator component 32 disposed opposite a rotor component 34 within a gas turbine engine 10;
 - a clearance control ring 40 being formed of a single structure and extending circumferentially disposed radially outward of at least a portion of said stator component;
 - said clearance control ring having a coefficient of thermal expansion which is lower than said at least a portion of said stator component; and,
 - wherein said at least a portion of said stator component is limited from thermal expansion and limited from growth from said rotor component.
2. The clearance control ring assembly of Claim 1 wherein said clearance control ring is positioned on a compressor discharge pressure seal 30.
3. The clearance control ring assembly of Claim 2, said stator component including an abradable material 38.
4. The clearance control ring assembly of Claim 3, said rotor component including a labyrinth seal 35 rotating adjacent said abradable material.
5. The clearance control ring assembly of Claim 1, said clearance control ring disposed in said compressor.
6. The clearance control ring assembly of Claim 5, said stator component including a blade ring 149.
7. The clearance control ring assembly of Claim 6, said clearance control ring disposed outwardly and circumferentially about said blade ring.
8. The clearance control ring assembly of Claim 7, said clearance control ring captured between a first aft case 145 and a second aft case 146.
9. The clearance control ring assembly of Claim 1 further comprising a mid-case ring 247 disposed between aft case structures 246, 245.
10. The clearance control ring assembly of Claim 9 further wherein said clearance control ring is a first ring 240 and a second ring 241 separated by said mid-case ring and between said aft cases and a blade ring 249 of said mid-case ring.
11. The clearance control ring assembly of Claim 8, at least one surface 341 of said control ring being angled relative to said engine axis.
12. The clearance control ring assembly of Claim 8 further comprising one of a projection 443 and a retaining shoulder 449 on one of said first and second aft case and the other

of said projection and said returning shoulder on said control ring, wherein said projection engages said retaining shoulder.

13. The clearance control ring assembly of Claim 1 further comprising a first case and a second case, said first case and said second case each having a flange 541.
14. The clearance control ring assembly of Claim 13, said control ring disposed at at least one of said flanges.
15. The clearance control ring assembly of Claim 13 further comprising a plurality of control wraps 640 extending about said at least one flange.
16. The clearance control ring assembly of Claim 13 further comprising a gap 547, 747 between said first flange and said second flange.
17. The clearance control ring assembly of Claim 16 further comprising a rib 748 extending into said gap.
18. The clearance control ring assembly of Claim 17 further comprising a flange extending from control ring and engaging adjacent vane platforms 131.
19. The clearance control ring assembly of Claim 8, wherein one of said first aft case and said second aft case has an angled engagement surface 947, 1047.
20. The clearance control ring assembly of Claim 19, said control ring having an angled engagement surface slidably engaging said angled engagement surface 1249 of said one of said first and second aft case.
21. The clearance control ring assembly of Claim 1 wherein said clearance control ring forms a blade ring 1349.
22. The clearance control ring assembly of Claim 1, said control ring forming a flange 1347, said flange engaging said blade ring.

- 1 23. A clearance control ring assembly, comprising:
2 a compressor discharge pressure seal stator 30;
3 a honeycomb abradable 38 opposite a compressor discharge pressure seal rotor 34;
4 a ceramic matrix composite control ring 40 extending circumferentially about said
5 compressor discharge pressure seal stator 32;
6 said ceramic matrix composite control ring being a one-piece structure; and,
7 said ceramic matrix composite control ring limiting thermal expansion of said
8 compressor discharge pressure seal stator and maintaining tight seal clearance between said seal
9 stator and said seal rotor.
24. The clearance control ring assembly of Claim 23 wherein said control ring is disposed on a labyrinth stator seal.
25. The clearance control ring assembly of Claim 23 further comprising an engine casing ring.
26. The clearance control ring assembly of Claim 25 further comprising said ceramic matrix composite control ring disposed adjacent said engine casing.
27. The clearance control ring assembly of Claim 26, said ceramic matrix composite control ring disposed adjacent a radially inner most wall of said engine casing defining a flowpath.
28. The clearance control ring assembly of Claim 27 further comprising a spring 1444 disposed between said ceramic matrix composite control ring and said inner most wall.
29. The clearance control ring assembly of Claim 27, said ceramic matrix composite control ring controlling clearance between said engine casing and a turbine blade 20.
30. The clearance control ring assembly of Claim 26, wherein said ceramic matrix composite control ring is disposed within a flowpath.
31. The clearance control ring assembly of Claim 26, said ceramic matrix composite control ring is disposed at a radially outer end of said engine casing ring.
32. The clearance control ring assembly of Claim 26 further comprising at least one spring 1543, 1540 on said CMC control ring.
33. The clearance control ring assembly of Claim 32, said at least one spring 1544 being on said radially outer surface.
34. The clearance control ring assembly of Claim 33, said at least one spring being a radial spring.
35. The clearance control ring assembly of Claim 32 further comprising said at least one spring acting in an axial direction.

36. The clearance control ring assembly of Claim 35, said at least one spring being an axial spring 1543.

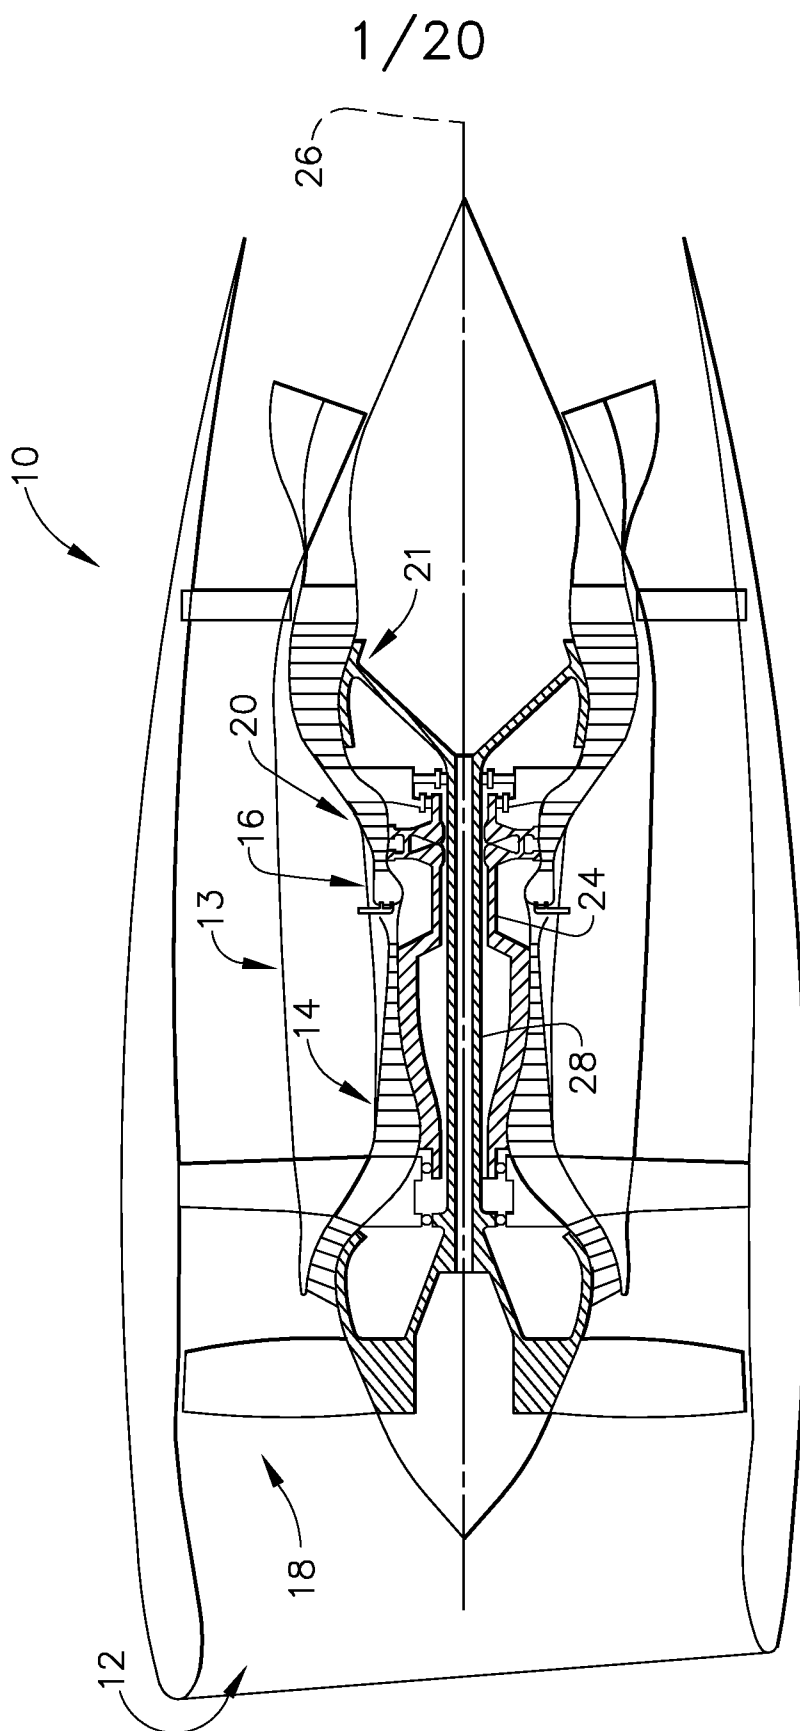


FIG. 1

2/20

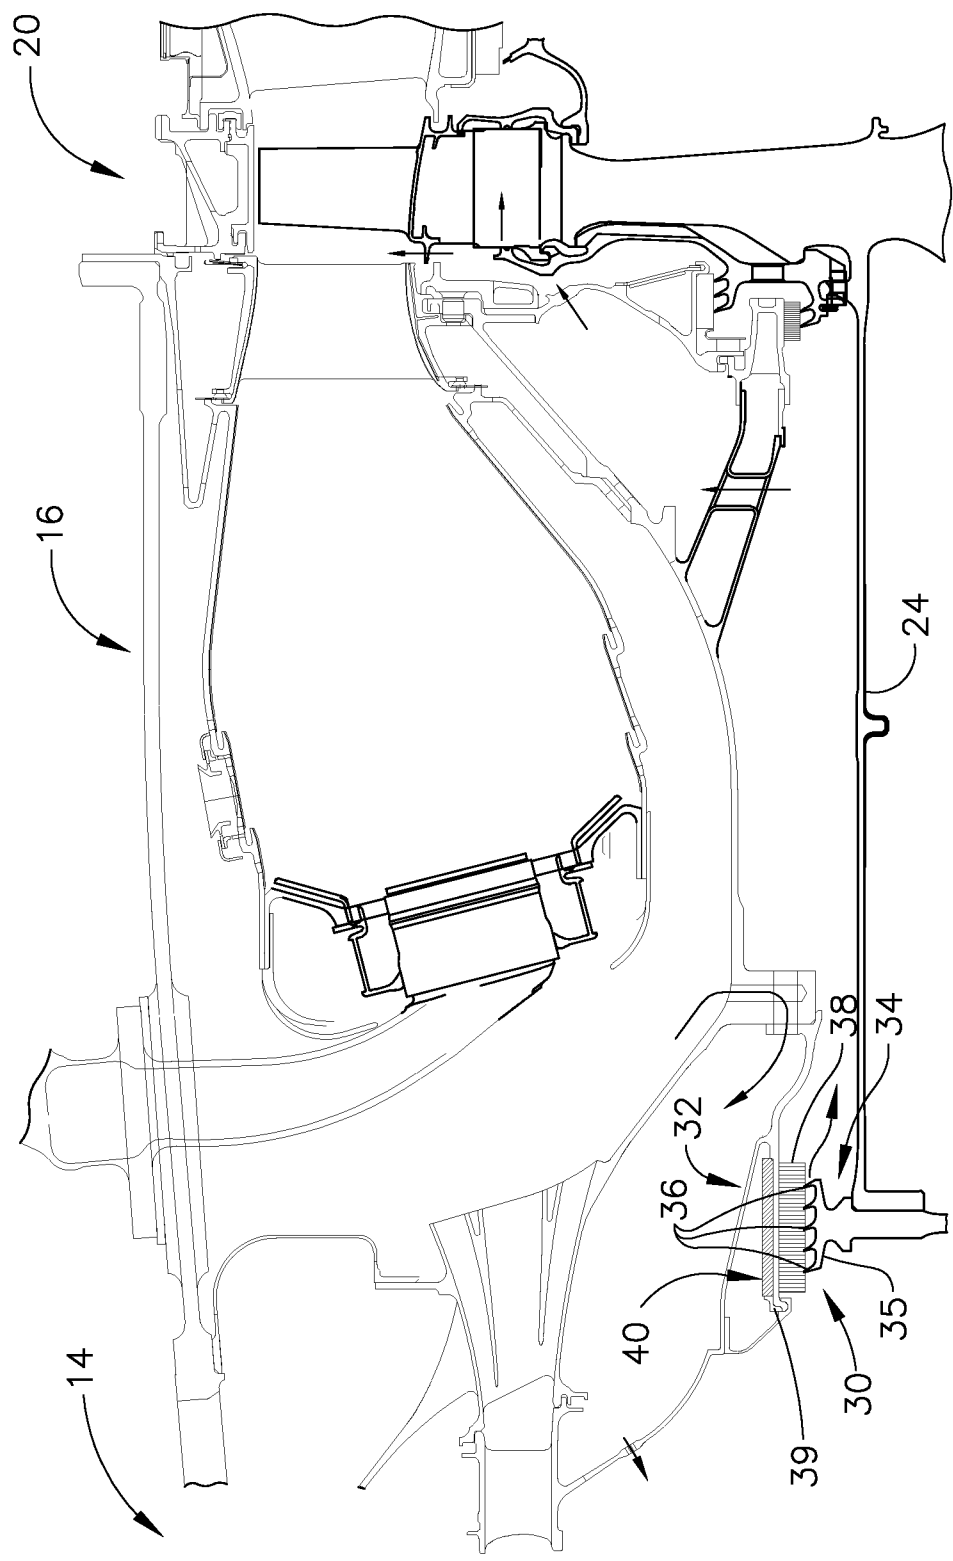


FIG. 2

3/20

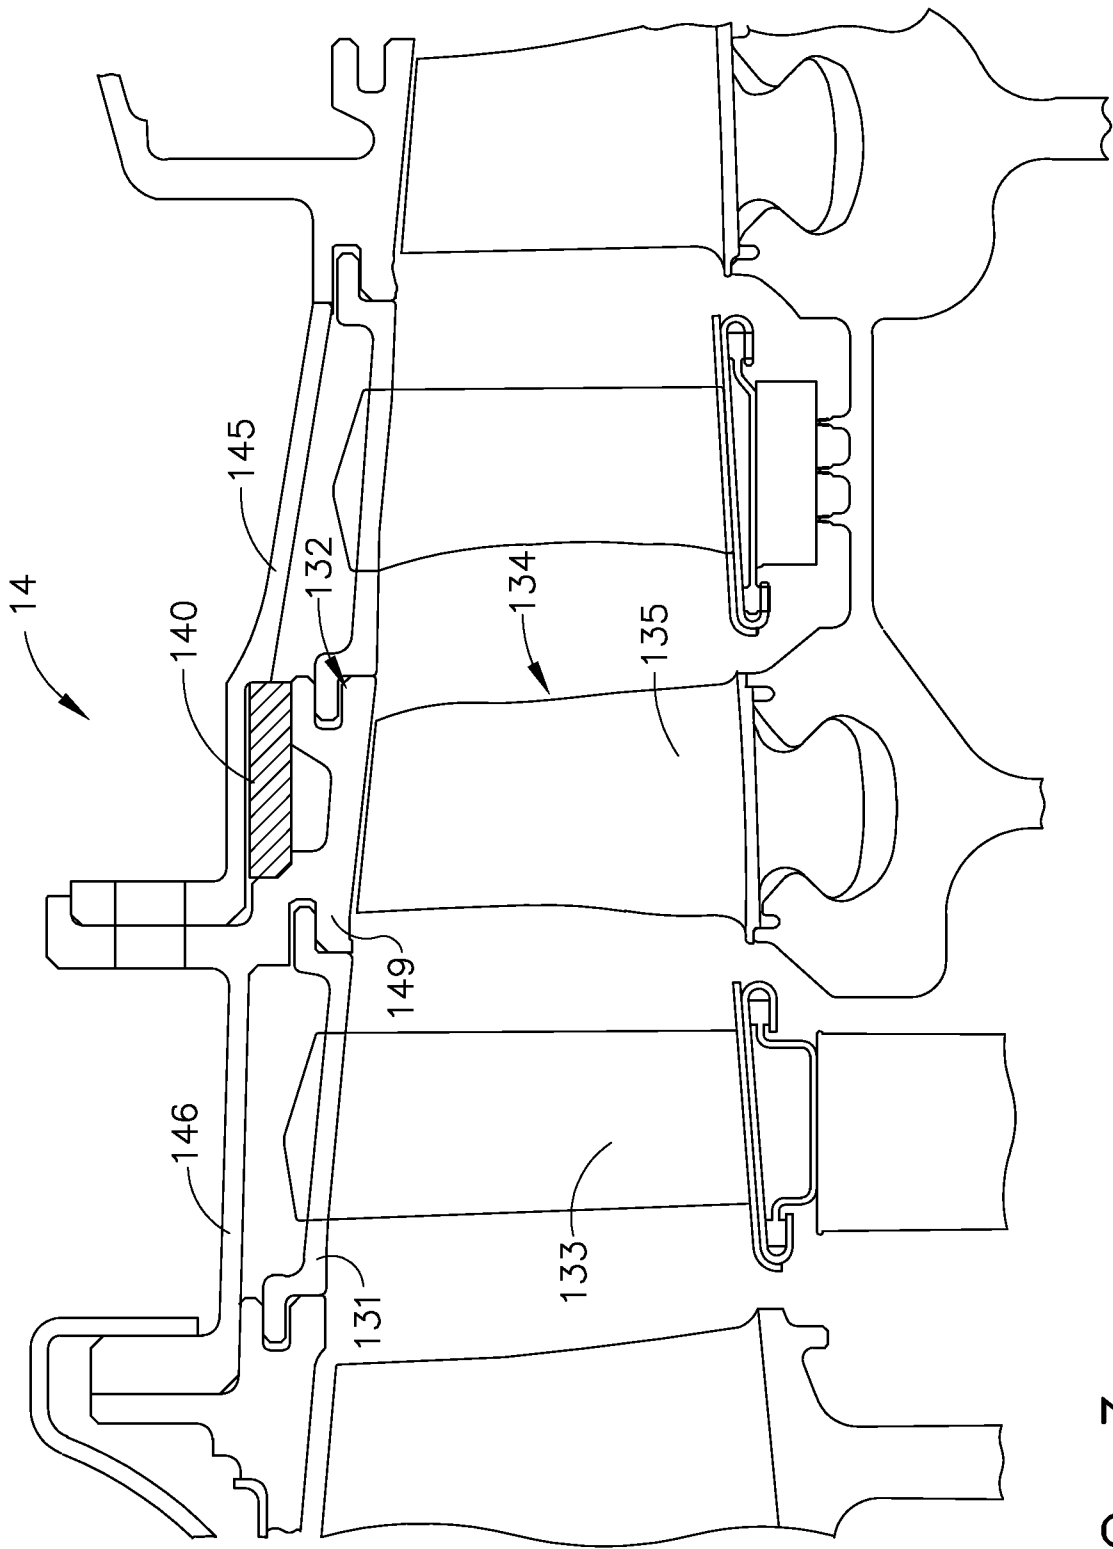


FIG. 3

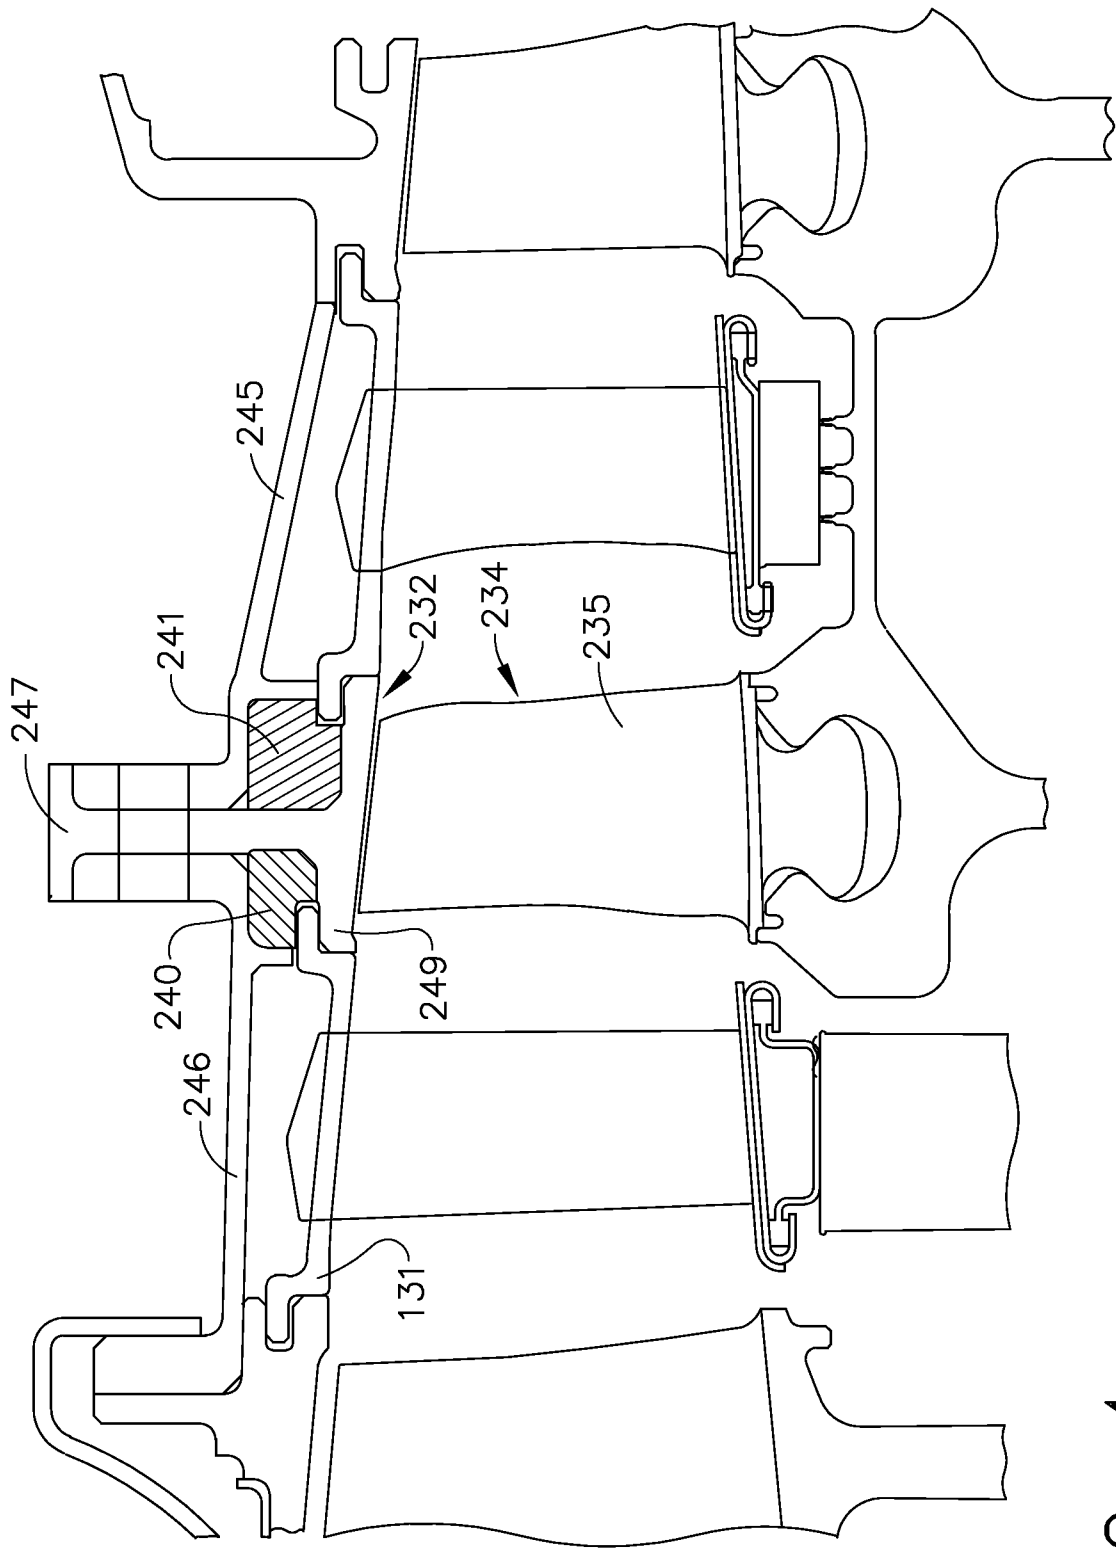


FIG. 4

5/20

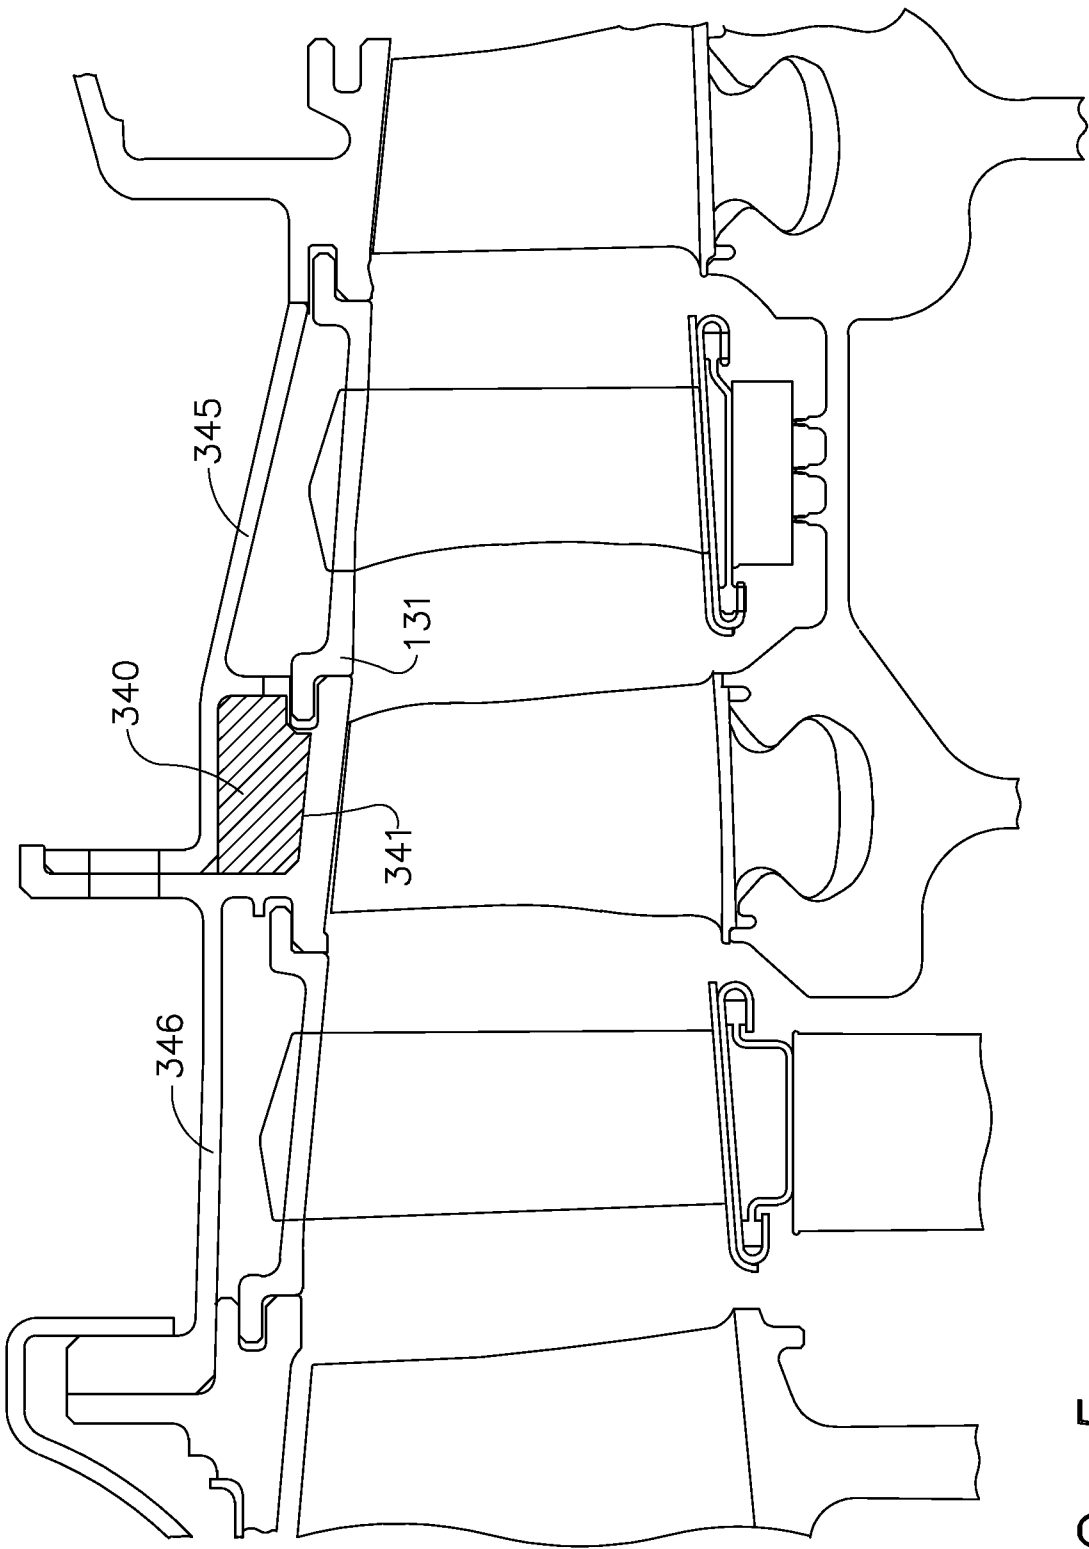


FIG. 5

6/20

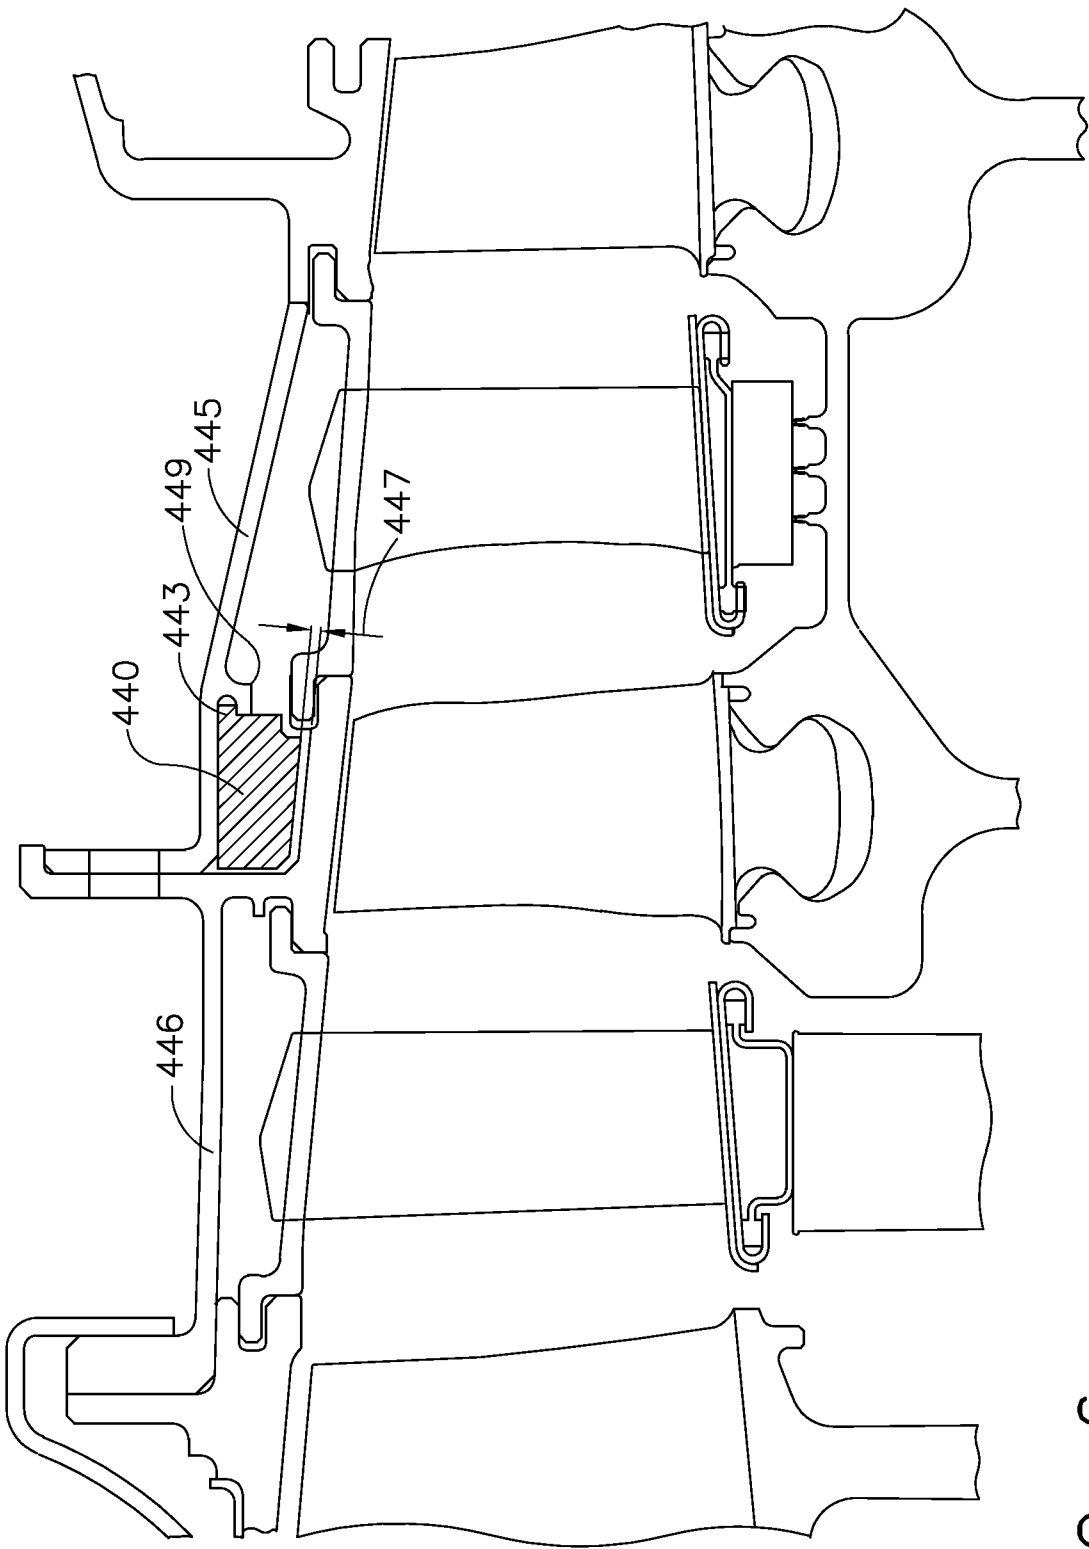


FIG. 6

7/20

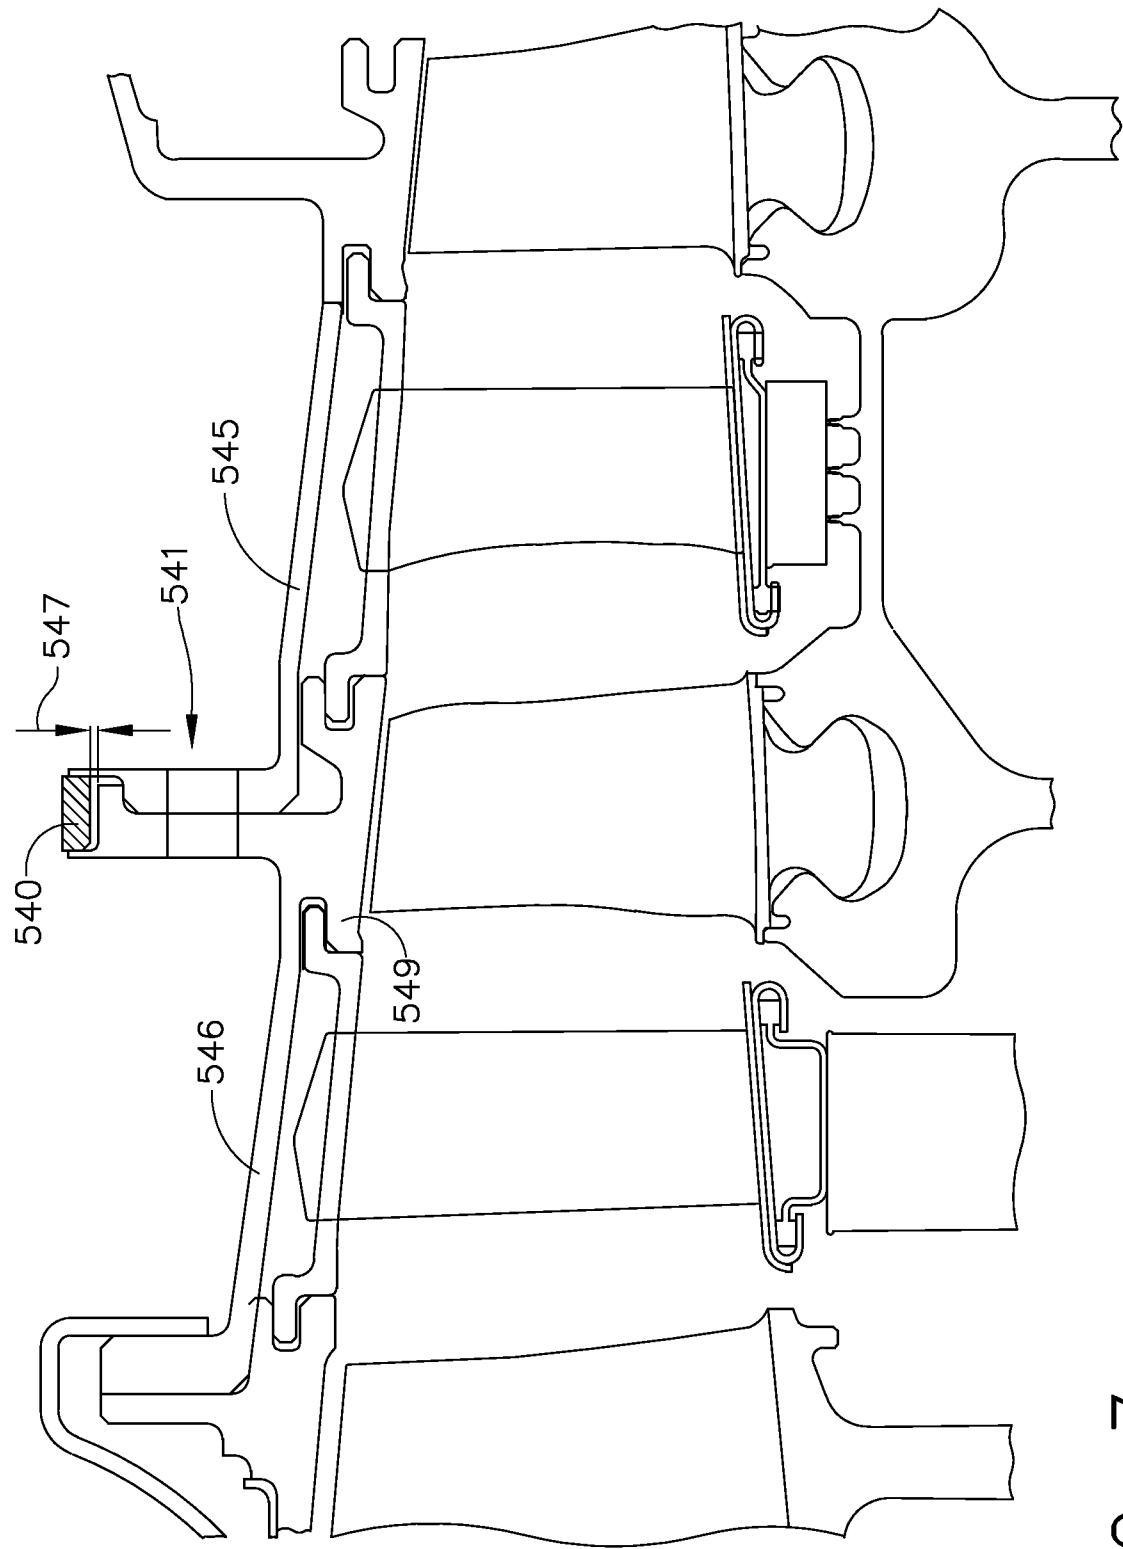


FIG. 7

8/20

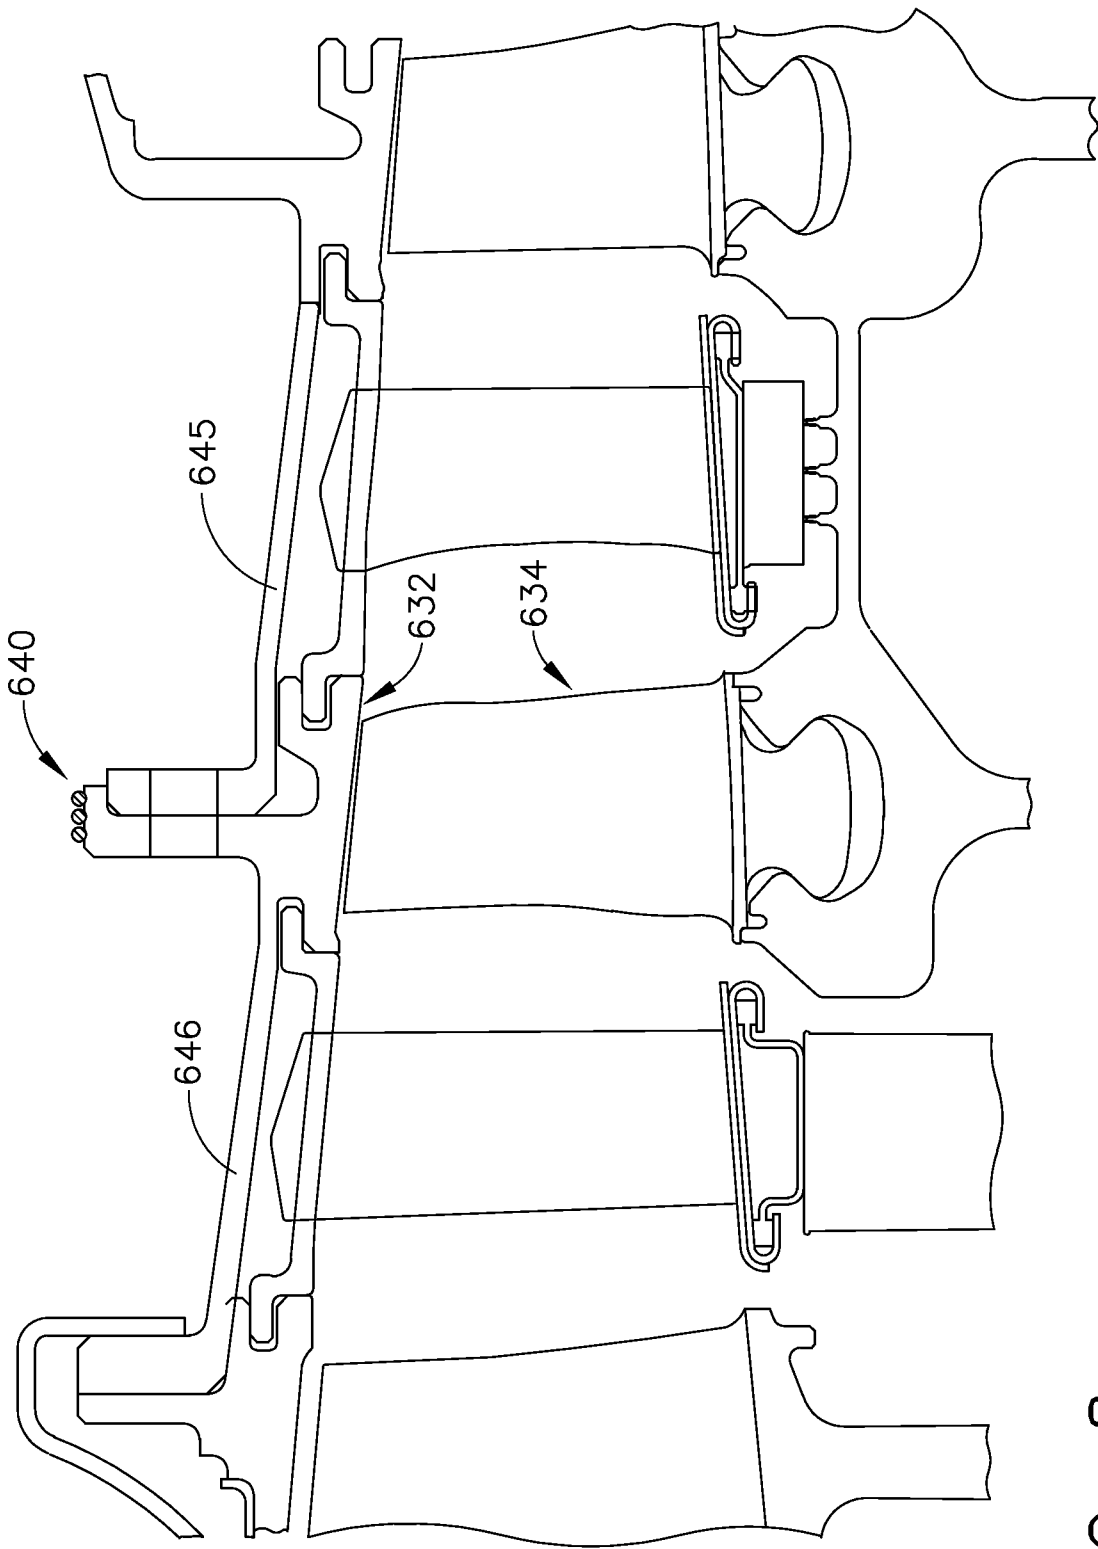


FIG. 8

9/20

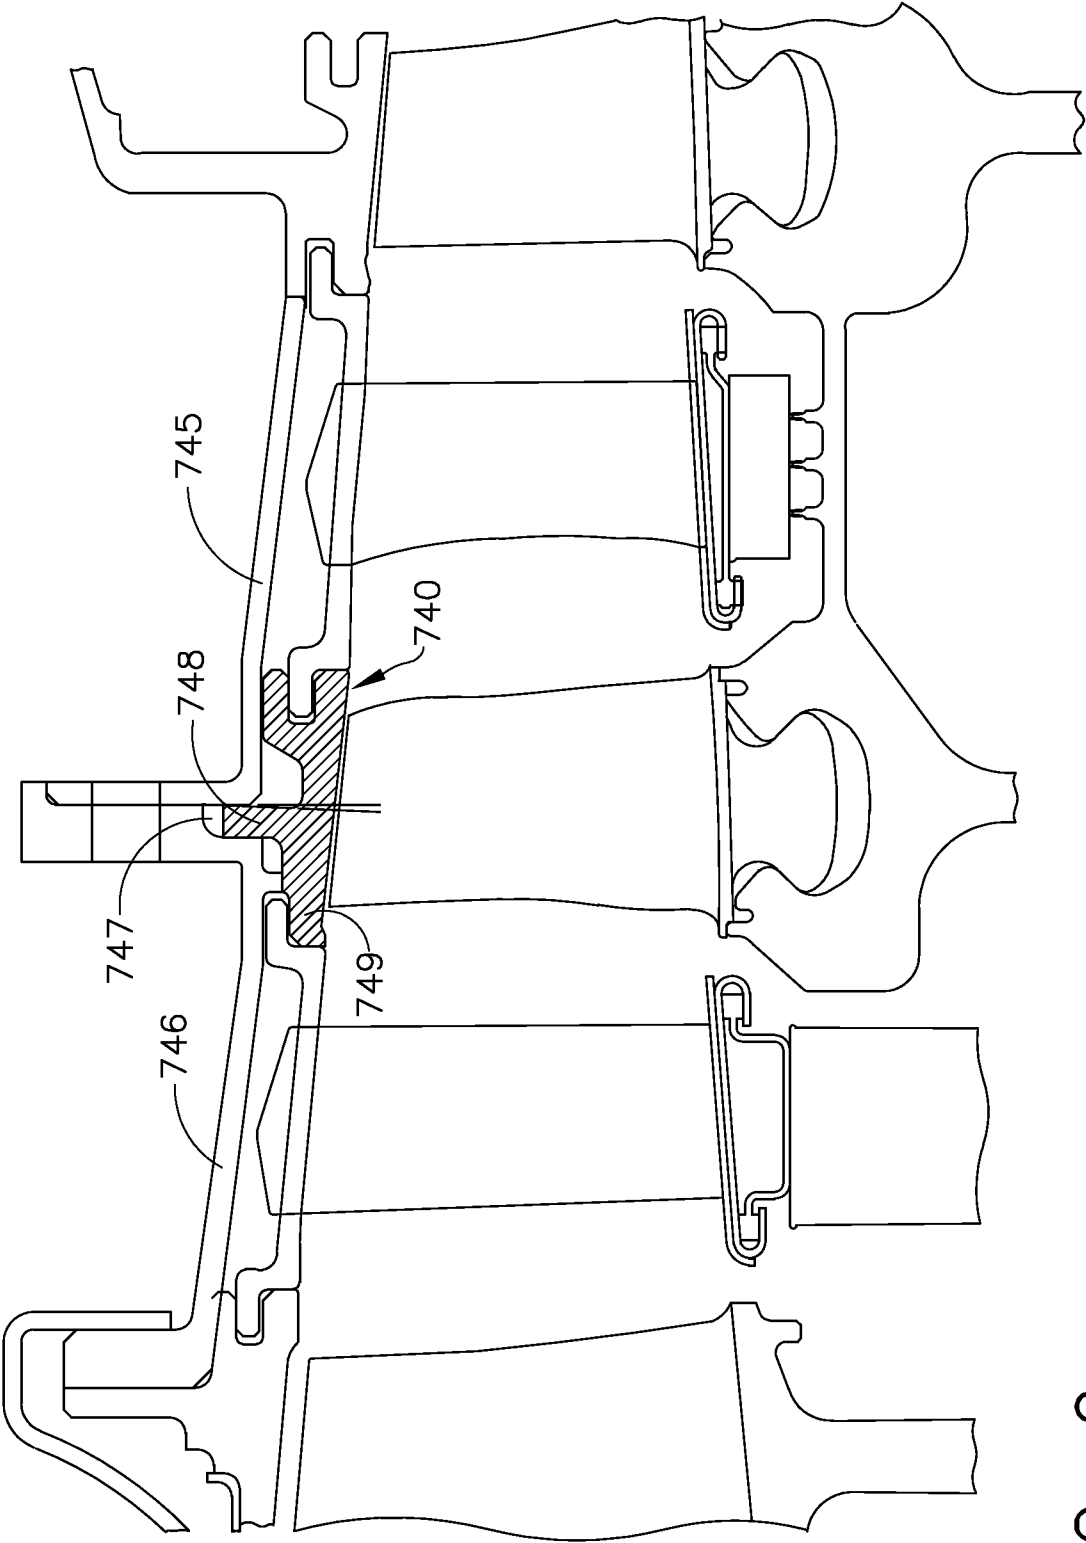


FIG. 9

10/20

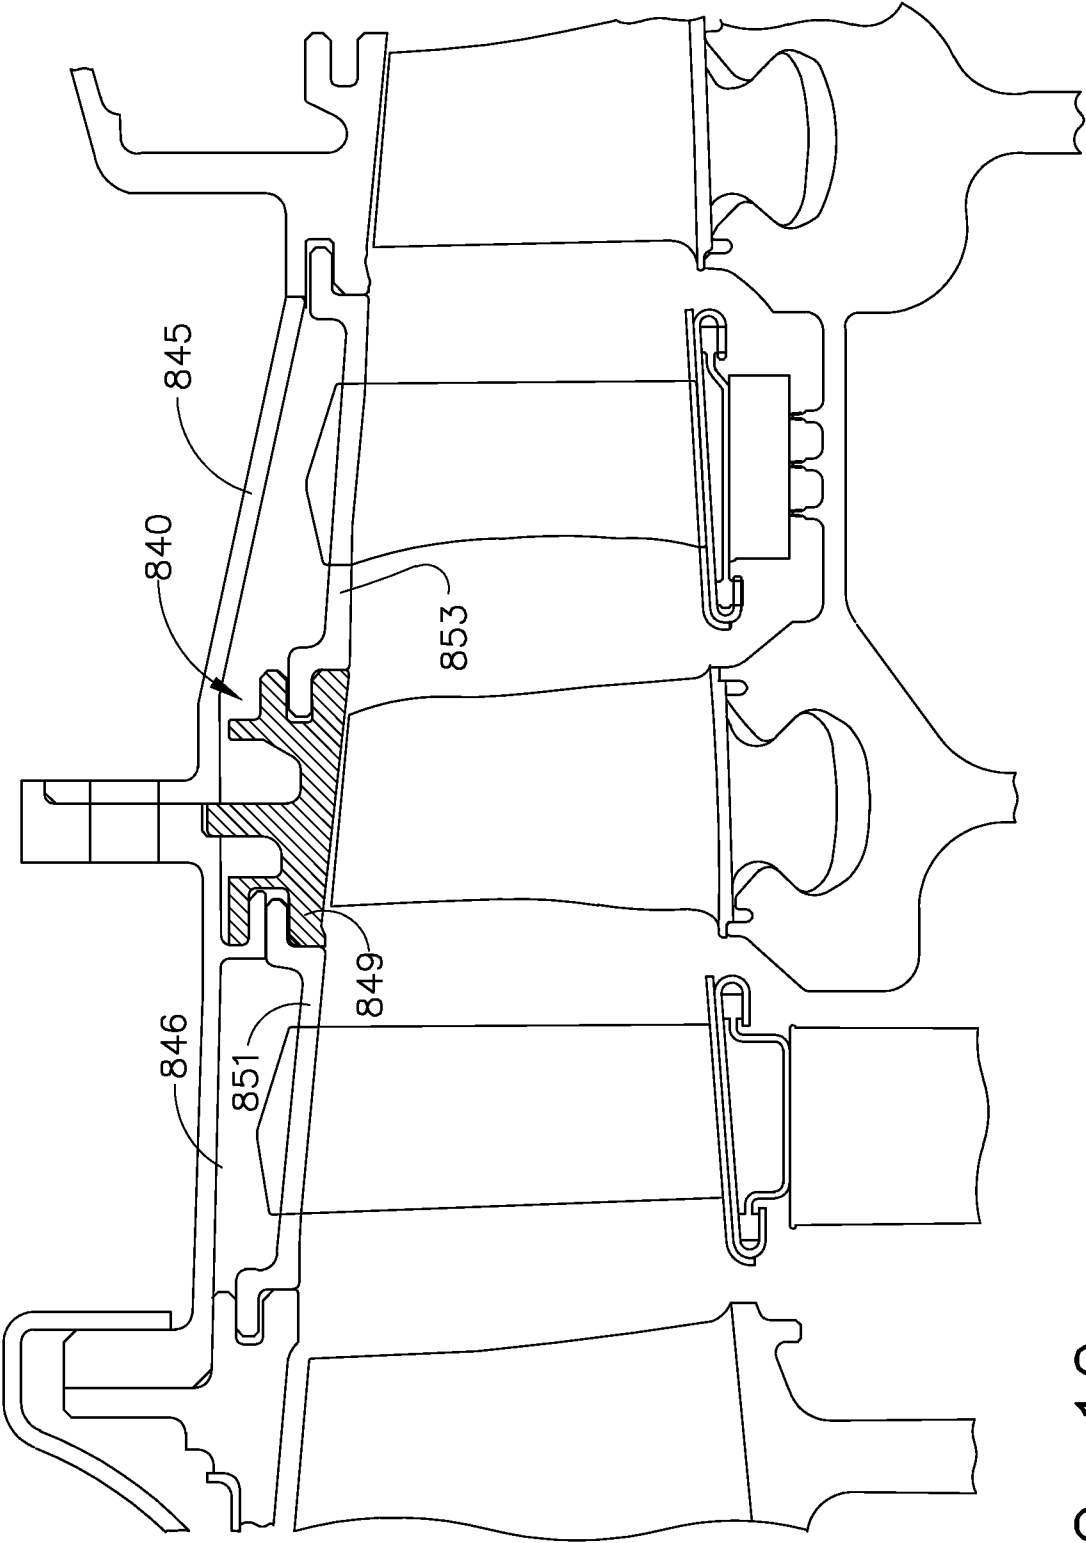


FIG. 10

11/20

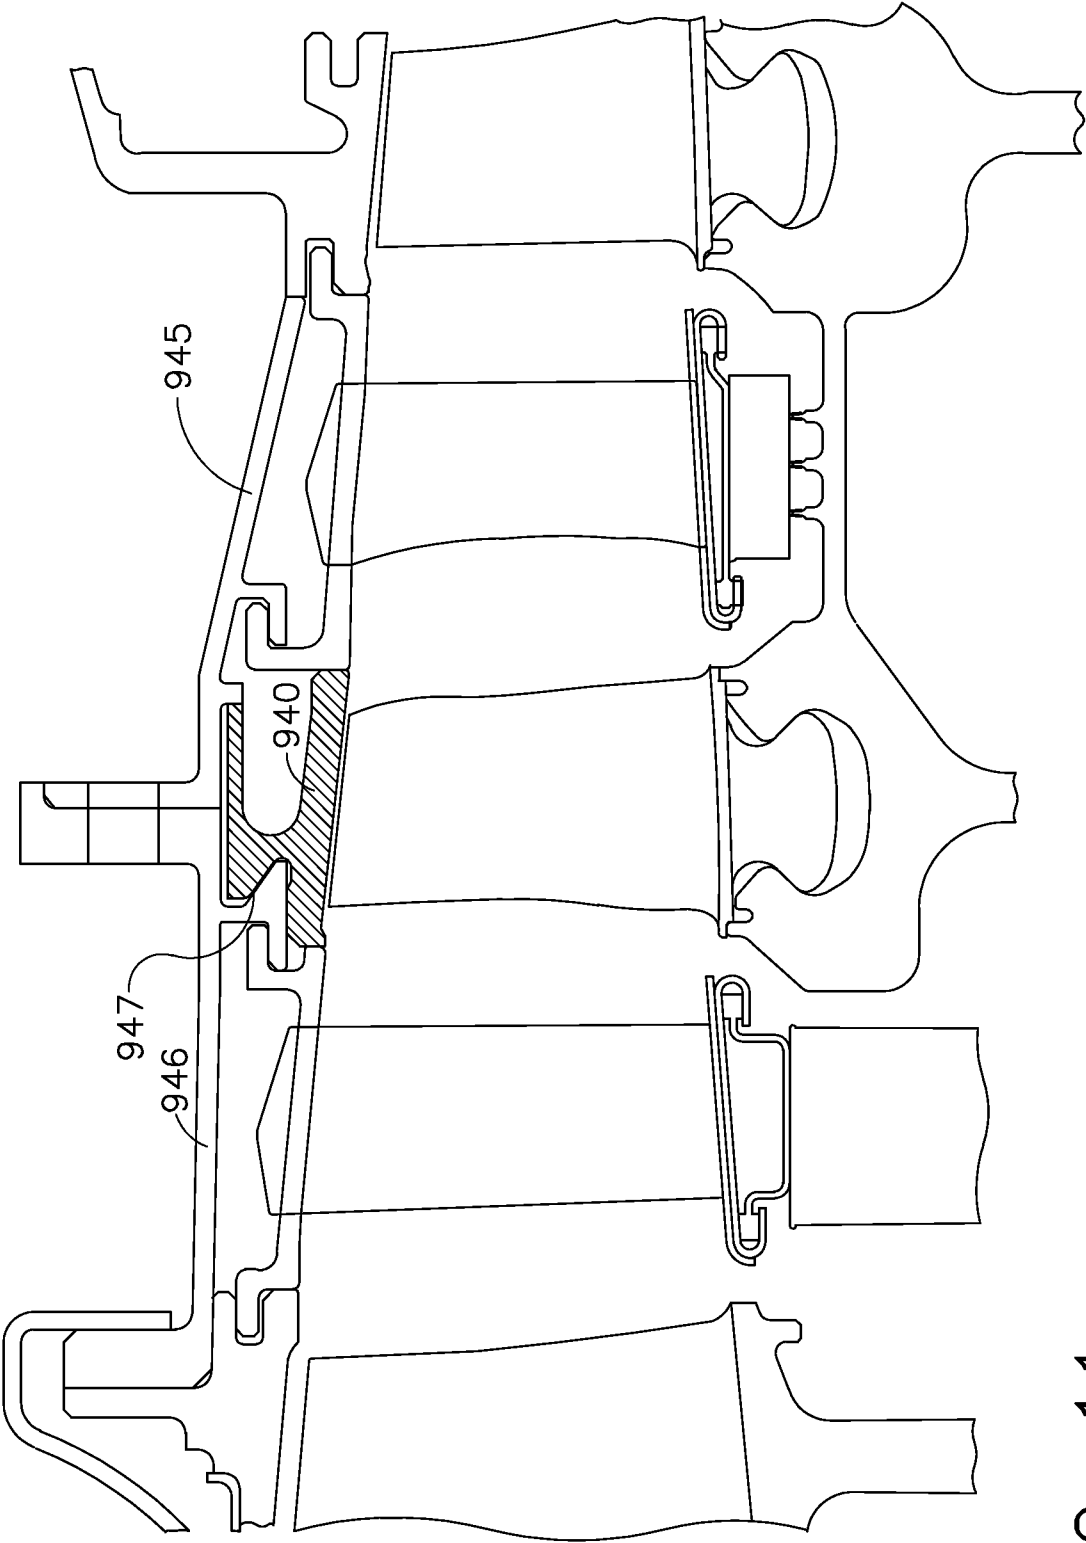


FIG. 11

12/20

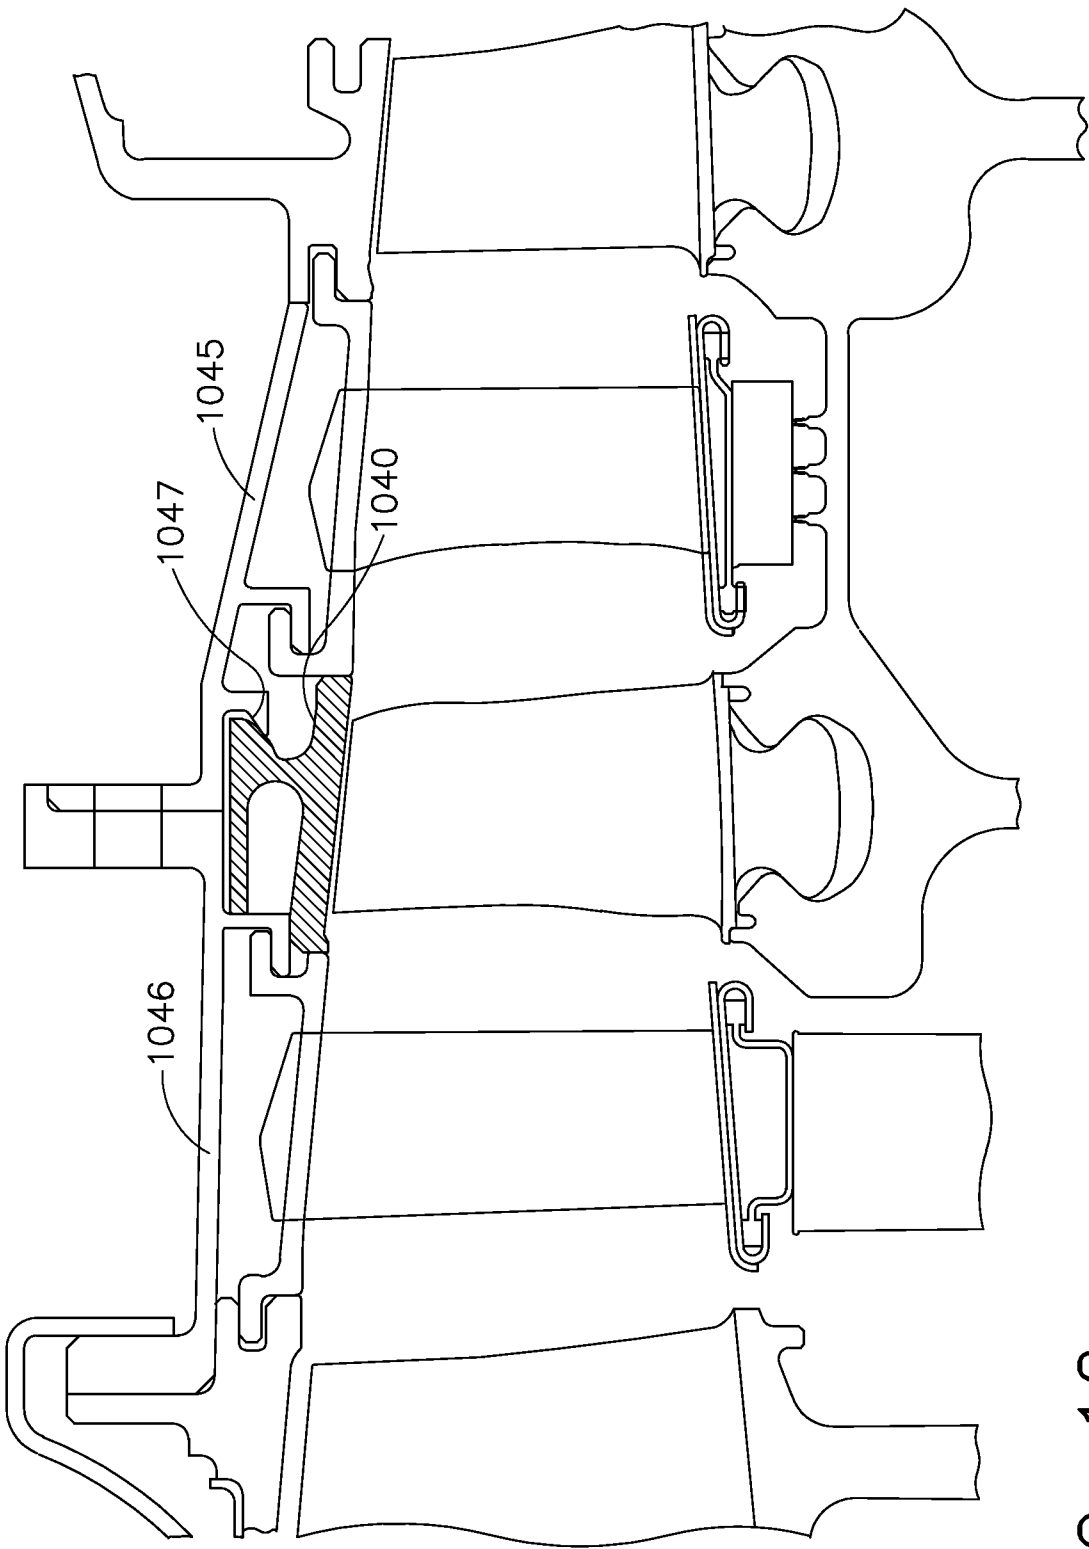


FIG. 12

13/20

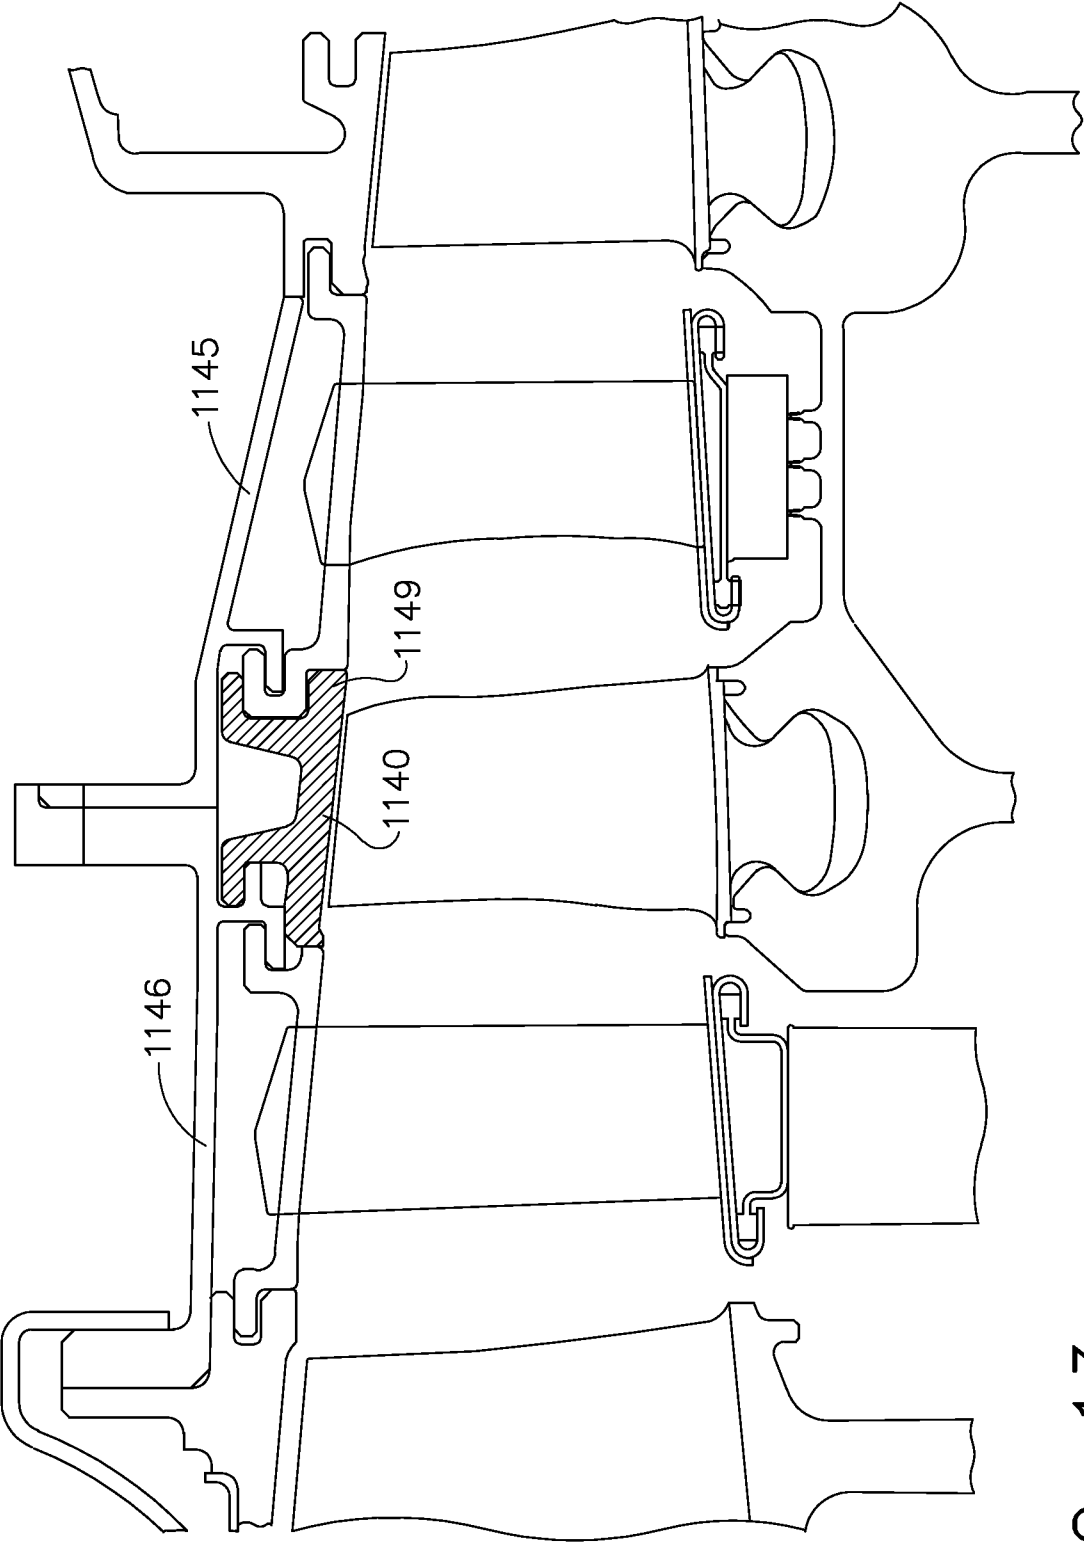


FIG. 13

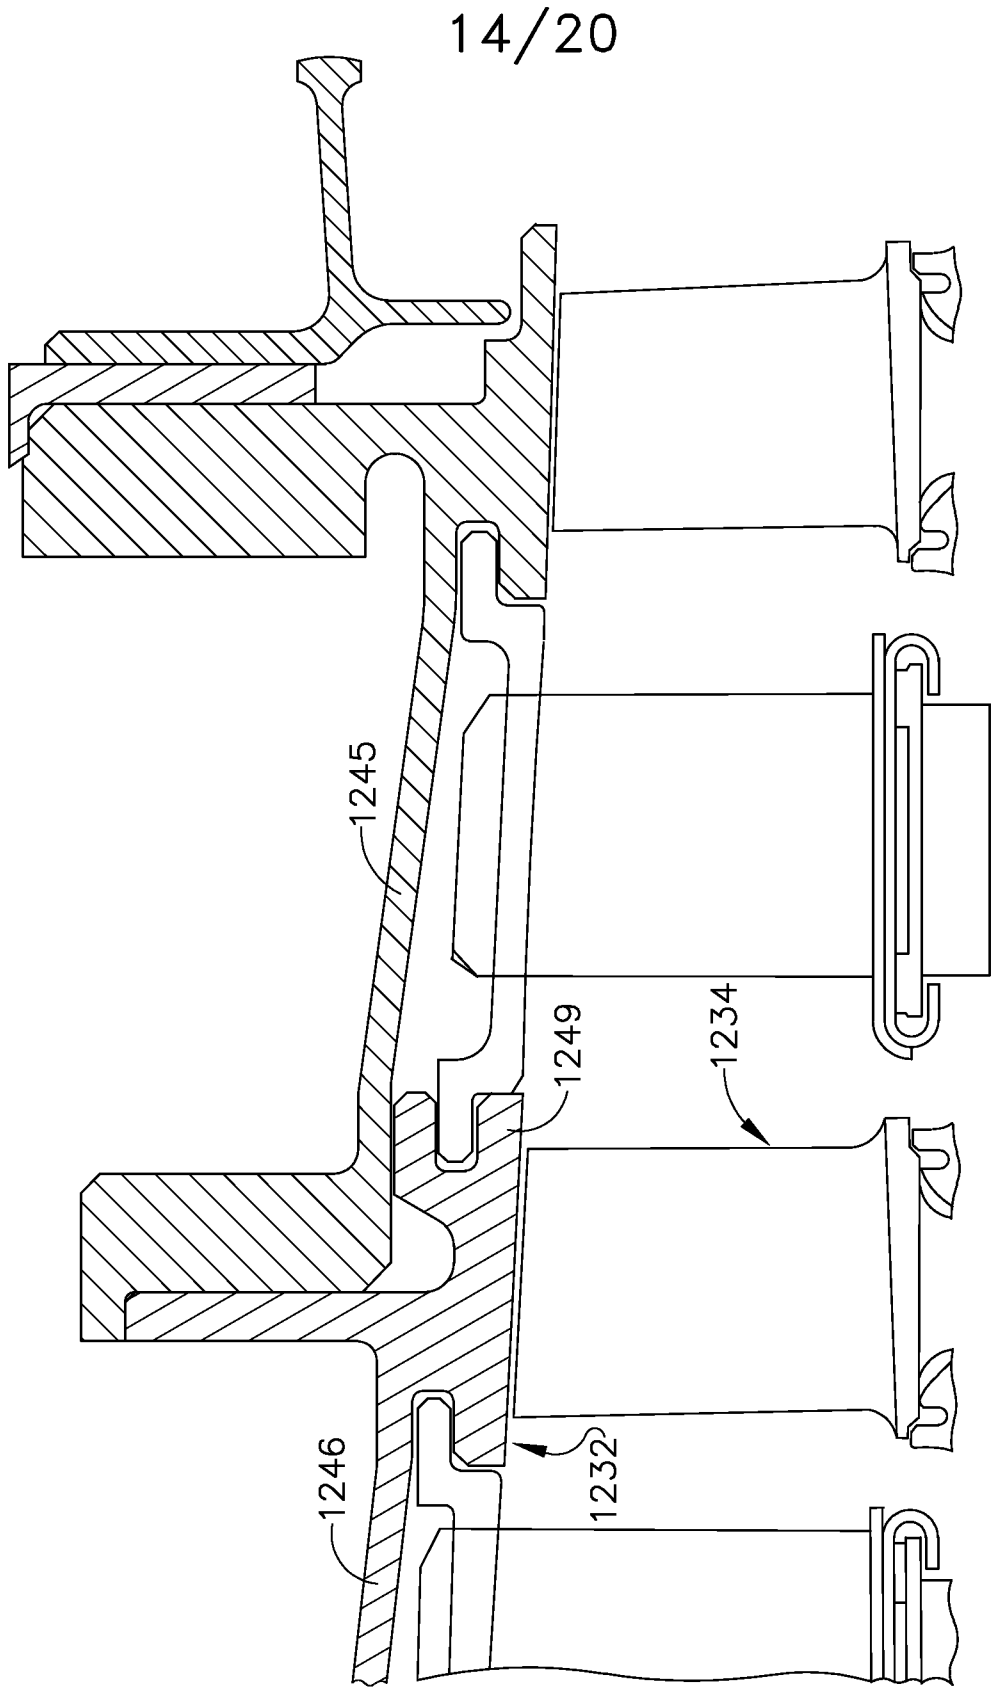


FIG. 14

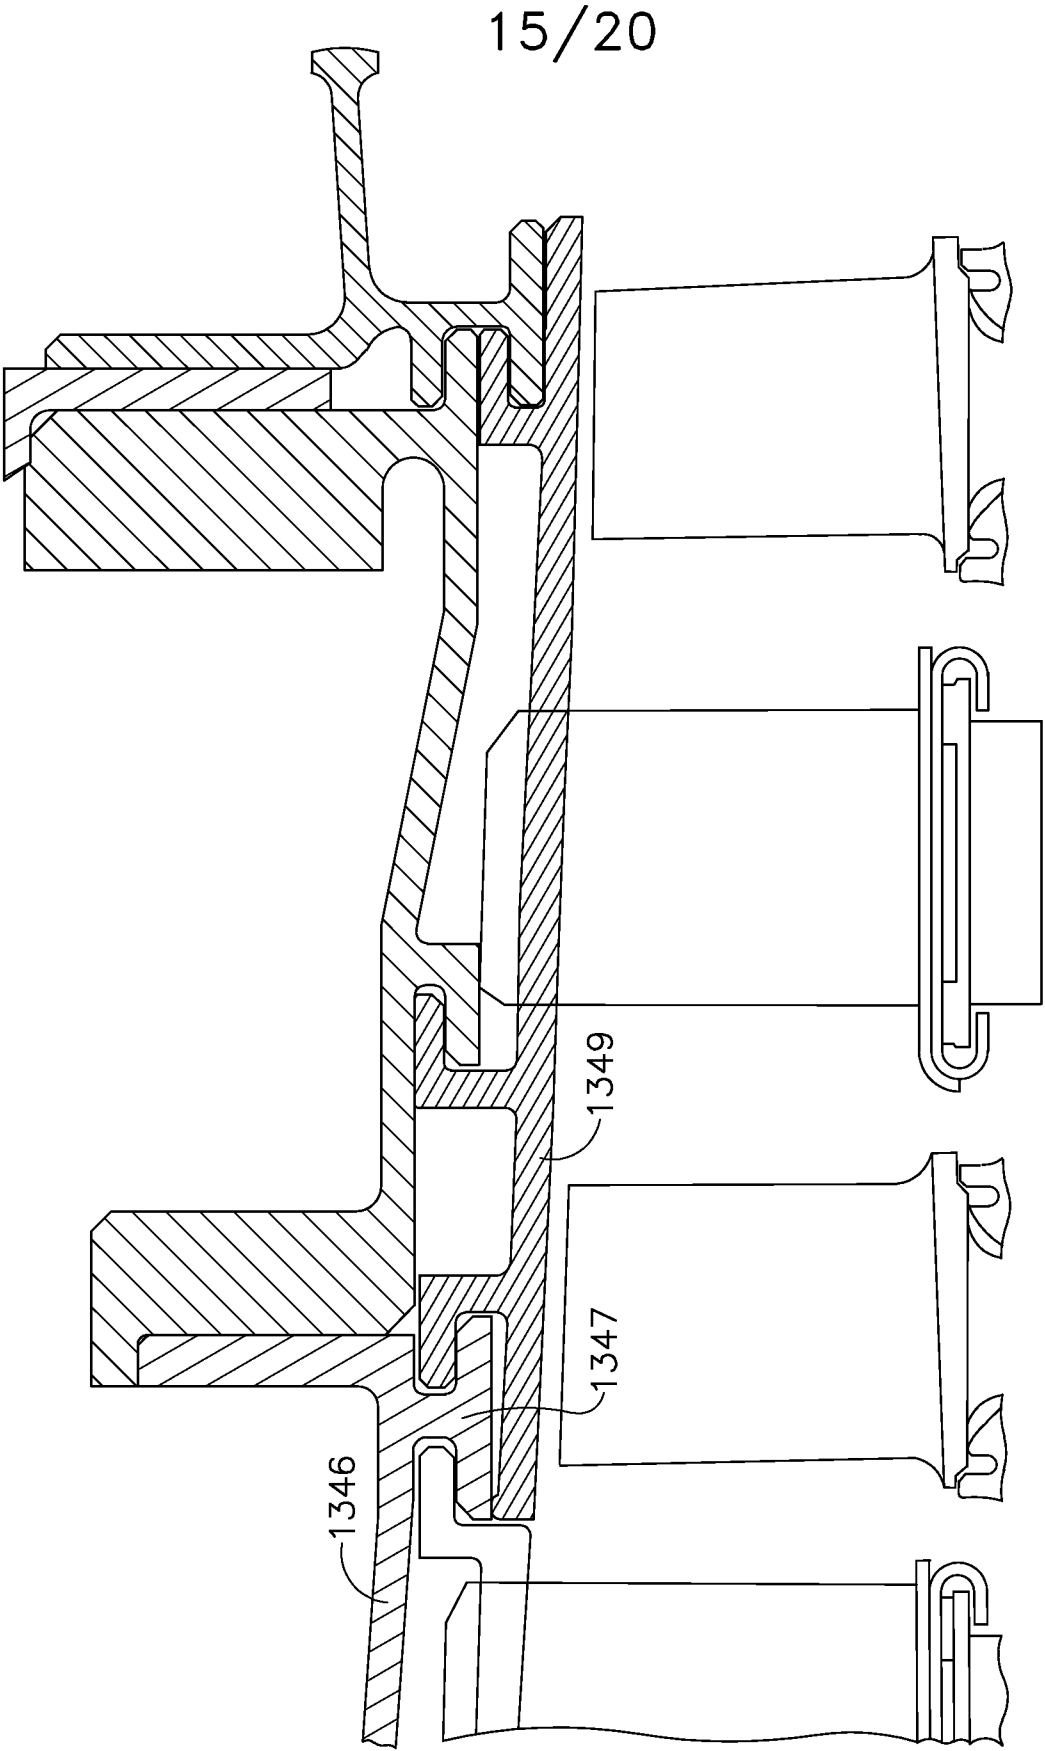


FIG. 15

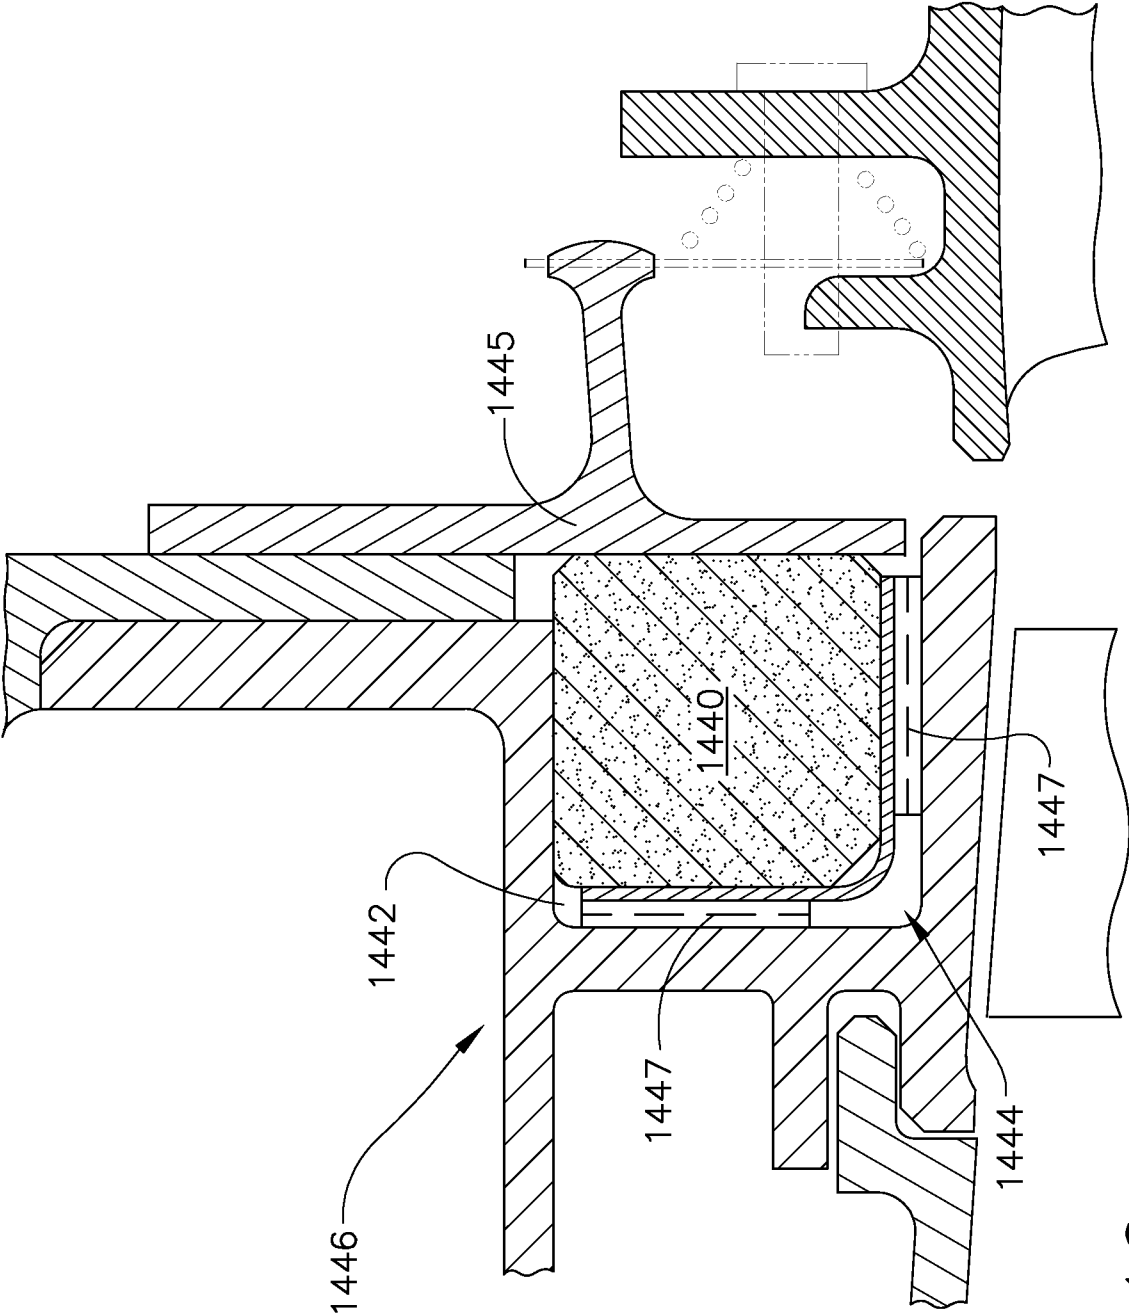


FIG. 16

17/20

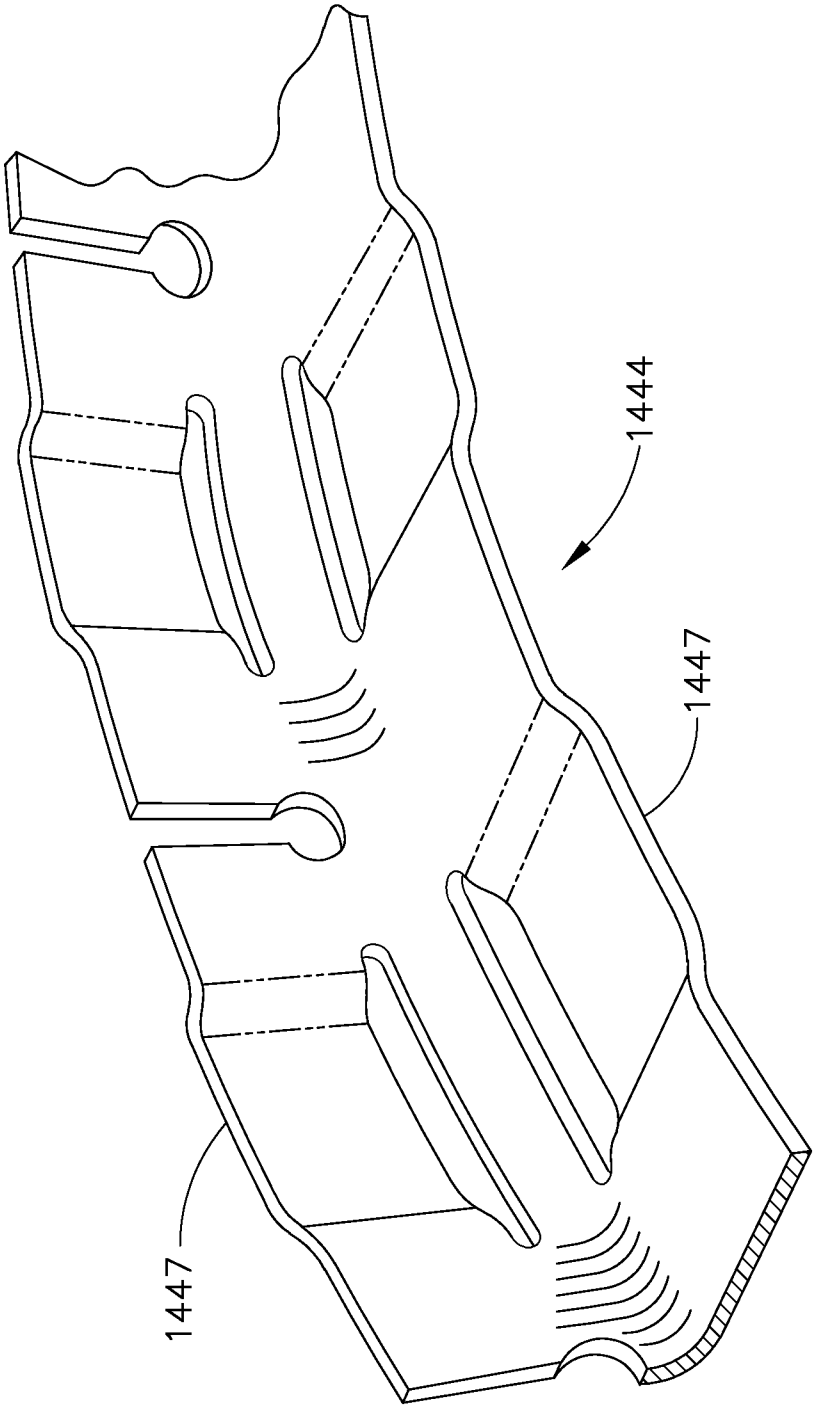


FIG. 17

18/20

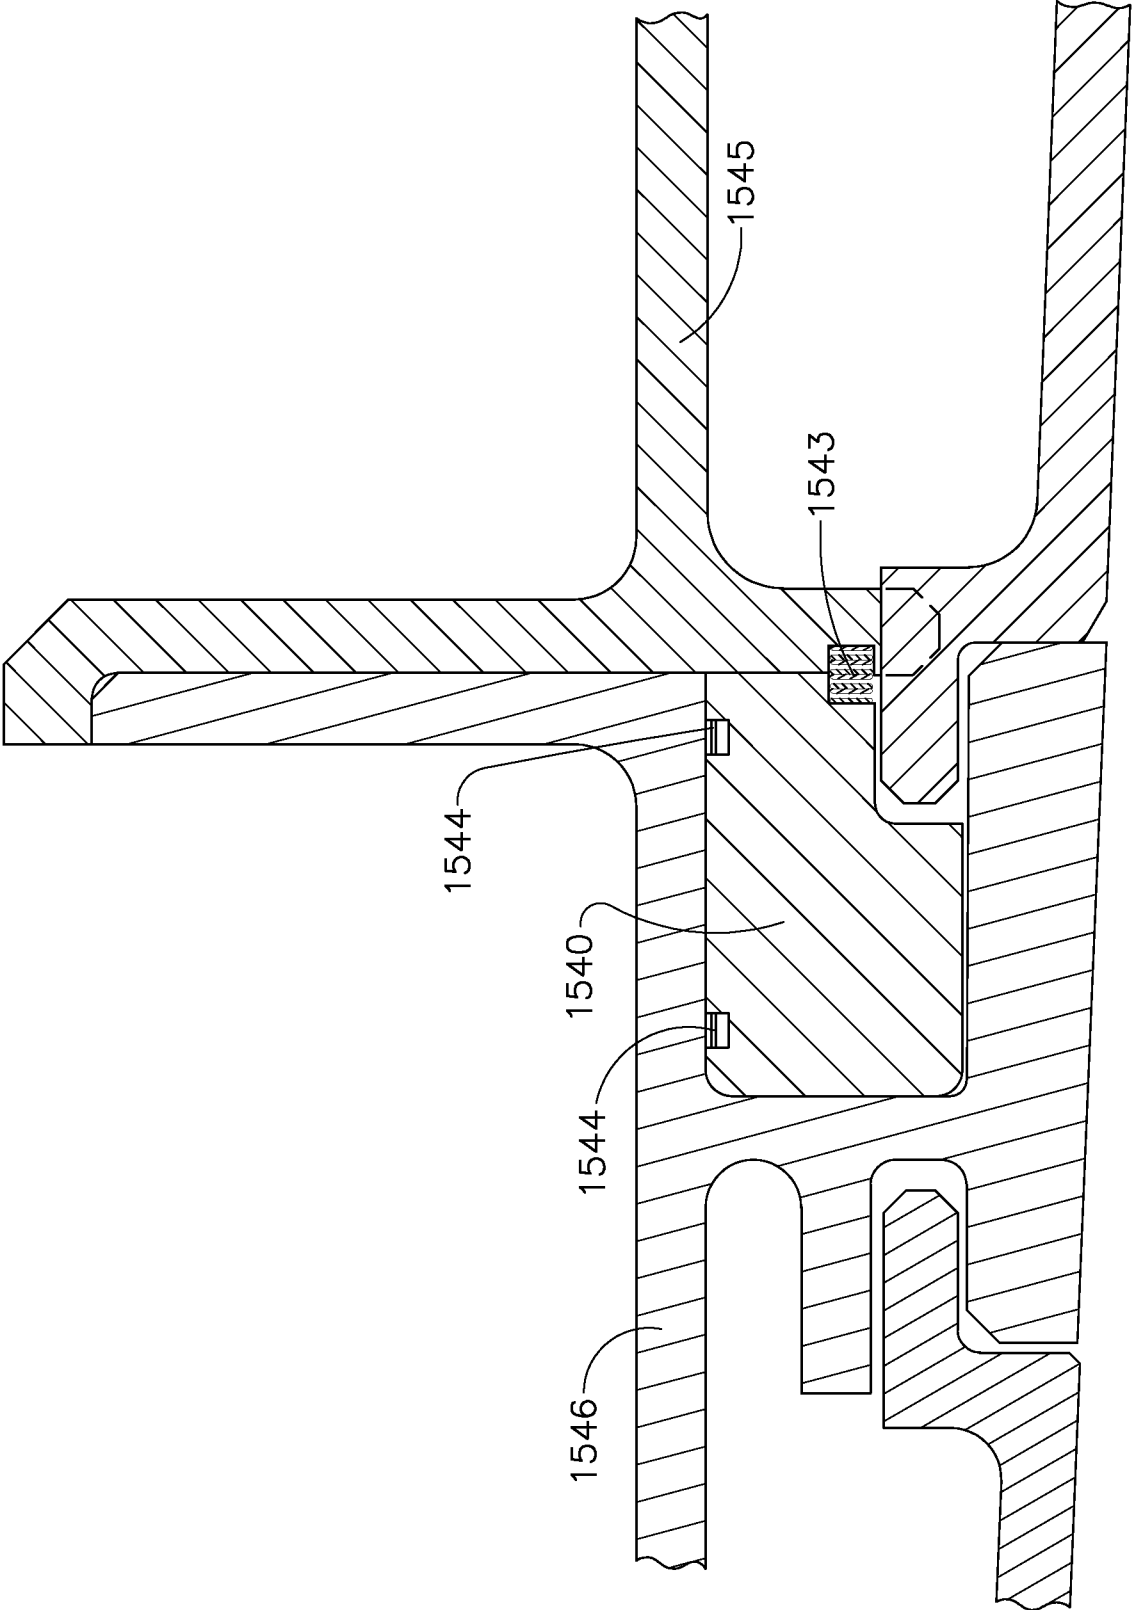


FIG. 18

19/20

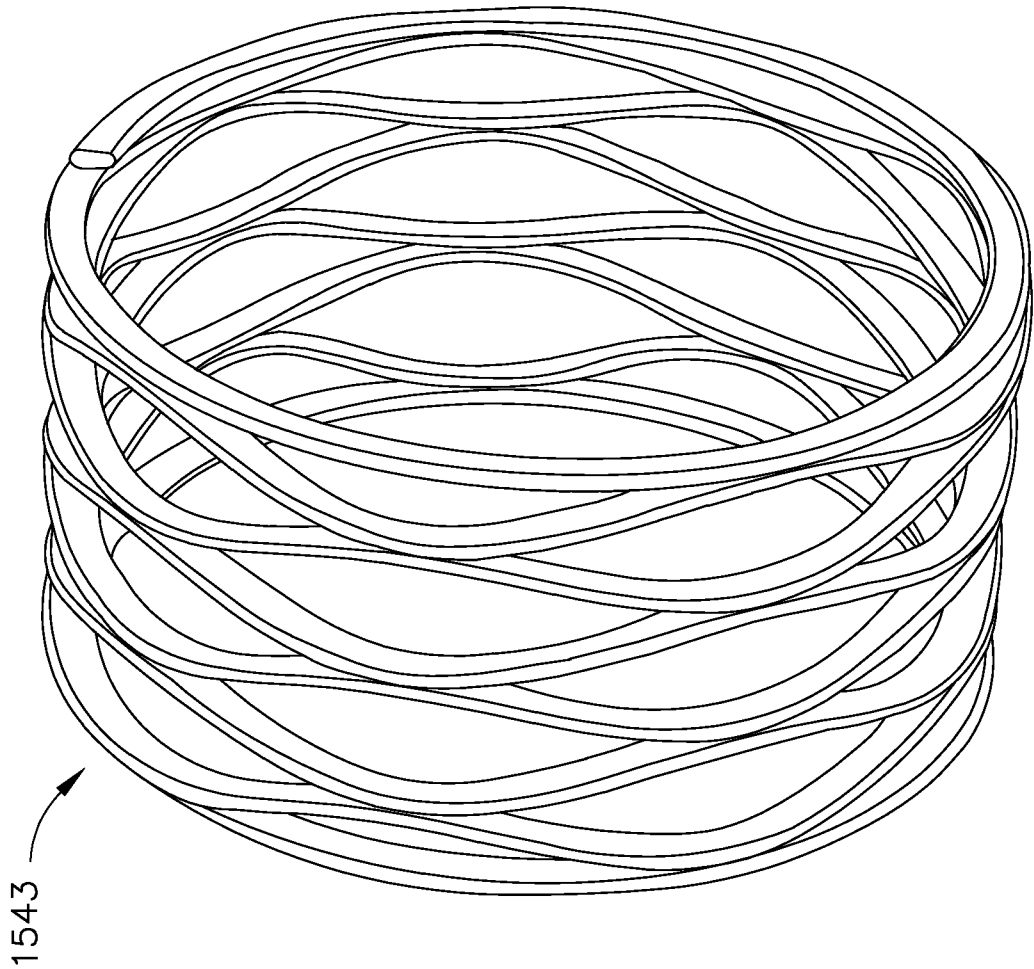


FIG. 20

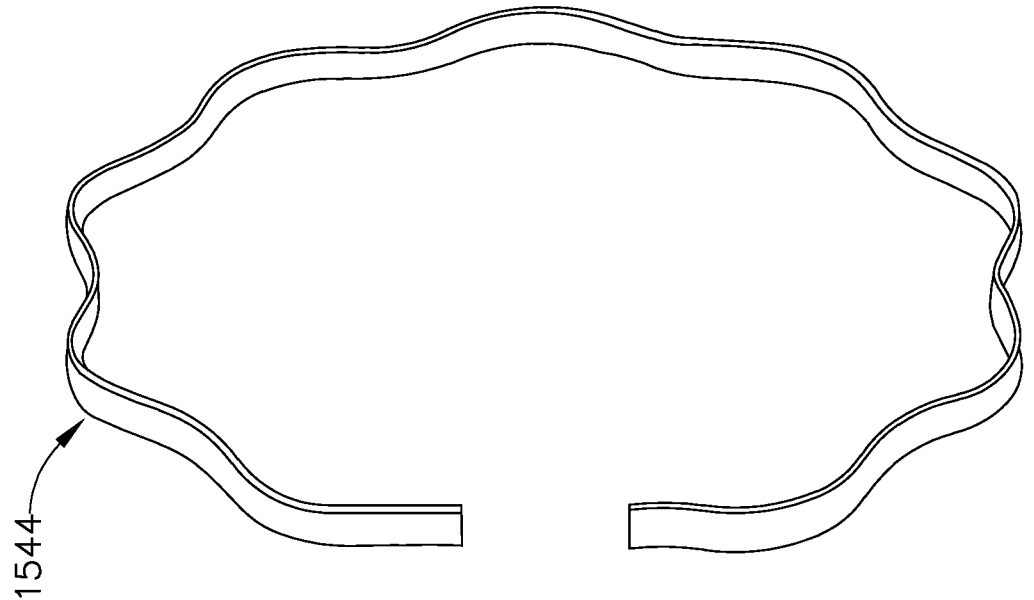


FIG. 19

20/20

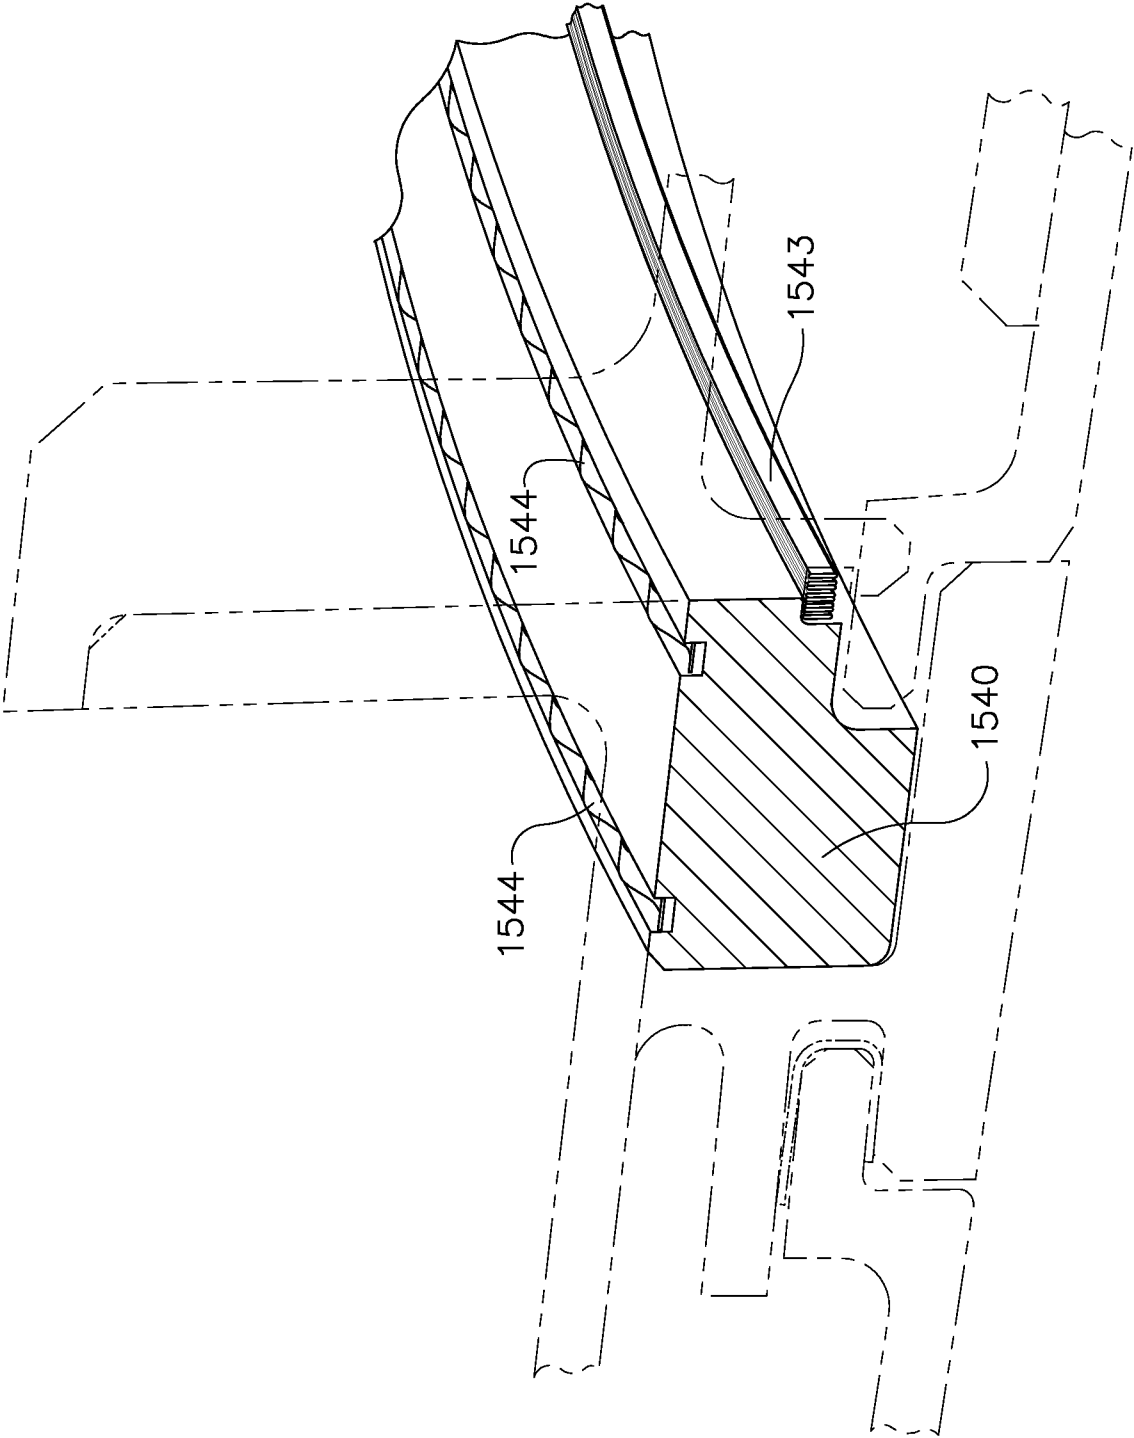


FIG. 21

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/040792

A. CLASSIFICATION OF SUBJECT MATTER

INV. F01D11/02 F01D11/18
 ADD. F01D25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 518 274 A2 (UNITED TECHNOLOGIES CORP [US]) 31 October 2012 (2012-10-31)	1,5-8, 13-15, 19,20, 23, 25-29, 32-34 35,36
Y	page 2, column 2, paragraph 8 - paragraph 9; figures 1-5 page 3, paragraph 14 - paragraph 15 page 3, column 4, line 52 - line 55 page 4, column 6, paragraph 24 - paragraph 26 ----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 September 2014

Date of mailing of the international search report

12/09/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Lutoschkin, Eugen

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/040792

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/031446 A1 (RESS ROBERT ANTHONY [US] ET AL RESS JR ROBERT ANTHONY [US] ET AL) 10 February 2005 (2005-02-10)	1,5-7, 22,23, 25-27,29
Y	page 3, paragraph 27 - paragraph 31; figures 1-3 page 4, paragraph 39	30,31
X	US 5 092 737 A (LAU KWOK Y [GB]) 3 March 1992 (1992-03-03)	1,5,8, 11-21
Y	page 1, line 49 - page 3, line 16; figures 1, 2, 5 column 7, paragraph 42 - paragraph 58	30,31
X	EP 0 616 113 A1 (GEN ELECTRIC [US]) 21 September 1994 (1994-09-21)	1-4,23, 24
	page 2, column 2, line 3 - line 15; figures 1, 2 page 3, column 3, line 6 - column 4, line 23	
X	US 2005/265827 A1 (WILSON JACK JR [US] WILSON JR JACK W [US]) 1 December 2005 (2005-12-01)	1,5-7
	figures 1-3 page 1, paragraph 10 - page 2, paragraph 15 page 2, paragraph 22 - page 3, paragraph 26	
X	US 5 314 303 A (CHARBONNEL JEAN-LOUIS [FR] ET AL) 24 May 1994 (1994-05-24)	1,9,10
	column 1, line 59 - column 2, line 13; figures 1, 2a, 2b, 5 column 3, line 3 - column 4, line 3	
Y	US 6 406 256 B1 (MARX PETER [CH]) 18 June 2002 (2002-06-18)	35,36
	column 1, line 27 - line 30; figures 3,4	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/040792

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 2518274	A2	31-10-2012	EP	2518274 A2		31-10-2012
			US	2012275898 A1		01-11-2012

US 2005031446	A1	10-02-2005	NONE			

US 5092737	A	03-03-1992	DE	68906779 D1		01-07-1993
			DE	68906779 T2		02-09-1993
			EP	0381895 A1		16-08-1990
			JP	H02233804 A		17-09-1990
			US	5092737 A		03-03-1992

EP 0616113	A1	21-09-1994	DE	69411301 D1		06-08-1998
			DE	69411301 T2		25-03-1999
			EP	0616113 A1		21-09-1994
			JP	H0713479 B2		15-02-1995
			JP	H06280615 A		04-10-1994
			US	5332358 A		26-07-1994

US 2005265827	A1	01-12-2005	US	2004071548 A1		15-04-2004
			US	2005265827 A1		01-12-2005

US 5314303	A	24-05-1994	FR	2685936 A1		09-07-1993
			GB	2263138 A		14-07-1993
			US	5314303 A		24-05-1994

US 6406256	B1	18-06-2002	DE	19938274 A1		15-02-2001
			EP	1076161 A2		14-02-2001
			US	6406256 B1		18-06-2002
