



(22) Date de dépôt/Filing Date: 2011/12/21

(41) Mise à la disp. pub./Open to Public Insp.: 2012/06/22

(45) Date de délivrance/Issue Date: 2016/05/24

(30) Priorité/Priority: 2010/12/22 (US61/426,393)

(51) Cl.Int./Int.Cl. *B60P 3/36* (2006.01),
B60R 15/00 (2006.01), *B60R 15/04* (2006.01),
B63B 29/16 (2006.01), *B67D 7/40* (2010.01),
E03F 1/00 (2006.01)


(72) Inventeurs/Inventors:
PENNER, ERICH, CA;
PENNER, KURT RICHARD, CA

(73) Propriétaires/Owners:
PENNER, ERICH, CA;
PENNER, KURT RICHARD, CA

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : APPAREIL D'EVACUATION DES EAUX USEES D'UN VEHICULE RECREATIF

(54) Title: APPARATUS FOR SEWAGE DISPOSAL FROM A RECREATIONAL VEHICLE

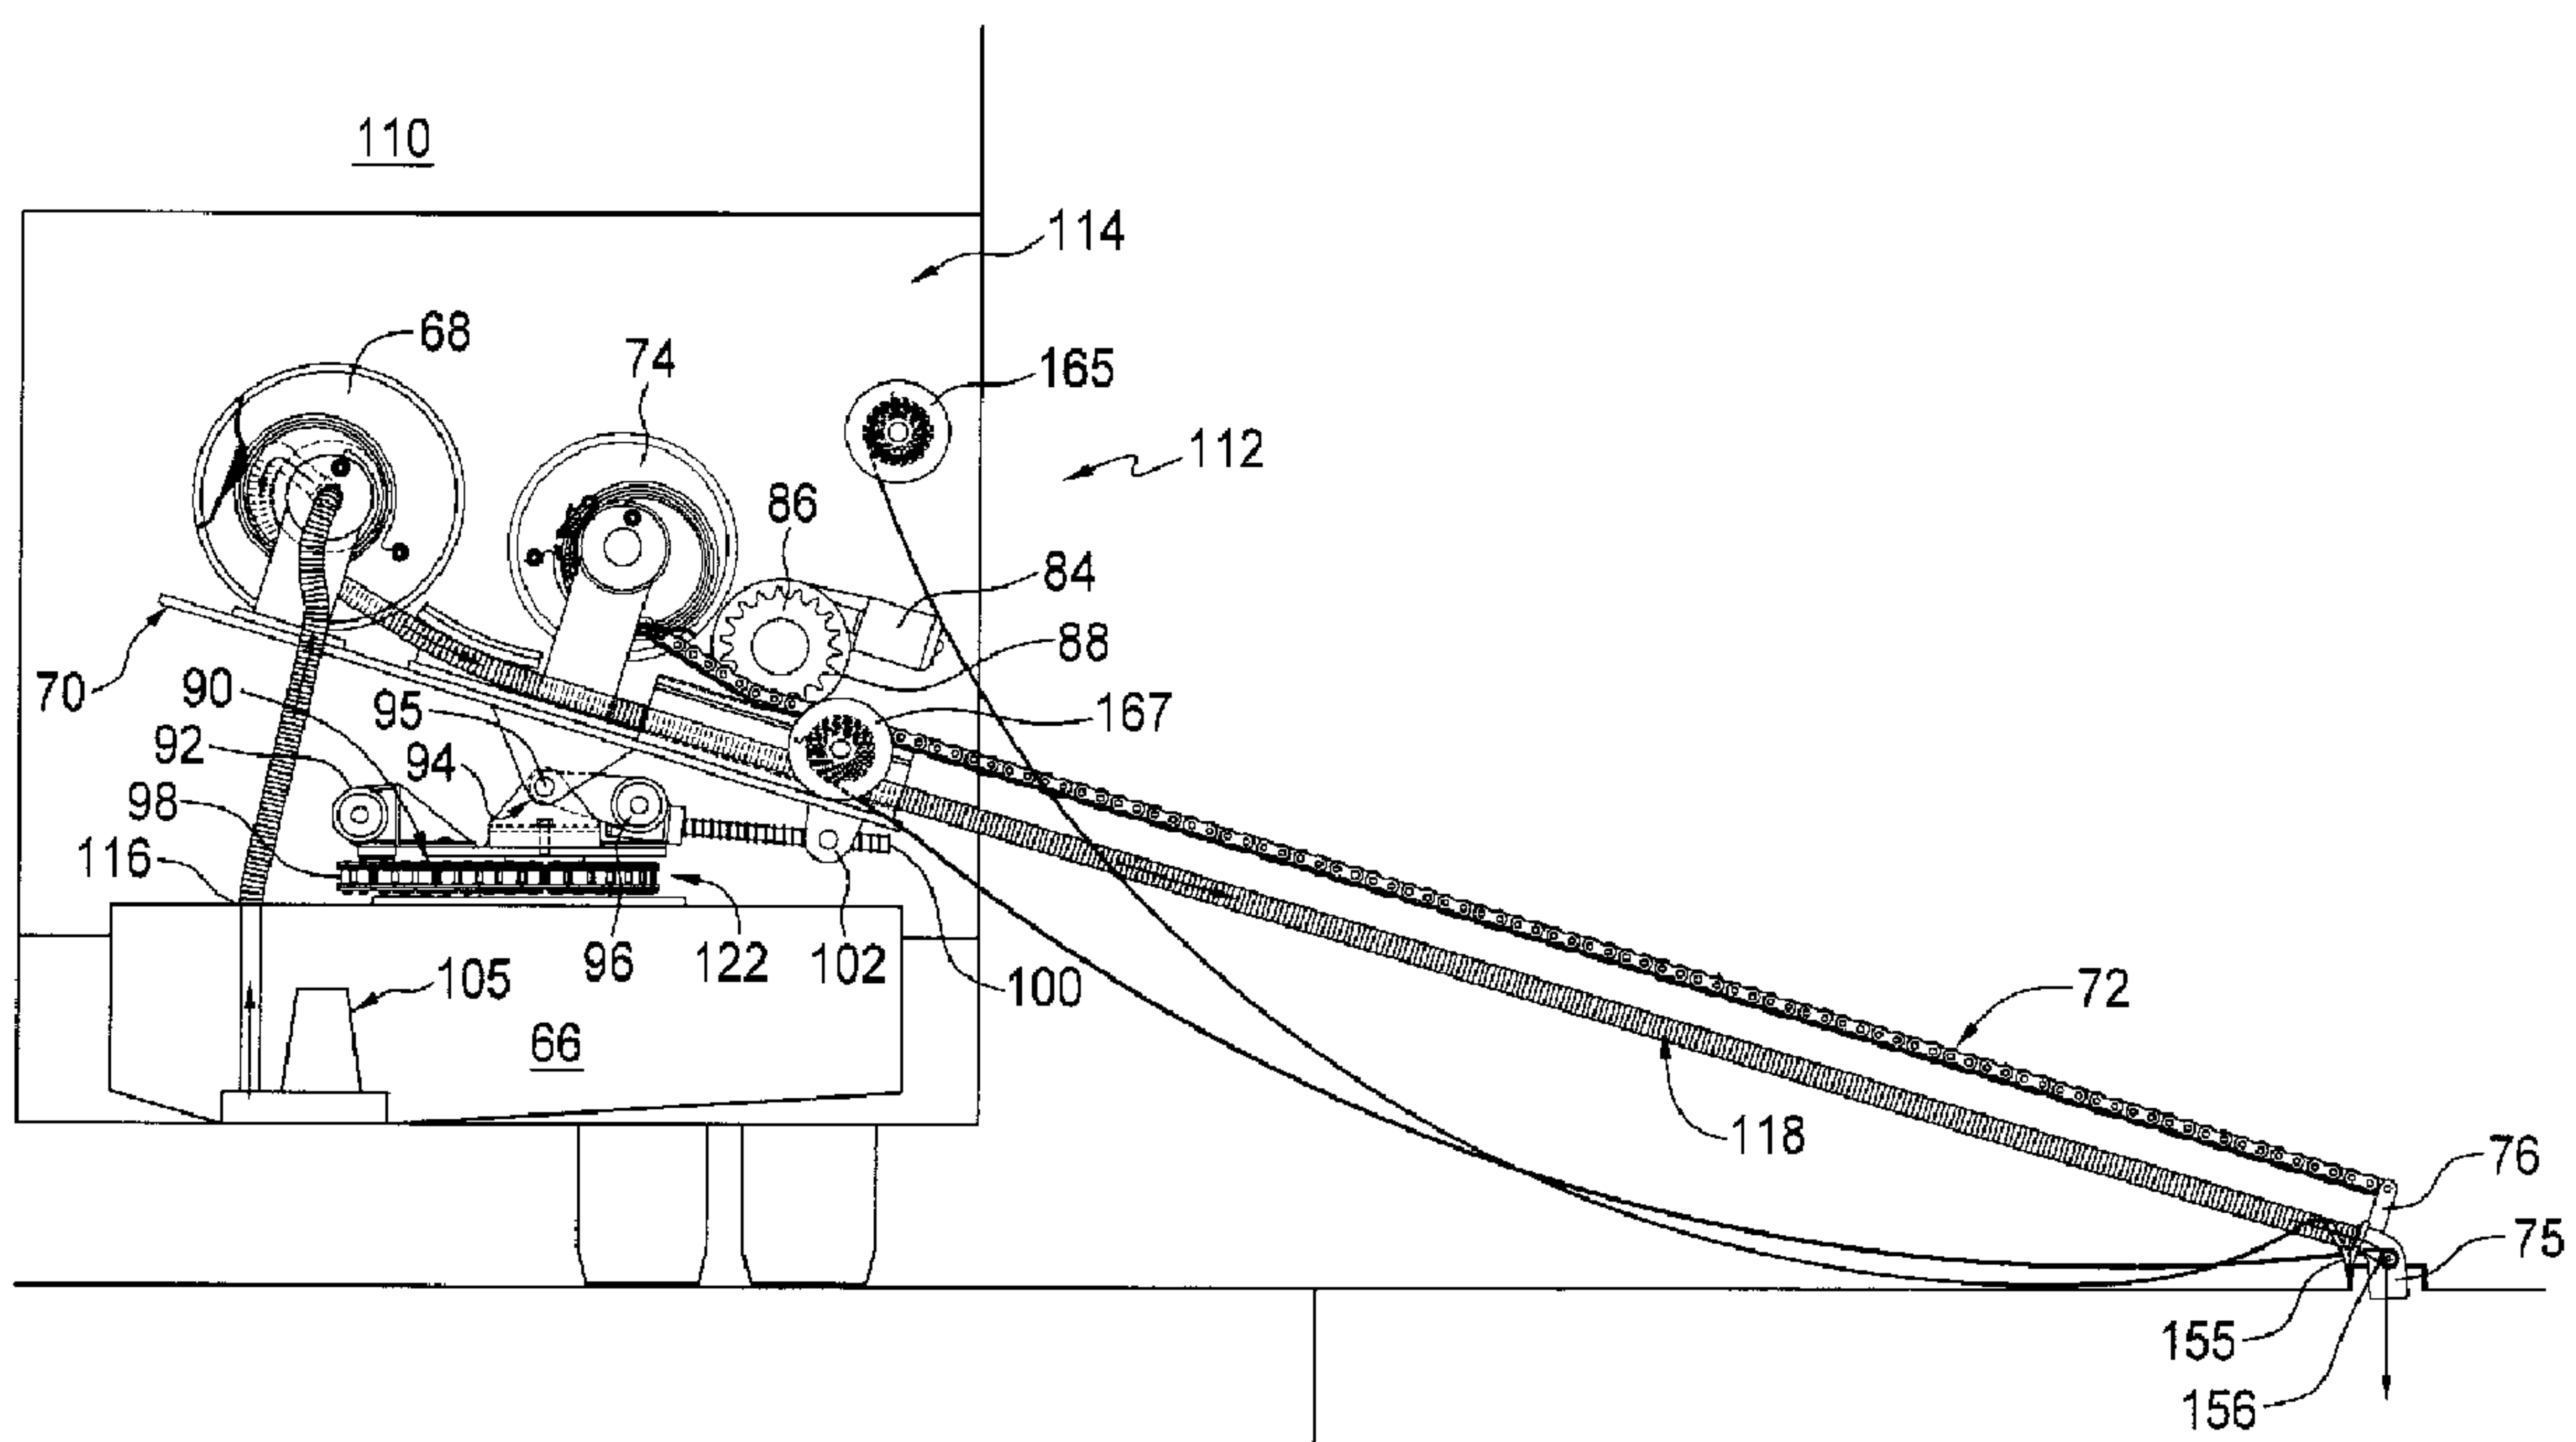

(57) Abrégé/Abstract:

An apparatus for emptying a sewage storage tank of a vehicle into a sewage disposal unit, the apparatus including: an extendible member coupled to the vehicle, the extendible member comprising a first end pivotally coupled to the vehicle and a second end for coupling to an outlet of a sewage conduit of the vehicle, the extendible member being movable between a retracted position and an extended position; and wherein the extendible member is pivotable and extendible for moving the outlet of the sewage conduit into communication with the inlet of the sewage disposal unit prior to opening the valve of the sewage storage tank.



Abstract

An apparatus for emptying a sewage storage tank of a vehicle into a sewage disposal unit, the apparatus including: an extendible member coupled to the vehicle, the extendible member comprising a first end pivotally coupled to the vehicle and a second end for coupling to an outlet of a sewage conduit of the vehicle, the extendible member being movable between a retracted position and an extended position; and wherein the extendible member is pivotable and extendible for moving the outlet of the sewage conduit into communication with the inlet of the sewage disposal unit prior to opening the valve of the sewage storage tank.

APPARATUS FOR SEWAGE DISPOSAL FROM A RECREATIONAL VEHICLE

Technical Field

[0001] The present disclosure relates to methods and apparatus for emptying sewage or other storage tanks of recreational vehicles and other mobile units having sewage or other storage tanks.

Background

[0002] Many recreational vehicles, such as mobile homes, include toilets having on-board sewage storage. In order to drain sewage from sewage storage tanks of the prior art, an operator performs a series of steps. First, the operator removes a sewage hose from its storage position and manually attaches one end of the sewage hose to a drain valve of the recreational vehicle. The sewage hose is then manually extended toward the sewage disposal unit at the park or campsite, for example, and the sewage hose is manually coupled to the inlet of the sewage disposal unit. The operator then opens the valve of the recreational vehicle tank in order for the sewage to drain into the sewage disposal unit inlet. Once all of the sewage has drained, the operator removes the dirty sewage hose from the sewage disposal unit inlet, removes the hose from the recreational vehicle drain valve and closes the drain valve. The operator then manually returns the sewage hose to its storage position.

[0003] These steps are quite onerous and often result in the operator coming into contact with the sewage.

Summary

[0004] In an aspect there is provided an apparatus for moving a sewage conduit of a vehicle to a sewage disposal unit, the apparatus including: a base coupled to the vehicle; a link arm comprising a first end and a second end, the first end being hinged to the base; an upper arm assembly comprising an upper arm and an extendible arm, a first end of the upper arm being hinged to the second end of the link arm and a first end of the extendible arm being axially movable relative to the upper arm to move the upper arm assembly between a retracted position and an extended position, a second end of the extendible arm for

coupling to an outlet of the sewage conduit of the vehicle; wherein the base is rotatable for directing the second end of the extendible arm toward the sewage disposal unit and the link arm and upper arm assembly are movable to extend the second end of the extendible arm to the sewage disposal unit.

[0005] In another aspect there is provided an apparatus for emptying a sewage storage tank of a vehicle into a sewage disposal unit, the apparatus including: an extendible member coupled to the vehicle, the extendible member comprising a first end pivotally coupled to the vehicle and a second end for coupling to an outlet of a sewage conduit of the vehicle, the extendible member being movable between a retracted position and an extended position; wherein the extendible member is pivotable and extendible for moving the outlet of the sewage conduit into communication with the inlet of the sewage disposal unit prior to opening the valve of the sewage storage tank.

[0006] There is also provided herein a self-supporting chain including: a roller chain including links coupled to one another, the roller chain being limited to bending in a single plane; stops coupled to one side of the roller chain between adjacent ends of the links; wherein the rolling chain is movable from a retracted position to an extended position and the stops limit bending of the roller chain beyond a generally linear position.

Drawings

[0007] The following figures set forth embodiments in which like reference numerals denote like parts. Embodiments are illustrated by way of example and not by way of limitation in the accompanying figures.

[0008] Figure 1 is a side view of an example recreational vehicle including an apparatus for emptying sewage according to an embodiment;

[0009] Figure 2 is an enlarged view of a portion of Figure 1;

[0010] Figure 3 is a top view of the example recreational vehicle of Figure 1;

[0011] Figure 4 is an enlarged view of a portion of Figure 3;

[0012] Figure 5 is a rear view of the example recreational vehicle of Figure 1;

[0013] Figure 6 is an enlarged view of a portion of Figure 5;

[0014] Figure 7 is a rear view of another example recreational vehicle including an apparatus for emptying sewage according another embodiment in which the apparatus in an extended position;

[0015] Figure 8 is an enlarged view of a self-supporting chain of the apparatus for emptying sewage of Figure 7; and

[0016] Figure 9 is a rear view of the example recreational vehicle of Figure 7 in which the apparatus for emptying sewage is in a retracted position.

Detailed Description

[0017] Referring to Figures 1 and 2, an apparatus 12 for moving a sewage conduit of a vehicle toward a sewage disposal unit (not shown) is coupled to a recreational vehicle 10, which is shown by way of example. The apparatus 12 may be installed on any vehicle having an on-board sewage storage tank including: recreational vehicles, trailers or boats, for example.

[0018] The apparatus 12 is located in a recess 14 that is provided near a sewage storage tank (not shown) of the vehicle 10. The recess 14 is sized to include an outlet 16 of the sewage storage tank, the apparatus 12 and a sewage conduit 18, which is coupled to the outlet 16. A cover (not shown) is removable to allow the operator to access the recess 14. The cover may be a hinged door that is openable to allow the operator to access the recess 14.

[0019] The sewage conduit 18 is generally a hose that is coupled to the outlet 16 of the sewage storage tank. The sewage conduit 18 is collapsible and is stored within the recess 14 when not in use. In the embodiment of Figures 1 and 2, the sewage conduit 18 is a collapsible corrugated pipe having an outlet 20. The sewage conduit may alternatively be a telescopic pipe or another retractable or collapsible pipe, for example.

[0020] Referring also to Figures 3 and 4, the apparatus 12 includes a base 22, a link arm 24 and an upper arm assembly 26, which includes an upper arm 28 and an extendible arm 30. The apparatus 12 further includes a motor driven hydraulic pump and valve assembly 32 and a control panel 34 for controlling movement of the link arm 24 and upper arm assembly 26.

[0021] The base 22 includes a fixed portion 36 and a rotatable portion 38. The fixed portion 36 is coupled to a lower surface 40 of the recess 14 and the rotatable portion 38 rotates relative thereto.

[0022] A first end 42 of the link arm 24 is hinged to the base 22 and a first end 46 of the upper arm 28 is hinged to a second end 44 of the link arm 24. The extendible arm 30 of the upper arm assembly 26 is movable relative to the upper arm 28 along an axis of the upper arm 28. Movement of the extendible arm 30 may be powered by hydraulics (water or oil), electric motor or movement of the extendible arm may be manually achieved using a cable system, for example. In one embodiment, the movement of the extendible arm 30 may be achieved manually by including a handle (not shown) on the extendible arm 30 so that the operator may manually move the sewage conduit 18.

[0023] A second end 48 of the extendible arm 30 includes a clamp 52 that is continuously coupled to the outlet 20 of the sewage conduit 18. The clamp 52 is generally an elbow-shaped fitting that redirects sewage exiting the sewage conduit 18 into the sewage disposal unit. Although the sewage conduit 18 is continuously coupled to the outlet of the sewage storage tank at one end and the clamp 52 at the opposite end, it will be appreciated by a person skilled in the art that the sewage conduit may be de-coupled to allow for cleaning, replacement or repair, for example.

[0024] The apparatus 12 is rotatable to swing the link arm 24 and upper arm assembly 26 in the direction indicated by arrow 54 of Figure 4. The maximum range of rotation of the rotatable portion 38 is at least 180 degrees, however, the range may be reduced based on how far the base 22 is located into the recess 14. When extended, the link arm 24 and the upper arm assembly 26 cover a distance of approximately 20ft from the base 22. In other embodiments this distance may be increased or reduced by adjusting the length of one or more of the link arm 24, the upper arm 28 and the extendible arm 30.

[0025] A first sensor 56 is coupled to the second end 48 of the extendible arm 30. The first sensor 56 is for communicating with a second sensor (not shown). The second sensor is stored in the vehicle 10 and is movable by the operator to a location adjacent the inlet of the sewage disposal unit. In general, the first sensor 56 is a receiver and a transmitter and the second sensor is at least

a transmitter. The first sensor 56 receives location information from the second sensor and sends its own location information and the location information of the second sensor to the control panel 34, which controls movement of the apparatus 12. In one embodiment, both sensors send their respective location information to the control panel 34. In another embodiment, both sensors are provided with both receiving and transmitting capabilities.

[0026] The control panel 34 is generally a computer that is in communication with the motor driven hydraulic pump and valve assembly 32, which forces fluid through hydraulic lines 64 that actuate first and second hydraulic cylinders, 58 and 60. The hydraulic cylinders 58 and 60 are coupled between the base 22 and the link arm 24 and the link arm 24 and the upper arm 28, respectively. The control panel 34 further controls opening and closing of the valve (not shown) at the outlet of the sewage control tank. Alternatively, opening and closing of the valve may be performed manually.

[0027] Movement of the apparatus 12 may be controlled automatically based on feedback from the first sensor 56 and second sensor or may be controlled manually by using a joystick 62, which is coupled to the control panel 34.

[0028] In operation, in order to empty the on-board sewage storage tank, the operator parks the vehicle 10 near a sewage disposal unit at a campsite or recreational vehicle park, for example, and removes the cover to expose the sewage conduit 18 and the apparatus 12. Using the control panel 34, the operator then initiates movement of the apparatus 12 to move the outlet 20 of the sewage conduit 18 into communication with the sewage disposal unit, as shown in Figures 5 and 6,. Once the outlet 20 is positioned so that sewage exiting the sewage conduit 18 will be deposited into the sewage disposal unit, the operator then opens the valve at the outlet of the sewage storage tank to allow sewage to empty from the on-board sewage storage tank. Once sewage disposal is complete, the operator operates the control panel 34 to close the valve and retract the apparatus 12 into the recess 14.

[0029] In another embodiment, the base 22, link arm 24 and upper arm assembly 26 are manually operable to move the outlet 20 of the sewage conduit 18 into communication with the sewage disposal unit. In this embodiment, the

motor, control panel and hydraulic cylinders are omitted and a handle is coupled to the extendible arm 30 adjacent the second end 48. In operation, the operator would manually locate the outlet 20 of the sewage conduit 18 using the handle and manually open the valve at the outlet of the sewage storage tank using a lever or other externally accessible valve-opening mechanism. Once sewage disposal has completed, the operator would manually close the valve and stow the sewage conduit and apparatus.

[0030] In yet another embodiment, rather than being hydraulically powered, the apparatus 12 is electro-mechanically powered. In this embodiment, the hydraulic cylinders are replaced by electric servo motors.

[0031] In another embodiment, a video camera is provided in communication with the control panel 34. In this embodiment, the video camera is mounted to the recreational vehicle 10 and is able to view the inlet of the sewage disposal unit. An object may be placed beside the inlet of the sewage disposal unit and the camera provided with software having object recognition capability, which identifies the object and provides location information to the control panel 34. The control panel 34 would then direct the apparatus 12 to the inlet of the sewage disposal unit. The video camera may be used with hydraulic powered apparatus 12 or an electro-mechanically powered apparatus 12.

[0032] In still another embodiment, the software of the video camera is capable of identifying at least one feature of the inlet of the sewage disposal unit and providing location information to the control panel 34.

[0033] Referring now to Figure 7, according to another embodiment, an apparatus 112 for moving a sewage conduit 118 toward a sewage disposal unit (not shown) is coupled to a recreational vehicle 110. Similar to the apparatus 12 of Figures 1 to 6, the apparatus 112 may be installed on any vehicle having an on-board sewage storage tank including: recreational vehicles, trailers or boats, for example.

[0034] The apparatus 112 is located in a recess 114 of the vehicle 110, near a sewage storage tank 66. The recess 114 is sized to include an outlet 116 of the sewage storage tank 66, the apparatus 112 and the sewage conduit 118. A cover (not shown) is removable to allow the operator to access the recess 114. The cover may be a hinged door that is openable to allow the operator to access

the recess 114. In the recreational vehicle 110 of FIG. 7, the recess 114 is located on the back of the recreational vehicle 110, however, the recess 114 may alternatively be located on a side or other location near the sewage storage tank 66.

[0035] The sewage conduit 118 is generally a hose that is coupled, at a first end, to the outlet 116 of the sewage storage tank 66. The sewage conduit 118 is wound around a sewage conduit reel 68 that is mounted on a platform 70 and is rotatable to extend and retract the sewage conduit 118. The sewage conduit 118 is stored in a retracted position, as shown in Figure 9, when not in use, and movable toward an extended position, which is shown in Figure 7, for sewage disposal. A second end of the sewage conduit 118 is coupled to a pipe elbow 75, which is inserted into an inlet of a sewage disposal unit during sewage disposal.

[0036] The sewage conduit 118 is movable between the retracted position and the extended position by a self-supporting chain 72. The self-supporting chain 72 is wound around a chain reel 74 when retracted and is movable between the retracted and extended positions by a chain motor 84. The motor 84 includes a rotatable gear 86 having teeth 88 for engaging the self-supporting chain 72. The chain reel 74 is mounted on the platform 70 adjacent to the sewage conduit reel 68. A clamp 76 is located at a second end of the self-supporting chain 72 to couple the self-supporting chain 72 to the pipe elbow 72. Because the second end of the self-supporting chain 72 is coupled to the second end of the sewage conduit 118, the sewage conduit 118 extends when the self-supporting chain 72 extends. Similarly, the sewage conduit 118 retracts when the self-supporting chain 72 retracts.

[0037] Referring also to Figure 8, the self-supporting chain 72 includes a plurality of stops 78 that are coupled to a lower side of a roller chain 80 including a plurality of links 82. The roller chain 80 may be any industrial chain that is limited to bending in a single plane to wind and unwind the roller chain 80. In the example of Figure 8, the stops 78 are plates that are located on an underside of the self-supporting chain 72 when the apparatus 112 is installed in the vehicle 110. The plates are coupled between adjacent ends of the links 82 and support the links 82 when the self-supporting chain 72 is extended in order to maintain the self-supporting chain 72 in a generally linear position. The plates restrict rotation

of the roller chain 80 in one direction only, therefore, the self-supporting chain 72 may be wound around the chain reel 74 when the self-supporting chain 72 is in the retracted position.

[0038] It will be appreciated by a person skilled in the art that the stops 78 are not limited to being plates, the stops 78 may be any component capable of limiting movement of adjacent links 82 relative to one another. Further, one or both of the sewage conduit reel 68 and the chain reel 74 may be spring loaded to automatically retract the sewage conduit 118 and the self-supporting chain 72.

[0039] The apparatus 112 includes a base 122 that is rotatably coupled to the recreational vehicle 110. The base 122 includes a rotation unit 90 having a chain 98 that is movable by a worm gear and sprocket arrangement (not shown) that is driven by a first motor 92. A tilting unit 94 is coupled between the base 122 and a platform 70. A worm gear 100, which is driven by a second motor 96, engages a mating component 102 that extends from an underside 104 of the platform 70 to tilt the platform 70 about a tilting axis 95. It will be appreciated by a person skilled in the art that the base 122 and platform 70 may alternatively be hydraulically, electrically or manually driven.

[0040] Together, the base 122 and the platform 70 facilitate pivoting of the platform 70 relative to the vehicle 110. The amount that the base 122 is able to rotate relative to the vehicle 110 may be dependent on the location of the base 122 within the recess 114 as well as a starting position of the base 122. In one example, the base 122 is rotatable 180 degrees. The amount that the tilting unit 94 is able to tilt may be dependent on the location of the base 122 within the recess 114, the distance between the base 122 and the platform 70 and the length of the worm gear 100, for example. In one example, the tilting unit 94 is able to tilt the platform 70 45 degrees.

[0041] Referring back to Figure 7, a first sensor 156 is coupled to the second end of the self-supporting chain 72. A second sensor 155 is for locating next to the sewage disposal unit during sewage disposal. The sensors operate in a similar manner as has been described with respect to the first and second sensors of the embodiment of Figures 1 to 6. The first sensor 156 and the second sensor 155 are coupled to sensor cables, which are wound on sensor cable spools 165, 167, respectively, when not in use. The sensor cable spools 165, 167

may be spring loaded to automatically retract the cables following use. In one embodiment, the sensor cables are eliminated and the sensors 156, 155 communicate wirelessly.

[0042] The apparatus 112 further includes a control panel (not shown), which is generally a computer that is in communication with the first motor 92, the second motor 96 and the chain motor 84. Movement of the apparatus 112 may be controlled automatically based on feedback from the first sensor 56 and second sensor 160 or may be controlled manually by using a joystick (not shown) or other input device in communication with control panel. The control panel operates in a similar manner as has been described in relation to the embodiment of Figures 1 to 6 and, therefore, will not be described further here.

[0043] In operation, in order to empty the on-board sewage storage tank 72, the operator parks the vehicle 110 near a sewage disposal unit at a campsite or recreational vehicle park, for example, and removes the cover to expose the apparatus 112. Using the control panel, the operator then initiates movement of the apparatus 112 to move an outlet of the pipe elbow 75 of the sewage conduit 118 into communication with the sewage disposal unit, as shown in Figure 7. Movement of the apparatus 112 may include rotation by the rotation unit 90, tilting by the tilting unit 94, and extension of the self-supporting chain 72. Once the outlet is positioned so that sewage exiting the sewage conduit 118 will be deposited into the sewage disposal unit, the operator then opens the valve at the outlet of the sewage storage tank 66 and turns on a sewage pump 105 to pump sewage from the on-board sewage storage tank 66 through the sewage conduit 118. Once sewage disposal is complete, the operator operates the control panel to close the valve and stop the sewage pump and to retract the extendable arm into the recess 114.

[0044] It will be appreciated by a person skilled in the art that pivoting of the apparatus 112 and extension and retraction of the sewage conduit 118 and sensor cables may be performed manually.

[0045] The embodiment of Figures 7 and 9 is not limited to including a self-supporting chain 72. As will be appreciated by a person skilled in the art, the apparatus 112 may include other types of extendible members. Any extendible member capable of positioning the outlet of the pipe elbow 75 relative to a sewage

disposal unit may be used, such as an extendible arm similar to the extendible arm 30 described in relation to Figures 1 to 6, for example.

[0046] Although sewage disposal has been discussed, it will be appreciated by a person skilled in the art that the sewage conduit may also be used to dispose of grey water from a recreational vehicle, for example. When disposing of grey water, a grey water valve is opened to allow the grey water to flow into the sewage conduit.

[0047] An advantage of the embodiments described herein is that the operator does not contact the sewage conduit so that the sewage disposal process is sanitary and does not result in the operator coming into contact with sewage.

[0048] A further advantage of the embodiments described herein is that the recess provides space so that the sewage conduit may be continuously coupled to the outlet of the sewage storage tank. Re-connection of the sewage conduit to the outlet each time sewage is disposed of, is therefore avoided.

[0049] Specific embodiments have been shown and described herein. However, modifications and variations may occur to those skilled in the art. All such modifications and variations are believed to be within the scope and sphere of the present embodiments.

CLAIMS:

1. An apparatus for emptying a sewage storage tank of a vehicle into a sewage disposal unit, the apparatus comprising:

a platform coupled to a base by a tilting unit, the base rotatably coupled to a surface within a recess of the vehicle;

a chain reel coupled to the platform;

a self-supporting chain mounted on the chain reel, a first end of the self-supporting chain coupled to the chain reel and the self-supporting chain being unwindable from the chain reel to move a second end of the self-supporting chain from a retracted position to an extended position, the self-supporting chain comprising stops to limit links of the self-supporting chain from moving beyond a generally linear position when in the extended position, the self-supporting chain being coupled to an outlet of a sewage conduit of the sewage storage tank for moving the outlet of the sewage conduit into communication with an inlet of the sewage disposal unit prior to opening a valve of the sewage storage tank; and

a control panel in communication with a driving mechanism of the apparatus to control extension and pivoting of the self-supporting chain relative to the vehicle;

wherein the apparatus is sized to be received in a recess of the vehicle when the self-supporting chain is in the retracted position.

2. An apparatus as claimed in claim 1, wherein the sewage conduit is mounted on a sewage conduit reel and is unwound to move with the self-supporting chain between the retracted position and the extended position.

3. An apparatus as claimed in claim 1, comprising a first sensor for coupling to an outlet of the sewage conduit and a second sensor for coupling to the inlet of the disposal unit, the first sensor being in communication with the control panel.

4. An apparatus as claimed in claim 1, comprising a video camera for identifying an object located near the inlet of the sewage disposal unit, the camera being in communication with the control panel.

5. An apparatus as claimed in claim 1, wherein the driving mechanism comprises: a first motor for rotating the base relative to the vehicle, a second motor for tilting the platform relative to the base and a chain motor for rotating the chain reel.
6. An apparatus as claimed in claim 1, wherein the vehicle is one of: a recreational vehicle, a trailer and a boat.
7. An apparatus as claimed in claim 1, wherein the second end of the self-supporting chain is coupled to a pipe elbow, the pipe elbow being located at an end of the sewage conduit and sized for insertion into the inlet of the sewage disposal unit.

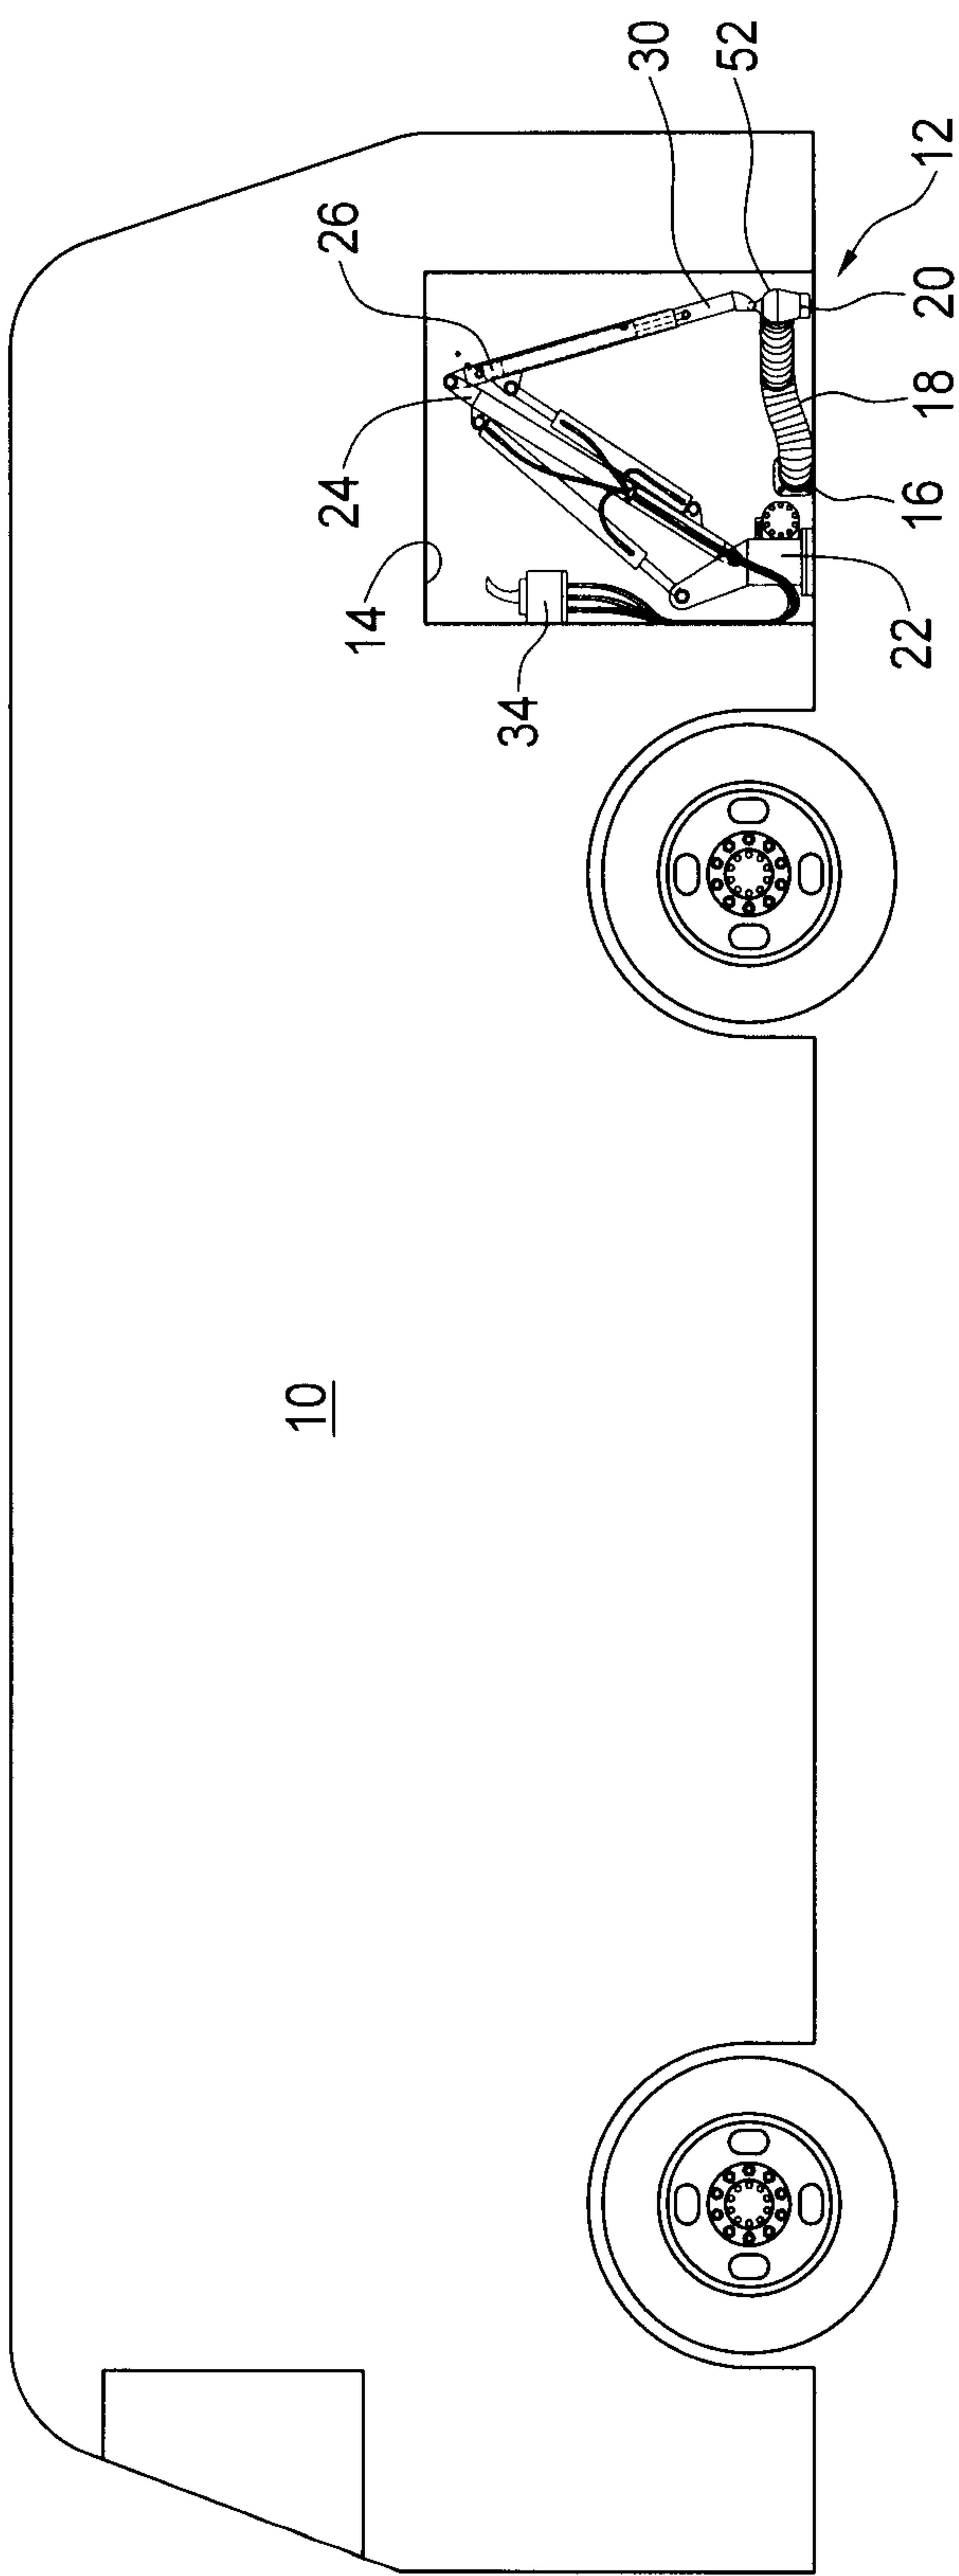


FIG. 1

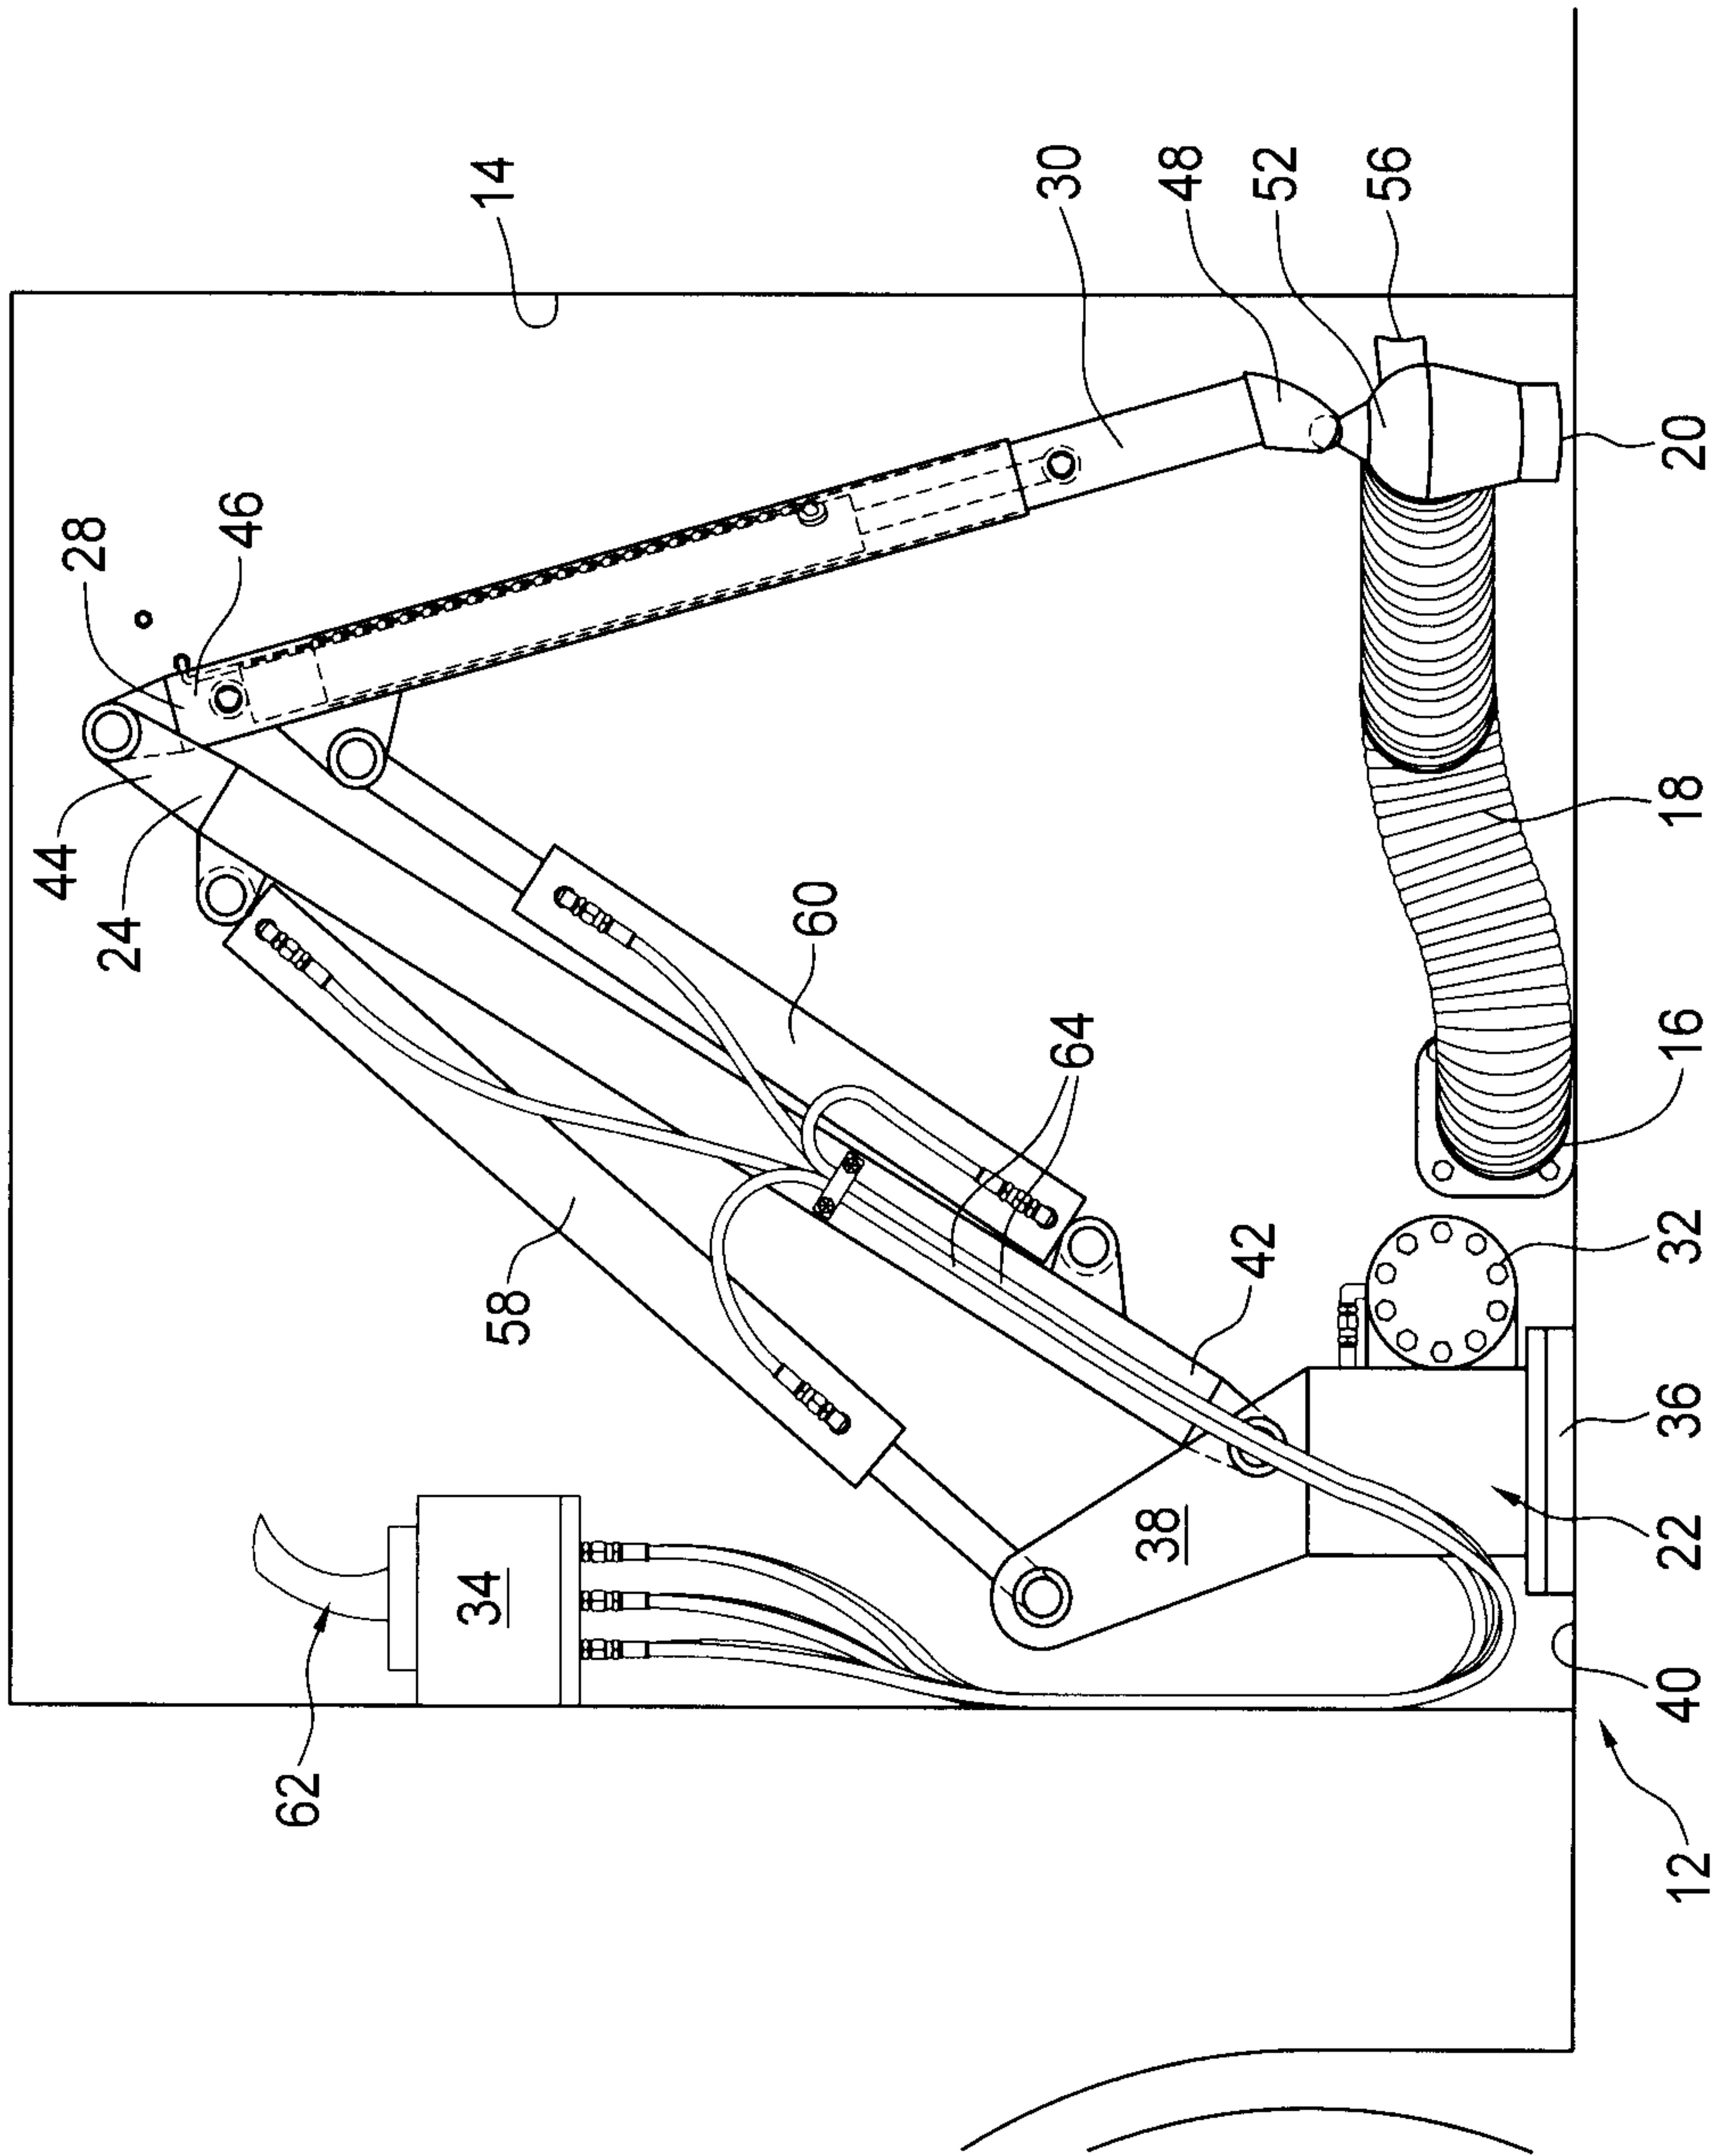


FIG. 2

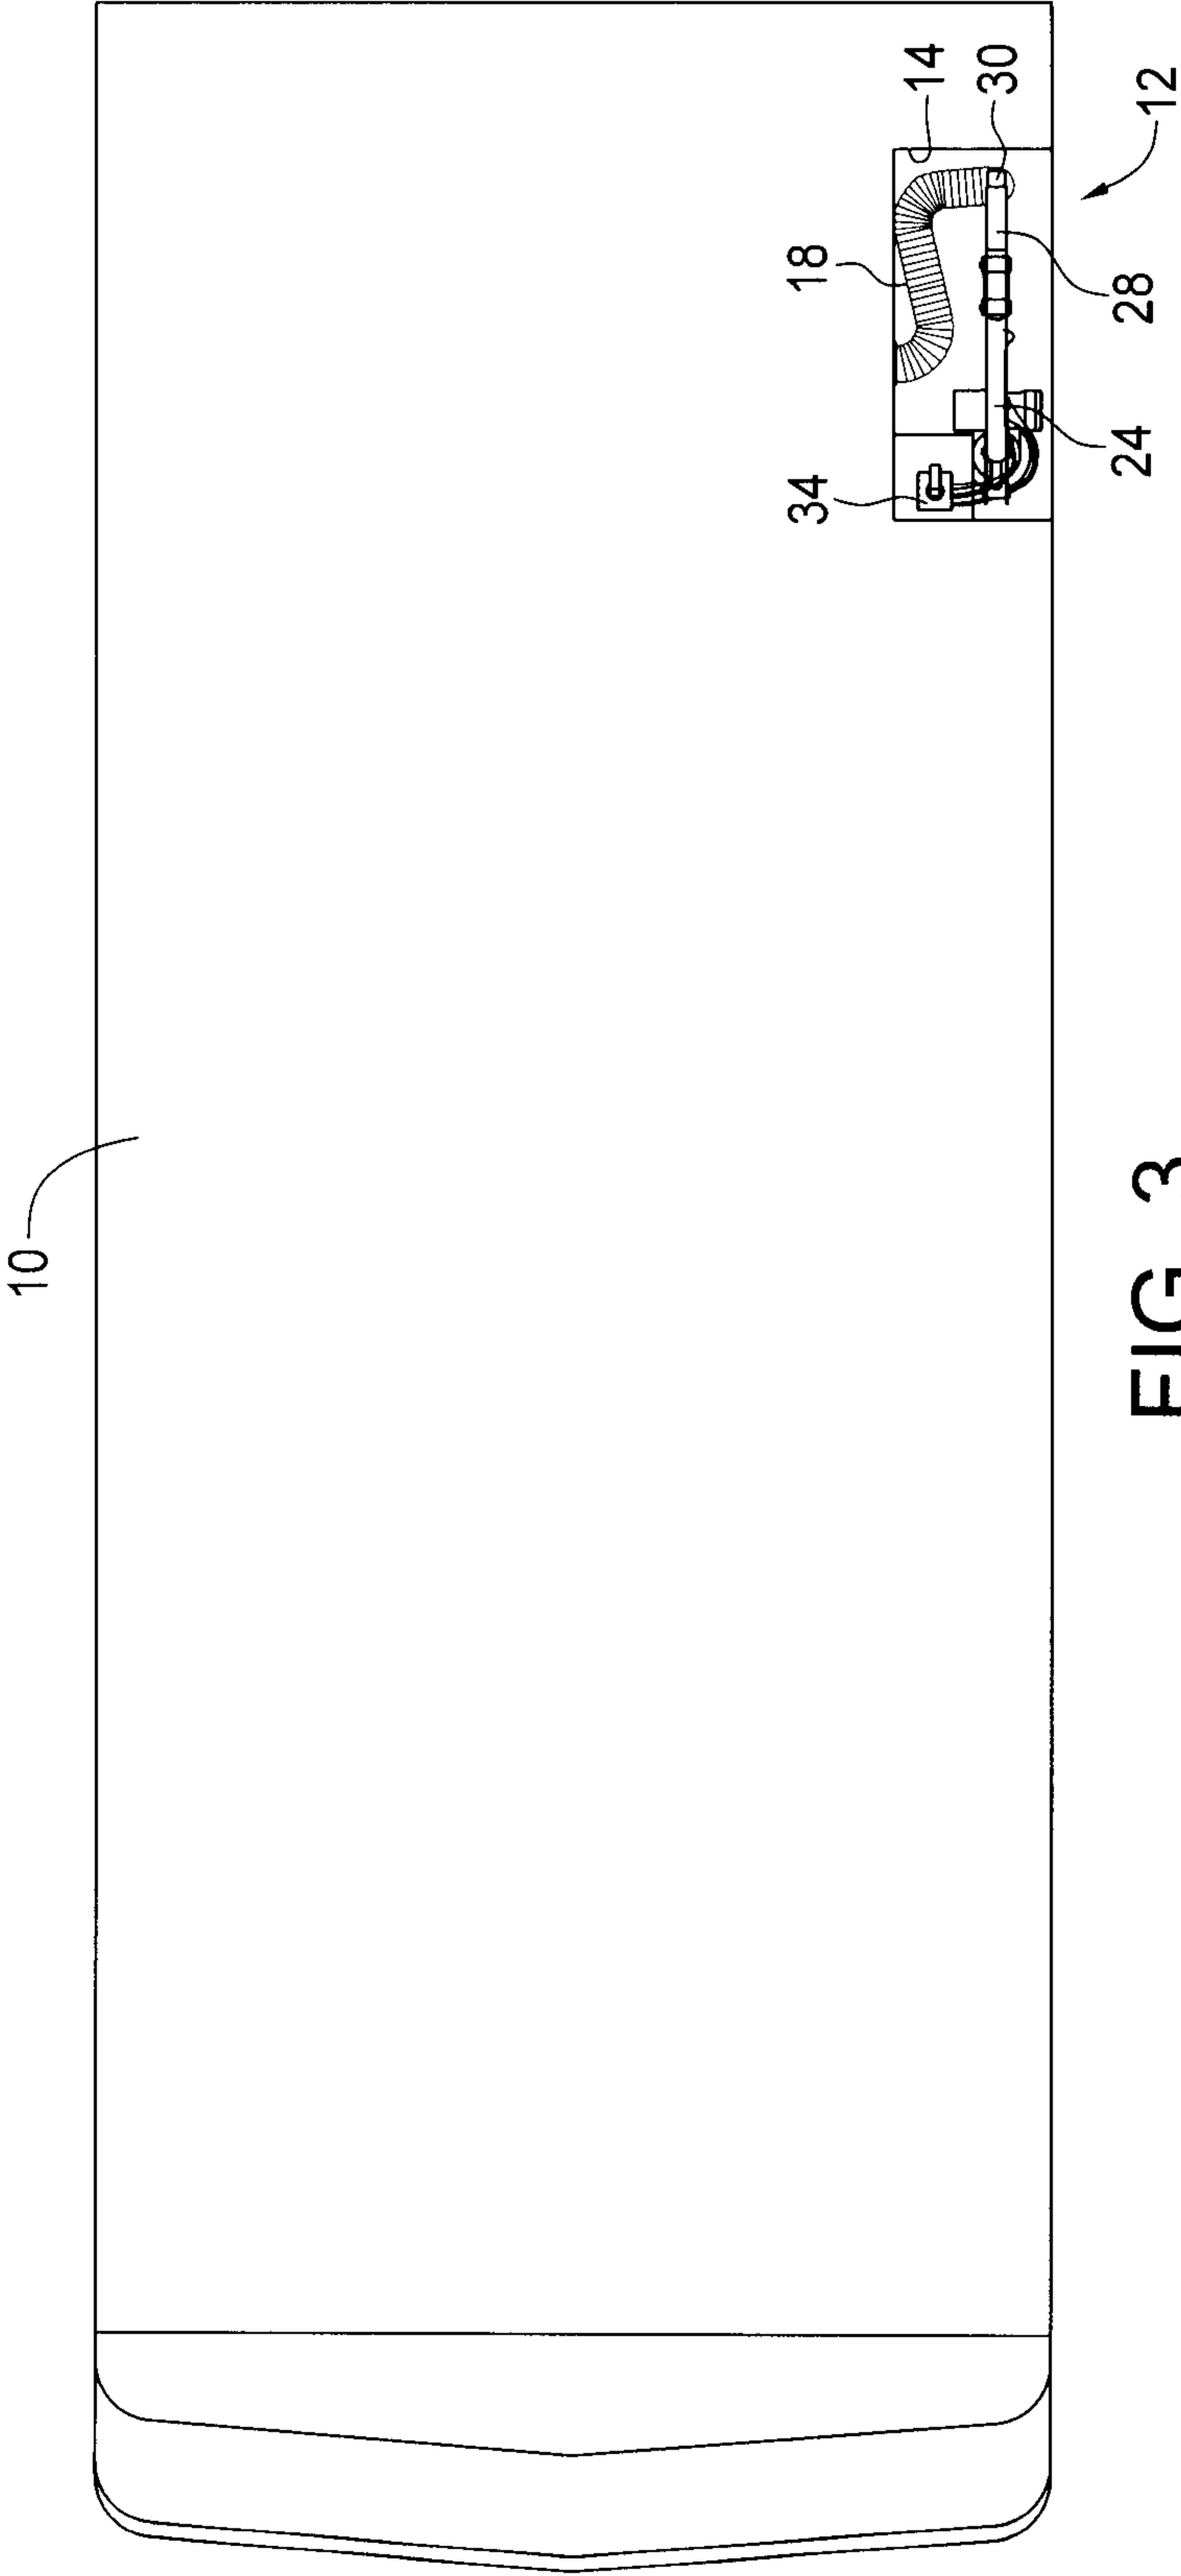
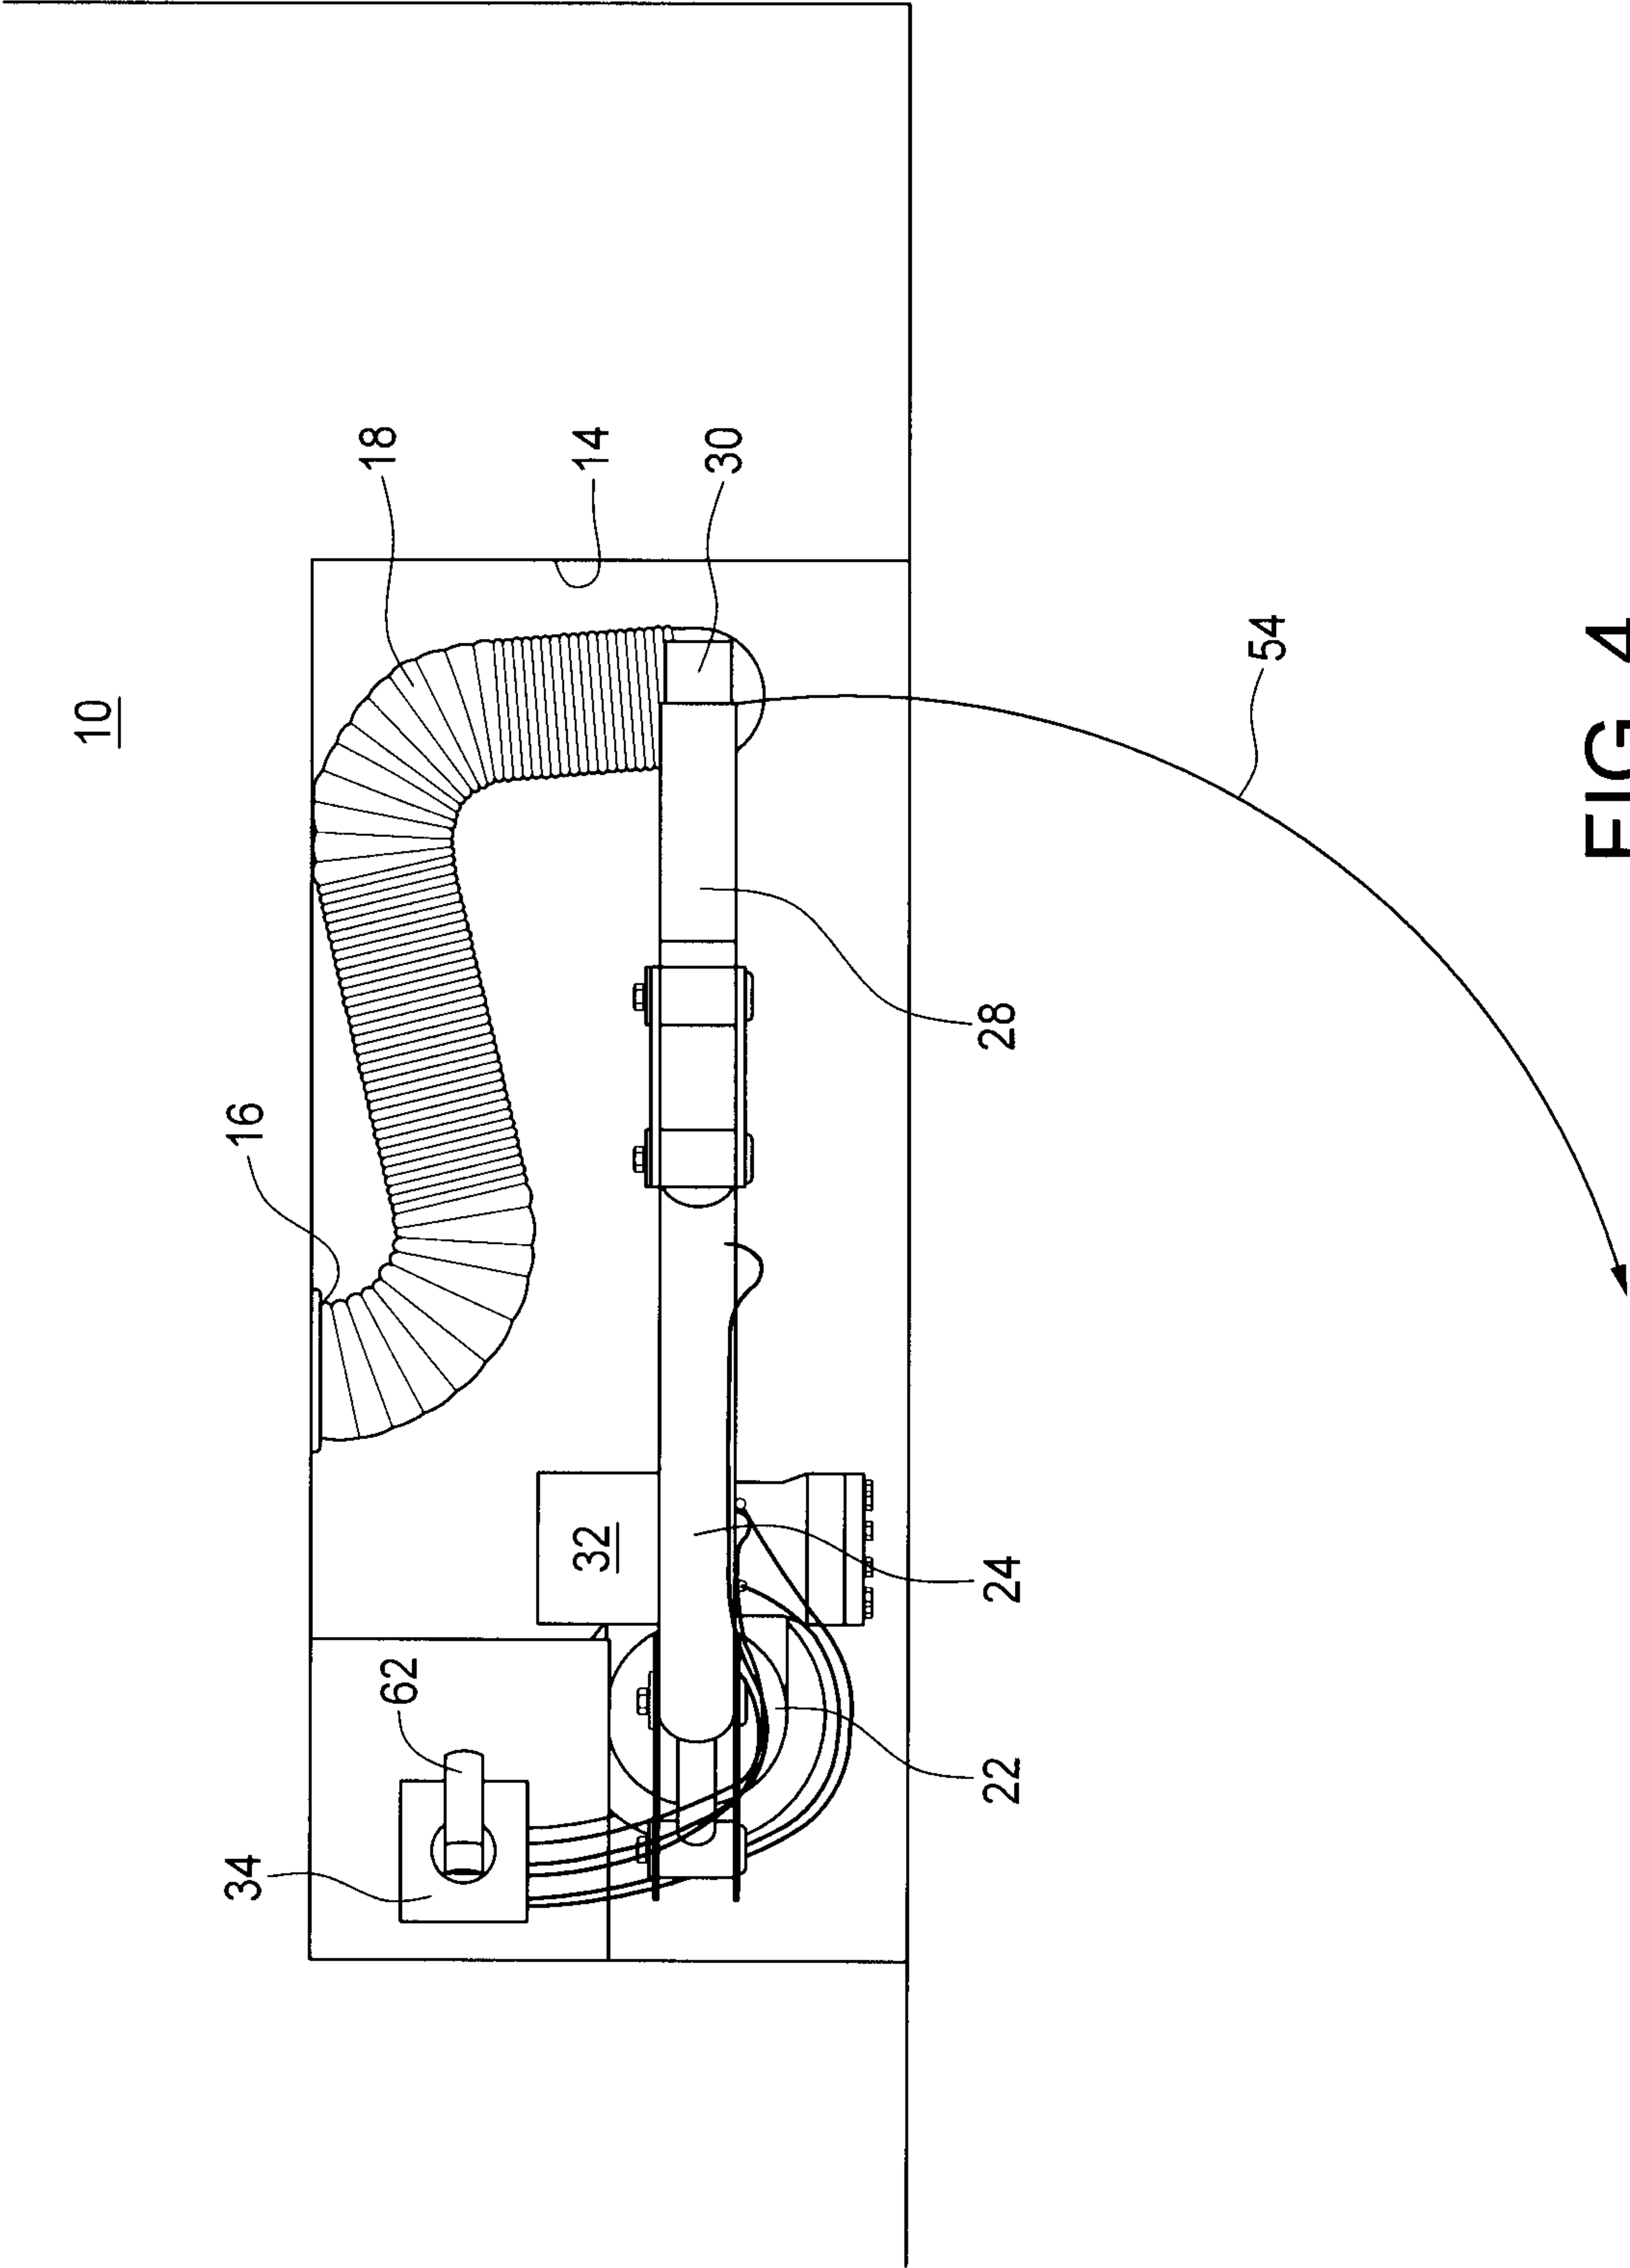


FIG. 3



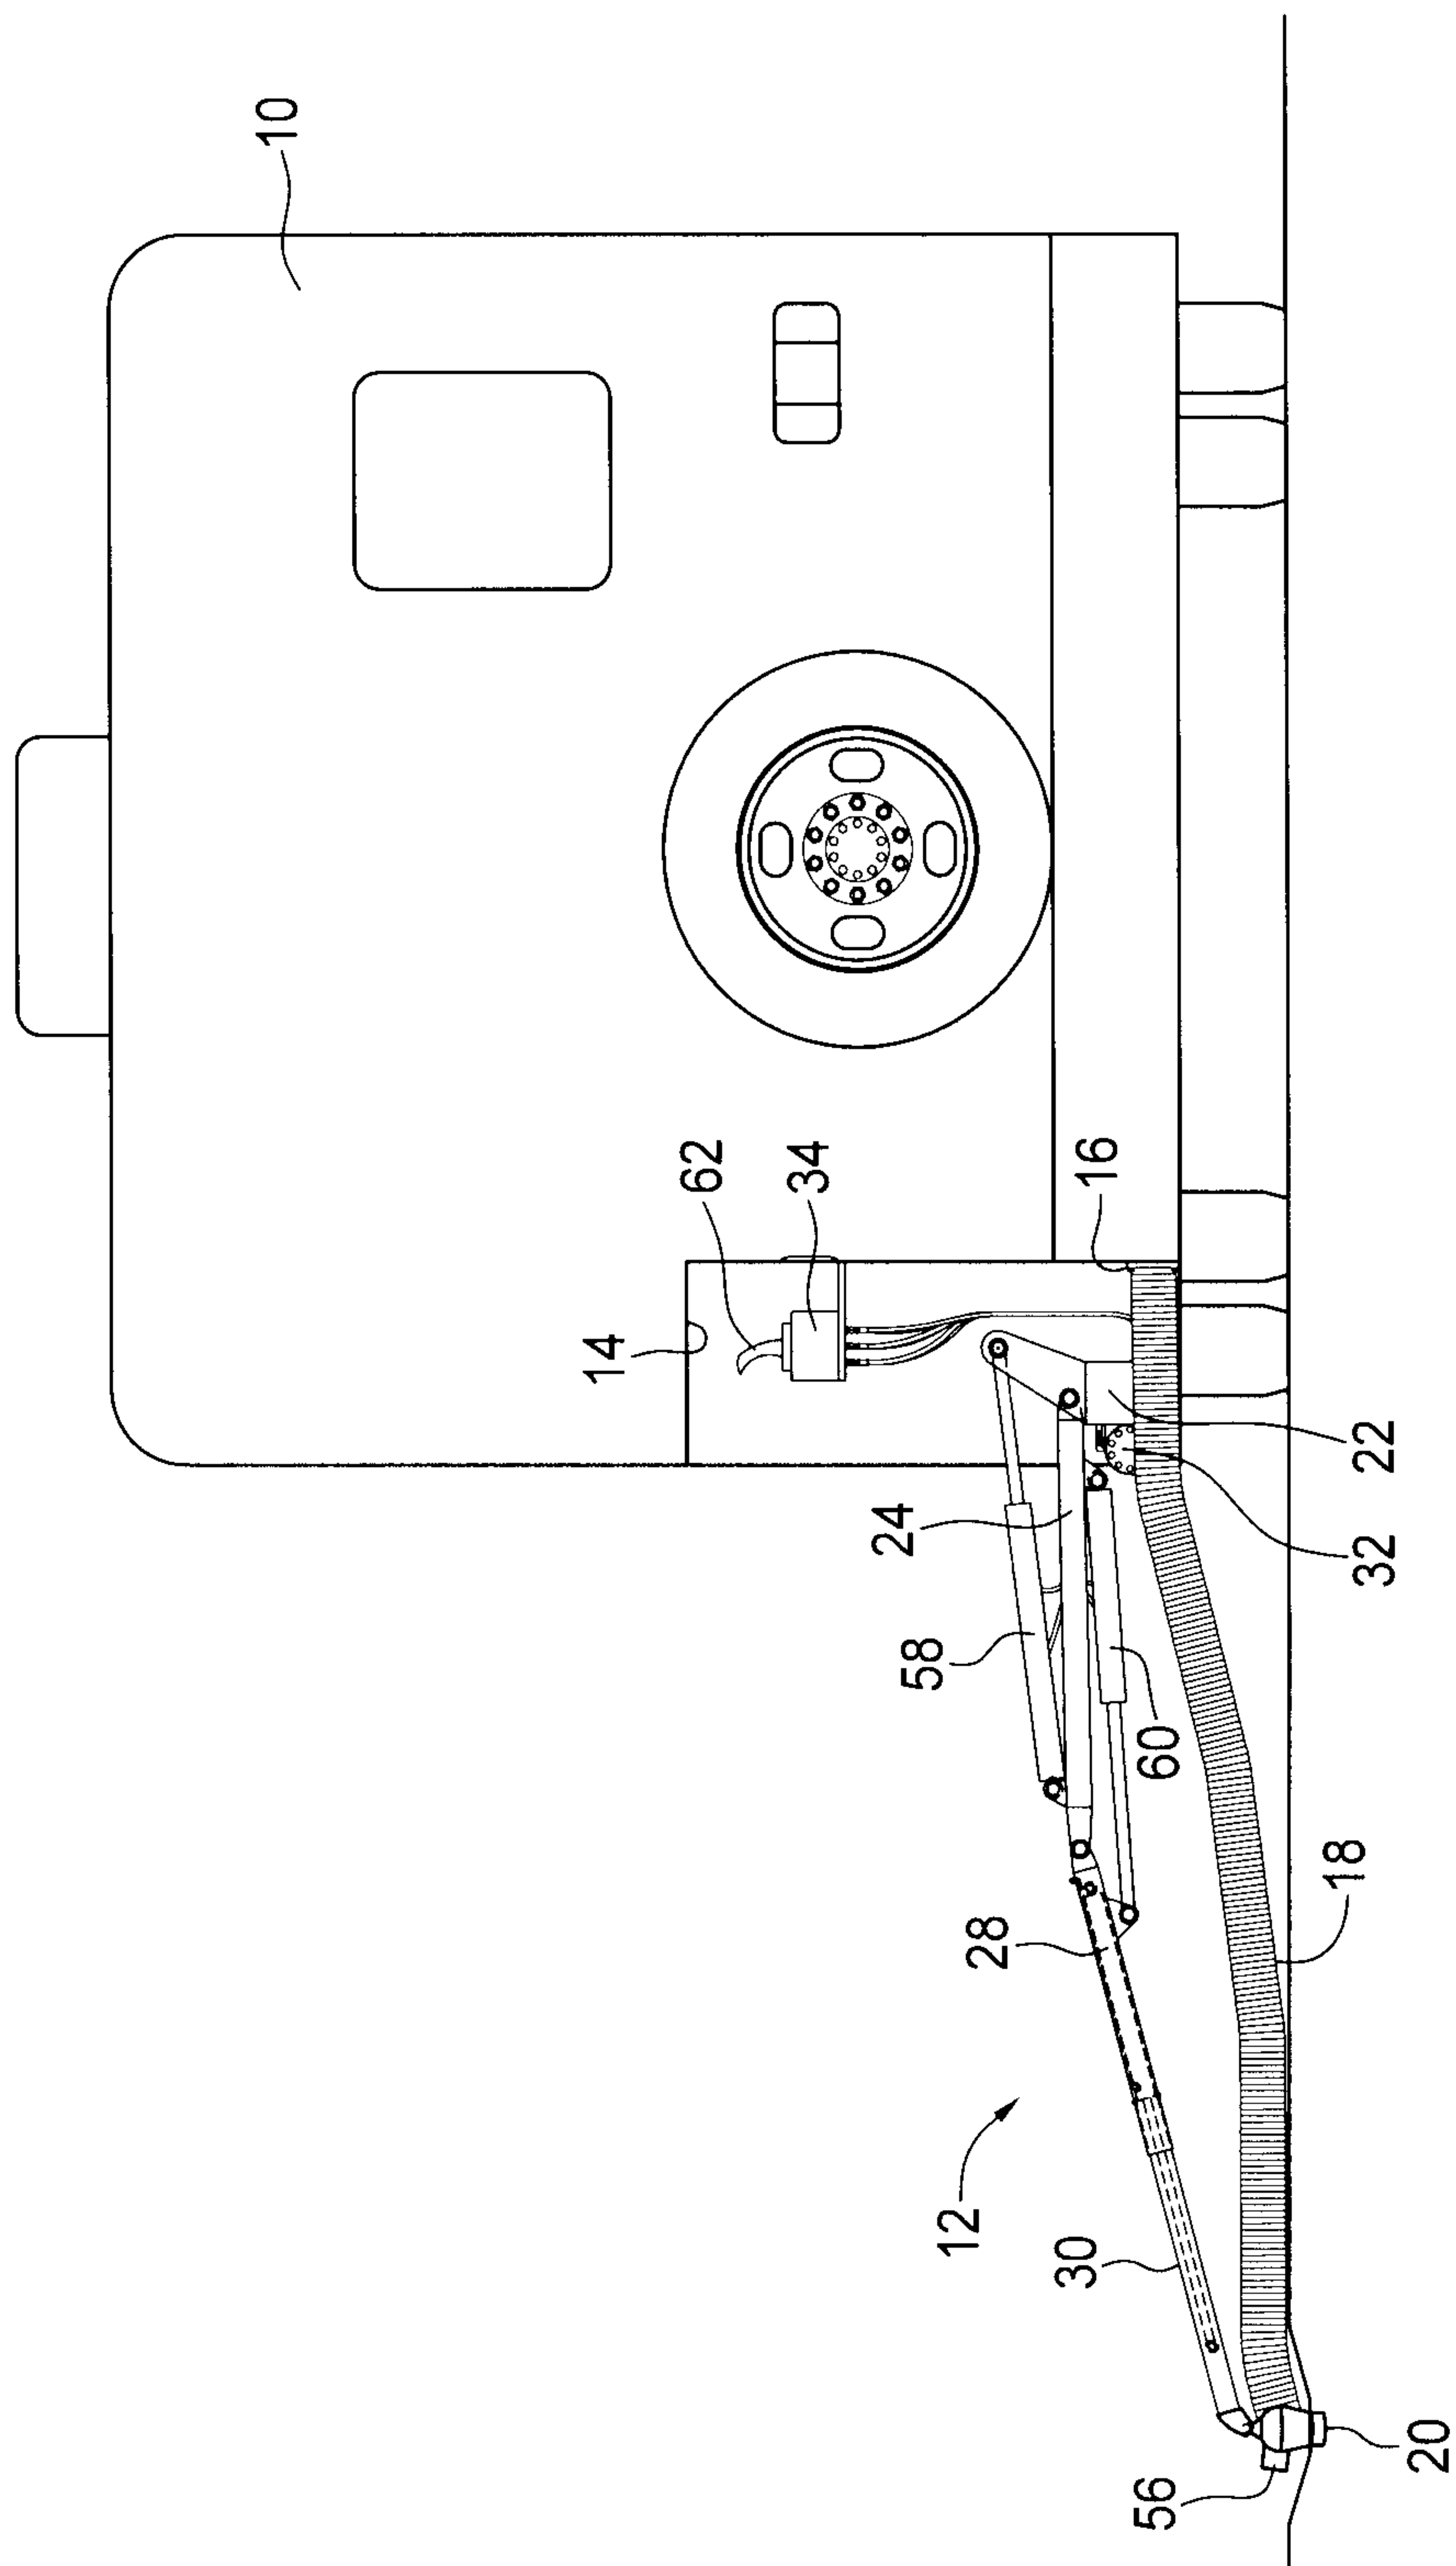


FIG. 5

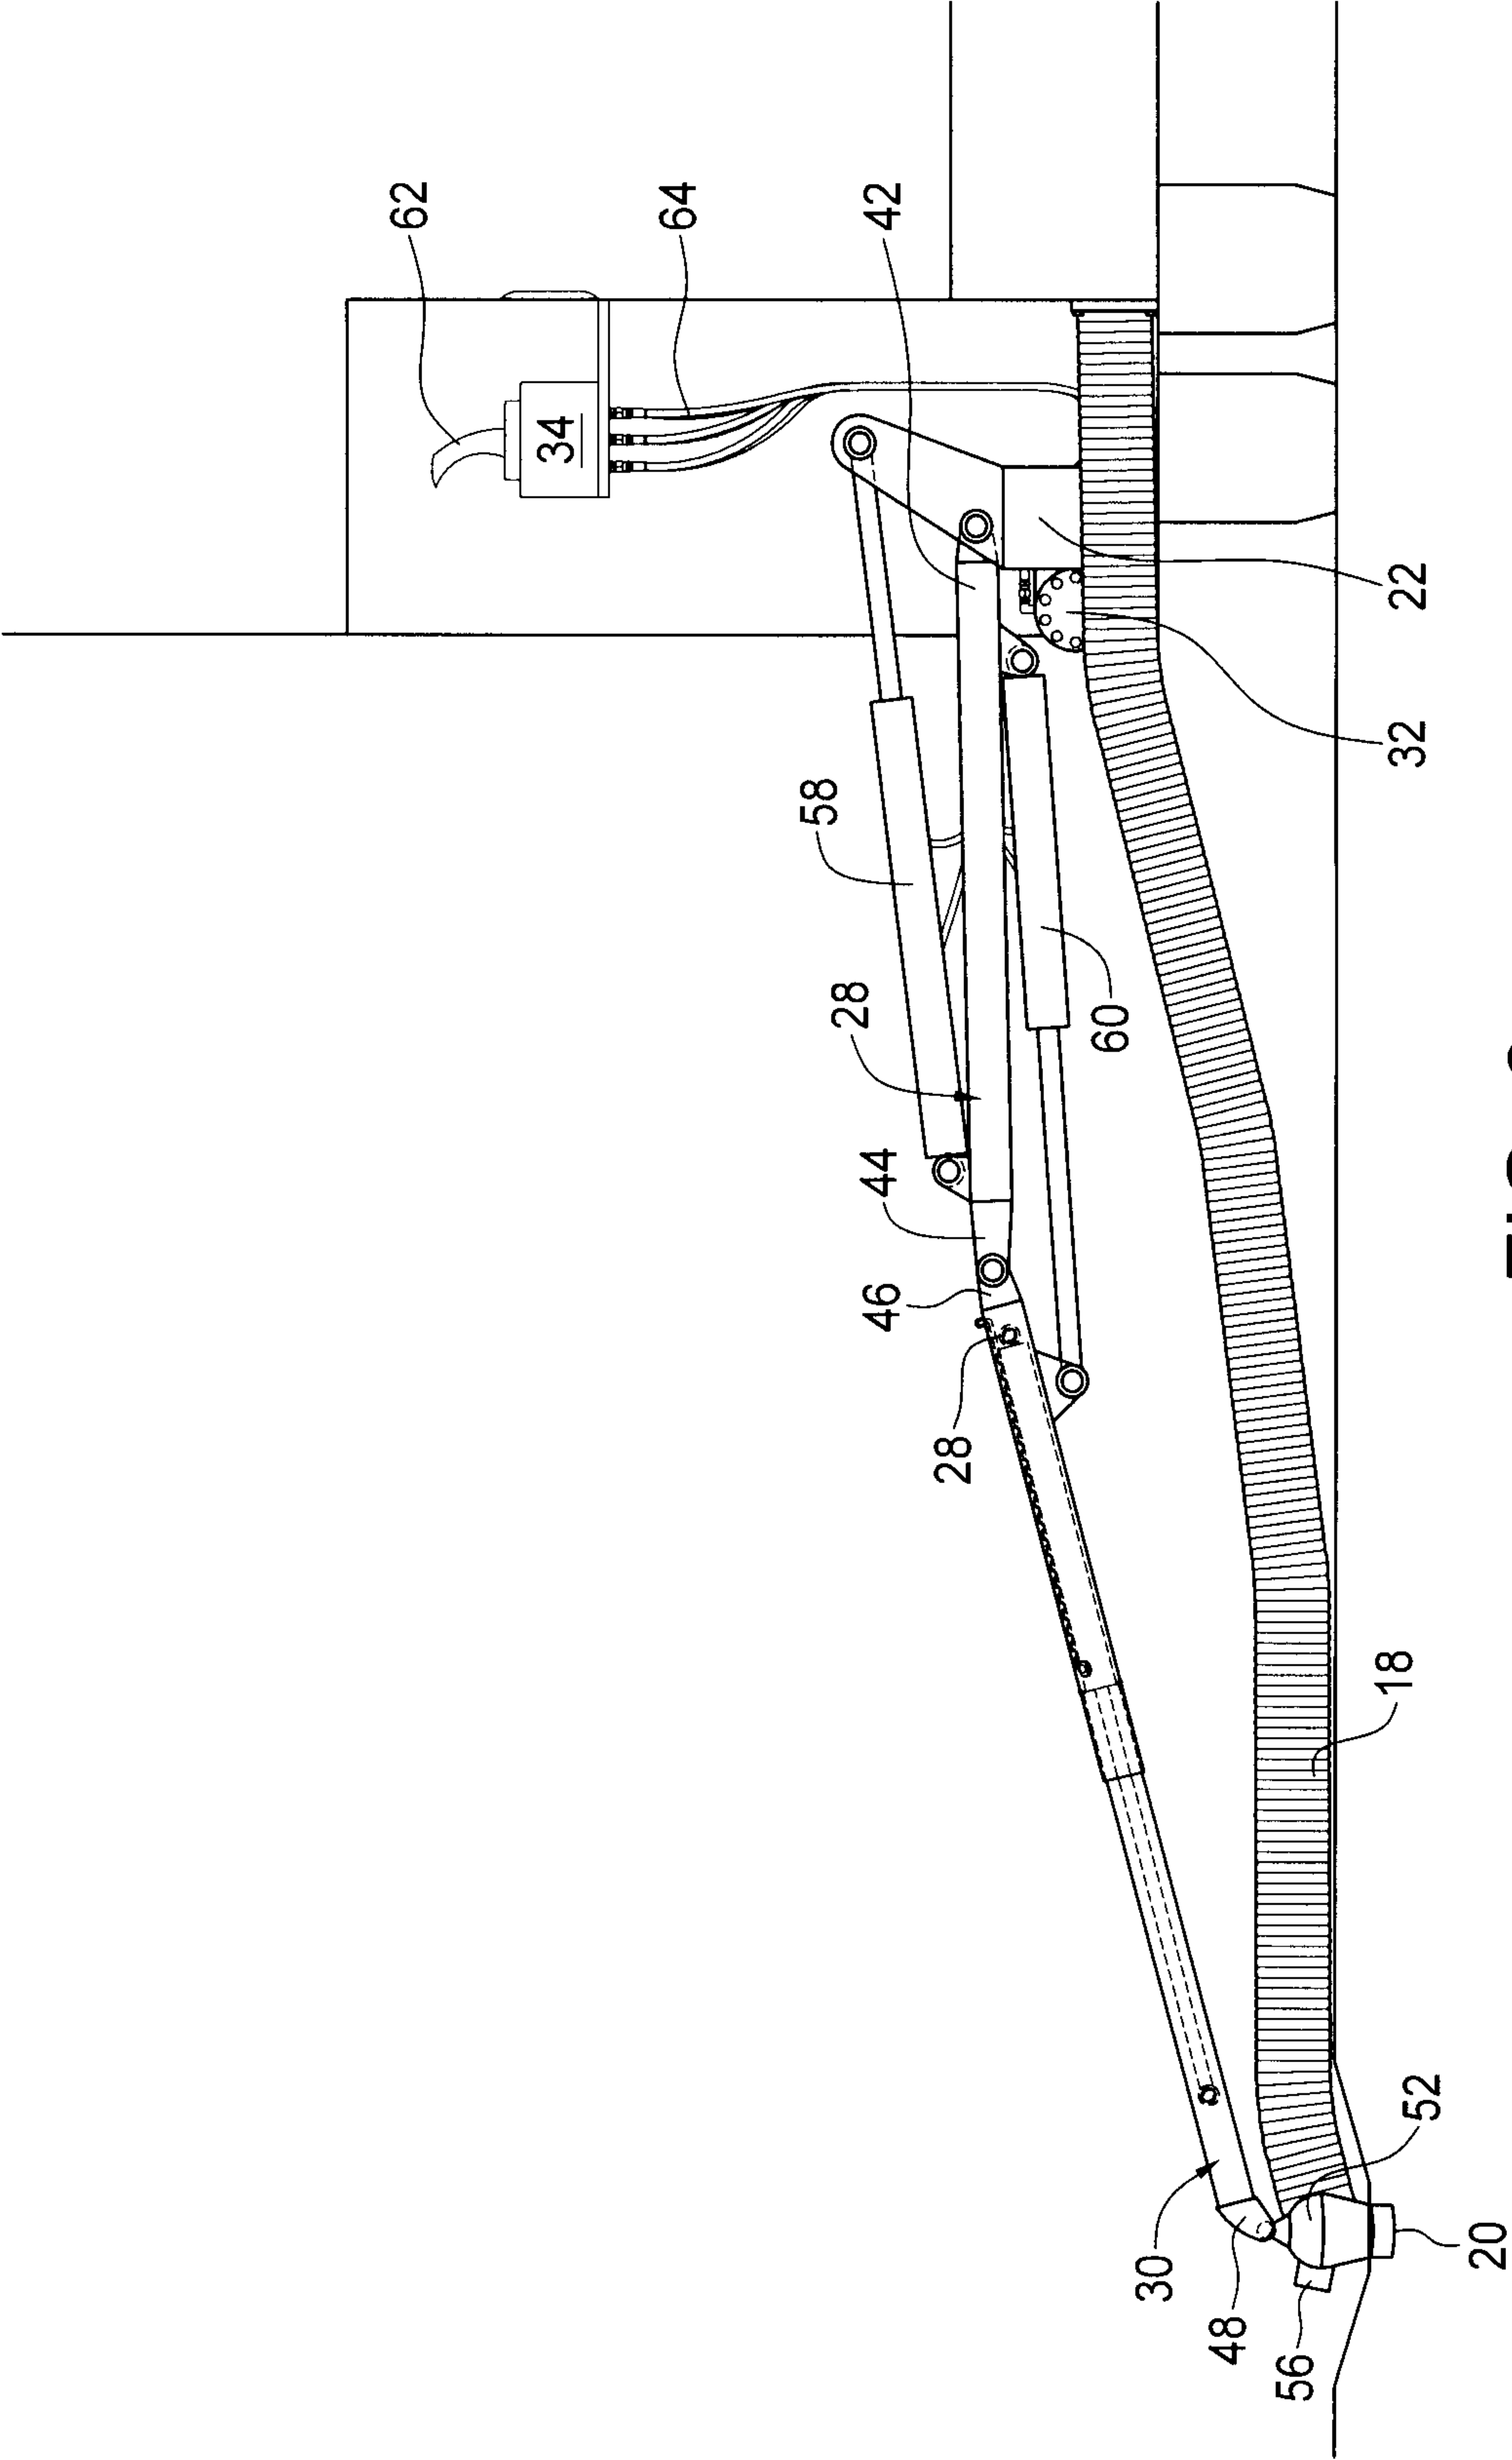


FIG. 6

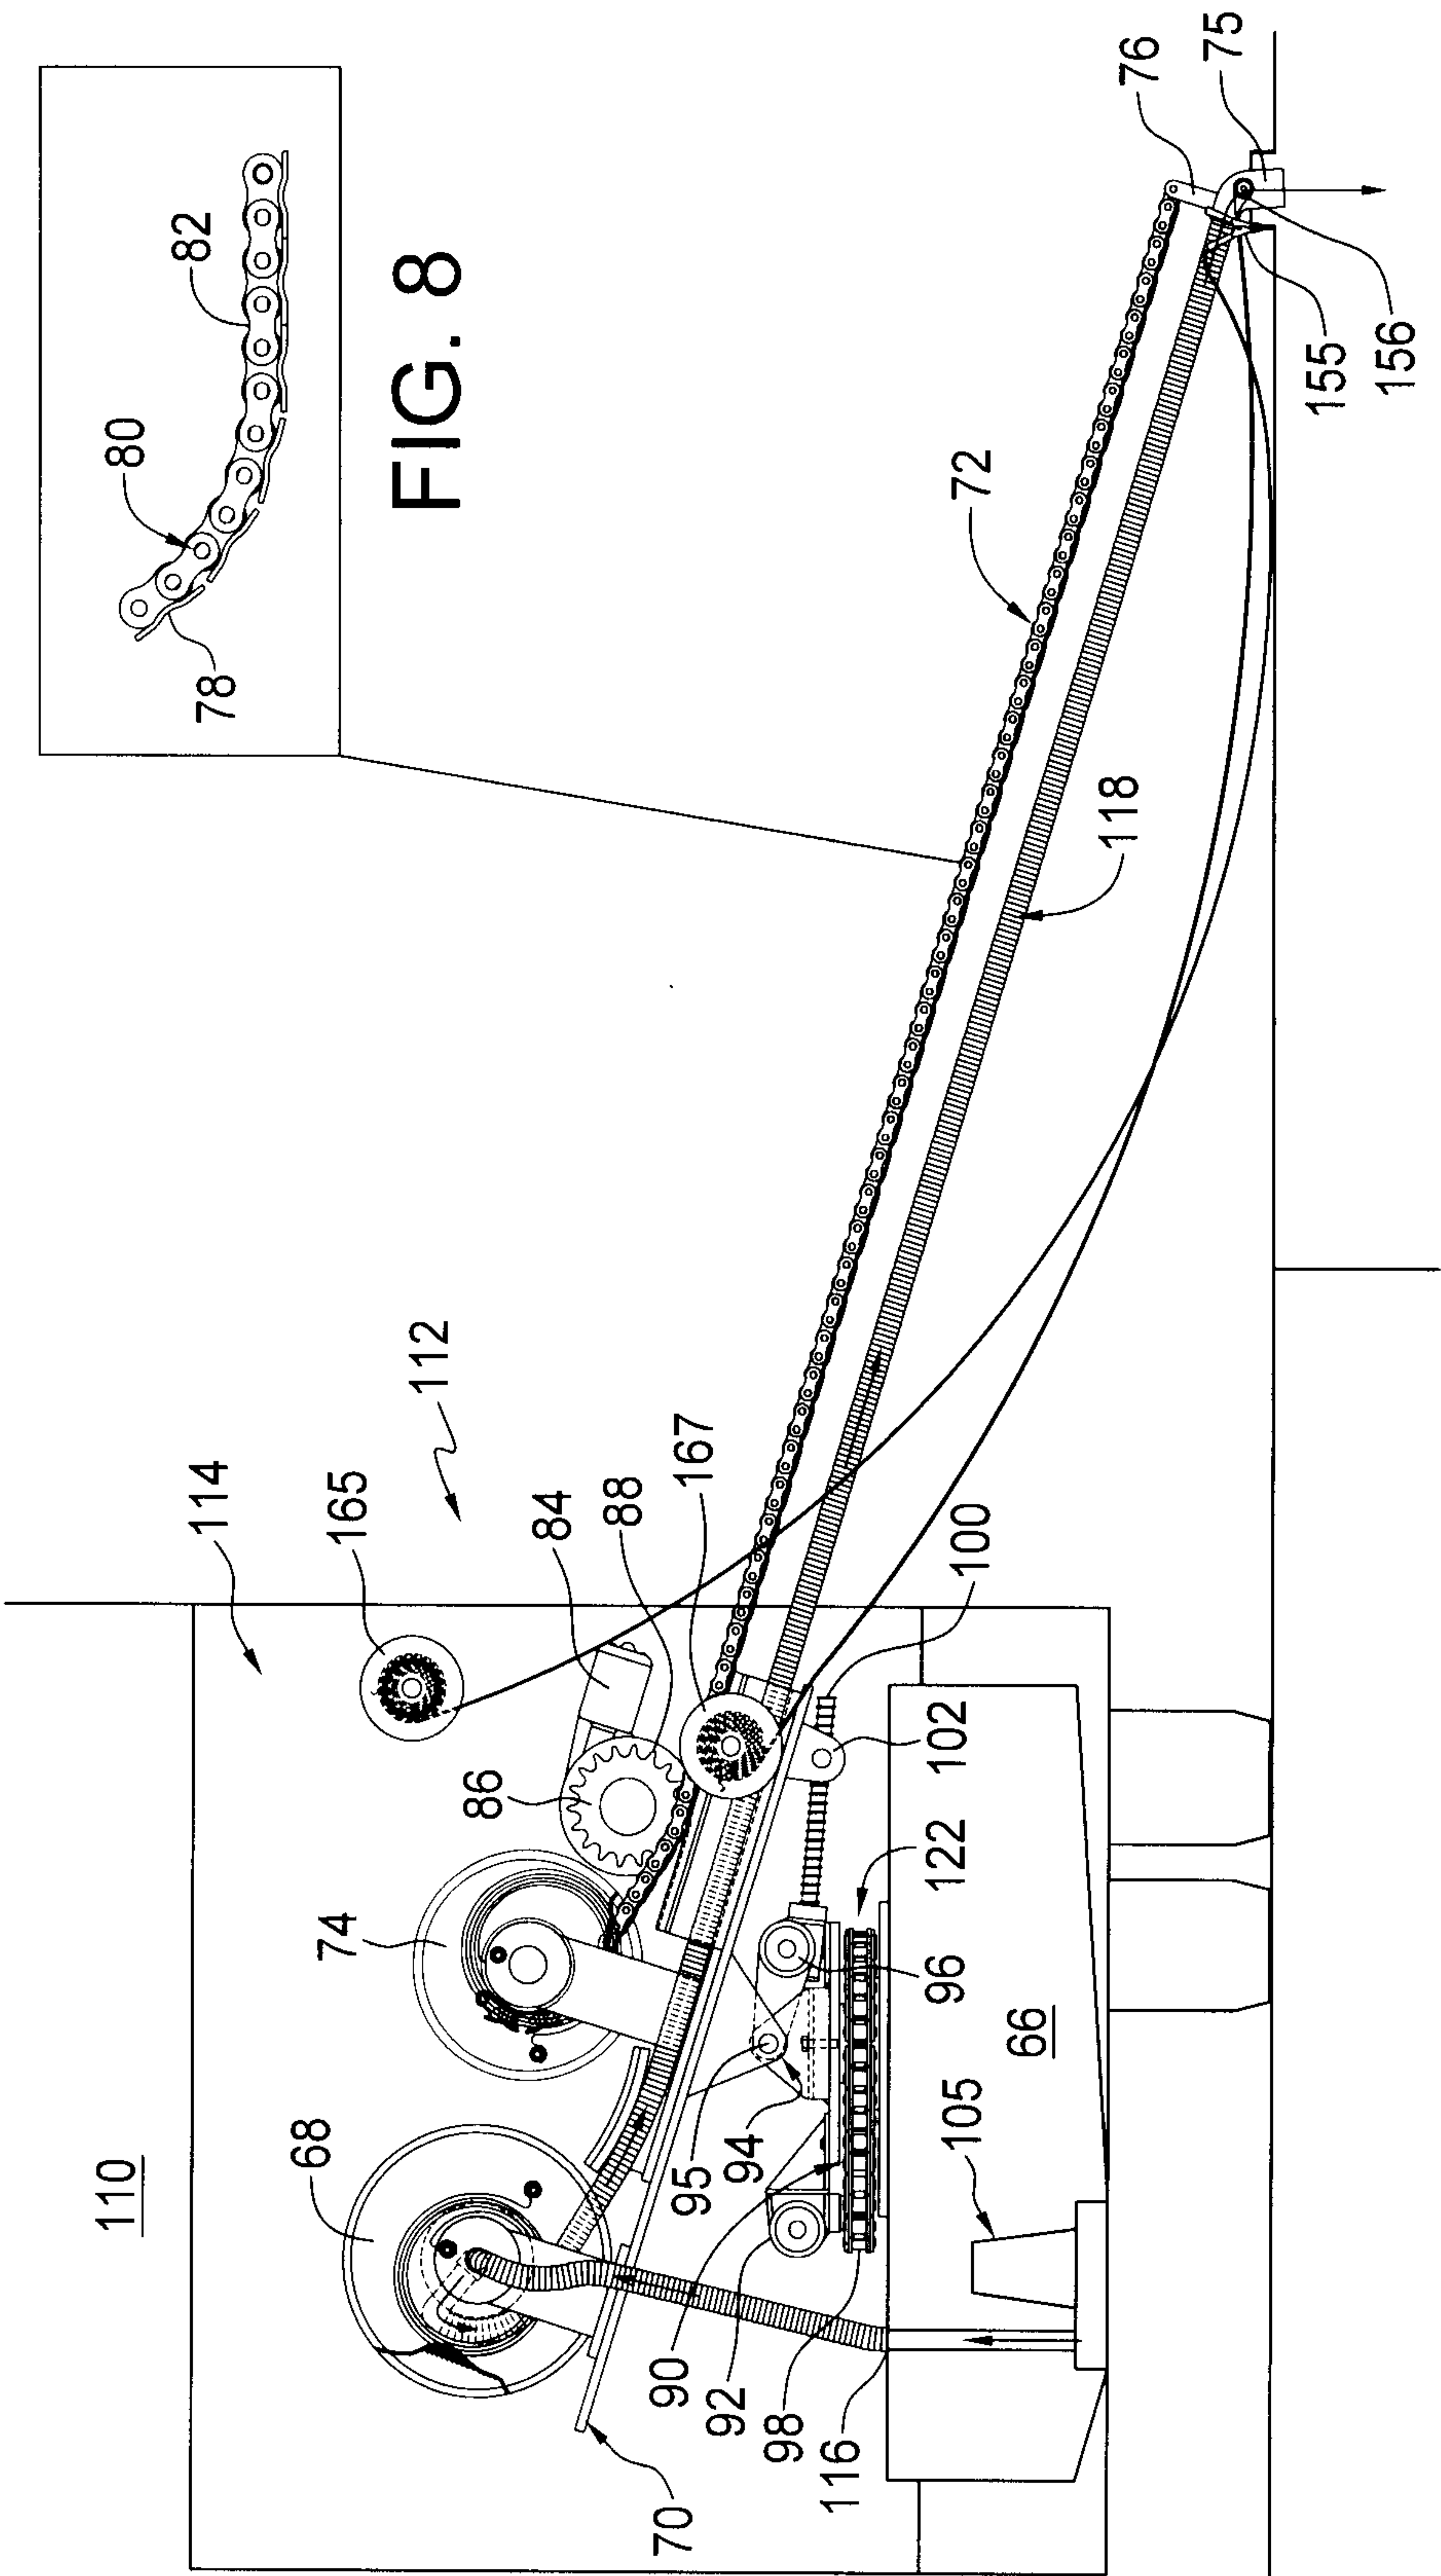


FIG. 7

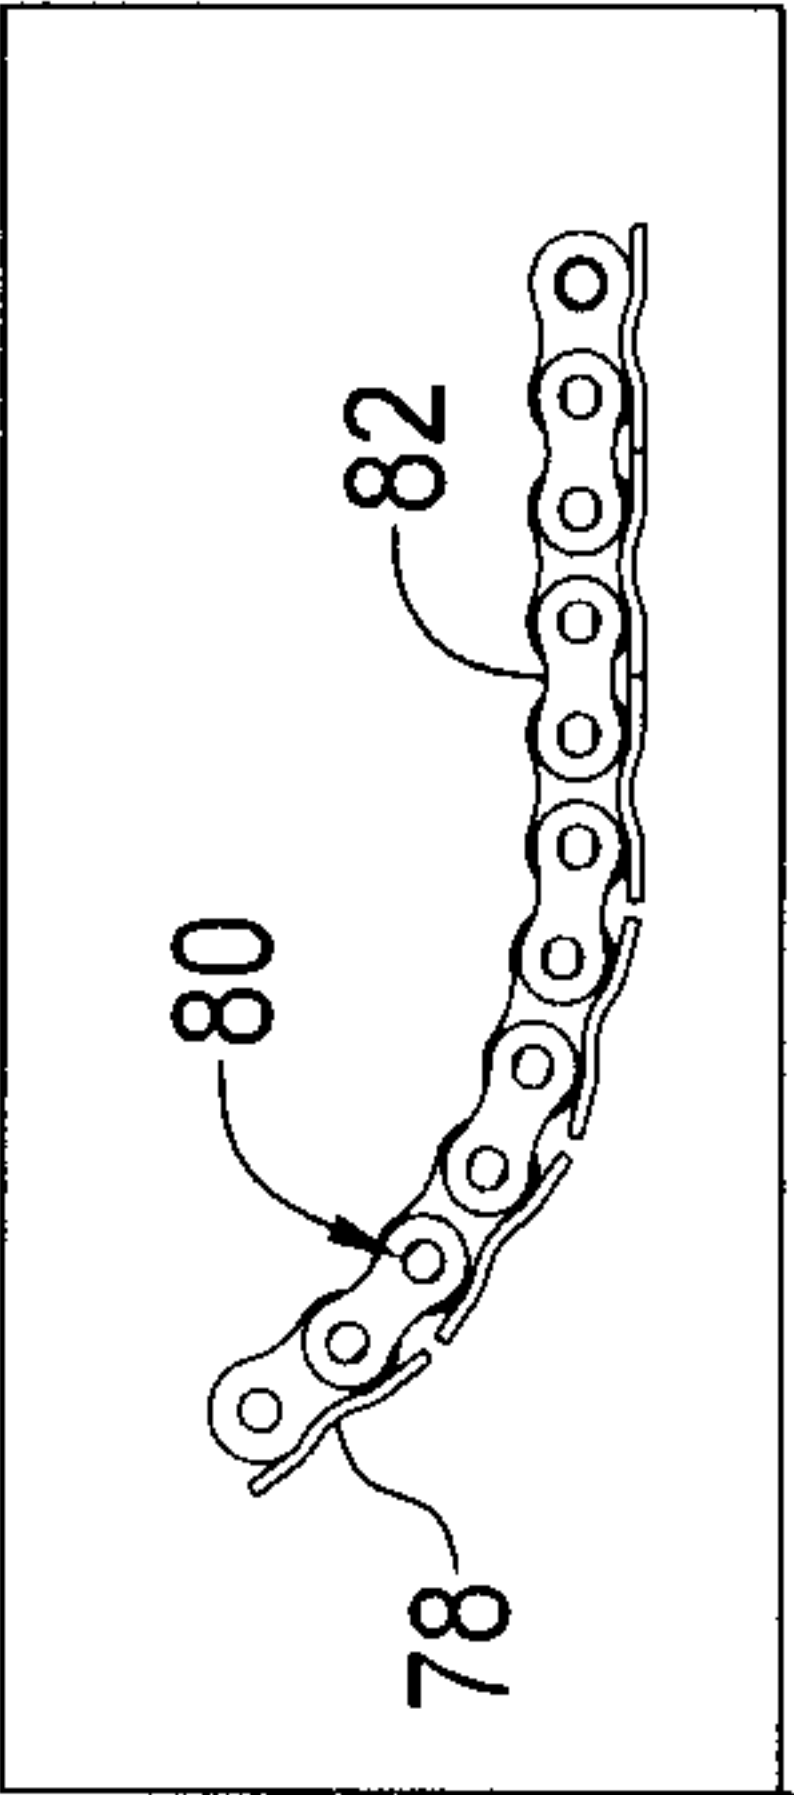


FIG. 8

