




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : F21V 5/02, G08G 1/095</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/25244</p> <p>(43) International Publication Date: 21 September 1995 (21.09.95)</p>
<p>(21) International Application Number: PCT/SE95/00262</p> <p>(22) International Filing Date: 14 March 1995 (14.03.95)</p> <p>(30) Priority Data: 9400875-2 16 March 1994 (16.03.94) SE</p> <p>(71) Applicant (for all designated States except US): ITAB INDUSTRI AB [SE/SE]; Instrumentvägen 6, S-553 02 Jönköping (SE).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): ROSENGREN, Lars [SE/SE]; Fågelstigen 5, S-561 38 Huskvarna (SE).</p> <p>(74) Agent: ARWIDI, Bengt; Ahlpatent AB, Förborgsgatan 27, S-554 39 Jönköping (SE).</p>		<p>(81) Designated States: AU, BR, CA, FI, JP, NO, SG, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. In English translation (filed in Swedish).</p>

(54) Title: LIGHTNING DEVICE

(57) Abstract

The present invention is for a lightning device by which a controlled light pattern is obtained from a specific light source. The device comprises a light source which emits several parallel light beams. There is one prism (3) for each light beam (8), which passes through there. All of the prisms are integrated parts of a common disc. Preferably the light source comprises several light emitting diodes (1) each emitting one light beam. The prisms are suitably made as straight, circular cylinders, at least those parts thereof which protrude from the common disc. The oblique surface may be freely varied at both its angles at the axis of the cylinder and direction whereby the direction of the corresponding light beam may be controlled.

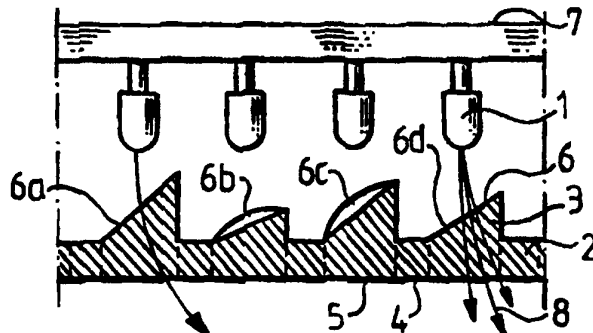

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

LIGHTNING DEVICE

The present invention is for a lightning device by means of which a controlled light pattern is obtained from a specific light source. Controlled means that the light as projected on a flat surface produces a light pattern of a predetermined intensity and shape. The device according to the invention is primarily intended to be used for traffic light posts.

It is often desirable that the light from a light source is recognized by individuals or other means primarily when these are at a specific position within a defined area. The effective output required from the light source may be reduced if the light from the light source is concentrated to the desired area.

It is known to make use of different kinds of light sources as well as light reflecting and refracting devices in order to obtain a desired light pattern. Thus it is known to have the light from an electric bulb to be reflected by a preferably parabolic reflector and then pass through a lens or prism setup. This may comprise a single lens or prism but there may also be several of these, functioning together in different ways. In stead of electric bulbs light emitting diodes may be used. Different kinds of these are available which emit light as a concentrated, directed beam of specific intensity, spreading angle and wave length span.

Devices of the kind mentioned above are found both as headlights and lamps for different kinds of vehicles and as traffic signal lights. Especially for the last mentioned application known devices have primarily been intended to give an acceptably concentrated light beam have an essentially circular cross section, whereby a comparatively large border area with diffuse light refraction is obtained.

The object of the present invention is to provide a lightning device, by means of which a carefully controlled light pattern of predetermined intensity and shape is obtained. The device according to the invention also makes individual variations and adaptations to specific applications possible. This is obtained thereby that the device comprises a light source which emits a number of parallel light beams. A prism is arranged for each light beam which passes through the prism. All of the prisms are integral parts of a common disc. Preferably the light source comprises a number of light emitting diodes, each of them emitting one light beam. The light emitting diodes, which in one device may be individually different in respect of e. g. luminance, are suitably mounted onto a common flat plate.

The common disc of the prisms has one preferably flat surface on the side facing away from the light source. A smooth, flat surface brings advantages, e. g. by being dirt repellent and easy to clean if necessary. Also from a production point of view a flat surface is advantageous as compared to e. g. a curved, smooth surface, making it possible to keep down the costs for moulds and tooling. This surface will be one outer side of the lightning device and be turned towards a viewer. Each one of all of the prisms is an integrated part of this common disc, which means that they are parts of the fixed disc construction and in a preferred embodiment the prisms and the disc constitute one piece of homogenous goods. In other embodiments individual prisms may be mounted into holes intended for this purpose in the disc. Disc and prisms may then be made from the same or from different materials. Essentially all of light which is emitted from the device passes through the prisms. Suitably the prisms - at least those parts thereof which protrude from the common disc - are shaped as straight circular cylinders. Each such prism has one end surface which is essentially at right angle to the axis of the cylinder and one end surface which is oblique thereto. The surface which is at right angle to the axis preferably coincides with the flat surface of the common disc, i. e. its outer surface. The

complete device thus has a common flat outer surface. If the common disc e. g. has a curved outer surface the ends of the prisms which coincide with this surface will not be at exactly right angle to the axis of the cylinder. The oblique surface may have a freely variable angle relative to the axis of the cylinder and freely variable direction of its slope whereby the direction of the corresponding light beam is controlled.

The invention will below be further illustrated by the examples of embodiments thereof which are shown in the enclosed figures.

Figure 1 shows a disc with prisms as seen from the inside of the device.

Figure 2 shows a cross section through a part of the disc and corresponding light sources.

Figure 3 shows an example of a light pattern.

Figure 4 shows some different designs of prisms at the disc.

The common disc 2 as shown in figure 1 has a flat outer surface facing downwards in the figure. At the disc and protruding upwards from its surface are several prisms 3 having circular cross sections. The number of prisms and there positions at the disc may vary due to the application. One example of a design is a disc with an outer diameter of about 200 mm. At this disc there are 260 prisms, each having an outer diameter of about 8 mm.

The disc and the prisms may be made from the same or different materials. Preferrably they are made as one piece from polycarbonate, which has properties as required in many applications regarding index of refraction, light transmission and mechanical strength. Another possible embodiment is a disc from a freely choosen material having a number of holes which corresponds to the number of prisms and a separate prism

inserted into each hole.

Figure 2 shows a cross section of a part of the disc with prisms, four of which are shown in the figure, and with light sources connected with the prisms. These are light emitting diodes 1 each of which emits a well concentrated light beam. The spread of the light beam is often about 2-4° from the centre axis of the diode. The light beam is directed onto the oblique surface 6 of each prism and is refracted by this surface. Thereupon the light beam passes through the prism and is again refracted by the outer surface 5, which may be common with the outer surface 4 of the disc. For the surface which is designated 6a also the outermost light is shown and it is seen that all of the emitted light passes through the prism. Only insignificant quantities of stray light finds itself other paths.

The oblique surfaces 6 of each prism may be varied in respect of both the angle at the centre axis of the prism and the direction of the surface. In the figure the surfaces 6a and 6d have the same direction but different angles, while the surfaces 6b and 6c have a somewhat different direction.

One example of a desired light pattern is shown in figure 3, which in the form of a diagram shows the desired light strength in a vertical plane at a certain distance from the lightning device. The rectangular, full lines indicated the desired values and the broken irregularly shaped lines show the results of a metering of the strength of the light emitted from a device according to the invention.

Figure 4a-4c shows different designs of the prisms and the corresponding disc. Preferably the prisms and the disc are made as one unit by injection molding of polymer, where polycarbonate has turned out to have the most suitable combination of properties. The oblique surface of the prism touches the inner surface of the disc and then protrudes

therefrom, so that there is no pit or the like in the unit. Alternatively the the disc and prisms unit may be produced by drilling holes into an all over flat disc whereupon individual prisms are placed in these holes. The prisms may then be of different size as shown in figures 4b and 4c. The last mentioned embodiment will preferrably be used only when a very small number of identical devices shall be produced and the costs for making a mould or adaption of an existing mould for injection moulding are too high. When making these moulds it is preferred that the oblique surfaces of the prisms are formed on the surfaces of small, exchangeable parts of the mould. In this way changes and adaptations are possible easily and at a much lower cost than if the complete mould would have to be replaced. The replaceable details of the mould are controlled in some way, e. g. by means of a flattened surface, so that they can not freely be turned around there axis when they are mounted into the mould. This also applies to individual prisms when these are made as inserts into holes in a common disc.

The invention makes it possible to obtain a desired light pattern with much increased precision. Adjustments as desired are easily made and e g left and right designs are easily obtainable. One plate with light emitting diodes may produce different light patterns which may be exchanged and adapted to changing conditions.

CLAIMS

1. A device for obtaining a light pattern having predetermined intensity and shape comprising a light source, which emits several parallel light beams, a prism (3) corresponding to each light beam through which the beam passes, all of the prisms being integral parts of a common disc (2) characterized therein that the for all of the prisms (3) common disc (2) has a flat surface (4) over which the prisms are distributed and which also forms one surface of the prisms and that the surfaces (6) of the prisms which are oblique thereto are positioned adjacent the opposite surface of the disc.

2. A device according to claim 1 characterized therein that each prism is a straight circular cylinder having one end surface (5) at right angle to the axis of the cylinder and one end surface (6) oblique to the axis of the cylinder.

3. Device according to claim 1 or 2 characterized therein that each prism is mounted into a corresponding hole in the common disc (2).

Fig. 1

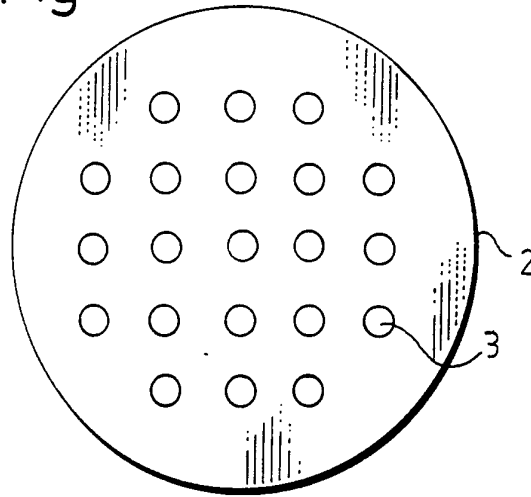


Fig. 2

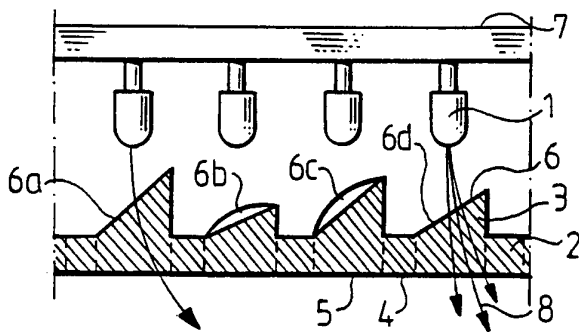


Fig. 3

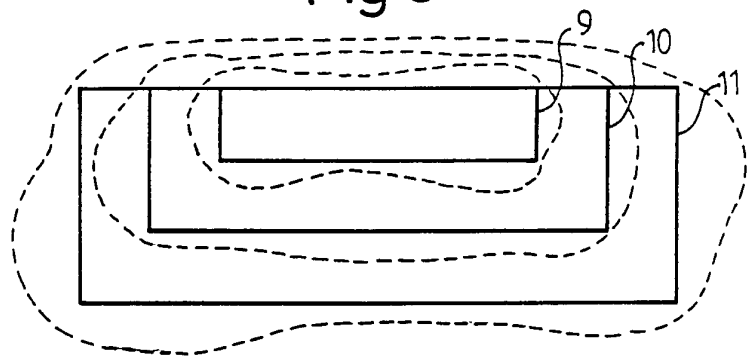


Fig. 4a




Fig. 4b




Fig. 4c



INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00262

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: F21V 5/02, G08G 1/095 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: F21V, G08G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4630180 (K. MURAKI ET AL), 16 December 1986 (16.12.86), column 2, line 17 - line 57, figures 1, 2 --	1-3
A	FR, A1, 2563929 (THERY-HINDRICK), 8 November 1985 (08.11.85), page 3, line 9 - line 32, figures 1-3 --	1-3
A	FR, A1, 2586844 (SOFRELA S.A.), 6 March 1987 (06.03.87), page 5, line 17 - line 30, figures 1,2, 4,5 --	1-3
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
19 June 1995		27 -06- 1995
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Ingemar Hedlund Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00262

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR, A1, 2588109 (VALANCOGNE, P.A.M.L.), 3 April 1987 (03.04.87), page 4, line 17 - page 5, line 7, figures 1-4 --	1-3
A	FR, A1, 2655173 (GARBARINI (S.A.)), 31 May 1991 (31.05.91), page 5, line 18 - page 6, line 24, figures 3-5 --	1-3
A	US, A, 4669034 (A. BANBACH ET AL), 26 May 1987 (26.05.87), column 2, line 59 - column 3, line 3, figure 2 --	1-3
A	EP, A1, 0449219 (ZENI LITE BUOY CO., LTD.), 2 October 1991 (02.10.91), column 6, line 26 - column 7, line 18; column 9, line 4 - line 27, figures 1,2,4,7-9 -- -----	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/05/95

International application No.

PCT/SE 95/00262

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4630180	16/12/86	CA-A- 1269834 DE-A- 3520231 GB-A,B- 2161021 JP-A- 60229017	05/06/90 12/12/85 02/01/86 14/11/85
FR-A1- 2563929	08/11/85	NONE	
FR-A1- 2586844	06/03/87	NONE	
FR-A1- 2588109	03/04/87	NONE	
FR-A1- 2655173	31/05/91	NONE	
US-A- 4669034	26/05/87	AU-B- 578326 AU-A- 5001785 DE-U- 8504325 EP-A,A,A 0191264 SE-T3- 0191264 JP-C- 1706022 JP-B- 3075963 JP-A- 61188805	20/10/88 21/08/86 04/07/85 20/08/86 27/10/92 04/12/91 22/08/86
EP-A1- 0449219	02/10/91	AU-B- 650444 AU-A- 7382491 DE-D- 69106757 JP-A- 4230901 US-A- 5224773	23/06/94 03/10/91 00/00/00 19/08/92 06/07/93