




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : F16K 1/228, F16J 15/48 F02D 9/10	A1	(11) International Publication Number: WO 93/06396 (43) International Publication Date: 1 April 1993 (01.04.93)
(21) International Application Number: PCT/GB92/01654 (22) International Filing Date: 10 September 1992 (10.09.92) (30) Priority data: 9119644.4 13 September 1991 (13.09.91) GB (71) Applicant (for all designated States except US): WABCO AUTOMOTIVE U.K. LIMITED [GB/GB]; 90 Newbold Road, Rugby, Warwickshire CV21 2NL (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : THOMPSON, Derek [GB/GB]; 28 Ash Grove, North Hykham, Lincoln LN6 8DU (GB). FLETT, Magnus, Edward [GB/GB]; 31 Rosslyn Court, Earlsheaton, Dewsbury WF12 8BG (GB).		(74) Agent: CHETTLE, Adrian, John; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB). (81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE). Published <i>With international search report.</i>

(54) Title: BUTTERFLY VALVE SEAL

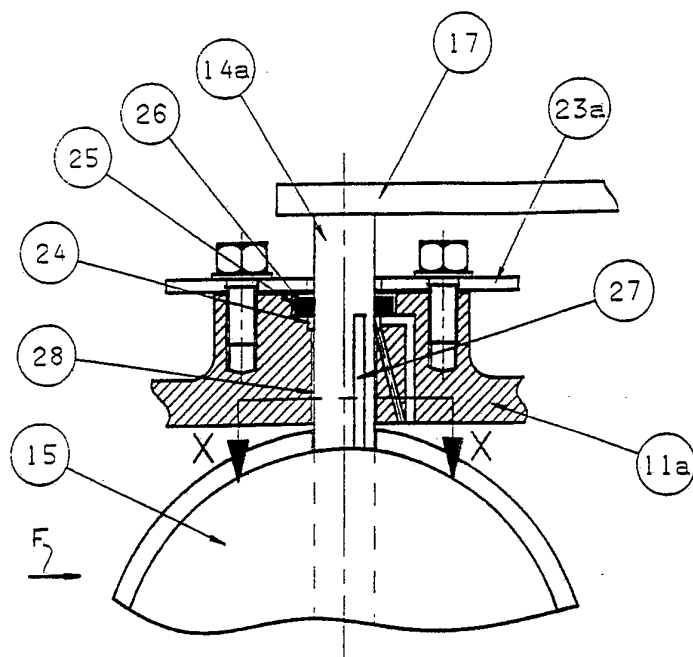

(57) Abstract

An exhaust obturator comprises a tubular housing (11a) having a butterfly valve (14a, 15) journaled in the wall thereof. The butterfly spindle (14a) passes through a chamber (24, 25) on one side of the housing and carries a sealing ring (26) thereon and located in the chamber (24, 25). The sealing ring (26) is a close sliding fit on the spindle (14a) when the obturator is closed, exhaust gas pressure on the upstream side enters the chamber (24, 25) and urges the seal (26) against a cover plate (23a) thereby to prevent the escape of exhaust gas to atmosphere. The chamber (24, 25) is preferably vented to the downstream side. The seal may alternatively be biased by resilient means.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MN	Mongolia
AU	Australia	FR	France	MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgium	GB	United Kingdom	NL	Netherlands
BF	Burkina Faso	GN	Guinea	NO	Norway
BG	Bulgaria	GR	Greece	NZ	New Zealand
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	PT	Portugal
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovak Republic
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LU	Luxembourg	SU	Soviet Union
CZ	Czech Republic	MC	Monaco	TD	Chad
DE	Germany	MG	Madagascar	TG	Togo
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain			US	United States of America

BUTTERFLY VALVE SEAL

This invention relates to an improved seal for the spindle of a butterfly valve, particularly a butterfly valve used as an obturator in the exhaust of an internal combustion engine.

Exhaust obturators, for I.C. engines, have been known for many years and often comprise a butterfly valve located close to the engine and operable to close the exhaust duct. With the butterfly valve in the open condition, pressure in the exhaust system is normal, but when the valve is closed, pressure upstream of the valve rises very quickly, and the resultant back pressure on the engine acts as a brake.

The maximum pressure upstream of the valve when the butterfly is closed is directly related to the retarding effect of the engine, but is however limited by the condition of the engine and the maximum back pressure that the engine valves and gaskets are designed to withstand. Design back pressures up to 5 bar (75 p.s.i.) are typical.

Exhaust obturators have uses other than as an exhaust brake. An obturator may be designed to divert flow from one exhaust stack to another, thereby permitting incineration of unburnt hydrocarbons in a non-working stack. Alternatively, or in addition, an obturator may be used to impose a low back pressure on an engine, thereby to make the engine work harder and reduce warm-up time from cold start; such an arrangement has the particular advantage of reducing cab warm-up time in cold weather.

The fit of the butterfly valve in the exhaust duct is not critical (unless used as a diverter valve) and a small leakage can be tolerated. Sealing of the butterfly spindle where it passes through the wall of the exhaust duct to an operating lever is, however, more important, because when the butterfly is closed, the high upstream pressure may cause a jet of very hot raw exhaust gas to issue, often at pedestrian level. This problem is compounded by the need for reasonable large spindle/bearing clearance to cater for heat expansion, and exacerbated by the fact that, when the butterfly is closed, the spindle is pushed in the low pressure direction, thus maximising the spindle clearance on the high pressure side.

Hitherto, the problem of spindle sealing has usually been solved by the use of a strong spring to bias an annular face of the spindle against an annular face of the butterfly valve body. The metal/metal seal is not very satisfactory and results in a high operating load, high drag forces and very high hysteresis. The arrangement is nevertheless acceptable for directly operated single function obturators.

In recent times it has been proposed to provide reactive butterfly obturators, in which the butterfly itself reacts to changes in back pressure. Such a reactive butterfly valve is described in WO-A-9208887. In this arrangement axial loading of the spindle to form a gas seal is unacceptable because the high hysteresis and drag would prevent reaction of the butterfly to small changes in back

pressure; reaction would also be inconsistent.

It is essential to provide a spindle seal which ensures that raw exhaust gases do not leak to the exterior of the obturator; small leakage past the butterfly to the low pressure side can be tolerated without detriment to operation of an exhaust brake or cab heater.

The present invention provides a spindle seal which is more effective than in prior art arrangements, and which exerts no axial load on the butterfly spindle.

According to the invention there is provided an exhaust obturator comprising a tubular housing, a spindle crossing said housing and journaled in the wall thereof, and a butterfly attached to said spindle and arcuately movable with the spindle to open and close the obturator, the wall of the housing defining a chamber through which said spindle passes, the chamber defining an annular space around said spindle and having a sealing face substantially perpendicular to the axis of said spindle, and said spindle having an annular sealing ring slidable thereon and movable into sealing engagement with said sealing face under the action of a biasing force.

Preferably said seal is of graphite and has opposed radially extending faces normal to the axis of said spindle, one face being for sealing contact with an end wall of the chamber normal to the axis of said spindle.

In one embodiment the sealing ring is resiliently biased against the sealing face of said chamber.

In a preferred embodiment the sealing ring is urged by exhaust gas pressure against the sealing face, the sealing ring acting in the manner of a piston in said chamber and sliding along said spindle to form a substantially gas tight seal for said chamber.

In the preferred embodiment said housing comprises a tubular body and a cover plate, said chamber comprising a double diameter bore of said body and said end wall comprising a cover plate secured to said body and closing said chamber.

Alternatively thge body may be closed by a press-in plug or any other suitable means.

Preferably the first and second diameter portions are co-axial about said spindle axis.

In a preferred embodiment said second diameter portion is connected through a vent to the downstream of said butterfly. Said vent may comprise a flat or groove in the exterior of said spindle, or a passageway in said housing. Preferably said vent is not on a thrust face of said spindle.

Other aspects of the invention will be apparent from the following description of a preferred embodiment described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a side elevation of a conventional butterfly exhaust obturator;

Figure 2 is an end elevation of the obturator of

Figure 1;

Figure 3 is a schematic partial transverse section through a prior art obturator;

Figure 4 is a schematic partial transverse section through a butterfly obturator according to the invention and in the open condition;

Figure 5 corresponds to Figure 4 but illustrates the butterfly in the closed condition; and

Figure 6 is an exaggerated illustration of the spindle clearance of the butterfly illustrated in Figure 5 and on line X-X.

With reference to Figures 1 and 2 there is illustrated a conventional exhaust obturator of the kind typically installed in the exhaust system of a heavy truck. The obturator comprises a generally cylindrical body 11 having flanges 12,13 to accept the flared ends of upstream and downstream exhaust pipes; these pipes are secured by circular clips (not shown) or by any other suitable means.

The housing contains a transverse spindle 14 to which is attached a conventional butterfly 15 by, for example, set screws 16 or rivets. The spindle 14 is journaled in the housing and protrudes through the housing at one end for attachment to an actuating lever 17. The other end of the spindle 14 is located in a blind bore.

Arcuate movement of the lever 17, by for example a pneumatic cylinder, causes the butterfly 15 to open and shut in accordance with operation of a drivers control lever

or footbrake.

Figure 3 illustrates a conventional gas seal for the spindle 14, the direction of gas flow being signified by arrow F. The spindle 14 has a circular flange 18 which is urged against a corresponding thrust face 19 of the body 11 by a spring 21; the spring reacts against a support surface 22 of a cover plate 12, secured to the body 11 by any suitable means.

In use, the spring ensures a face seal between the flange 18 and thrust face 19, the butterfly clearance being designed such that the distal side of the butterfly does not rub against the body 11. In practice this results in a less than perfect butterfly seal, and frequently the remote side of the butterfly does, in fact, rub on the housing, causing wear, additional operating loads and poor sealing between the flange 18 and thrust face 19.

The metal/metal seal provided by the flange 18 and thrust face 19 does not give a particularly good gas seal but has hitherto been considered adequate. The arrangement suffers from very high hysteresis caused by drag forces on the sealing faces and the butterfly edges.

Figures 4 and 5 illustrate a sealing arrangement in accordance with the invention; gas flow is in the direction indicated by arrow F.

The butterfly spindle 14a is plain but for a flat or groove 27 whose purpose will be explained below.

The housing 11a has two radially outward steps in the

spindle bore which define annular spaces 24 and 25 as illustrated. The outer and larger space 25 houses an annular seal of graphite or like material which is a light interference fit on the spindle 14a but has radial clearance from the housing 11a. The seal 26 is retained by a cover plate 23a attached to the housing 11a by set screws, as illustrated, or any other suitable means.

Whilst the clearances in Figures 4 and 5 are somewhat exaggerated for the purpose of explanation, it should be clear that the seal 26 can slide along the spindle 14a and imposes no significant axial load thereon.

The inner annular space 24 communicates with the downstream side of the butterfly by virtue of a flat or groove 27 such that when the butterfly is closed, pressure in the inner space 24 is vented to the downstream side.

Figure 4 illustrates the butterfly 15 in the open condition, exhaust gas passing freely through the obturator. Gas pressure upstream and downstream of the butterfly is negligible and thus the load on the spindle is also negligible. As illustrated, the radial spindle clearance 28 is the same both on upstream and downstream sides.

Figure 5 illustrates the butterfly 15 in the closed condition having been turned through 90° by the lever 17. Other lever angles are possible depending on the type of butterfly used. In use, exhaust gas pressure builds upon the upstream side and pushes the spindle in the direction of gas flow, thus increasing the spindle clearance 28 on the

upstream side and reducing the clearance on the downstream side to zero.

Gas pressure builds up in the inner annular space 24 and urges the seal 26 against the inner surface 29 of the cover plate 23a to provide a gas seal. The seal 26 slides
5 along the spindle to the sealing position. The flat or groove 27 ensures that pressure in the inner space 24 is vented to exhaust. (Figure 6 illustrates a groove 27a).

The arrangement of the floating annular seal 26
10 ensures that gas sealing is not impaired by the inevitable movement of the butterfly spindle 14a in the downstream direction, and the consequent large clearance on the high pressure side.

Figure 5 also illustrates alternative vent passageways for the inner space 24, such as a cast passage 27b or
15 drilled hole 27c. Where the vent is on the spindle (flat 27 or groove 27a) it is situated off the line of pressure to ensure maximum transverse spindle load is applied to full supporting area. Similarly the passage 27b and hole 27c may
20 be arranged to enter the annular space 24 other than as the centreline of the housing 11a.

In use, a vent having an effective passageway of 3.2mm diameter will facilitate sealing of a 22 mm diameter spindle with a diametral clearance of 0,35 mm at back pressure of 4
25 bar (60 p.s.i.). The vent size is chosen to ensure sufficient pressure build-up in the inner space 24 to flip the seal 26 against the cover plate 23a, but not so much

pressure build-up that the axial load is excessive and would result in an unacceptable degree of wear. A similar vent is provided for the opposite spindle journal (not illustrated) to avoid a build-up of pressure exerting an axial load on the spindle with potential fouling of the butterfly 15 with the wall of the housing 11a; such fouling would result in increased wear and, more importantly, unacceptable hysteresis.

A seal 26 of graphite is preferred since it has excellent resistance in degradation at high temperatures whilst being self-lubricating and unaffected by corrosive exhaust gases and moisture. Other materials having similar properties would also be acceptable.

The fit of the butterfly 15 in the housing 11a is determined by the need to avoid frictional contact with the inner wall of the housing whilst ensuring the necessary axial movement of the spindle 14a as the seal 26 moves to seal against the cover plate 23a. In practice the normal clearance between the seal 26 and coverplate 23a can be very small so that axial movement of the seal on the spindle is minimal.

The use of gas pressure to urge the seal against the cover plate is preferred, although it is possible to use a resilient member, such as a coil spring to urge the seal 26 against a sealing face of the annular spaces 24,25. In this case the annular space need not have the double diameter illustrated in Figures 4 and 5. The use of resilient means

to load the seal constantly against a sealing surface may result in the seal wearing more rapidly than the gas activated seal described with reference to Figures 4-6.

5 The seal provides a substantially friction free gas seal which is especially useful in conjunction with a reactive exhaust brake.

CLAIMS:

1. An exhaust obturator comprising a tubular housing (11a), a spindle (14a) crossing said housing and journaled in the wall thereof, and a butterfly (15) attached to said spindle (14a) and arcuately movable with the spindle to open and close the obturator, the wall of the housing (11a) defining a chamber (24,25) through which said spindle (14a) passes, the chamber (24,25) defining an annular space around said spindle (14a) and having a sealing face (29) substantially perpendicular to the axis of said spindle, and said spindle (14a) having an annular sealing ring (26) slidable thereon and movable into sealing engagement with said sealing face (29) under the action of a biasing force.
2. An obturator according to claim 1 and further including resilient means for biasing said sealing ring (26) against said sealing face (29).
3. An obturator according to claim 2 wherein said resilient means comprises a coil spring about said spindle (14a).
4. An obturator according to any preceding claim wherein said sealing face (29) is an inwardly facing side of said chamber (24,25).
5. An obturator according to claim 1 wherein said chamber (24,25) comprises a fluid pressure chamber having fluid connections (28,27) to the upstream and downstream sides of said butterfly (15).

6. An obturator according to claim 5 wherein the upstream connection comprises a clearance (28) between the butterfly spindle (15) and said tubular housing (11a).

5 7. An obturator according to claim 5 or claim 6 wherein the downstream connection comprises a groove (27a) of the butterfly spindle (14a).

8. An obturator according to claim 5 or claim 6 wherein the downstream connection comprises a flat (27) of the butterfly spindle (14a).

10 9. An obturator according to claim 7 or claim 8 wherein said downstream connection is parallel to the longitudinal axis of said spindle (14a) and at approximately 45° to the plane of said butterfly (15).

15 10. An obturator according to claim 5 or claim 6 wherein the downstream connection comprises a passage (27b,27c) in the wall of said housing (11a).

11. An obturator according to any of claims 5-10 wherein said chamber is cylindrical and has end faces substantially perpendicular to the axis of said spindle, the chamber having an outer first diameter portion (25) and an inner second diameter portion (24), said sealing ring (26) being located within said first diameter portion (25) and having an outer diameter less than that of said first diameter portion (25) and greater than that of said second diameter portion (24).

20

25

12. An obturator according to any preceding claim wherein said sealing ring (26) is of a carbon based

material.

13. An obturator according to claim 11 wherein said sealing ring (26) is principally of graphite.

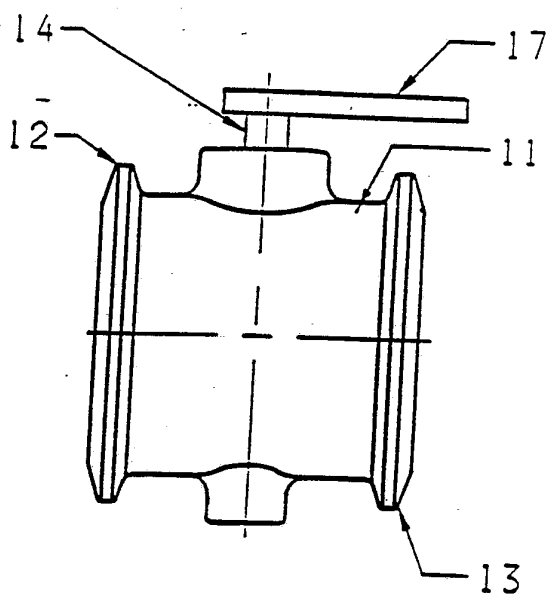


FIGURE 1

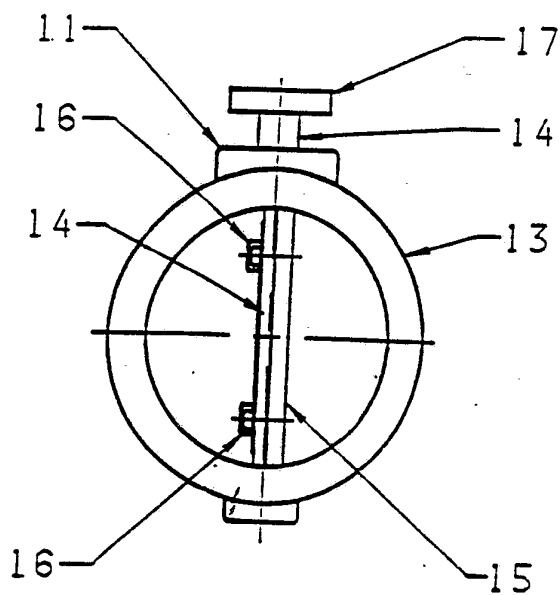


FIGURE 2


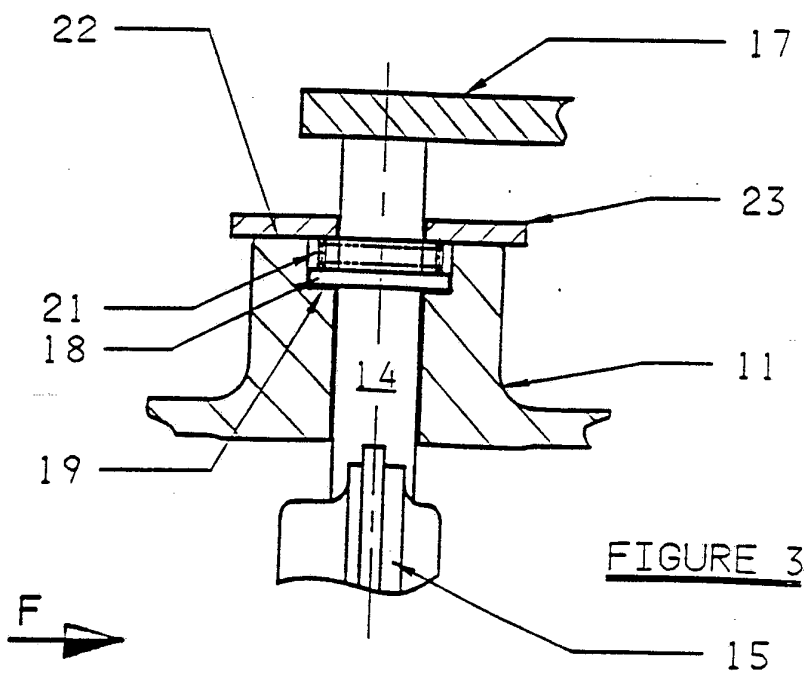


FIGURE 3

PRIOR ART

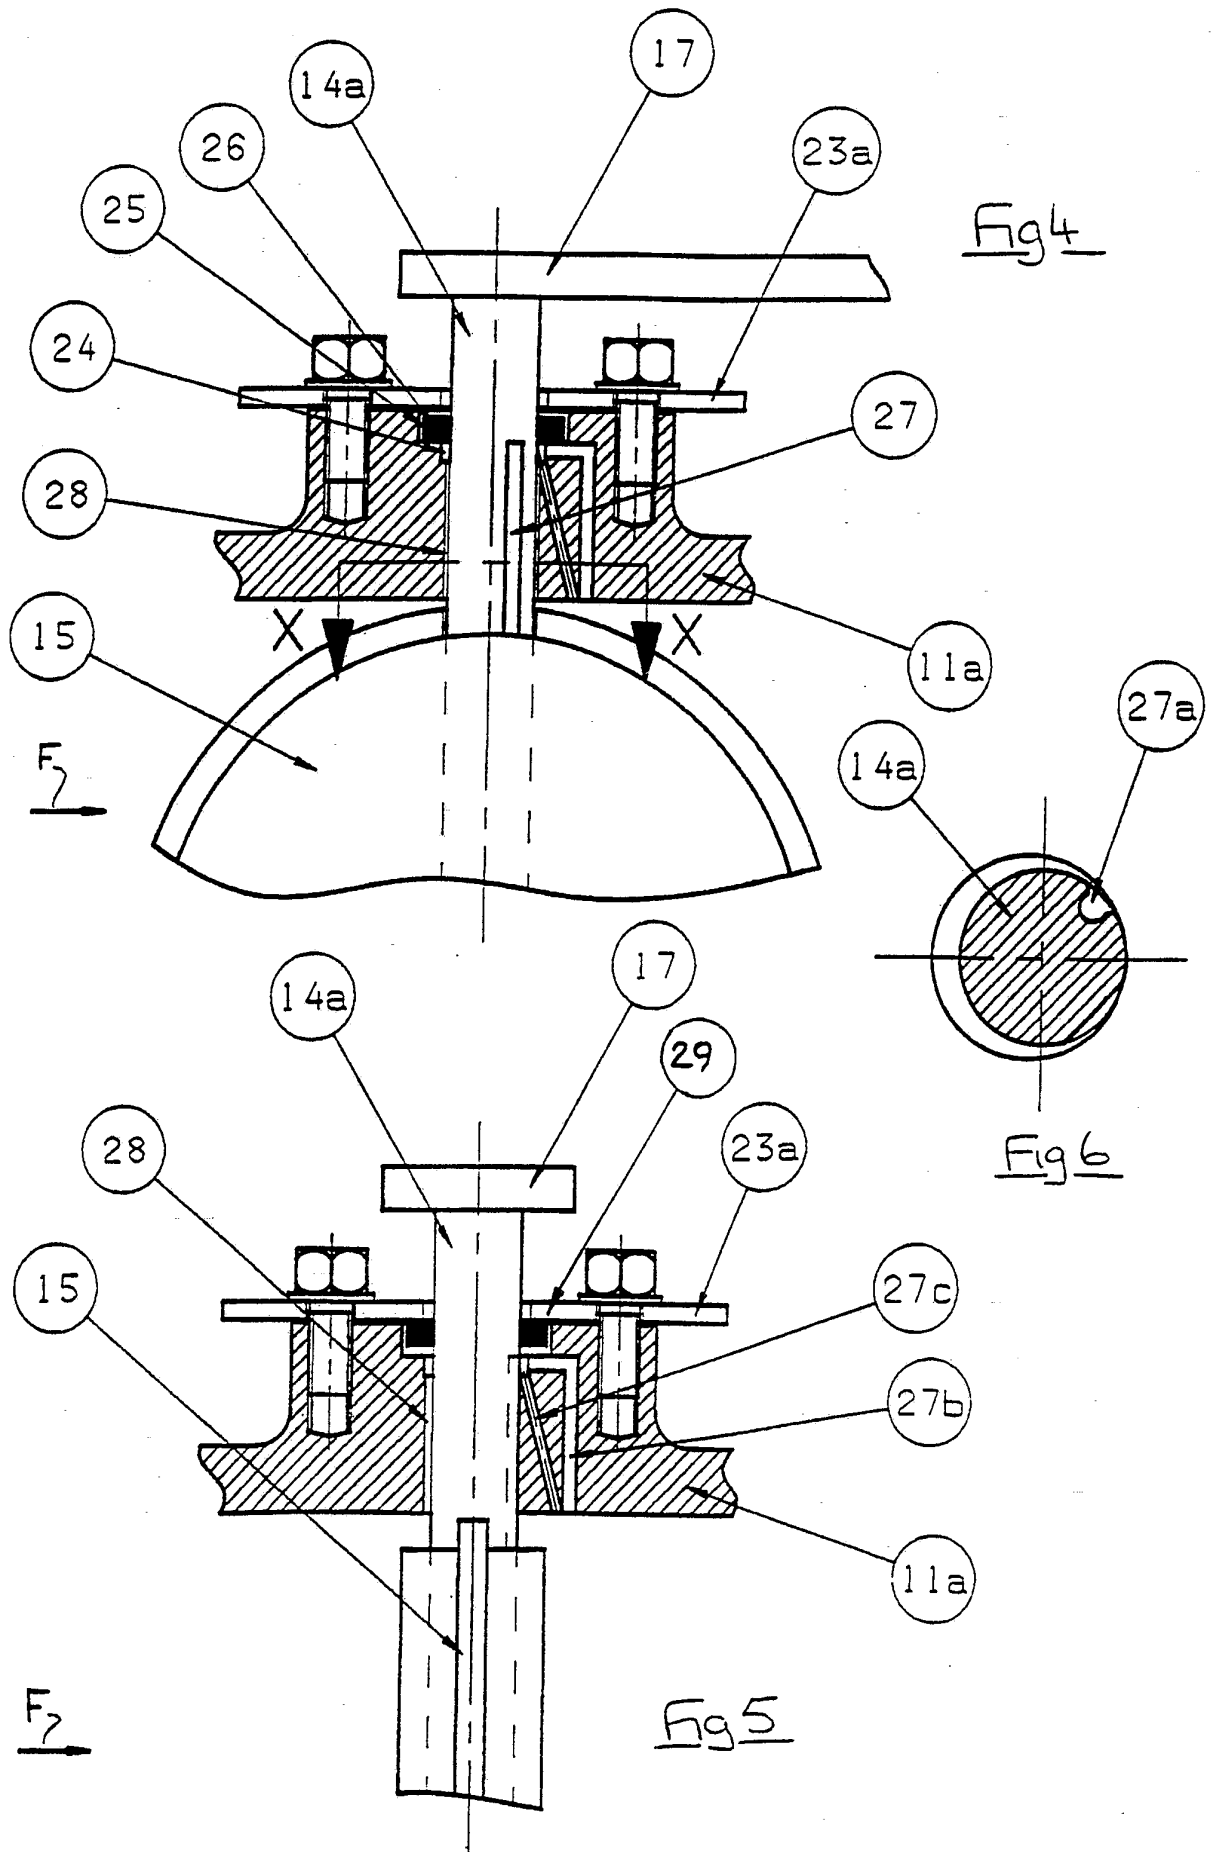

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 92/01654

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: F 16 K 1/228, F 16 J 15/48, F 02 D 9/10		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	F 02 B; F 02 D; F 16 K; F 16 J	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	DE, A1, 3620890 (HELLA KG HUECK & CO.) 23 December 1987, see the whole document --	1
A	DE, A, 2038225 (SCHNABEL, ERNST) 9 March 1972, see page 7, line 28 - page 8, line 13 --	1
A	GB, A, 2076907 (SCHUBERT & SALZER MASCHINENFABRIK AKTIENGESELLSCHAFT) 9 December 1981, see the whole document --	1
* Special categories of cited documents:¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
1st December 1992	15 DEC 1992	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	Herman Phalén	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category -	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	DE, C, 922800 (KLÖCKNER-HUMBOLDT-DEUTZ AKTIENGESELLSCHAFT) 24 January 1955, see figure 1 -- -----	1

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/GB 92/01654**

SA 64233

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 30/10/92. The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A1- 3620890	23/12/87	GB-A-B- 2192226 SE-A- 8702488	06/01/88 22/12/87
DE-A- 2038225	09/03/72	FR-A- 2103327	07/04/72
GB-A- 2076907	09/12/81	CH-A-B- 650281 DE-A-C- 3020725 FR-A-B- 2483473 JP-C- 1439746 JP-A- 57011219 JP-B- 62047973 US-A- 4383406	15/07/85 10/12/81 04/12/81 19/05/88 20/01/82 12/10/87 17/05/83
DE-C- 922800	24/01/55	NONE	

For more details about this annex : see Official Journal of the European patent Office, No. 12/82