



US 20050058483A1

(19) **United States**

(12) **Patent Application Publication**
Chapman et al.

(10) **Pub. No.: US 2005/0058483 A1**

(43) **Pub. Date: Mar. 17, 2005**

(54) **RFID TAG AND PRINTER SYSTEM**

Publication Classification

(76) Inventors: **Theodore A. Chapman**, San Juan Capistrano, CA (US); **Richard E. Schumaker**, Orange, CA (US); **Andrew W. Edwards**, Irvine, CA (US); **Stephen S. Morris**, Anaheim, CA (US); **James P. Harkins**, Lake Forest, CA (US); **Bradley S. Jarvis**, Newport Beach, CA (US)

(51) **Int. Cl.7** **B41J 11/44**

(52) **U.S. Cl.** **400/76**

(57) **ABSTRACT**


An RFID label with embedded tag is passed through an RFID antenna in a printer system, where the RFID antenna allows a roll of such labels to pass in close proximity to the antenna and still allow each individual RFID tag to be read and/or programmed. The RFID antenna has a rectangular RF field spreader in contact with a triangular divergent RF conductor with an RF source point at the point. Ground planes are located on either side of the antenna. In another embodiment, the printer system extracts or parses bar code commands from a data stream and passes the commands to both a printer and an RFID reader to print the image and program the tag with the bar code information.

Correspondence Address:

Tom Chen
MacPHERSON KWOK CHEN & HEID LLP
Suite 226
1762 Technology Drive
San Jose, CA 95110 (US)

(21) Appl. No.: **10/660,856**

(22) Filed: **Sep. 12, 2003**

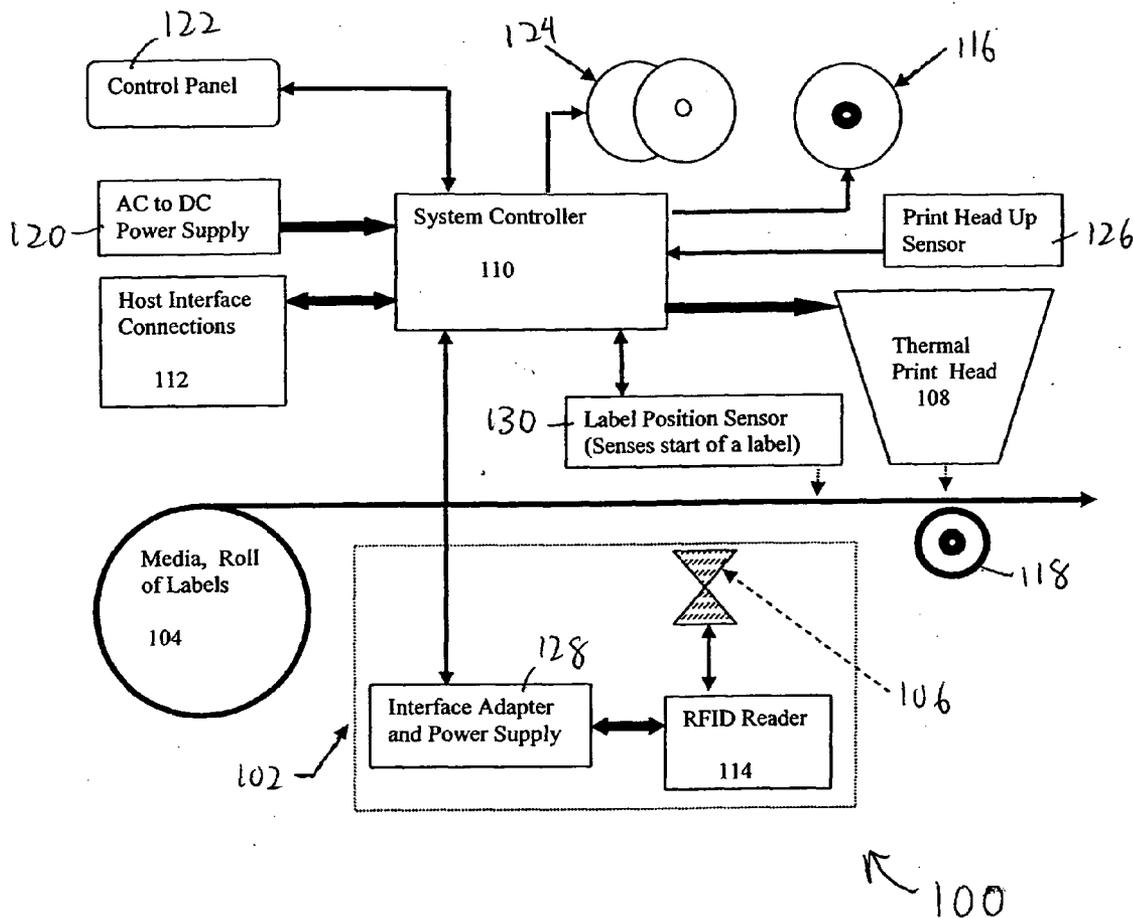

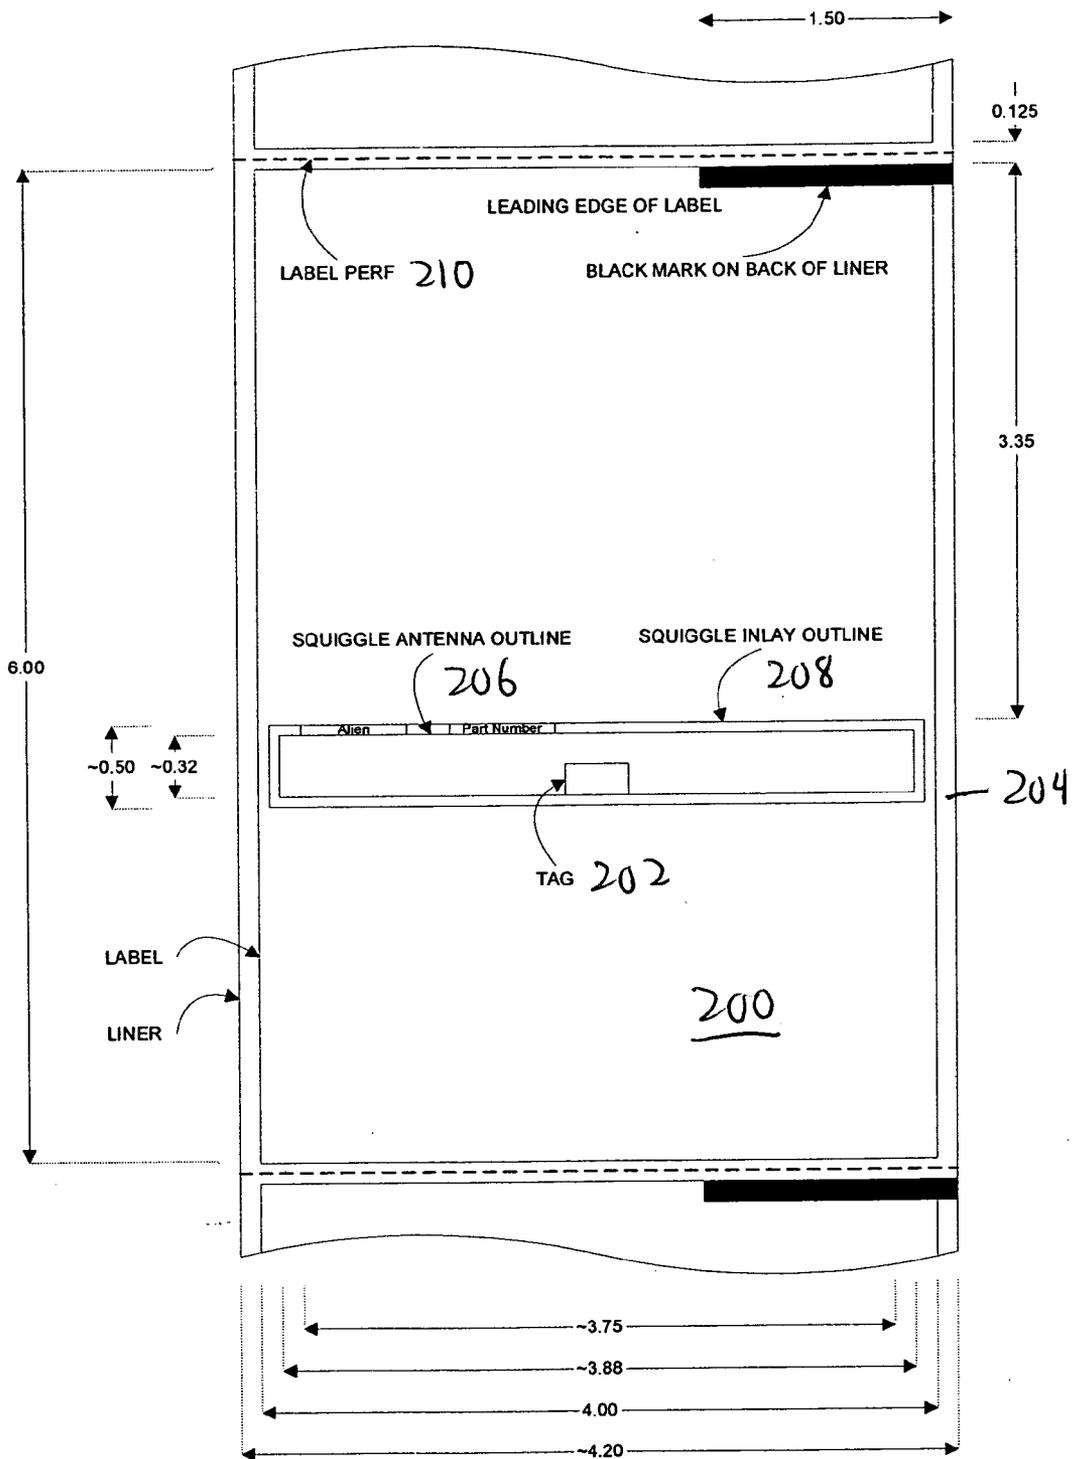
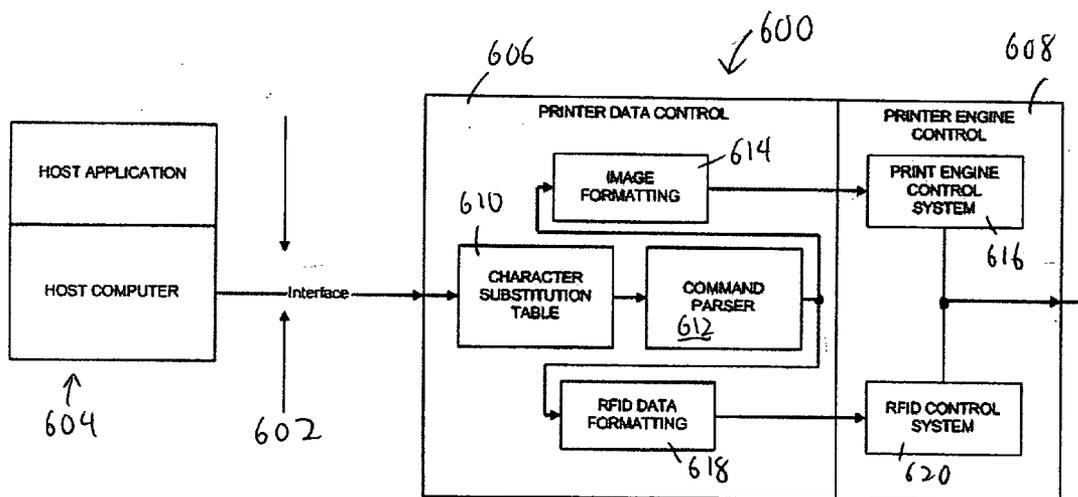
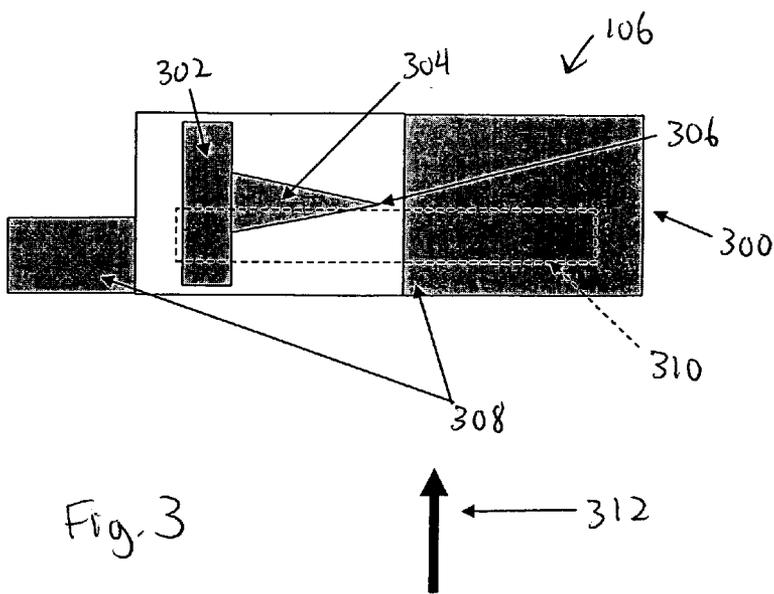


Fig. 2



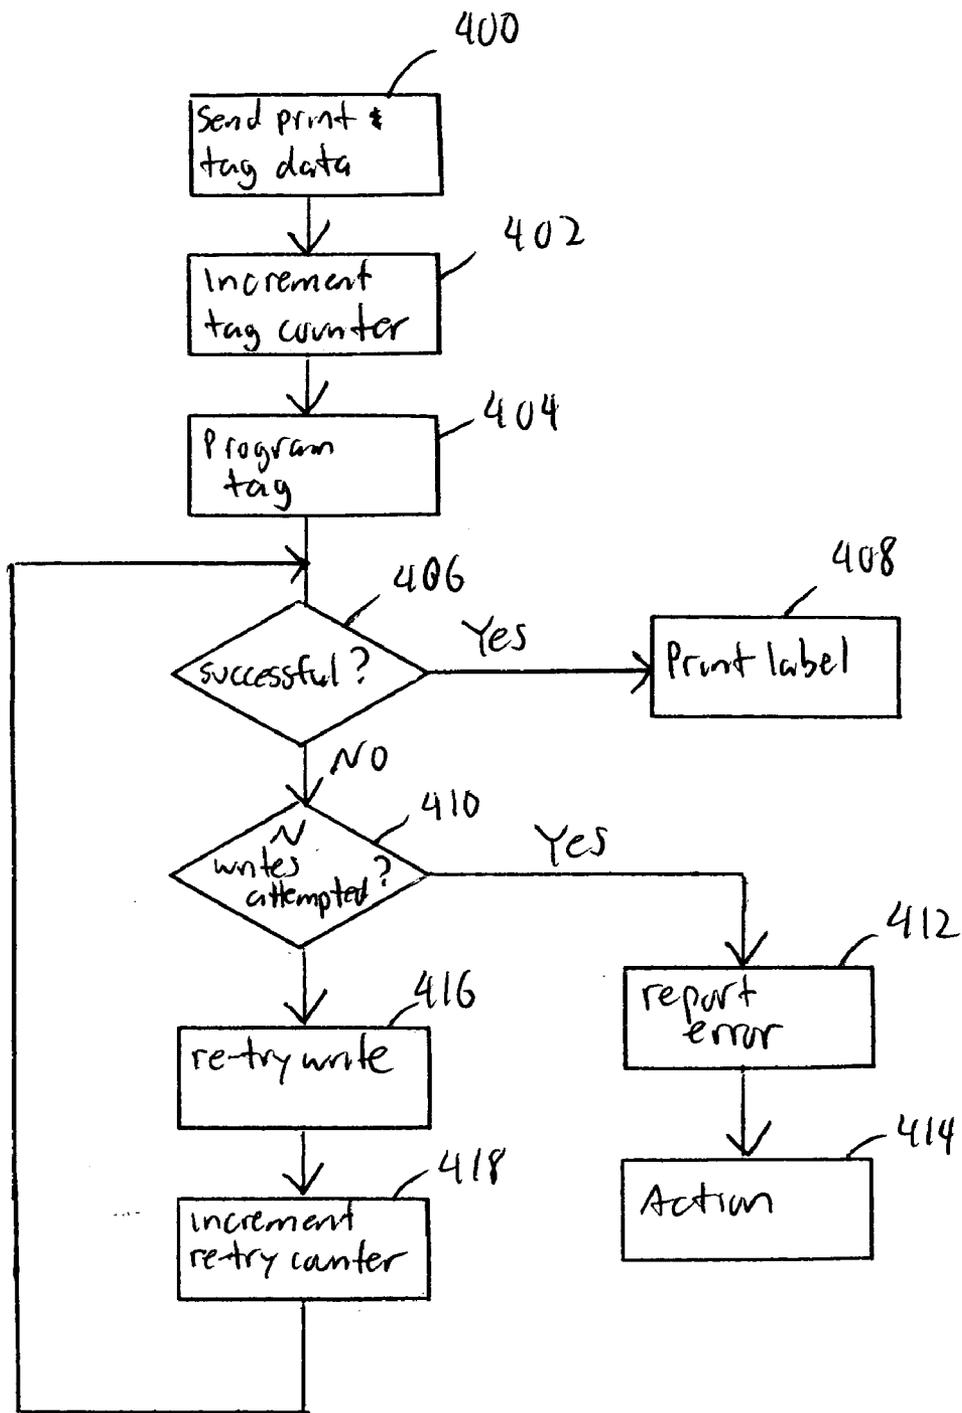


Fig. 4

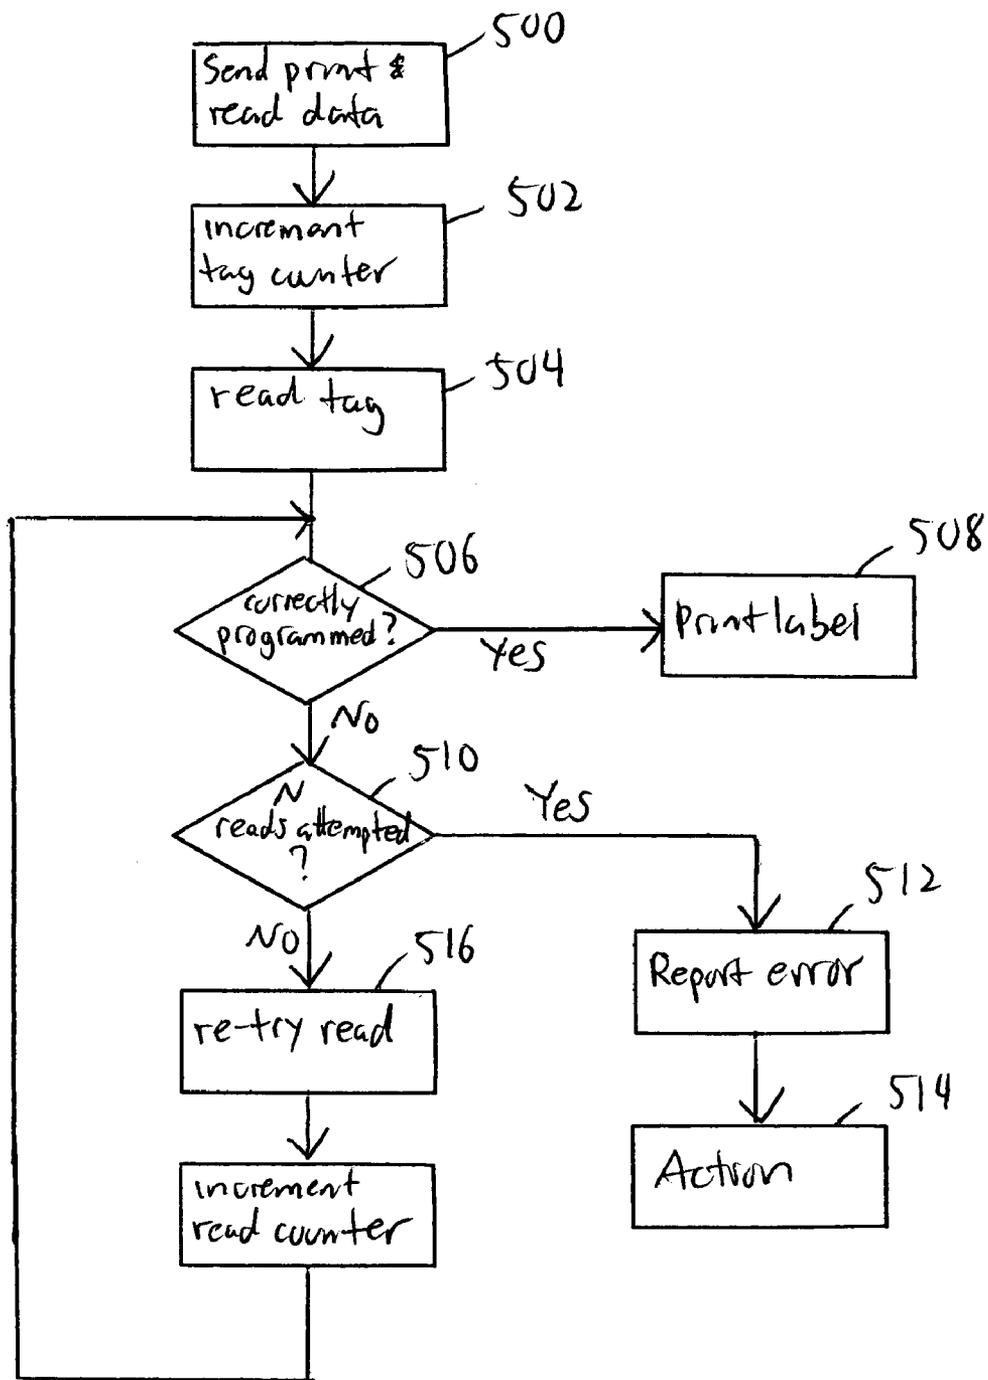


Fig. 5

RFID TAG AND PRINTER SYSTEM

BACKGROUND

[0001] 1. Field of the Invention

[0002] The present invention relates to printer systems, and in particular, a printer system for communicating with radio frequency identification (RFID) labels.

[0003] 2. Related Art

[0004] RFID transponders or tags, either active or passive, are typically used with an RFID reader to read information from the RFID tag. The information is then stored or otherwise used in various applications, such as monitoring, cataloging, and/or tracking of the item associated with the RFID tag, paying tolls, and managing security access. For example, RFID tags can be obtained through companies such as Alien Technology Corporation of Morgan Hill, Calif. Many applications for bar codes can also be used in conjunction with RFID systems.

[0005] A conventional RFID tag and reader uses radio frequency signals to acquire data remotely from the tags within the range of the reader. One example is reading the information associated with a transponder carried in a car, which allows the RFID system to determine the number of times a car passes through an RFID reader mounted over a toll road. This information can then be processed and a bill may be sent to the owner of the transponder based on the number of times the toll road was used. Another example is reading information from a group of objects, such as a cart of groceries. Each grocery item would have an RFID tag or label, which may include the description and price of the item. An RFID reader can then read the entire cart of items, print out the item description and price, and total price. This is in contrast to bar code systems, in which a bar code scanner must be brought within sufficient range and direction to the bar code in order for a scanner to read each individual item. Yet another example is reading RFID tags on cartons stored on pallets as the pallets are moved through a warehouse. This allows efficient inventory tracking of arriving and/or departing items.

[0006] These and other typical RFID systems require antennas that are able to interrogate RFID tags that are many wavelengths away. Such antennas typically have large power and beam widths. These types of antennas are not suitable for use in applications that require directional and confined interrogation.

[0007] RFID labels, such as for cartons or pallets, can be produced by placing an RFID tag in a label, programming information into the tag, such as from a host computer, and based on the information, printing the label with a proper bar code and/or other printable information using a thermal printer. RFID labels can also be produced in a thermal printer by first printing on the label and then programming or encoding the RFID tag on the label. These labels can then be read by both a bar code scanner and an RFID reader. However, printing after programming forces additional handling of the roll of labels and requires the use of additional hardware. To ensure that the correct information is printed on a label, an RFID reader must be used to synchronize the thermal printing process with the associated RFID tag. Furthermore, the capabilities of programming and reading RFID tags used in thermal printer labels is limited, due in

part, to the mechanical profile of the printer, which may cause performance issues with radio frequency signals associated with RFID technology, and to the proximity of multiple tags coupled with the need to address (program) only one tag at a time.

[0008] Accordingly, there is a need for printers and components that are able to process RFID labels that overcomes the deficiencies in the prior art as discussed above.

SUMMARY

[0009] According to one aspect of the invention, a thermal printer is used to read and write an RFID tag on a label and to print the label based on information read from the RFID tag. A thin quarter wave resonant antenna is used in one embodiment for interrogation of the RFID tag, with an operation frequency between 902 and 928 MHz and a free space wavelength between 12.73 and 13.9 inches. Such an antenna allows 1) the RF field to be controlled so that only the RFID tag associated with the label to be printed by the thermal print head is encoded, while not interrogating other RFID tags in a label roll, and 2) communication with an RFID tag as the label is moving across the antenna field.

[0010] According to one embodiment, a roll of blank labels includes an RFID tag embedded onto each label. The roll is inserted into a thermal printer having a thermal print head and an RFID antenna located between the print head and the roll of RFID labels and underneath the path of the labels. The RFID tags can be programmed with known information, such as from a host computer, and verified that the programmed information is correct. When a tag is programmed or encoded, any existing data is first erased and the new information transmitted, via the RFID antenna, to the tag. A read operation then follows to verify that the correct information was written. In one embodiment, if a first read (verify) operation indicates an improperly programmed tag, additional write operations, each followed by a read (verify) operation, are performed before the RFID tag is considered defective. If the RFID tag is defective, an error notification can be given to the operator and the printing halted or the thermal print head can print onto the label with an indication that the RFID tag is defective.

[0011] This allows the printer to have the capability to program data into an RFID label and verify that correct data was programmed before printing. If an error is detected, the printer can over-strike the label, indicating an error in the tag.

[0012] According to another embodiment, the RFID tag is interrogated at decreasing RF power levels until a minimum power level is determined that still allows the RFID tag to be read. This allows the system to determine a level of RFID tag performance margin or RFID tag quality level.

[0013] Any data accumulated associated with the RFID tag can be stored and retrieved for later usage, such as the number of defective tags, the number of RFID tag retries are needed for a successful write, and the minimum RF power level for an RFID tag.

[0014] According to yet another embodiment of the invention, information from a data stream from a host computer is intercepted, reconfigured, and used for programming or writing to the RFID tag. In one embodiment, bar code commands are extracted from the data stream. The bar code

data is then formatted into an RFID command and the bar code data is subsequently programmed into the RFID tag, and the RFID tag is printed with the commands from the data stream. The bar code data may be manipulated to ensure compliance with the RFID tag capabilities. Modifying the bar code data stream into an RFID programming command eliminates the need to modify the host application software.

[0015] It is noted that some company's thermal printers can print labels based on other company's languages allowing easy migration into competitor applications. Thus, the concept of converting the bar code command into an RFID command can be applied to a thermal printer that supports not only its standard programming language but also any competitor languages that the printer happens to support.

[0016] This invention will be more fully understood in conjunction with the following detailed description taken together with the following drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 shows a block diagram of a thermal printer system with the RFID subsystem installed according to one embodiment;

[0018] FIG. 2 shows a label with an RFID tag according to one embodiment;

[0019] FIG. 3 shows an RFID antenna for use in the system of FIG. 1 according to one embodiment;

[0020] FIG. 4 is a flow chart showing a process for writing to and printing on a label according to one embodiment;

[0021] FIG. 5 is a flow chart showing a process for reading from and printing on a label according to one embodiment; and

[0022] FIG. 6 is a block diagram of a printer system for extracting commands from a data stream and printing and programming a label according to one embodiment of the invention.

[0023] Use of the same or similar reference numbers in different figures indicates same or like elements.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] FIG. 1 shows a block diagram of a printer system 100 with a radio frequency identification (RFID) reader subsystem 102 according to one embodiment. Printer system 100 also includes a roll 104 of labels or media, where an RFID tag is embedded in each label. RFID tags are conventional passive tags, such as manufactured by Alien Technology Corporation. Labels from roll 104 are fed over an RFID antenna 106, interrogated, and printed by a thermal print head 108. A host computer 112 coupled to a system controller 110 that is in turn coupled to RFID reader subsystem 102 and antenna 106 allows the RFID tag on each label to be written to and verified. If the RFID tag was programmed correctly, the label passes through thermal print head 108 for printing. The resulting label then has both a printed media as well as a programmed RFID tag that can be read, such as with bar code scanners and RF readers, respectively.

[0025] FIG. 2 shows a label 200 from roll 104 of FIG. 1, where label 200 includes an RFID tag 202. RFID tag 202, in

one embodiment, is embedded on label 200 between a layer of wax paper or liner 204 and the adhesive side of label 200. As seen from FIG. 2, RFID tag 202 is approximately centered width-wise and slightly off-center length-wise. An outline of an RFID antenna 206, associated with RFID tag 202, is also shown, along with the outline of an RFID tag assembly (inlay) 208. This example is from an RFID tag assembly manufactured by Alien Technology Corporation. RFID tag 202 and RFID antenna 206 are conventional elements. Also, as shown in FIG. 2, label 200 is one of many labels from roll 104, each label 200 can be separated from an adjacent label by a perforation 210. Perforation 210 allows labels to be easily separated after printing. Label 200 shown in FIG. 2 is a 4x6 inch label, although other size labels can also be used, such as 4x4 inch labels.

[0026] Referring back to FIG. 1, labels 200 from roll 104 pass over RFID antenna 106 for interrogation. In one embodiment, labels 200 pass at a speed of up to 10 inches per second, which for a 6 inch label is up to 5 labels every 3 seconds. A media drive motor 116, coupled to system controller 110, drives a platen 118 to pull labels 200 through the printer, as is known in the art. System controller 110 is also coupled to a power supply 120 and a user-operated control panel 122 that allows the user to control certain operations of the print system, as will be discussed below. System controller 110 also controls thermal ribbon drive motors 124 and receives information from a label position sensor 130, which allows system controller 110 to communicate the appropriate actions to other portions of the printer system. An interface adapter and power supply 128 within RFID reader subsystem 102 provides power to RFID reader 114 and RFID antenna 106 and allows signals between system controller 110 and RFID antenna 106 and reader 114 to be received and transmitted.

[0027] Due in part to the small areas within a printer system, labels 200 are brought in close proximity to RFID antenna 106 during interrogation. A label position sensor 130 senses the start of a new label and conveys that information to system controller 110. In one embodiment, labels 200 pass within approximately 0.30 inches or less of RFID antenna 106. Thus, contrary to conventional antennas used for RFID tag interrogation having large beam widths, RFID antenna 106 of the present invention, according to one embodiment, is a quarter wave resonant antenna having a free space wavelength between approximately 12.73 inches and 13.9 inches.

[0028] FIG. 3 shows RFID antenna 106 according to one embodiment. RFID antenna 106 is a quarter wave resonant antenna formed on a printed circuit board assembly 300 having a rectangular shaped RF field spreader 302 and a triangular shaped divergent RF conductor 304, both formed from copper according to one embodiment, although other conductive materials may also be suitable. The narrow end of divergent RF conductor 304 is connected to an RF source node 306.

[0029] On either side of RF field spreader 302 and RF conductor 304 are ground planes 308. In one embodiment, RF source node 306 is electrically connected to RFID reader 114 by means of a coaxial cable and a microstrip transmission line, both having a characteristic impedance of 50 ohms. The microstrip line transports the RF signal from the edge of the board, which is where the coaxial cable is

terminated, to the desired center connect point. This eliminates the need to terminate the coaxial cable at the center of the antenna, which would be difficult due to the mechanical constraints of the printer system. In one embodiment, the transition from coaxial cable to the microstrip transmission line incorporates an 6 dB attenuator as part of the antenna printed circuit board assembly **300**. **FIG. 3** shows the various dimensions of RFID antenna **106** according to one embodiment. Also shown in **FIG. 3** by dotted lines **310** is the outline of RFID tag assembly **208**, which moves over RFID antenna **106** along the direction of arrow **312**. Note that the length of RFID antenna **106** and positioning of label **200** allows RFID tag **202** to pass over RFID antenna **106** with RF source point **306** closely centered relative to tag **202**.

[0030] The RFID antenna used in the present invention is designed to meet the specific requirements of the application, e.g., reading and writing RFID tags in a small area with hundreds of RFID labels in close proximity to each other, i.e., in a roll. In one embodiment, the operating frequency of RFID reader **114** (from **FIG. 1**) is time varying (frequency hopping) between approximately 902 and 928 MHz inclusive in the ultra high frequency (UHF) band. The frequency hopping is known and is required by regulatory agencies such as the Federal Communications Commission (FCC) in order to minimize interference. This frequency range has a wavelength in free space between 13.9" and 12.73" inclusive. Other suitable RFID frequencies include 13.46 MHz in the HF band, 860 MHz in the UHF band, and 2.45 GHz in the UHF band.

[0031] As mentioned above, the RFID tags pass very close to the RFID antenna (e.g., 0.3 inches). This is in sharp contrast to conventional RFID tag antennas, which are designed to operate at multiple wavelength distances between the RFID tag and the RFID receiver. These conventional applications required the RFID tags to be read at a much larger distance. Consequently, these RFID antennas are designed for use at a distance of multiple wavelengths of the operating frequency. However, in the present invention, the interrogation distance as the RFID tag or label passes through the controlled RF field radiating from the antenna is just a small fraction of the wavelength. For example, in one embodiment where the distance between the RFID antenna and the RFID tag is 0.25 inches and the operating wavelength is 12.73 inches, the distance is approximately 0.02 wavelengths. In order to maximize performance, the antenna is designed to be near resonance when an RFID tag is in close proximity to the antenna. Furthermore, at these close distances and speeds of up to 10 inches per second, the RFID antenna must be able to accurately read from and write to the RFID tag as it passes through the RF field. The close distances also require that the RFID antenna be able to properly read from and write to RFID tags in the presence of various metallic structures within the thermal printer itself.

[0032] Other issues include the fact that there may be hundreds of RFID tags or labels in a roll, all of which are in close proximity to the RFID antenna and reader. Therefore, the RF field of RFID antenna must be controlled so that only the RFID tag passing over the RFID antenna is read/programmed and only the corresponding label is printed. Interrogation with one label should not affect any of the other RFID labels or tags, either within the roll or outside the roll. This would require a narrow RF field pattern; however,

the RF field pattern from the RFID antenna must not be so narrow that communication is not possible when the RFID tag is in motion and traveling over a minimum distance of 2.5 inches. This distance results from the physical space available in the T5000 thermal printer from Printronix and the distance between the label position sensor **130** and the stop point of a printed label as it waits for the user to remove the label. This allows communication with the RFID tag while in this wait mode position. Further, because the RF frequency is not fixed (i.e., it is frequency hopped over 902 and 928 MHz), the RFID antenna should have broadband characteristics in order to be efficient over the operating frequency range. Divergent RF conductor **304** allows RFID antenna **106** to be somewhat broadband over the 902 to 928 MHz operating range.

[0033] To achieve the foregoing requirements, RFID antenna **106** is designed as a quarter wave resonant antenna, such as shown in **FIG. 3**. In one embodiment, the antenna elements are constructed on a printed circuit board with a nominal thickness of 0.062" and a relative dielectric constant of 4.0. A relatively high dielectric constant material is desired to minimize the level of RF radiation off of the back of the antenna. Backside radiation would add to the level of reflected RF energy present inside the printer housing and increase the possibility of accessing unwanted RFID tags. The driven element of the antenna is made broadband by utilizing divergent RF conductor **304** with the narrow end connected to RF source node **306**. RF field spreader **302** is provided at right angles to the main axis of divergent conductor **304** to help spread the RF field along the media or label path. Because it is required that communications with the RFID tag be possible as the tag is moved over a controlled distance, some RF field distortion relative to a normal quarter-wave dipole is desired. This is achieved by expanding the far end of the basic radiating element. Ground planes **306** on either side of the RF radiating element (RF conductor **304** and RF field spreader **302**) are provided to minimize radiation of unwanted RF energy. Ground planes **306** close to the radiating element of the antenna restrain the extent of the RF field radiated by the antenna, thereby preventing unwanted communications with adjacent or nearby RFID tags on the roll of labels. Communicating with nearby RFID tags may greatly reduce the accuracy of reading or programming specific tags.

[0034] In the embodiment described with respect to and shown in **FIG. 3**, RFID antenna **106** can be used in a system for interrogating RFID tags (inlays) that are approximately 4 inches in length and 0.5 inches in width. The RF field is concentrated over this 4 inch width and spread over about 2.5 inches of the label length.

[0035] **FIG. 4** is a flow chart showing steps used during a programming and printing of RFID label **200** according to one embodiment. In step **400**, the host computer sends print image and tag data in one file to the printer. A counter is incremented, in step **402**, to indicate that a new tag or label is passing through for processing. Data is then written onto the RFID tag via RFID circuitry and the RFID antenna in step **404**. The write or programming operation is checked to determine if the data was written correctly in step **406**. If the programming operation was successful, the label is printed in step **408**, such as by a thermal print head. However, if the programming operation was not successful, the system determines if a certain number N of write operations have

been attempted on the specific label in step **410**. In one embodiment, N is between 1 and 5 and can be set by the user. If the number of attempts has reached N (i.e., N unsuccessful writes), an error is designated in step **412**. The appropriate action is then taken in step **414**. In one embodiment, the user can select one of two actions. The first action is halting operation of the printing process until the user re-starts the process. The second action is continuing the process by over-striking the label with an indication that the label is defective.

[**0036**] If, as determined in step **410**, the maximum number of attempts has been reached, the systems attempts a re-write of the same information on the next label in step **416**. A counter for the number of write attempts on each label is incremented in step **418**, and the programming operation is again verified in step **406**.

[**0037**] **FIG. 5** is a flow chart showing steps used during a reading and printing of RFID label **200** according to one embodiment. In this embodiment, the RFID label has been pre-programmed. In step **500**, the printer system is sent print image instructions and a read command to read the RFID tag. Next, a label counter is incremented in step **502**, which counts the number of RFID labels passing through the printer. As the RFID label passes over the RFID antenna, the RFID tag within the label is read, in step **504**. The printer system then determines, in step **506**, if the information read from the RFID tag is what should be programmed, i.e., if there is an error with the programming. If the data in the tag is correct, the label is printed with image data from a thermal print head in step **508**. However, if the read operation determines, in step **510**, that the data stored in the tag is in error or cannot be read, the printer system determines if a certain number N read attempts have been made on the RFID label. In one embodiment, N is between 1 and 5, as determined by the user. If there has been N read attempts, an error in the tag is noted in step **512**. Next, an appropriate action is taken in step **514**. In one embodiment, the user can select whether the printing stops until the user re-starts the process or the printing continues with a thermal print head over striking the label to indicate a faulty RFID tag.

[**0038**] If, in step **510**, the number of read attempts has not reached N, another read operation on the RFID tag is performed in step **516**. A read counter indicating the number of read attempts on the tag is then incremented in step **518**. The information in the tag is again checked for proper programming. Multiple read attempts allow the printer system to designate a faulty label with a higher level of confidence since some reads may not properly read the tag data, due to various factors, including interference from other sources.

[**0039**] Labels are advanced from the roll of labels for processing on the next RFID label. Processing continues until an end-of-label indicator is reached, the required number of labels have been printed, or the user halts operation, such as when a faulty label is encountered or a job needs to be interrupted.

[**0040**] **FIG. 6** is a block diagram showing a printer system **600** that extracts information from a data stream, transforms or converts portions of the data stream, if needed, and uses the portion to program the RFID tag, while also printing the label in the normal manner. In one embodiment, the portion is the bar code command. Printer system **600** receives

information via a data stream **602** from a host computer **604** that includes a host application, typically specific to the system through an electrical and software interface. The electrical interface can be any suitable communication means, such as, but not limited to, a serial or parallel physical link, an Ethernet connection, or a wireless link. The data stream contains various commands, such as line, box, font, and bar code commands, for printing lines, boxes, text, bar codes, and other images. The data stream is transmitted to the printer in specific languages to cause the printer to print an image on a label or other media.

[**0041**] Typically, each manufacturer uses a unique and specific language or software interface, such as PGL (Programmable Graphics Language used and supported by Printnrix of Irvine, Calif.), ZPL (Zebra Programming Language used and supported by Zebra Technologies of Illinois), and IPL (Intermec Programming Language used and supported by Intermec of Washington). To add RFID tag programming capability to the printer, additional printer language commands must be developed. Further, in the normal situation these commands would have to be integrated into host software application, at significant cost and effort, in order for the printer to deliver programmed RFID tags. In one embodiment, the data encapsulated in the bar code command is also programmed into the RFID tag. In this situation, the host application need not be modified when used in conjunction with additional software embedded in the printer. The additional printer software detects the bar code command from the incoming data stream and generates RFID specific commands which include the bar code data. These in turn are routed to the RFID system for programming into the RFID label.

[**0042**] In **FIG. 6**, printer **600** includes a printer data control section **606** that receives the data stream and a printer engine control section **608** for programming and printing the RFID label. Character substitution table **610**, within printer data control section **606**, is coupled to receive the data stream from host computer **604**. Character substitution table **610** intercepts any incoming bar code command, identifies the bar code of interest, transmits this bar code command to a printer command parser **612** for normal bar code printing, and in addition creates an RFID write command to allow programming of the RFID tag. Character substitution table **610** is a distinct software application that is downloaded to the printer to effect the data manipulation. The data manipulation can be diverse. In one embodiment, character substitution table **610** pre-parses the incoming data stream to identify the specific bar code command of interest and associated bar code data. The bar code data is extracted from the bar code command and applied to the RFID write-tag command. The resulting data string is transmitted to command parser **612** for normal command processing. The bar code command is also sent to command parser **612** according to conventional methods, as is known in the art.

[**0043**] Printer command parser **612** identifies the print commands and transmits the print commands to an image formatter software module **614**. Image formatter **614** processes the print commands such as to create a bit image of the desired print format. This bit image is transmitted to a print engine control system **616**, within printer engine control **608**, which manages the printer components (e.g., the print head, ribbon motors, platen motor and roller, sensors, etc.) to cause a printed image to be created on the label.

[0044] In parallel with this print process, command parser 612 also transmits the RFID specific commands to an RFID data formatting software module 618. This module formats the RFID data (or bar code data as was) sent with the RFID command to meet the formatting requirements of the RFID tag. In turn, this formatted RFID data is sent to an RFID control system 620, within printer engine control 608, which includes an RFID reader (or transceiver) capable of programming the RFID tag embedded within the label. The reader is attached to the antenna described above. The result is an RFID label that has been printed with images, as well as an RFID tag programmed with information from the data stream. This allows users to use their existing bar code application for RFID tags without extensive and costly modifications of the host computer application software.

[0045] In one embodiment, this same technique can be applied to thermal print systems that support more than one thermal printer language. The character substitution table can be configured to identify, for example, Zebra ZPL language bar code commands. Converting the bar code command from the data stream into an RFID command for programming the RFID tag can be utilized in systems that support various programming languages, such as from Zebra, Intermec, etc.

[0046] According to one embodiment, the bar codes can be supported in two modes, a copy mode and a transform mode. In the copy mode, an RFID tag with the exact information in the bar code is created, with a possible exception of checksum data. The checksum data may be supplied with the data or calculated by the printer. If calculated or generated by the printer, the checksum data is not present in the RFID tag. In the transform mode, data in the bar code is transformed before encoding into a tag. Two types of bar codes suitable for the invention are Integrated Two of Five (ITF) and Code 128C, although other codes may also be used. In the transform mode, data encoded in a bar code may be copied or programmed directly onto an RFID tag, but not printed on the label. This may be the application where the RFID tag data is not related to or supplements any of the printed bar code data. Data from the bar code may also be programmed exactly onto the RFID tag, except for the checksum and an application identifier or other type code.

[0047] Printer system 100 can be a standard thermal printing system, such as the T5000 from Printronix of Irvine, Calif. The RFID antenna and reader may simply be inserted into the existing print system to obtain the advantages discussed above of the present invention. Further, a simple modification of inserting a character substitution table into the existing code of the printer allows a printer to achieve the advantages discussed herein.

[0048] The above-described embodiments of the present invention are merely meant to be illustrative and not limiting. It will thus be obvious to those skilled in the art that various changes and modifications may be made without departing from this invention in its broader aspects. Therefore, the appended claims encompass all such changes and modifications as fall within the true spirit and scope of this invention.

What is claimed is:

1. A printer system, comprising:

a roll of labels, wherein each label comprises a radio frequency identification (RFID) tag;

an RFID reader system comprising:

an RFID reader; and

an RFID antenna, wherein the RFID antenna comprises:

an RF field spreader;

an RF divergent conductor, with a divergent side contacting the RF field spreader and an opposite side forming an RF source node;

a first ground plane adjacent to the RF field spreader; and

a second ground plane adjacent to the RF divergent conductor; and

a print head, wherein the RFID antenna is between the roll of labels and the print head.

2. The printer system of claim 1, wherein the RF field spreader is a rectangular-shaped conductor.

3. The printer system of claim 1, wherein the RF divergent conductor is a triangular-shaped conductor.

4. The printer system of claim 1, where the RF field spreader and the RF divergent conductor are copper.

5. The printer system of claim 1, wherein the print head is a thermal print head.

6. The printer system of claim 1, wherein the RFID tag is located in an approximately middle section of the label along the width-wise direction.

7. The printer system of claim 1, wherein the RF field spreader and the RF divergent conductor are formed on a first portion of a printed circuit board assembly.

8. The printer system of claim 7, wherein the second ground plane is formed on a second portion of the printed circuit board assembly.

9. The printer system of claim 8, wherein the first and second portions are approximately the same size.

10. The printer system of claim 1, wherein the first ground plane is smaller than the second ground plane.

11. The printer system of claim 1, wherein the RFID tag passes over the RF source node source.

12. The printer system of claim 1, wherein the RFID reader system writes to and reads from the RFID tag.

13. The printer system of claim 1, wherein the RFID antenna further comprises a microstrip transmission line to transmit an RF signal from an edge of the antenna to the RF source node.

14. The printer system of claim 1, wherein the RFID reader system operates in a frequency range of approximately 902 MHz to 928 MHz.

15. The printer system of claim 1, wherein the RFID antenna comprises a dielectric material having a dielectric constant of at least 4.0.

16. A printing system, comprising:

a host computer, wherein the host computer is capable of transmitting a data stream using a first programming language; and

a printer system, comprising:

- an extractor coupled to receive the data stream, wherein the extractor extracts a first portion of the data stream and generates RFID commands from the first portion;
- a parser coupled to the extractor, wherein the parser parses image portions from RFID portions of the first portion of the data stream;
- an image formatter coupled to receive the image portions from the parser;
- an RFID data formatter coupled to receive the RFID portions from the parser;
- a print sub-system coupled to the image formatter for printing an image on a label; and
- an RFID system coupled to the RFID data formatter for programming data on an RFID tag in the label.

17. The printing system of claim 16, wherein the first programming language is different than the programming language from the printer system.

18. The printing system of claim 16, wherein the first portion is bar code commands.

19. The printing system of claim 16, wherein the extractor is a character substitution table.

20. The printing system of claim 18, wherein the extractor generates an RFID command from bar code data.

21. The printing system of claim 16, wherein the print sub-system comprises a thermal print head.

22. A method for printing labels from a roll, with each label having a radio frequency identification (RFID) tag, the method comprising:

- passing a label over an RFID antenna;
- interrogating the RFID tag in the label;
- determining if the interrogating was successful;
- attempting N-1 additional interrogations until a successful interrogation is determined; and
- printing the label once a successful interrogation is determined.

23. The method of claim 22, further comprising receiving print and tag data from a host computer.

24. The method of claim 22, wherein the interrogating is reading data from the RFID tag.

25. The method of claim 22, wherein the interrogating is programming data in the RFID tag.

26. The method of claim 22, wherein N is 5 or less.

27. The method of claim 22, further comprising over striking the label if a successful interrogation cannot be determined after N interrogations.

28. The method of claim 22, further comprising halting operation of the process if a successful interrogation cannot be determined after N interrogations.

29. The method of claim 22, wherein the printing is by thermal printing.

30. A method of processing an label with an RFID tag, comprising:

- receiving, from a host computer, a data stream in a programming language;
- extracting a first portion from the data stream;
- formatting at least part of the first portion into an RFID command;
- programming bar code data into the RFID tag using the formatted portion; and
- printing the label using commands from the first portion of the data stream.

31. The method of claim 30, wherein the first portion are bar code commands.

32. The method of claim 30, further comprising parsing the RFID command to an RFID system and at least a portion of the data stream to a printer portion.

33. The method of claim 32, wherein the printer portion includes a thermal print head.

34. The method of claim 32, wherein the programming language is different than the programming language of the printer portion.

* * * * *