




(86) Date de dépôt PCT/PCT Filing Date: 1998/05/26
(87) Date publication PCT/PCT Publication Date: 1998/12/03
(45) Date de délivrance/Issue Date: 2007/10/09
(85) Entrée phase nationale/National Entry: 1999/01/25
(86) N° demande PCT/PCT Application No.: EP 1998/003087
(87) N° publication PCT/PCT Publication No.: 1998/054414
(30) Priorité/Priority: 1997/05/30 (DE197 22 676.0)

(51) Cl.Int./Int.Cl. *E01C 5/06* (2006.01)
(72) Inventeur/Inventor:
GEIGER, PETER, DE
(73) Propriétaire/Owner:
GEIGER, PETER, DE
(74) Agent: ROBIC

(54) Titre : JEU DE PAVES
(54) Title: STONE STRUCTURE ASSEMBLY

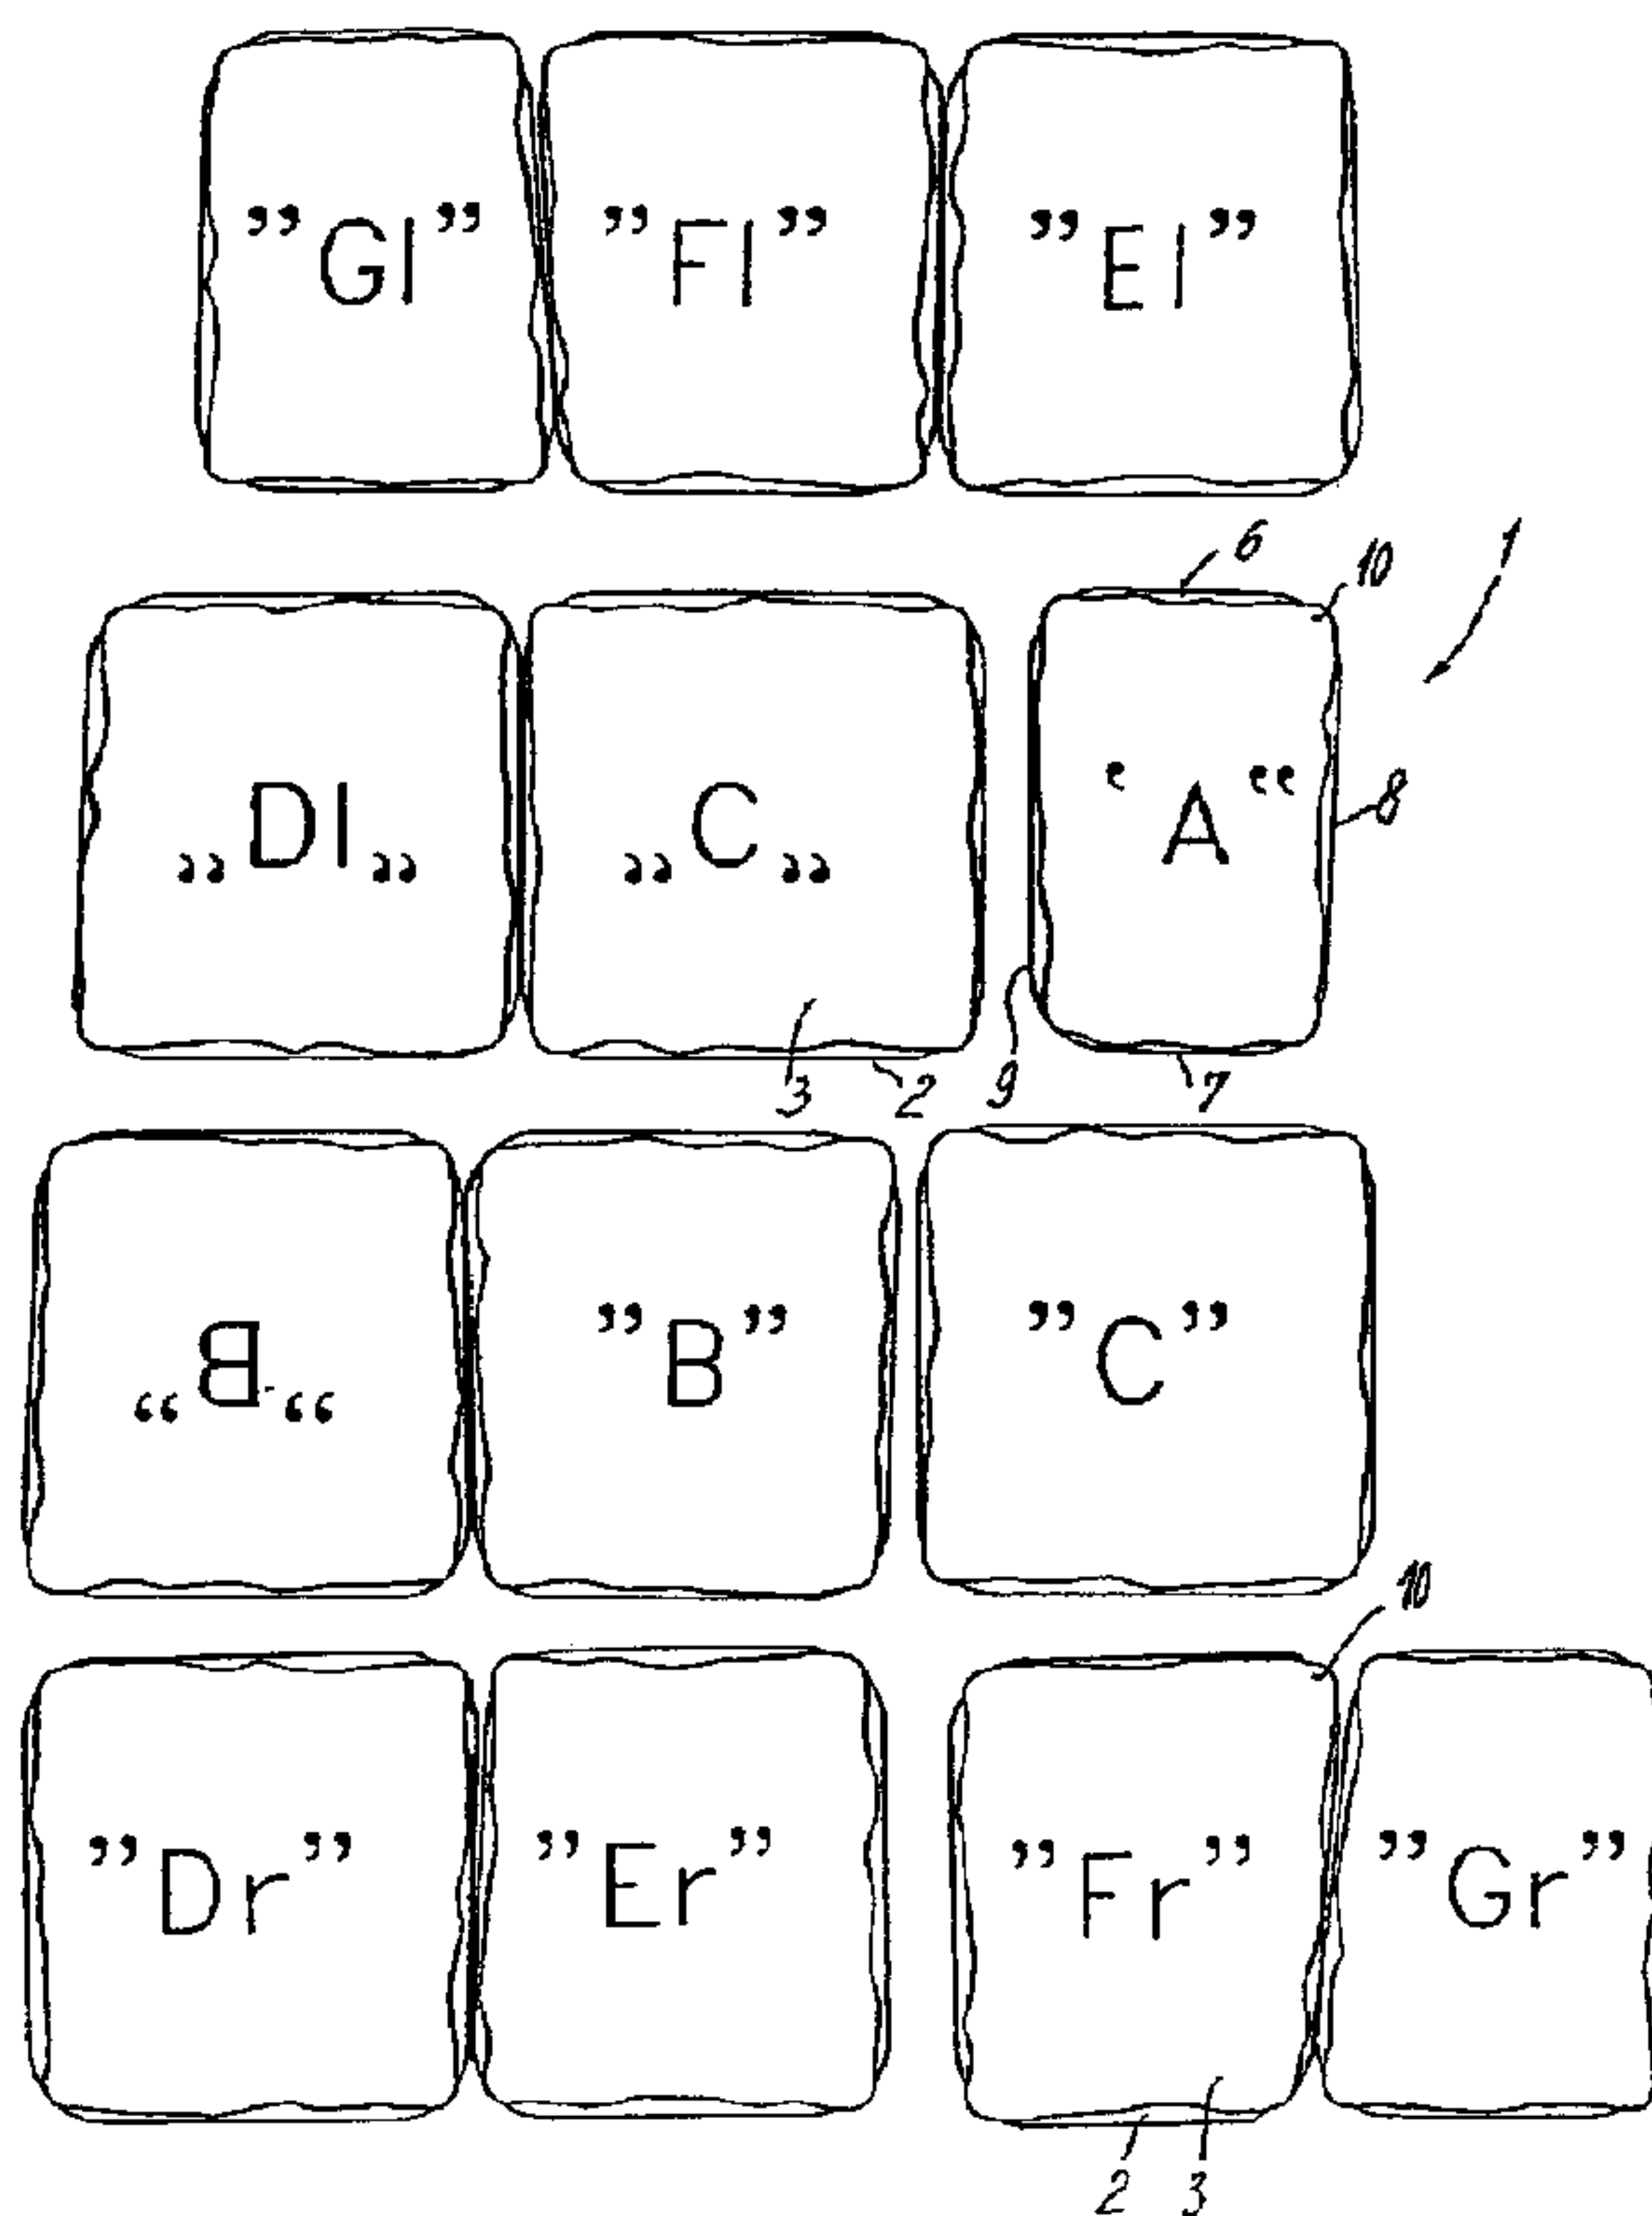

(57) Abrégé/Abstract:

The invention relates to a stone structure assembly, comprising a plurality of stones, especially concrete blocks, having similar height, upper and lower sides extending on parallel planes and vertical side walls. In order to place the thirteen stone blocks (G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr, Gr) pertaining to said assembly in such a way that they cannot be displaced and that similarly narrow spacing gaps are formed in-between said stones, two stones (C) are shaped as a prism with the same surface area and eleven stones (G1, F1, E1, D1, A, B, B, Dr, Er, Fr, Gr) are shaped as a trapezium with differing surface areas. The stones in the stone structure assembly are configured as a single piece with a bottom section (2) and a top section (3) set back from the peripheral surface of the base section (2) at least in certain areas.

PCT
 WELTORGANISATION FÜR GEISTIGES EIGENTUM
 Internationales Büro
 INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
 INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)



(51) Internationale Patentklassifikation 6 :

E01C 5/06

A1

(11) Internationale Veröffentlichungsnummer: WO 98/54414

(43) Internationales
Veröffentlichungsdatum:

3. Dezember 1998 (03.12.98)

(21) Internationales Aktenzeichen: PCT/EP98/03087

(22) Internationales Anmeldedatum: 26. Mai 1998 (26.05.98)

(30) Prioritätsdaten:

197 22 676.0

30. Mai 1997 (30.05.97)

DE

(71)(72) Anmelder und Erfinder: GEIGER, Peter [DE/DE]; Regensburgerstrasse 160, D-92318 Neumarkt (DE).

(74) Anwalt: GÖBEL, Matthias; Pruppacher Hauptstrasse 5-7, D-90602 Pyrbaum-Pruppach (DE).

(81) Bestimmungsstaaten: CA, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht*Mit internationalem Recherchenbericht.**Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.*

(54) Title: STONE STRUCTURE ASSEMBLY


(54) Bezeichnung: STEINBAUSATZ

(57) Abstract

The invention relates to a stone structure assembly, comprising a plurality of stones, especially concrete blocks, having similar height, upper and lower sides extending on parallel planes and vertical side walls. In order to place the thirteen stone blocks (G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr, Gr) pertaining to said assembly in such a way that they cannot be displaced and that similarly narrow spacing gaps are formed in-between said stones, two stones (C) are shaped as a prism with the same surface area and eleven stones (G1, F1, E1, D1, A, B, B, Dr, Er, Fr, Gr) are shaped as a trapezium with differing surface areas. The stones in the stone structure assembly are configured as a single piece with a bottom section (2) and a top section (3) set back from the peripheral surface of the base section (2) at least in certain areas.

(57) Zusammenfassung

Bei einem Steinbausatz mit einer Anzahl Steinen, insbesondere aus Betonwerkstoff, mit gleicher Höhe und mit in parallelen Ebenen sich erstreckenden Ober- und Unterseiten sowie vertikalen Seitenwandungen, ist zu verschiebungsfreien Verlegungen und Bildung gleichmäßig schmaler Abstandsfugen die Anordnung von dreizehn Bausatzsteinen (G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr, Gr) vorgesehen, von denen in horizontaler Ebene zwei Bausatzsteine (C) prismatisch flächengleich und elf Bausatzsteine (G1, F1, E1, D1, A, B, B, Dr, Er, Fr, Gr) trapezförmig flächenungleich ausgebildet sind, die Bausatzsteine einstückig mit einem Fußteil (2) und einem gegenüber der Umfangsfläche des Fußteils (2) mindestens über Abschnitte zurückversetzten Kopfteil (3) ausgebildet sind.

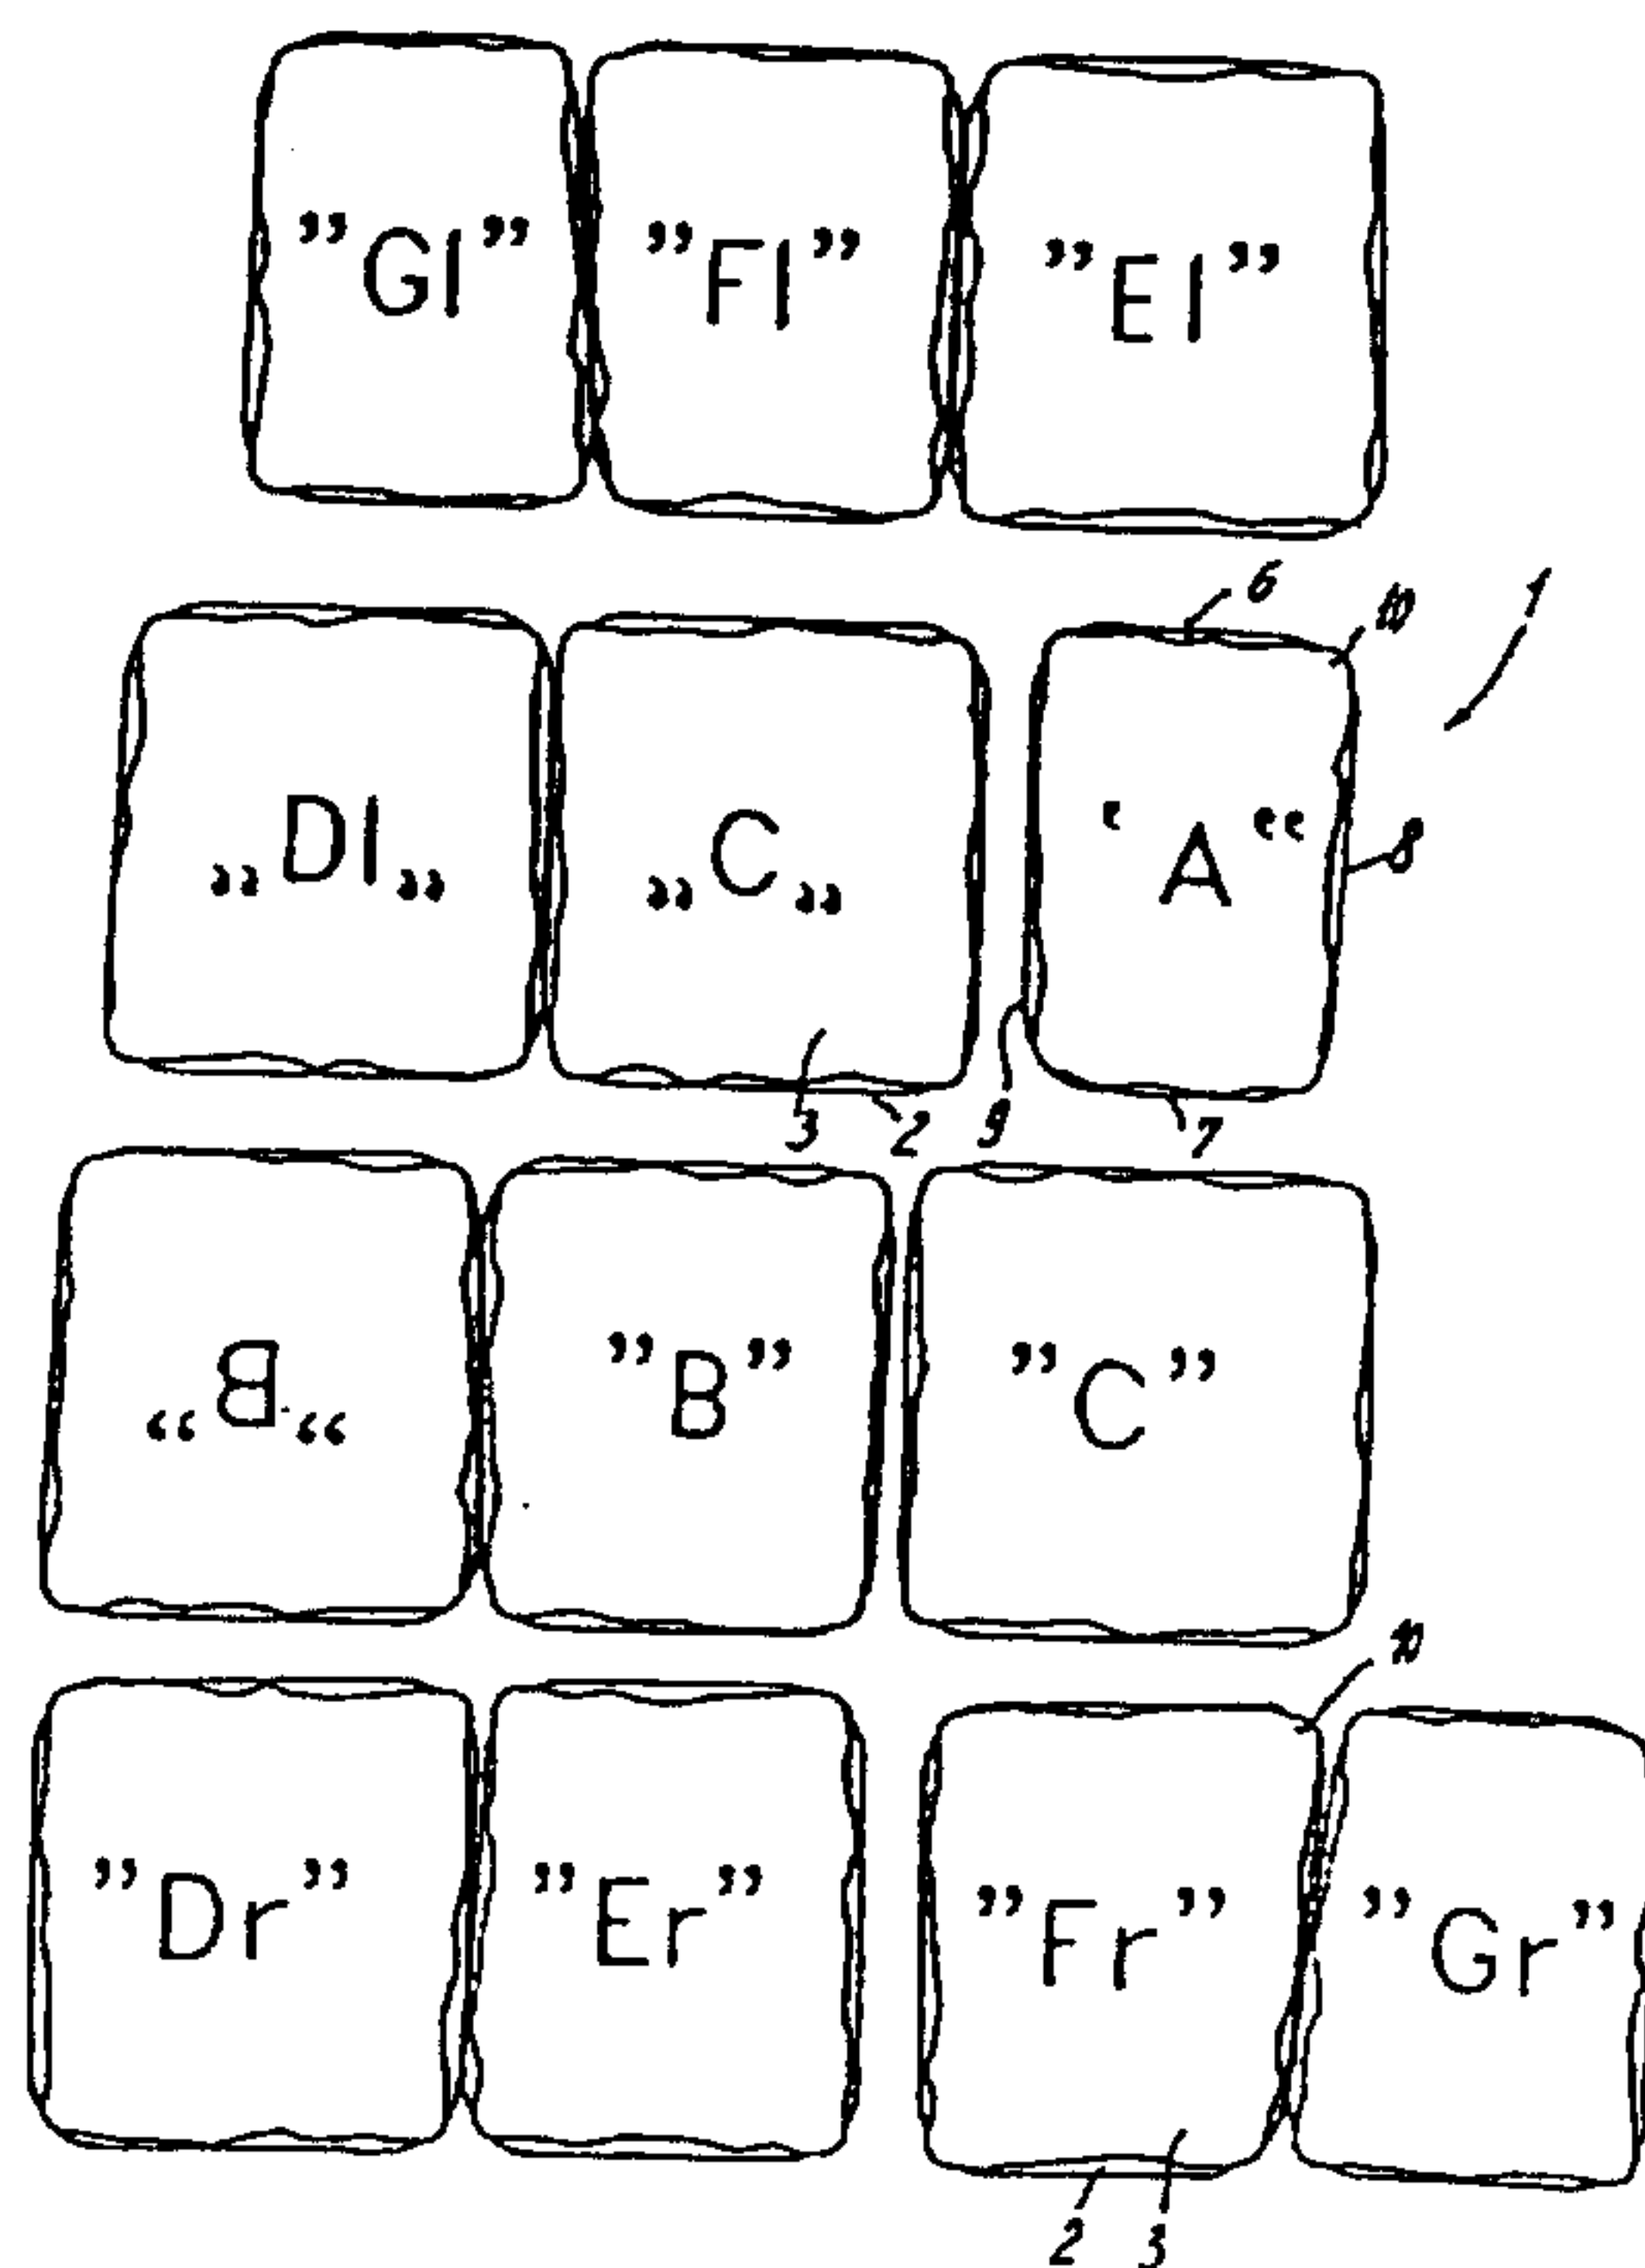

STONE STRUCTURE ASSEMBLY

The invention relates to a stone structure assembly with a plurality of stones made in particular from concrete material and having the same height and upper and lower sides extending in parallel planes, as well as vertical side walls.

10

A stone structure assembly formed by seven blocks is known (from DE design patent 84 05 128), which comprises rectangular and trapezoidal blocks. In the composite structure of said blocks it is possible to obtain a straight-line or a curved pattern of the laid blocks by lining up said blocks accordingly. If the blocks for the stone structure assembly are aligned in the form of an arc, joints are formed that become relatively wide toward the outer sides of the arc. Such joints make it more difficult to safely walk on such a composite structure. Furthermore, the blocks permit only few variations of the installed pattern. With another stone structure assembly, which is known as well (from DE design patent 90 13 003), the drawback of wide joints is avoided by exclusively employing trapezoidal blocks with equal legs of the trapezium. However, like the blocks of the first-mentioned stone structure assembly, said blocks have the drawback that they are spaced from each other in the installed pattern for forming joints, so that said blocks may get displaced. Such displacement results in an inharmonious pattern of the installed blocks and makes it difficult to drive on such a stone structure assembly.

The problem of the invention is to create a stone structure assembly comprising blocks which can be laid free of displacement against each other, and which are suitable for forming uniform narrow spacing joints.

According to the invention , there is provided a stone structure assembly comprising a plurality of blocks, with an identical height and with top and bottom sides extending in parallel planes, as well as with vertical side walls, the stone structure assembly being for forming an arrangement of the blocks by lining up
10 or setting said blocks, the stone structure assembly being characterized in that said arrangement comprises thirteen of said blocks, of which in a horizontal plane, two of said blocks are designed with prismatically identical surface areas, and the remaining eleven of said blocks are designed trapezoidally with varying surface areas, said blocks being designed in the form of single pieces having a base section and a top section set back from the peripheral surface of the base section in certain areas.

The proposed number of blocks permits a variable pattern of the assembled structure, whereby in the installed composite structure, the base
20 sections form abutting or supporting elements for adjacent blocks, such supporting elements being free of displacement - or being shiftable only to very minor degrees - and maintaining the top sections spaced from each other with permanent joint spacings. Supporting adjacent blocks by means of the base sections prevents displacement even under high loads and assures that uniform narrow joints are maintained with preferred widths of from 4 to 12 mm. The narrow joints so obtained permit safe walking on the installed set of blocks.

Preferably, for forming the block assembly provision is made that the corner regions of the base and top sections are designed in the form of segments of a circle, and that said corner regions are disposed one on top of the other at least approximately equiaxed, and that the base section ends in the corner regions with segments of the side surfaces projecting beyond the top section. The roundings so obtained in the corner regions of the blocks prevent damage to said corner areas, for example damage caused due to squeezing between adjacent corner regions when the blocks are installed in the form of an arc, or when corner regions are subjected to uneven mechanical loads.

Preferably, provision is made that the side surfaces of the base sections are substantially smooth-walled, and that the side surfaces of the top sections are irregularly corrugated with rounded deepenings and elevations. The result thereof is that the base sections safely support each other flatly irrespective of their inclination relative to one another, whereas the top sections have the appearance of broken natural stones.

Preferably, for the purpose of intensifying the appearance of natural stone, irregularly corrugated, rounded deepenings and elevations are preferably formed in the top sides of the top sections, or provision is made for top sections with embossed top sides. Furthermore, it was found to be advantageous if the top sides of the top sections or the latter as a whole are formed by dyed concrete material.

Preferably, provision is made that a straight-lined installation of the blocks is obtained in the composite structure by lining up blocks with prismatically

identical surface areas with blocks with trapezoidally uneven shapes and congruent association of the slanted surfaces. However, it is possible also to create by means of the blocks an arc-shaped composite structure by setting blocks with prismatically identical surface areas against the slanted surfaces of an equilegged trapezoidal block, and by setting the parallel top and bottom surfaces of trapezoidal blocks against said slanted surfaces. Therefore, the set of blocks can be employed in many different ways, and it is variable within its individual types of application.

According to a preferred design of the set of blocks, the angle of inclination of the slanted surfaces of the trapezoidally unequal blocks versus the fictitious planes which run transversely from the parallel side surfaces of the blocks is selected between $1^{\circ}44'$ and $5^{\circ}46'$. It is understood that when the blocks are installed in the form of an arc, the angles of inclination become increasingly larger as the spacing from the center of the installed structure increases.

Preferably, provision is made to design the blocks with a defined ratio of height between the top and the base sections. It was found that it is useful if the ratio of height between the top and base sections substantially amounts to 1:4 to 1:3. It is understood that other height ratios can be selected as well. For example, it is conceivable that the top section is designed with a lesser height and the base section with a correspondingly increased height.

The invention is illustrated with the help of an exemplified embodiment shown in the drawing, in which:

FIG. 1 shows a top view of a set of blocks comprising thirteen blocks.

FIG. 2 is a top view of the reduced blocks true to scale.

10 FIG. 3 shows a reduced top view of blocks installed in the form of an arc.

FIG. 4 shows a reduced top view of blocks set spaced from each other.

FIG. 5 shows a reduced view of a set of blocks laid in a straight line.

20 FIG. 6 is a reduced top view of an installation pattern with a larger number of sets of blocks laid in the form of arcs.

FIG. 7 is an enlarged sectional view of a block cut along line VII-VII of FIG. 1; and

FIG. 8 is a top view of a set of blocks with blocks installed in a straight line, including data of the pattern.

10 Block set 1 shown in the figures has thirteen blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr, and Gr" made from concrete material. Blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr and Gr" each are single pieces and each provided with a base section 2 and a top section 3, and have plane bottom surfaces 4 and parallel plane top surfaces 5. The side surfaces 6, 7, 8 and 9 of blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr, and Gr" extend vertically, which is particularly visible in FIG. 7.

20 The blocks C are substantially designed square with identical side lengths, whereas the blocks "G1, F1, E1, D1, A, B, Dr, Er, Fr and Gr" have horizontally a trapezoidal cross section. The base sections 2 of the blocks have smooth-walled side surfaces, whereas the side surfaces of the top sections 3 are provided with irregularly corrugated, rounded deepenings and elevations in order to impart in this way the impression of a natural stone. In addition, the top sides 5 of the blocks are either roughened or embossed or provided with irregularly corrugated, rounded deepenings and elevations, which supports the

appearance of natural stone of the blocks. FIGS. 1 and 2 show, furthermore, that the top sections 3 and the base sections 2 of the blocks are designed with rounded corner regions 10, and that the side surfaces 6, 7, 8 and 9 of the base sections 2 project beyond the side surfaces of the top sections 3. Side surfaces 6, 7, 8, 9 extend into the rounded corner regions 10. In the vertical direction, blocks "Gl, Fl, El, Dl, C, A, B, B, C, Dr, Er, Fr and Gr" are designed with a height of about 8 cm, whereby the height of base sections 2 comes to about 6 cm, whereas the height of top sections 3 amounts to approximately 2 cm. It is understood that it is possible to employ deviations with respect to the height of the base and top sections. For example, it is possible to design top sections 3 with a greater or lesser height relative to base sections 2. Furthermore, provision is made to manufacture the top sides of top sections 3 - or top sections 3 as a whole - from a dyed material in order to intensify in this way the appearance of natural stone.

Among blocks "Gl, Fl, El, Dl, C, A, B, B, C, Dr, Er, Fr and Gr", the blocks denoted by letter "C" are designed with prismatically identical surface areas, whereas the other blocks are designed trapezoidally with varying surface areas.

Blocks "G1, Gr; F1, Fr; E1, Er; D1, Dr" each have a side surface 8 or 9 that is inclined versus the adjacent parallel surfaces 6, 7, whereby the inclination is designed with differently sized angles of inclination as shown in FIG. 2. The blocks "B" and "A" are designed in the form of equi-legged trapezia viewed in the horizontal cross section, and the inclined surfaces are slanted only slightly. Blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr and Gr" can be selectively set up next to one another as shown in FIG. 5, whereby for the purpose of forming approximately identical joint spacings across the entire pattern of the installed blocks, blocks having slanted surfaces are associated with each other congruently with their slanted surfaces, permitting straight-lined installation (FIG. 4).

In FIG. 3, blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr and Gr" are associated with one another in the form of a segment of a circle, whereby blocks "B" and "A" are installed upright, and blocks "G1 to C" and "Gr to C" are installed in lying positions. Due to such association, blocks "A, B and B" installed in upright positions support each other with the side surfaces of the associated base sections 2, and blocks "G1 to C" and "C to Gr" support each other one on top of the other with base sections 2 and top

sections 3, effecting an association that is free of displacement, or subjected only to minor displacement, whereas the top sections 3 form the joints, which have a small width, so that it is possible to safely walk on said joints.

In the exemplified embodiment of FIG. 6, a great number of block sets 1 are installed in an arrangement in the form of a segment of a circle. Block sets 1 are laid analogous to the representation in FIG. 3.

10

FIG. 8 shows a block set 1 with blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr and Gr" laid in a straight line, with allocation of the data of the pattern. In this connection, the measure of the pattern for the depth of the blocks amounts to 100 mm, whereas the measure of the pattern for the set of blocks laid in a straight line comes to 1125 mm. By associating the inclined trapezium sides of the trapezoidally shaped blocks with each other approximately equally sized joint widths are obtained, resulting in a harmonious installation pattern. The width of the joints is variable if the horizontal cross section of top sections 3 is selected smaller.

20

The following dimensional data are proposed for base sections 2 of blocks "G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Fr and Gr":

Blocks	Depth	Base length	Top length	Angle of inclination
G1 and Gr	99	68	78	5°46' of one side surface
F1 and Fr	99	77	85	4°37' of one side surface
E1 and Er	99	91	85	3°28' of one side surface
D1 and Dr	99	91	95	2°19' of one side surface
10 A	99	82	88	1°44' of two side surfaces
B	99	88	94	1°44' of two side surfaces
C	99	96	96	-
C	99	96	96	-

It is in line with the idea of the invention that modifications are possible with respect to the dimensional ratios of the blocks and the inclinations of the side surfaces of trapezoidal blocks for forming modified installation patterns.

WHAT IS CLAIMED IS:

1. A stone structure assembly comprising a plurality of blocks, with an identical height and with top and bottom sides extending in parallel planes, as well as with vertical side walls, the stone structure assembly being for forming an arrangement of the blocks by lining up or setting said blocks, the stone structure assembly being characterized in that said arrangement comprises thirteen of said blocks (G1, F1, E1, D1, C, A, B, B, C, Dr, Er, Pr, Gr), of which in a horizontal plane, two of said blocks (C) are designed with prismatically identical surface areas, and the remaining eleven of said blocks (G1, F1, E1, D1, A, B, B, Dr, Er, Fr, Gr) are designed trapezoidally with varying surface areas, said blocks being designed in the form of single pieces having a base section (2) and a top section (3) set back from the peripheral surface of the base section (2) in certain areas.

2. The stone structure assembly according to claim 1, characterized in that in the installed composite structure, the base sections (2) form displacement-free or low-displacement abutting and supporting elements for adjacent blocks; and that the top sections (3) are maintained by the base sections (2) with a permanent joint spacing (12) from each other.

3. The stone assembly structure according to claims 1 or 2, characterized in that the base and top sections (2; 3) have corner regions designed in the form of segments of a circle and disposed at least approximately equiaxially one on top of the other; and that the base section (2) extends into the corner regions (10) with segments of the side surfaces projecting laterally beyond the top section (3).

4. The stone structure assembly according to claim 1 or 2, characterized in that the side surfaces of the base sections (2) are substantially

smooth-walled, and the side surfaces of the top sections (3) are designed irregularly corrugated with rounded deepenings and elevations.

5. The stone structure assembly according to any one of claims 1, 2 and 4, characterized in that irregularly corrugated, rounded deepenings and elevations are formed in the upper sides of the top sections (3).

6. The stone structure assembly according to claim 5, characterized in that the upper sides of the top sections (3) are embossed and roughened.

7. The stone structure assembly according to claim 4 or 5, characterized in that the upper sides of the top sections (3) are formed by dyed
10 concrete material.


8. The stone structure assembly according to claim 4 or 5, characterized in that the top sections (3) are wholly formed by a dyed material.

9. The stone structure assembly according to claim 1, characterized in that said arrangement is a straight-lined installation of the blocks is obtainable in the composite structure by lining up blocks (C) with prismatically identical surface areas with blocks (G1, F1, E1, D1, A, B, B, Dr, Er, Fr, Gr) with trapezoidally varying surface areas with congruent association of the inclined surfaces of the latter blocks.

10. The stone structure assembly according to claim 1, characterized
20 in that said arrangement is an arc-shaded composite structure obtainable by setting blocks (C) with prismatically identical surface areas against the inclined surfaces of a block (A) with an equilegged trapezoidal shape, and by setting the parallel top and bottom surfaces of the trapezoidal blocks (G1, F1, E1, D1, Dr, Er, Fr, Gr) against said block (A).

11. The stone structure assembly according to claim 1 or 2, characterized in that the height ratio of the top and base sections (3; 2) of the blocks relative to each other substantially amounts to from 1:4 to 1:3.

1/4

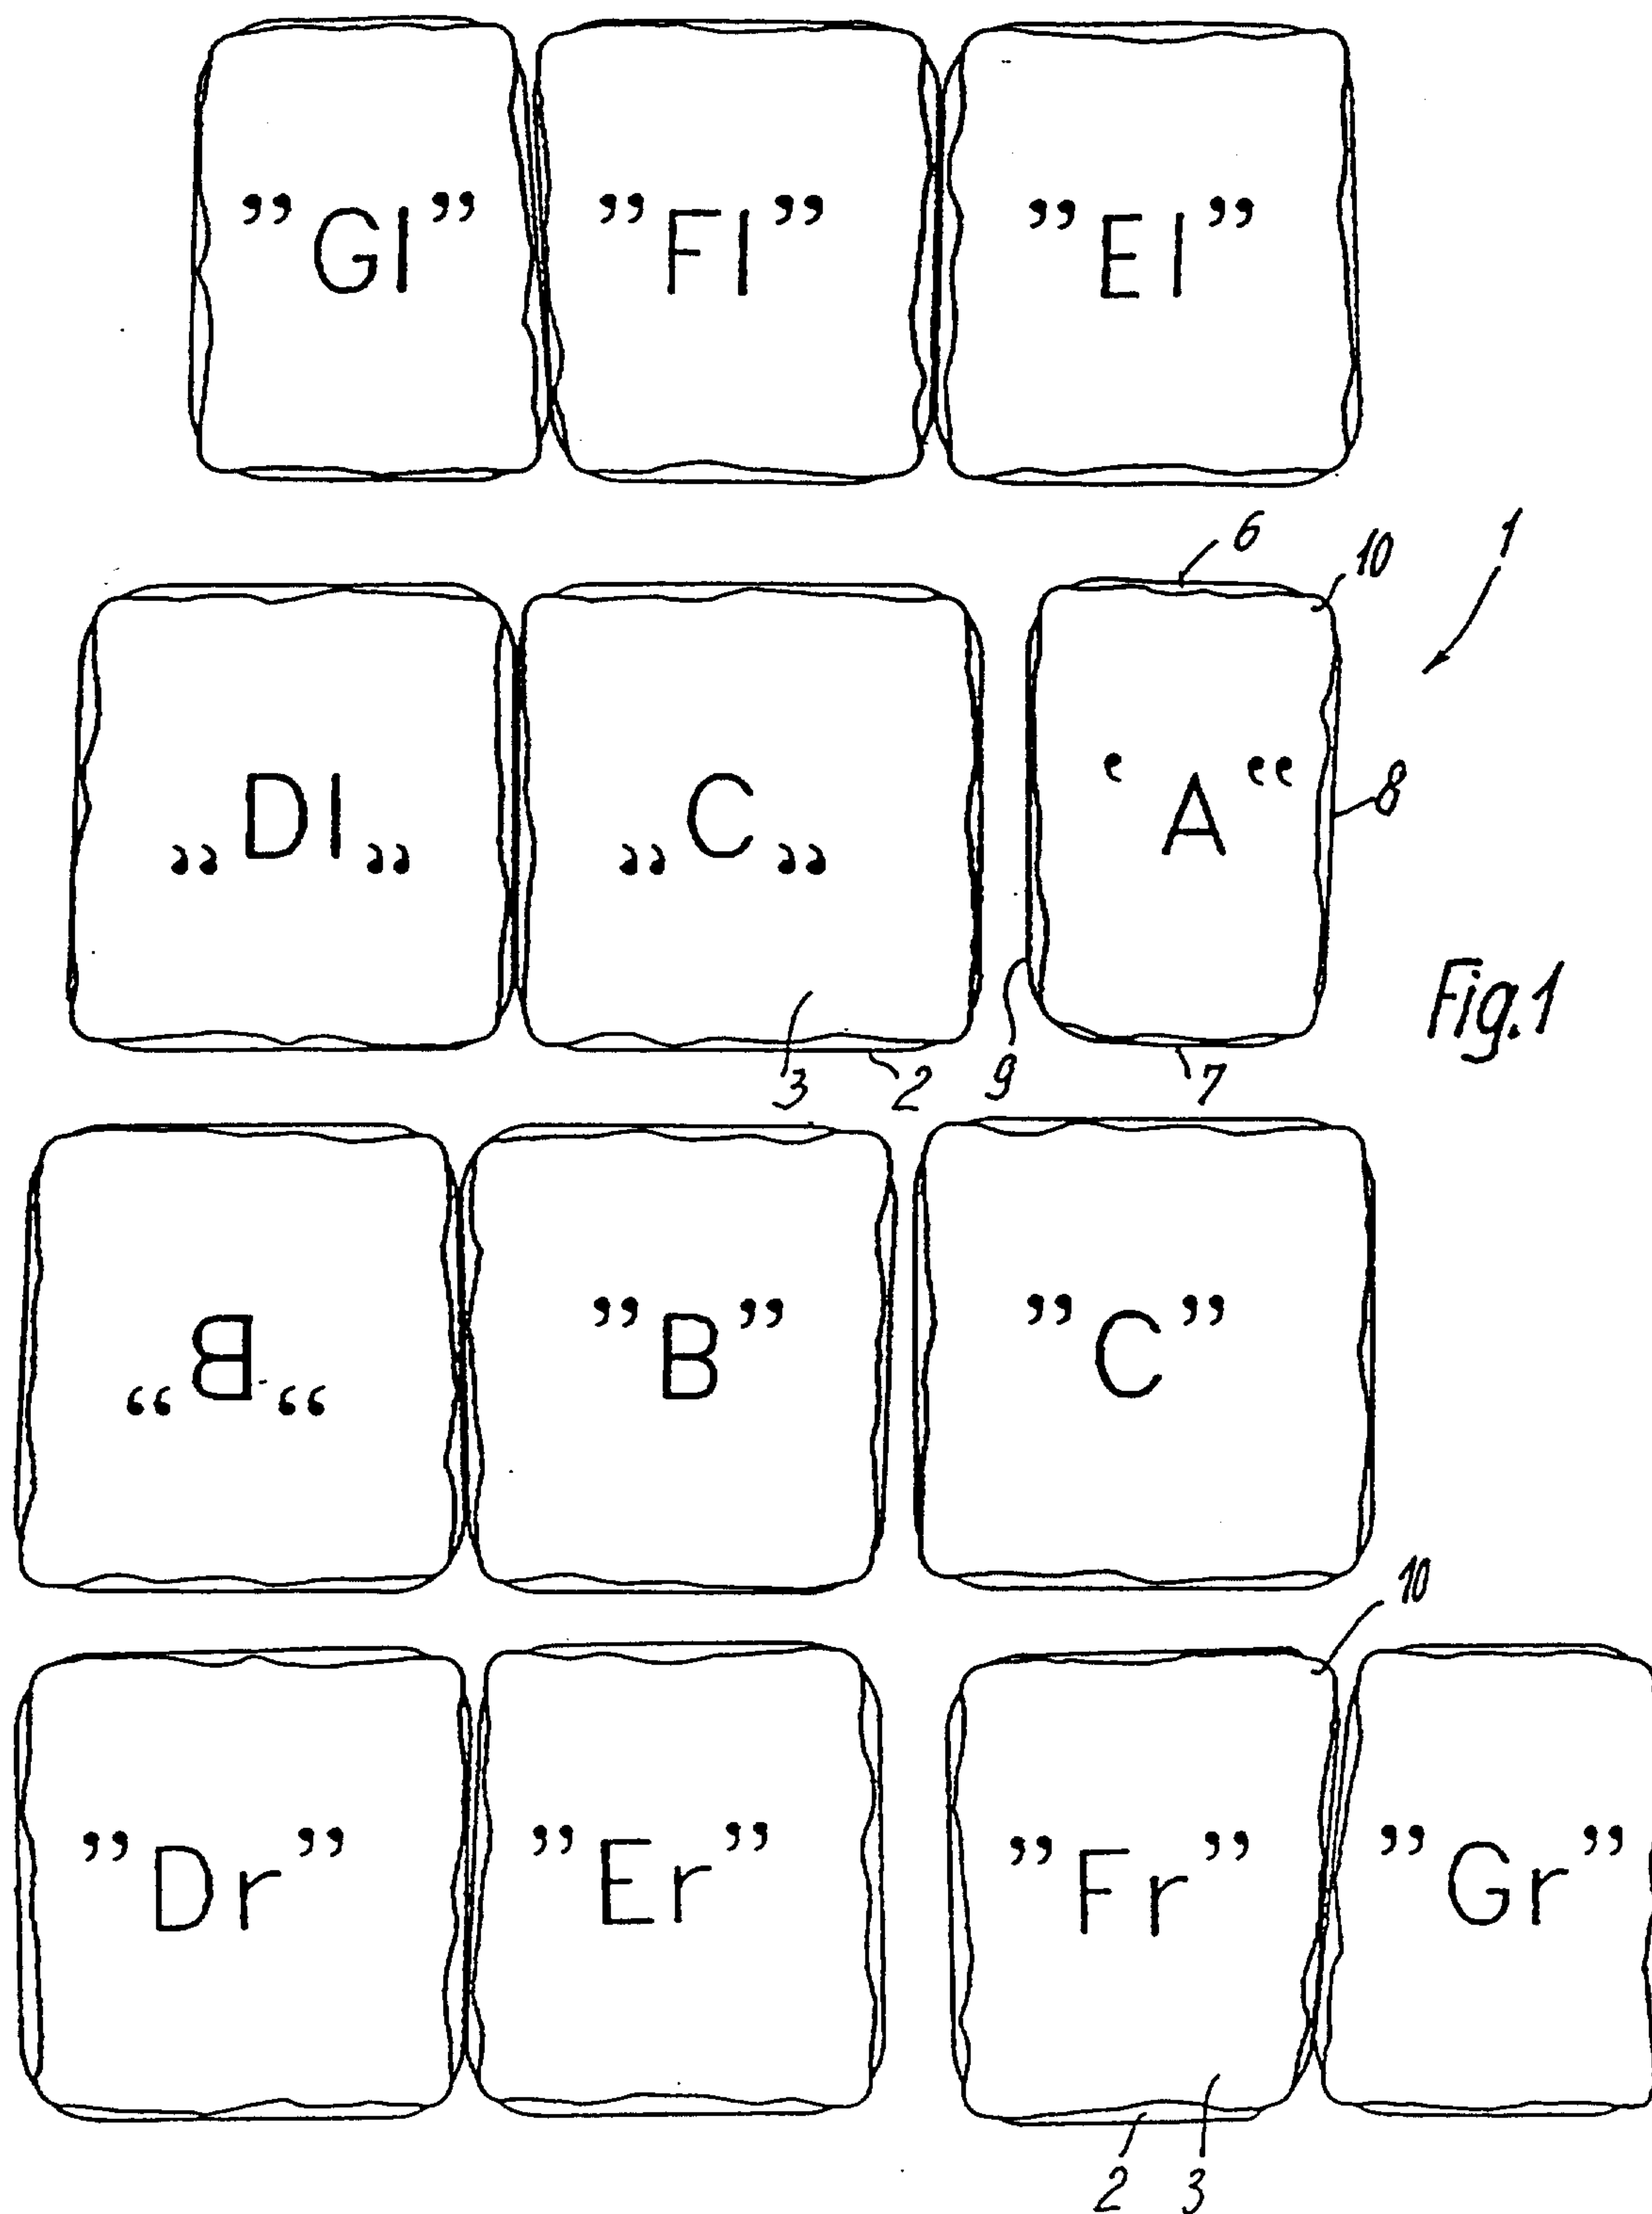

2 / 4

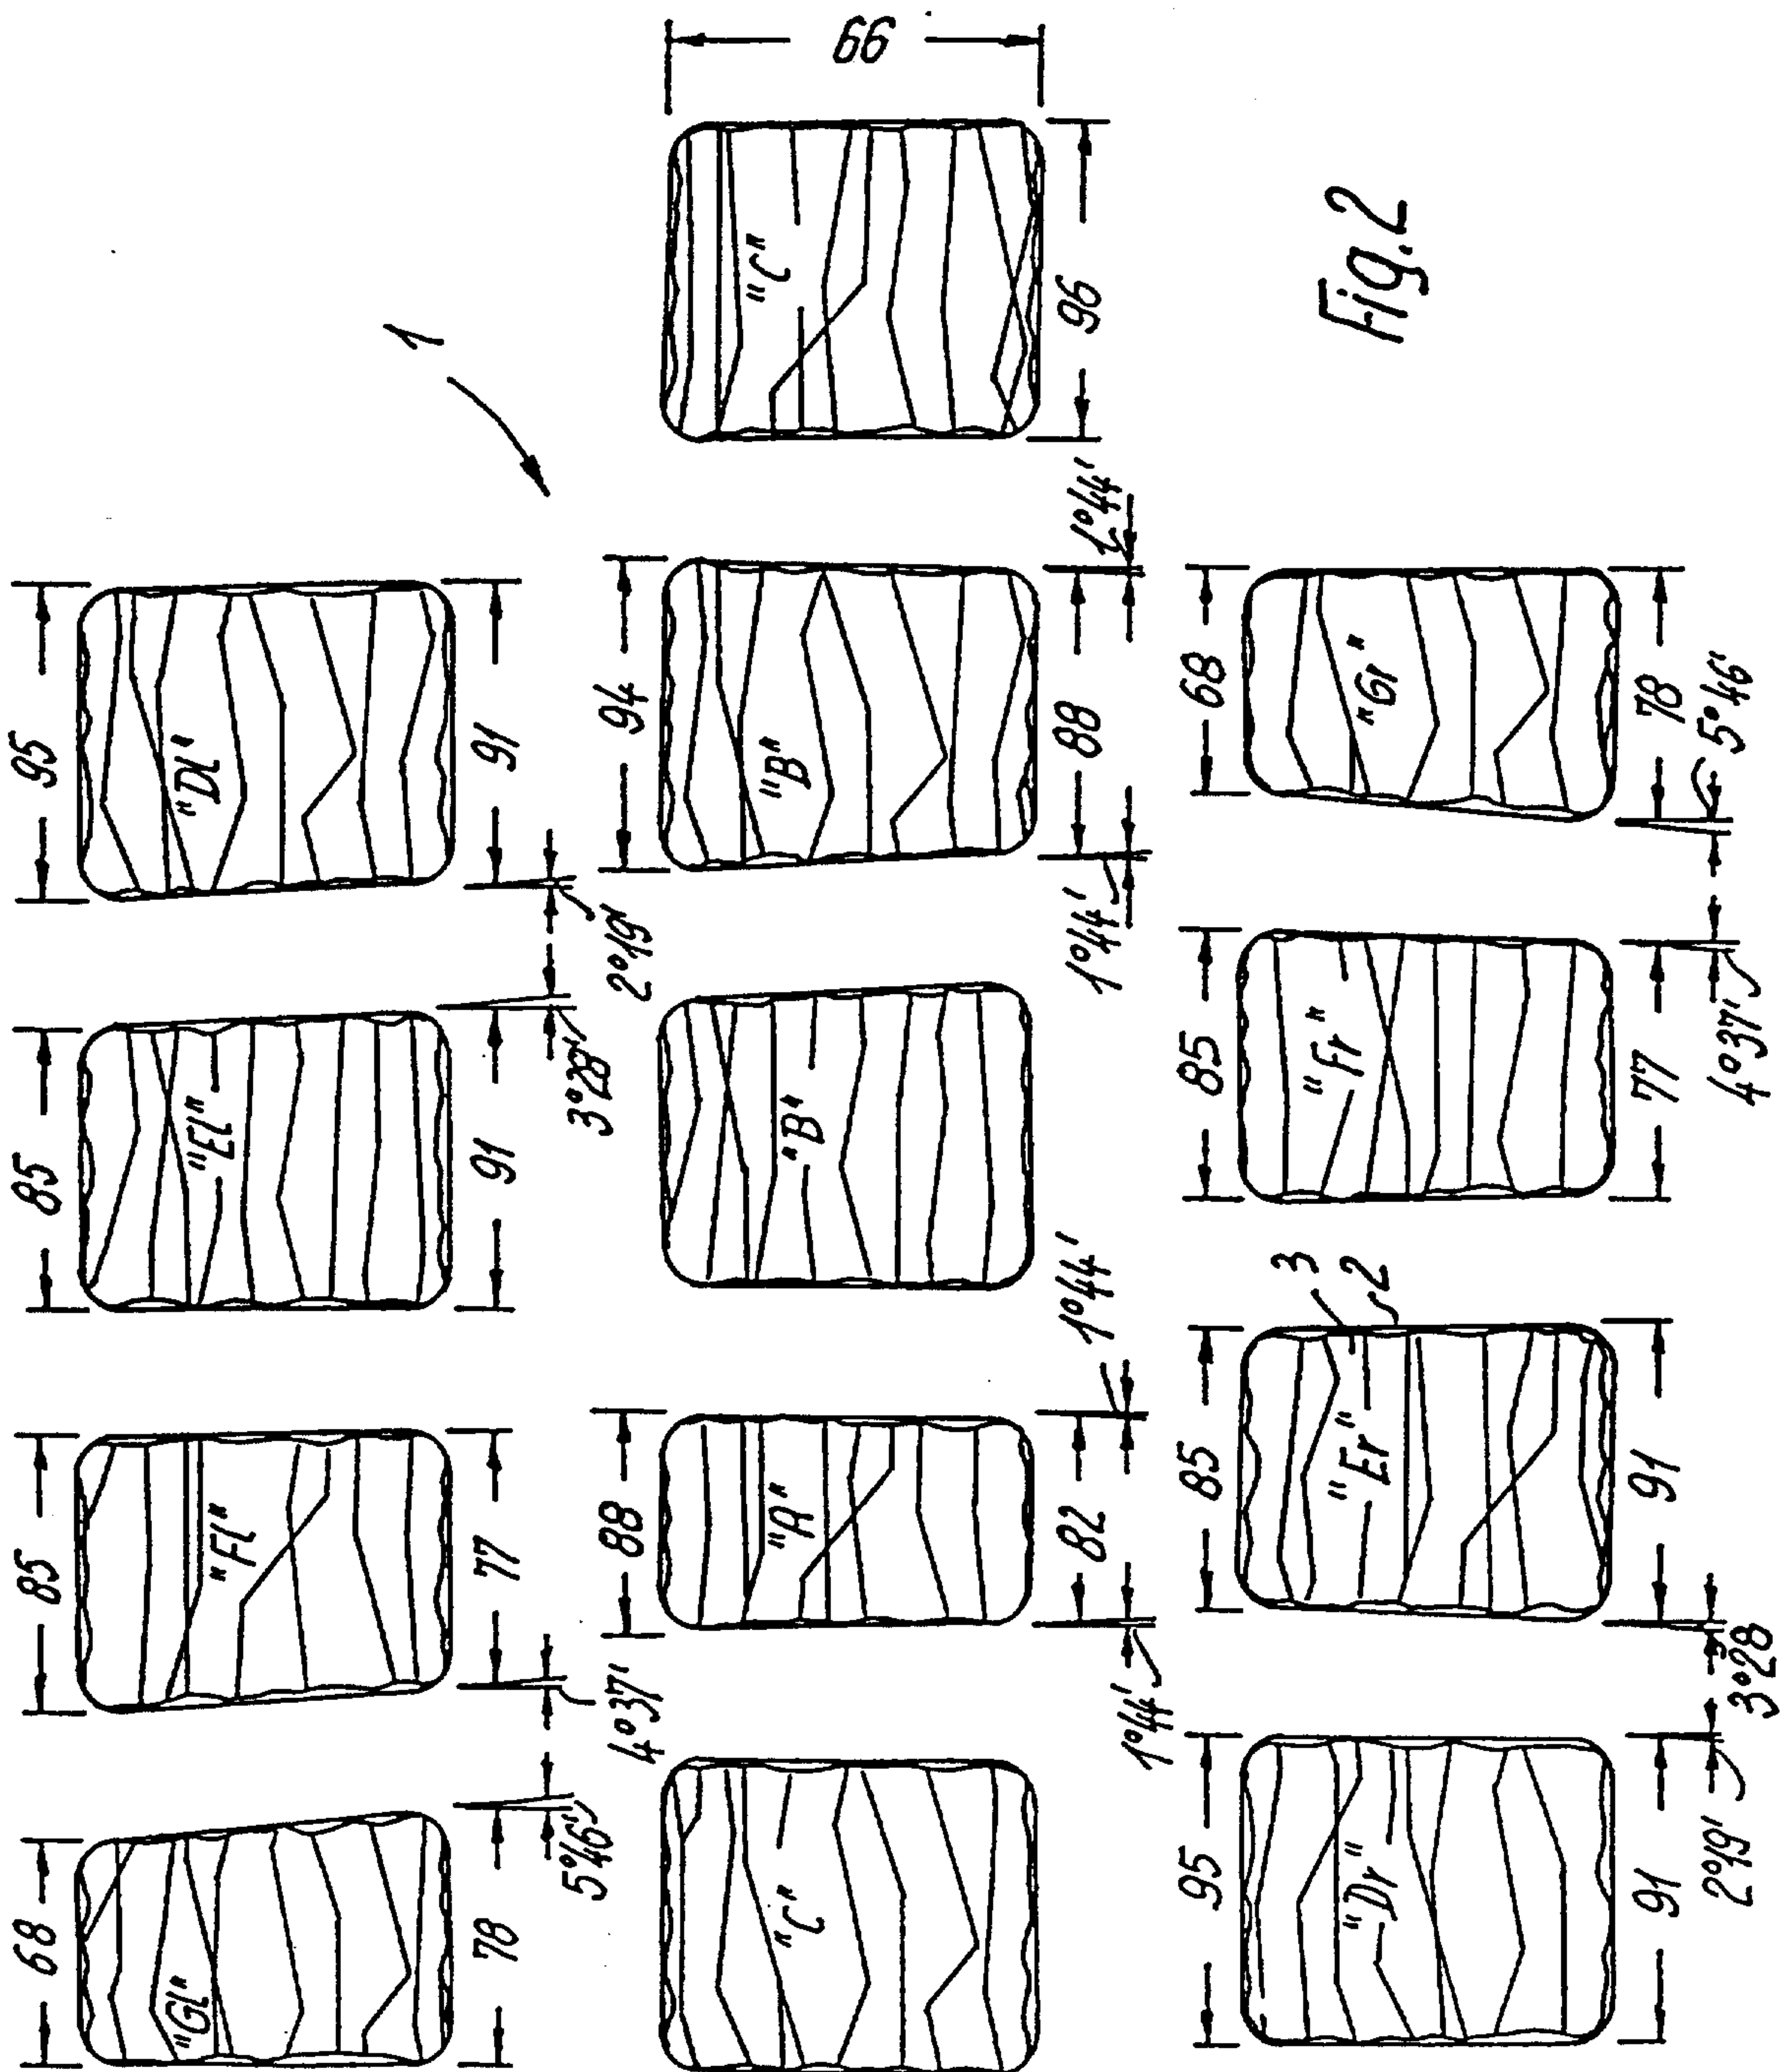




Fig. 5



Fig. 4

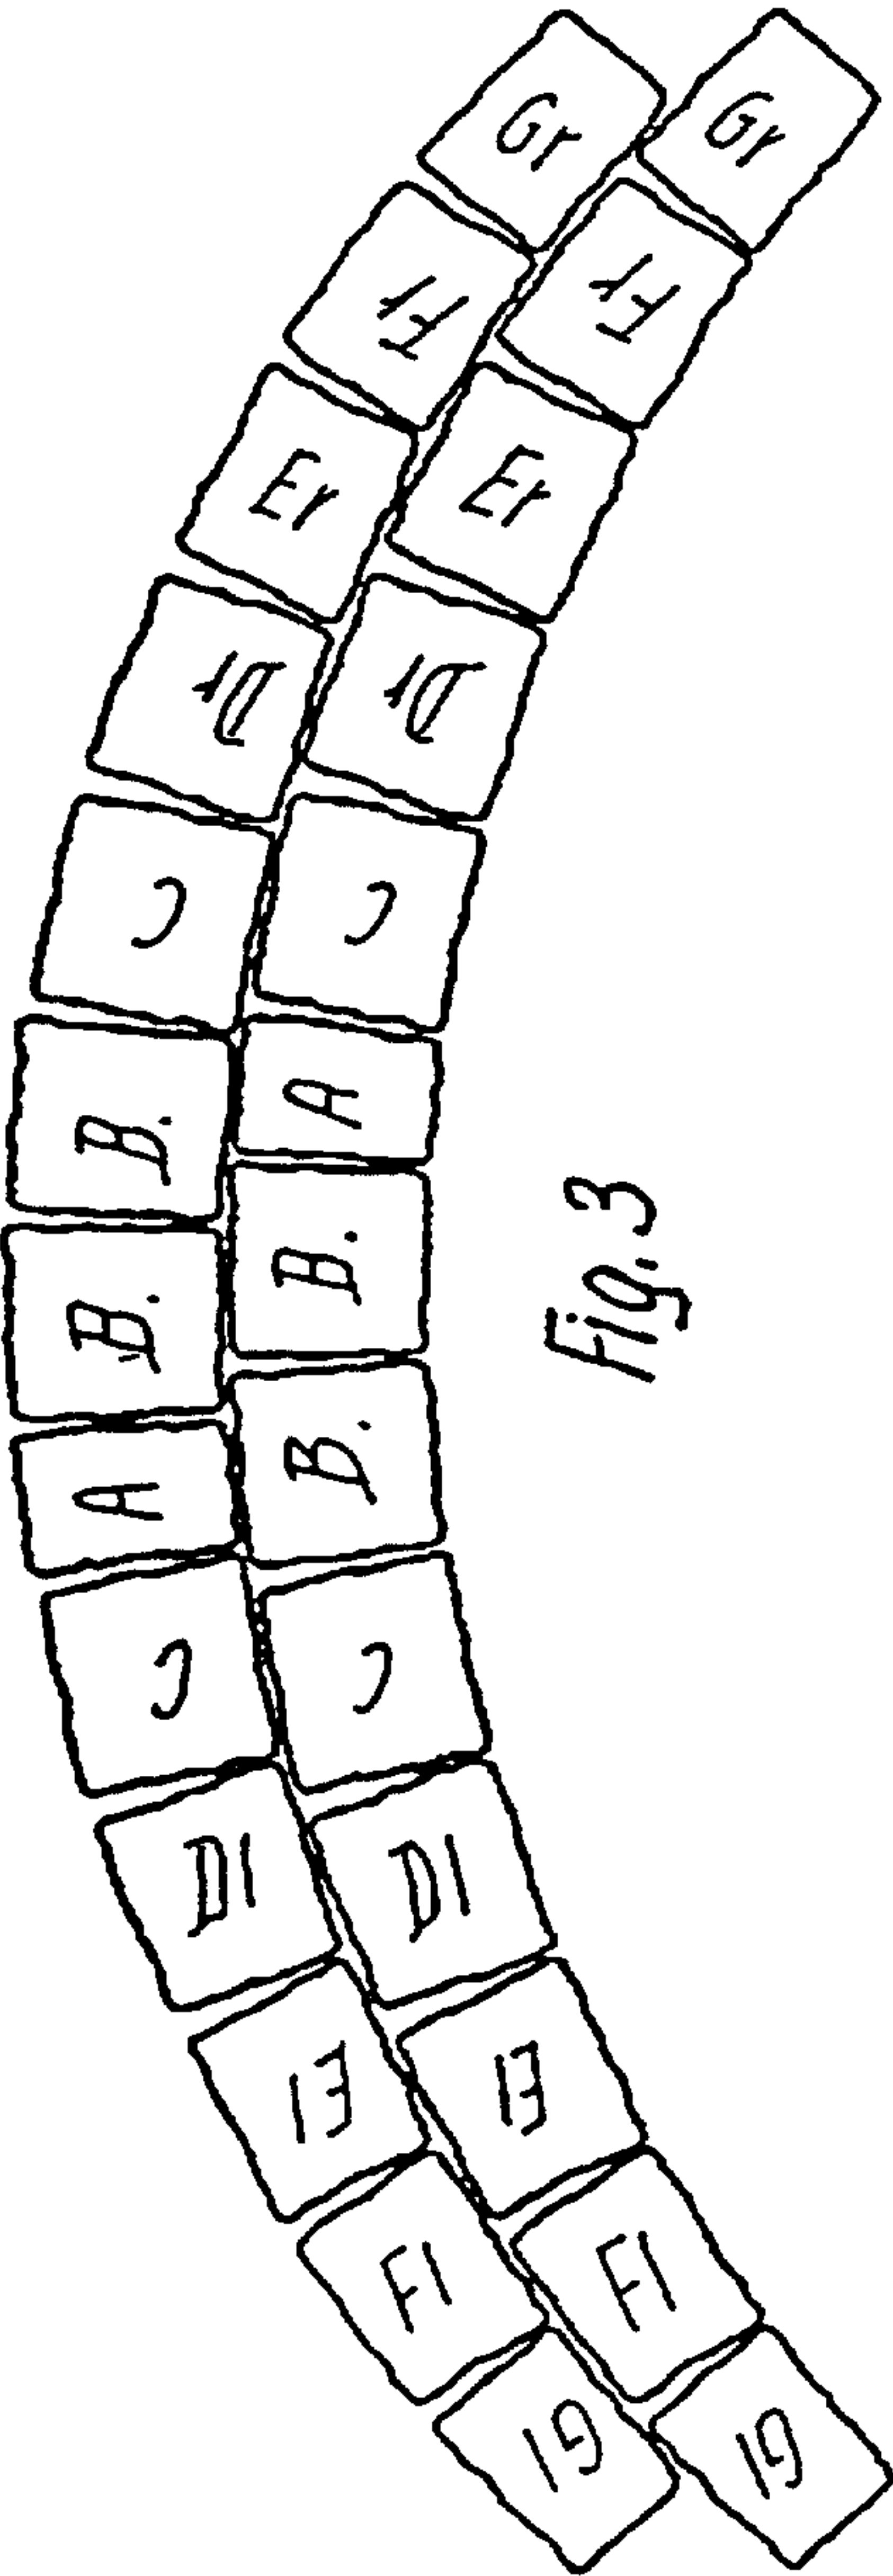


Fig. 3

4 / 4

