



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2002/0039286 A1**

FRANK, JR. et al.

(43) **Pub. Date:**

Apr. 4, 2002

(54) **INTEGRATED COMPUTER MODULE WITH EMI SHIELDING PLATE**

(52) **U.S. Cl.** 361/818; 361/800; 361/799; 361/685

(76) **Inventors:** CHARLES W. FRANK JR., IRVINE, CA (US); THOMAS D. HANAN, MISSION VIEJO, CA (US); WALLY SZEREMETA, MISSION VIEJO, CA (US)

(57) **ABSTRACT**

An integrated computer module having an EMI shielding plate which doubles as a mechanical retainer for a disk drive within the module and as an shield to insulate the disk drive's electronics from electromagnetic interference (EMI) emanating from a main PCBA located nearby. The module is adapted for removable insertion into a docking bay within a host assembly, and upon such insertion for connecting to a host connector and thereby controlling a display device. The preferred module comprises an enclosure, a main PCBA in the enclosure including a microprocessor generating EMI; a module connector electrically connected to the main PCBA and supported at the enclosure's back wall for connection to the host connector upon insertion of the integrated module into the docking bay in the host assembly; a disk drive including a casting and a controller PCBA mounted on one side of the casting; a conductor assembly electrically connecting the main PCBA to the controller PCBA; and an intermediate plate located above the disk drive, between the disk drive's controller PCBA and the main PCBA, and attached to the enclosure to capture the disk drive in the enclosure and to insulate the controller PCBA from EMI generated by the main PCBA.

Correspondence Address:
WESTERN DIGITAL CORP.
20511 LAKE FOREST DRIVE
C205 - INTELLECTUAL PROPERTY
DEPARTMENT
LAKE FOREST, CA 92630 (US)


(*) **Notice:** This is a publication of a continued prosecution application (CPA) filed under 37 CFR 1.53(d).

(21) **Appl. No.:** 09/283,931

(22) **Filed:** Apr. 1, 1999

Publication Classification

(51) **Int. Cl.⁷** H05K 9/00; H05K 7/14

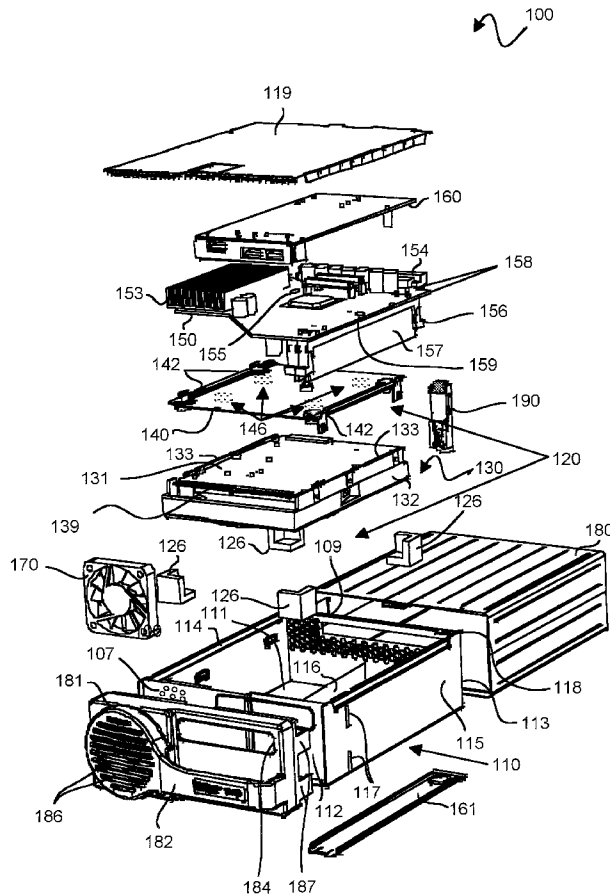

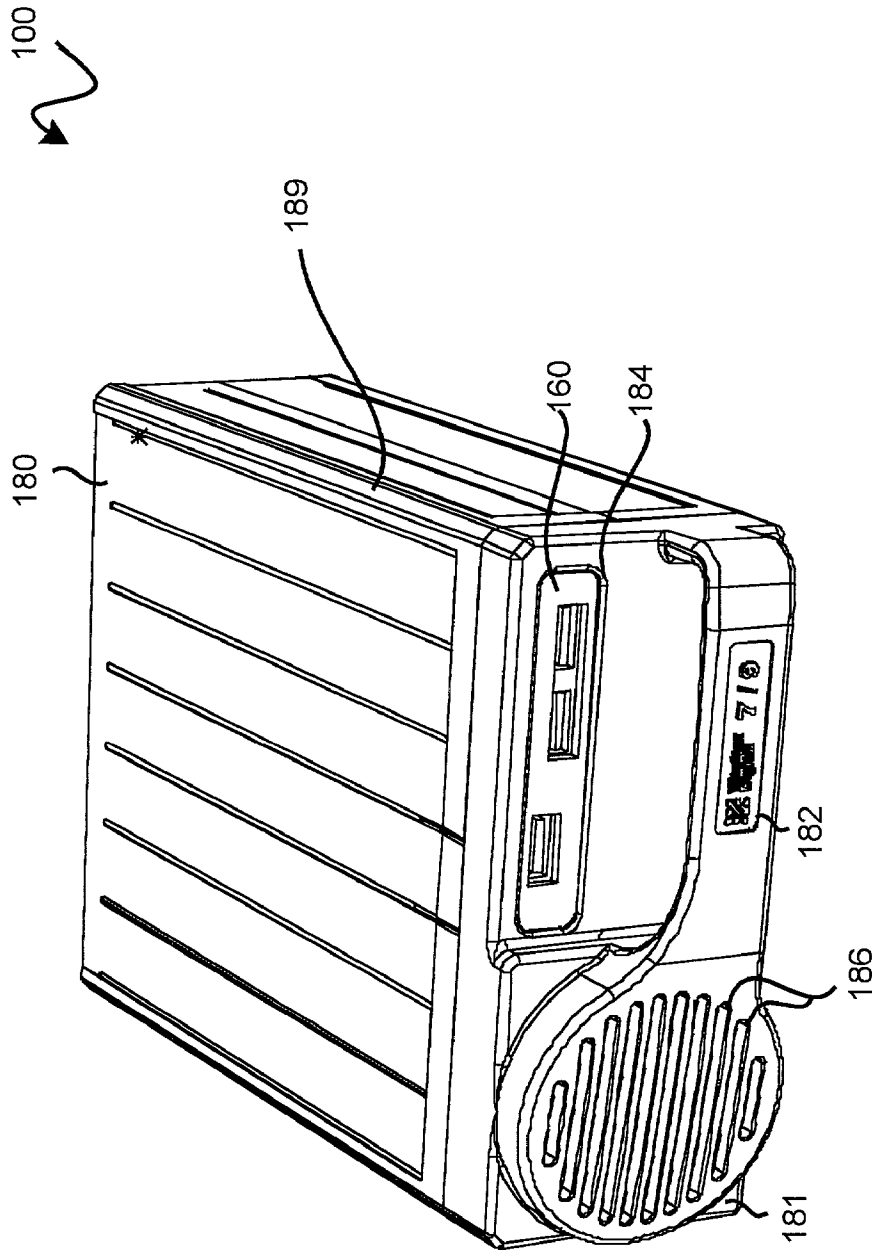


Fig. 1

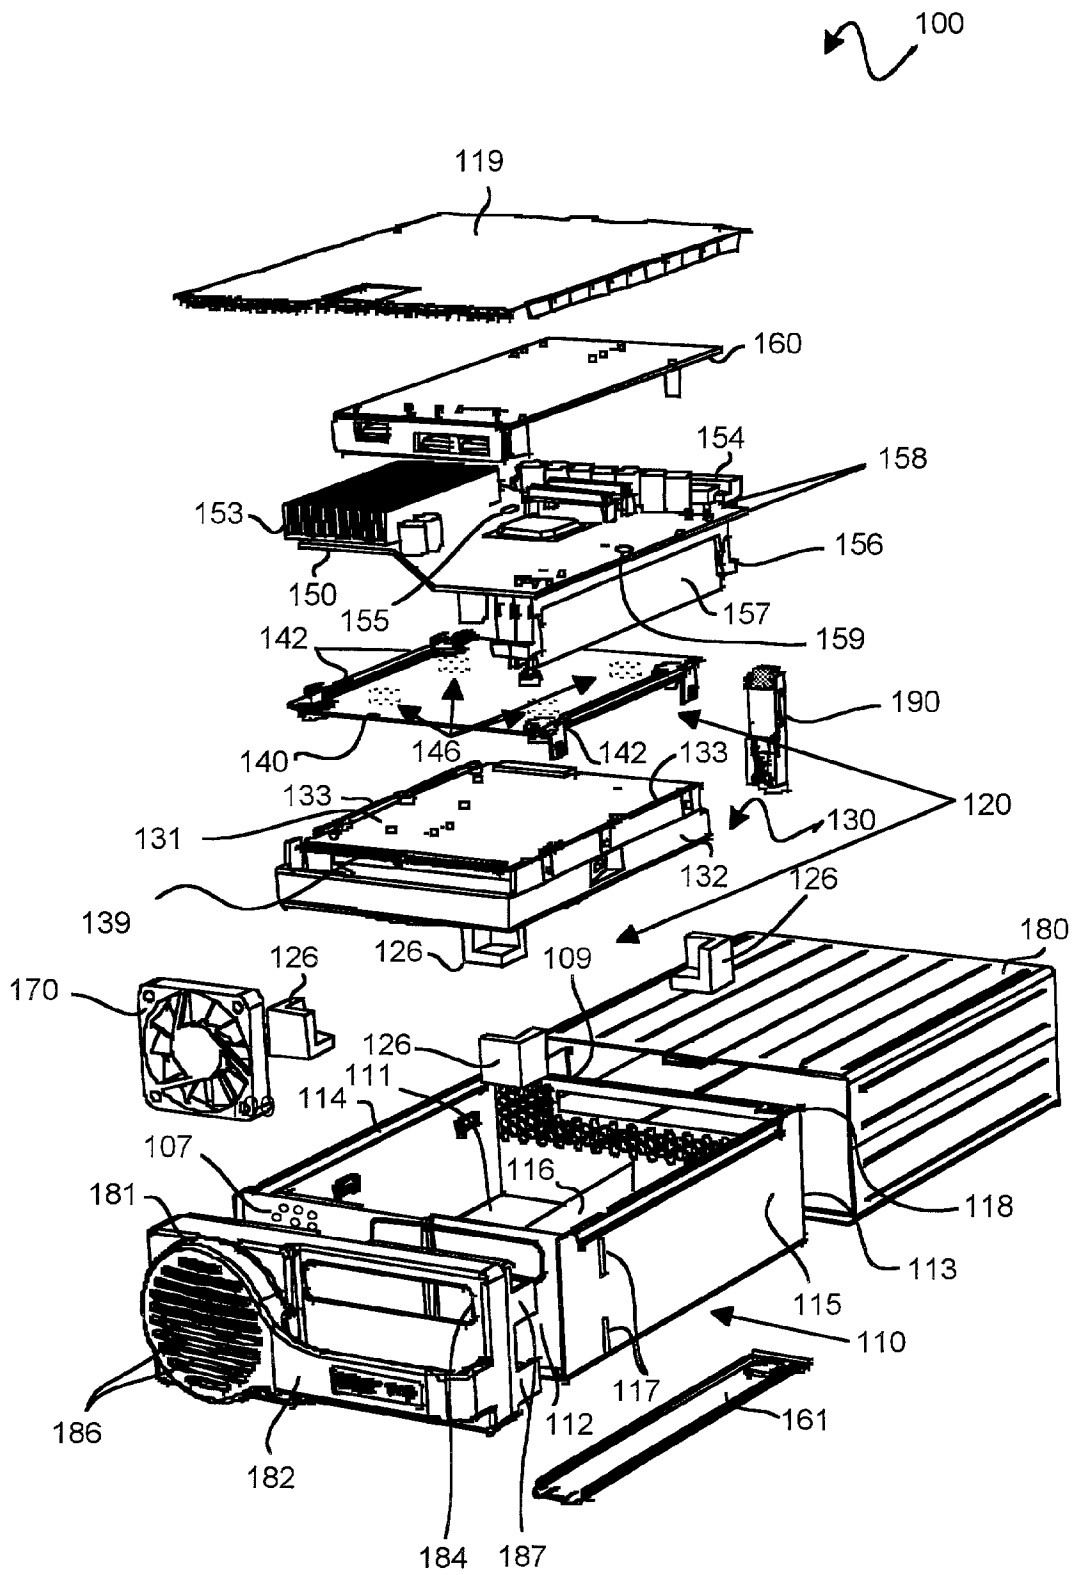


Fig. 2

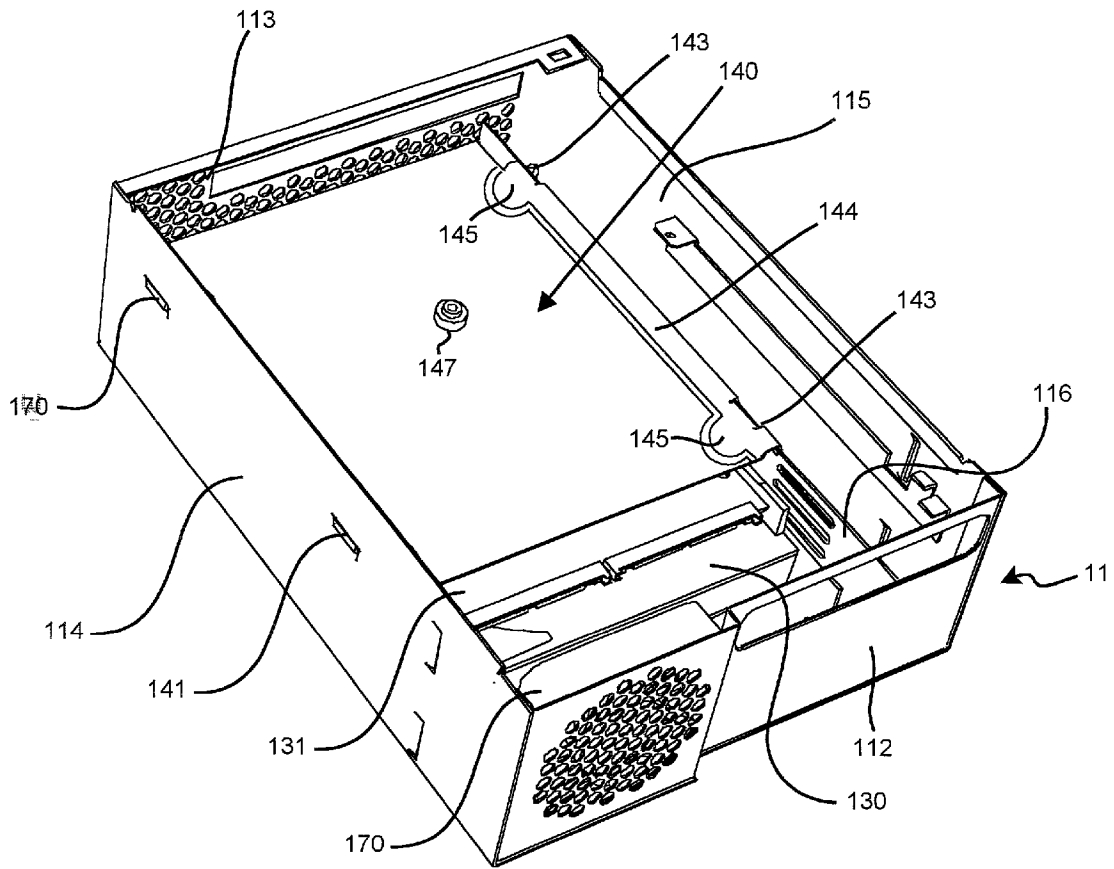


Fig. 2A

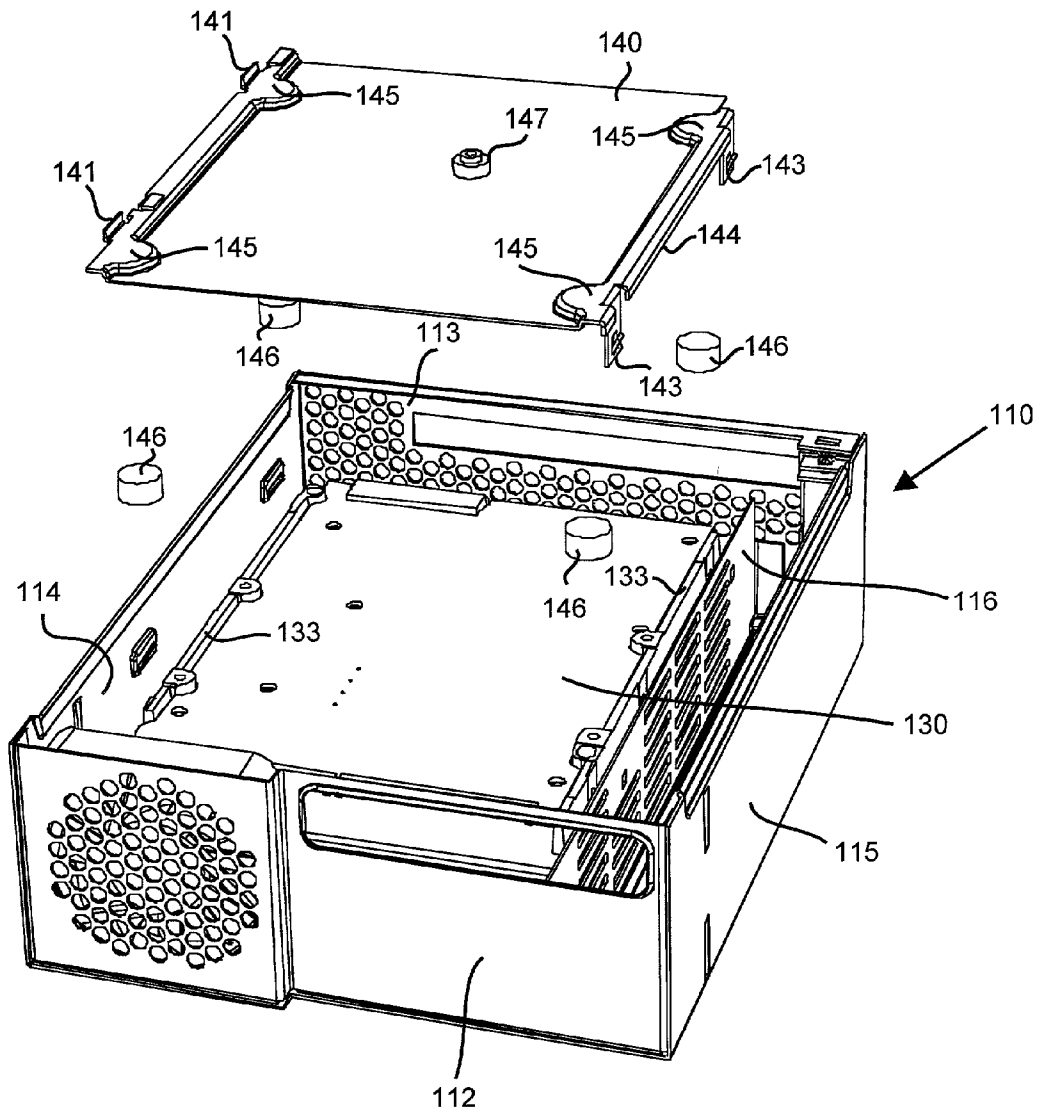


Fig. 2B

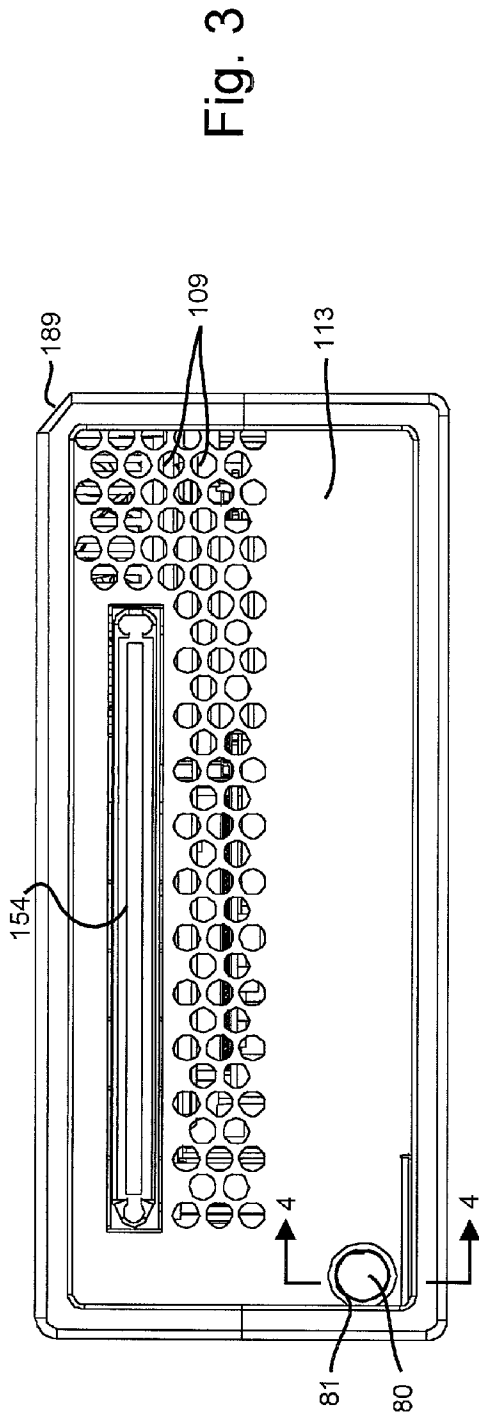


Fig. 3

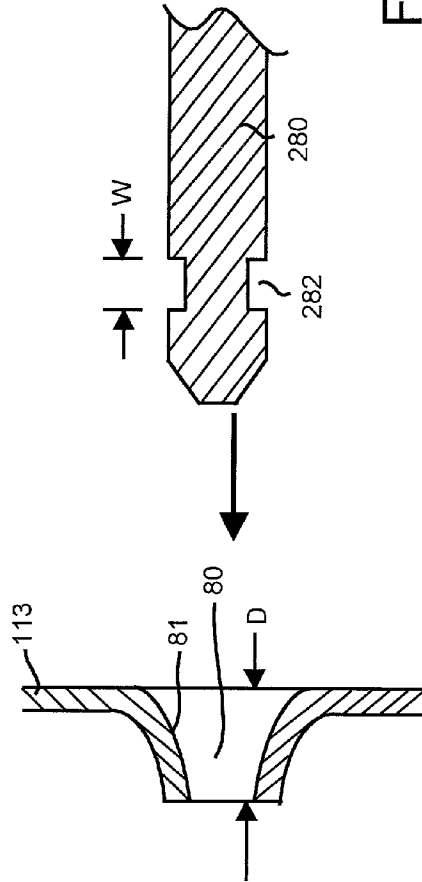


Fig. 4

200A

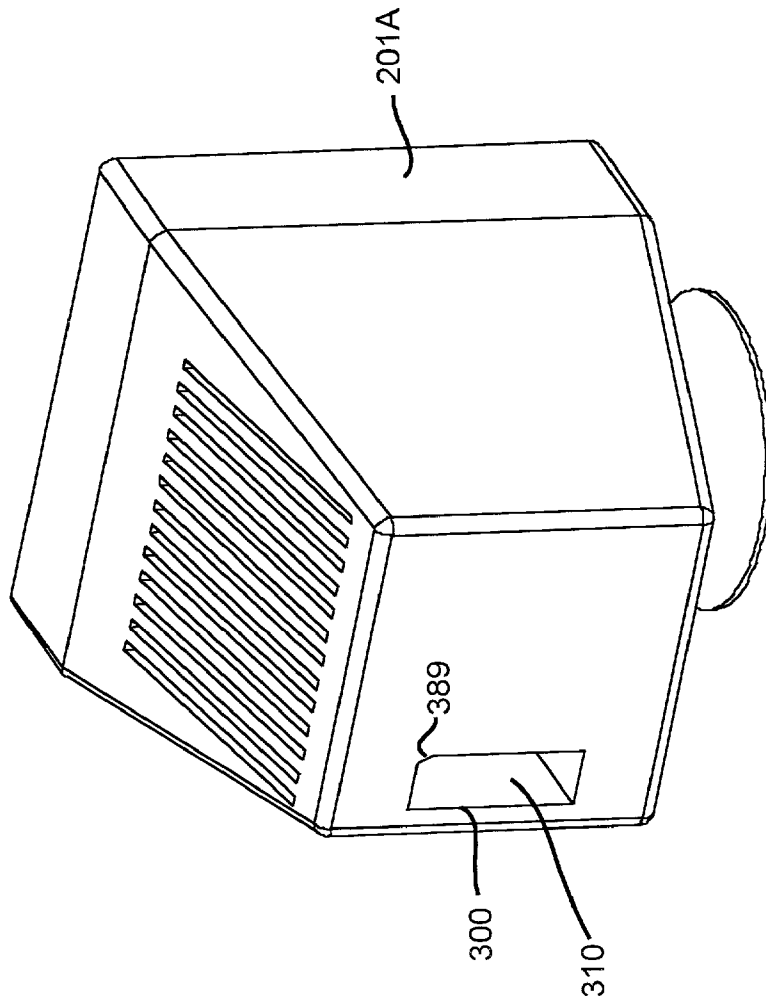


Fig. 5

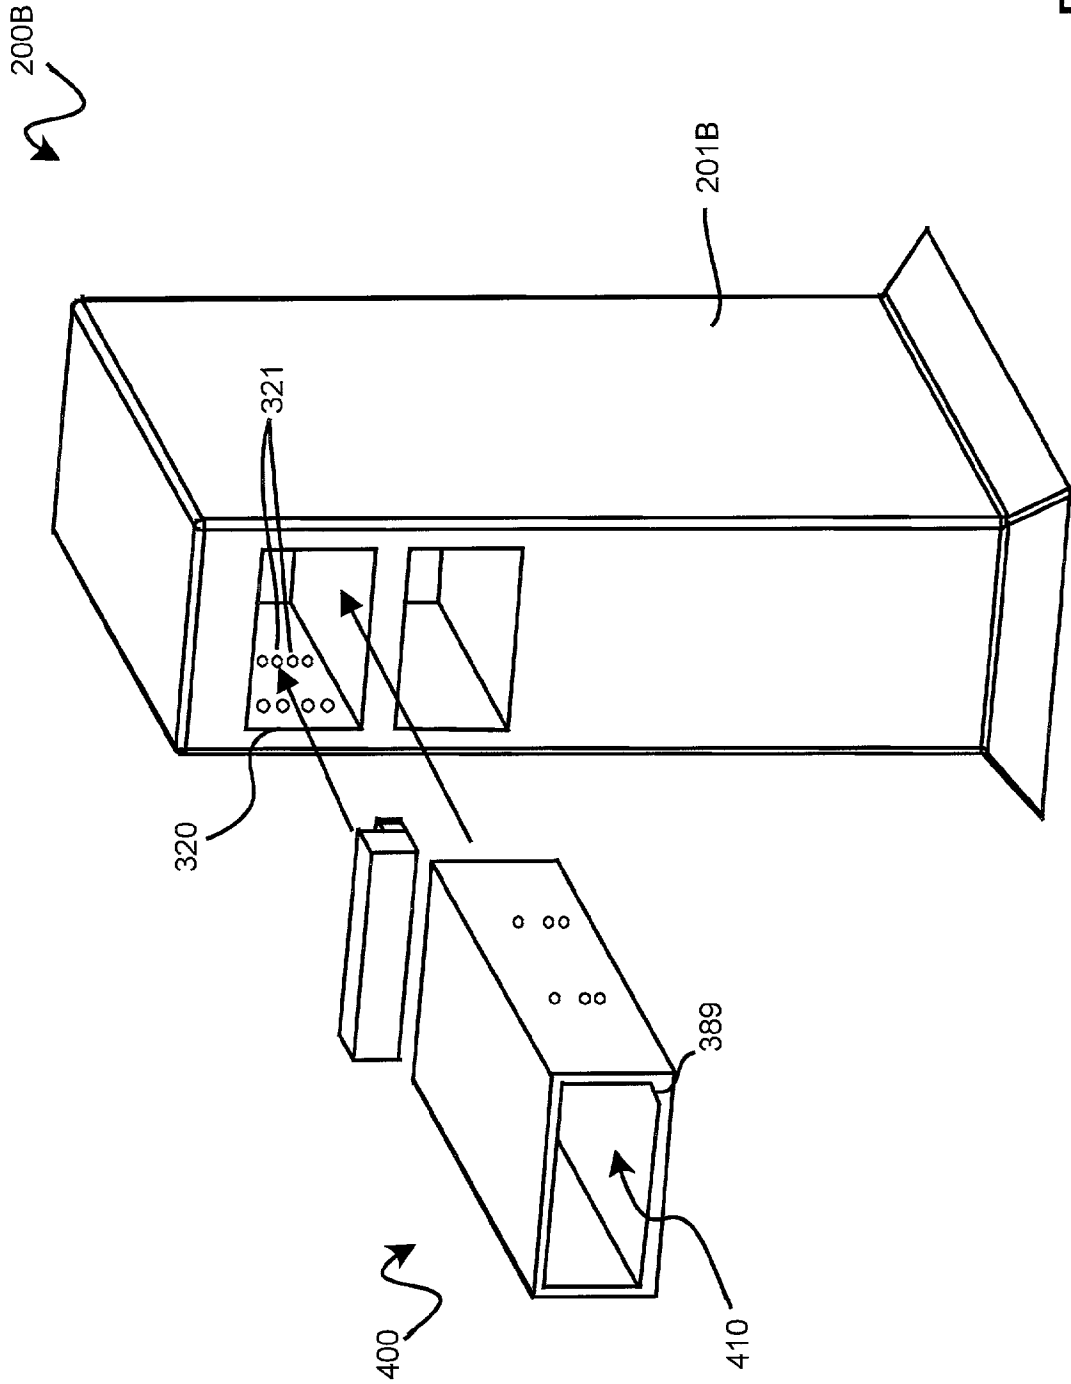


Fig. 6

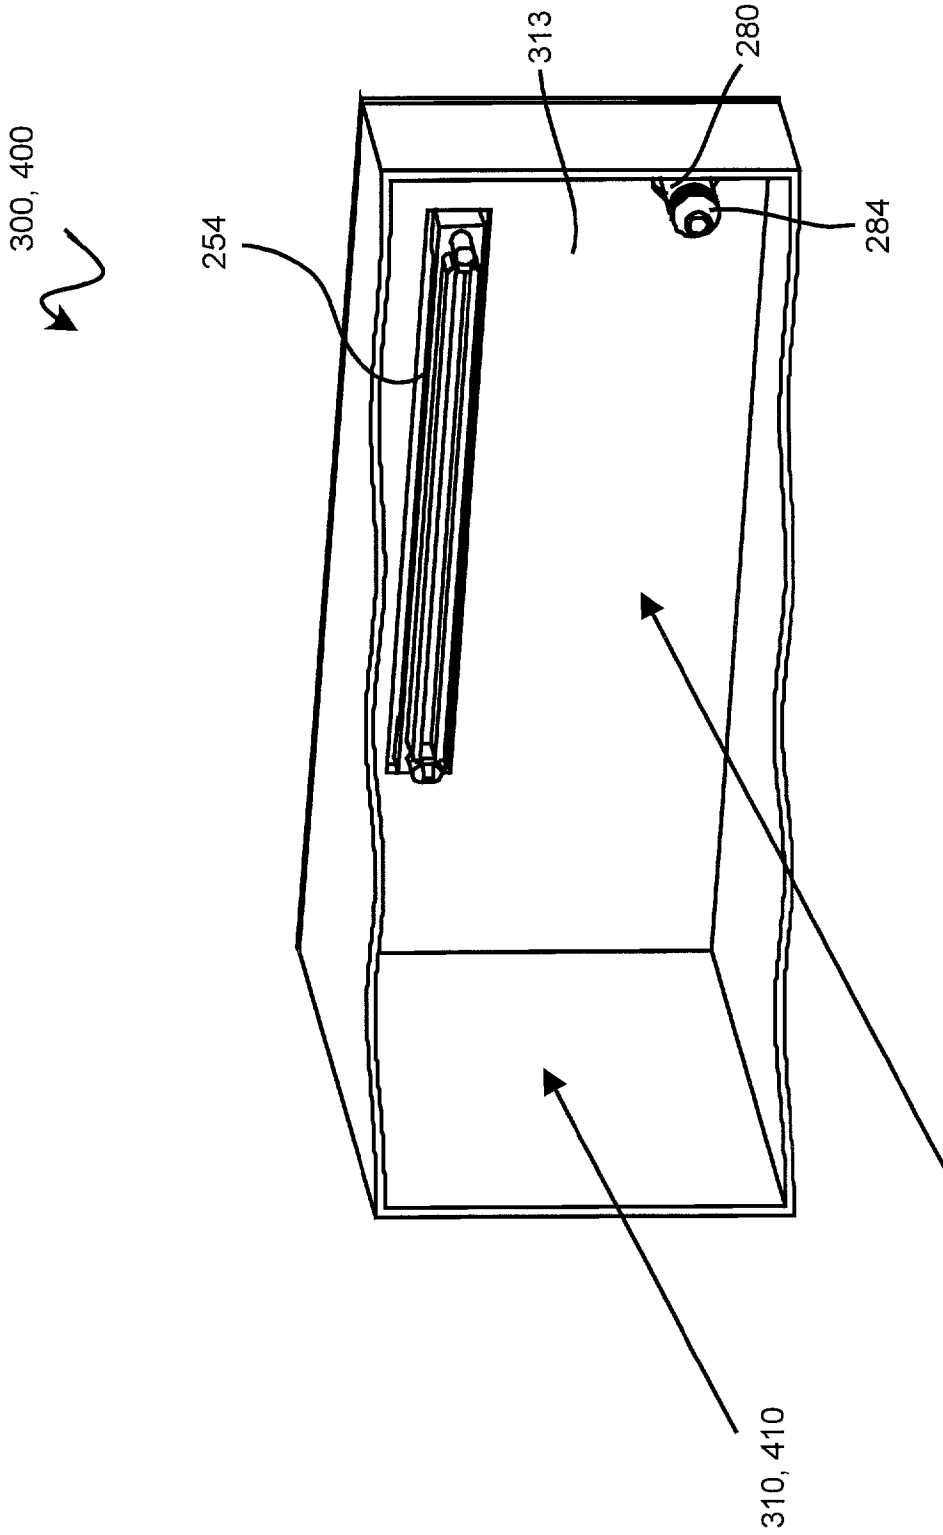


Fig. 7

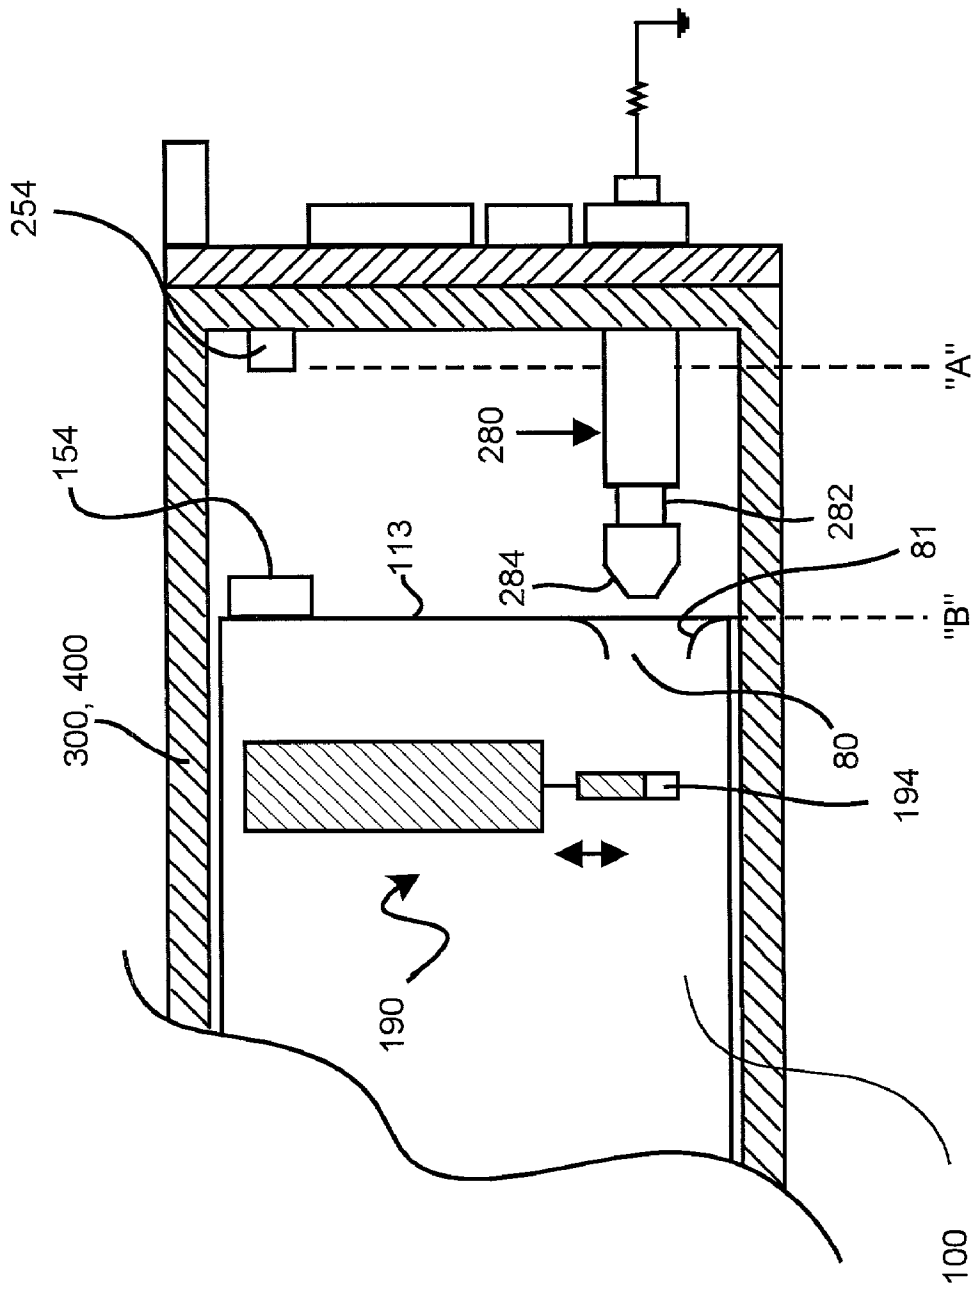


Fig. 7A

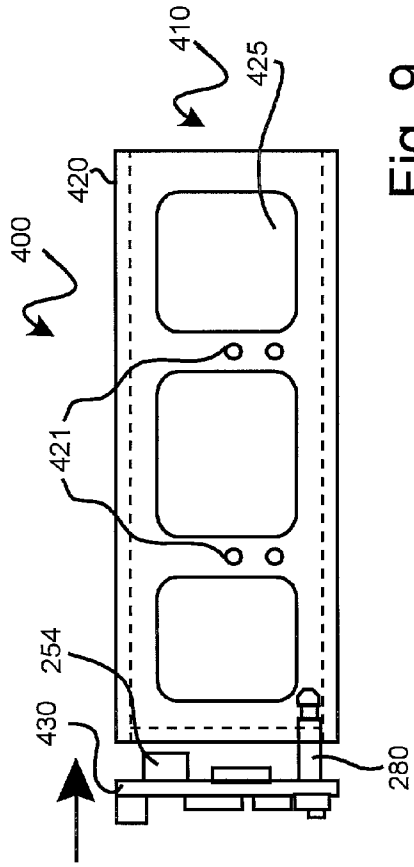


Fig. 9

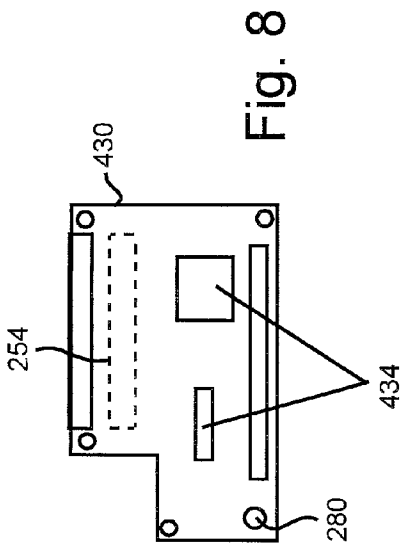


Fig. 8

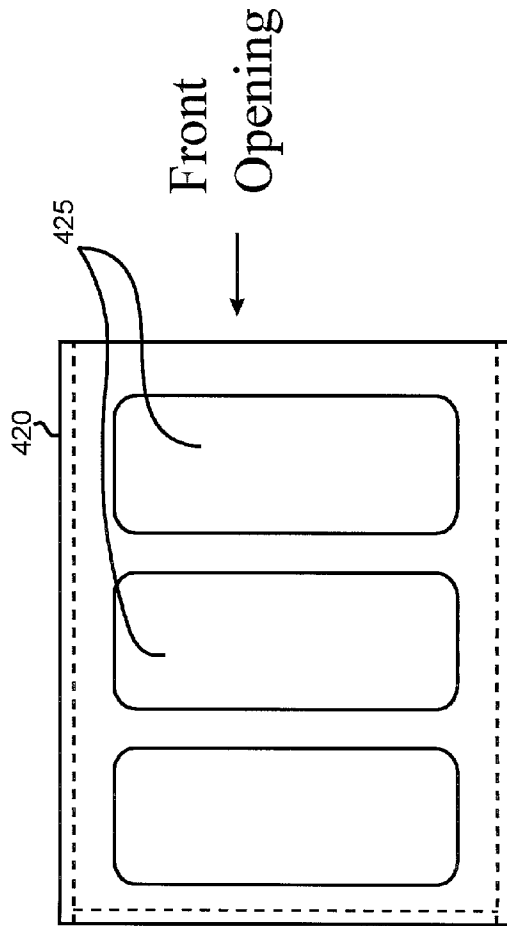


Fig. 10

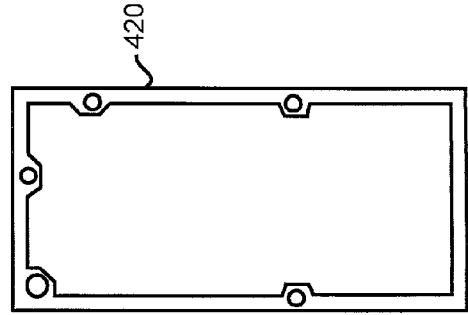


Fig. 11

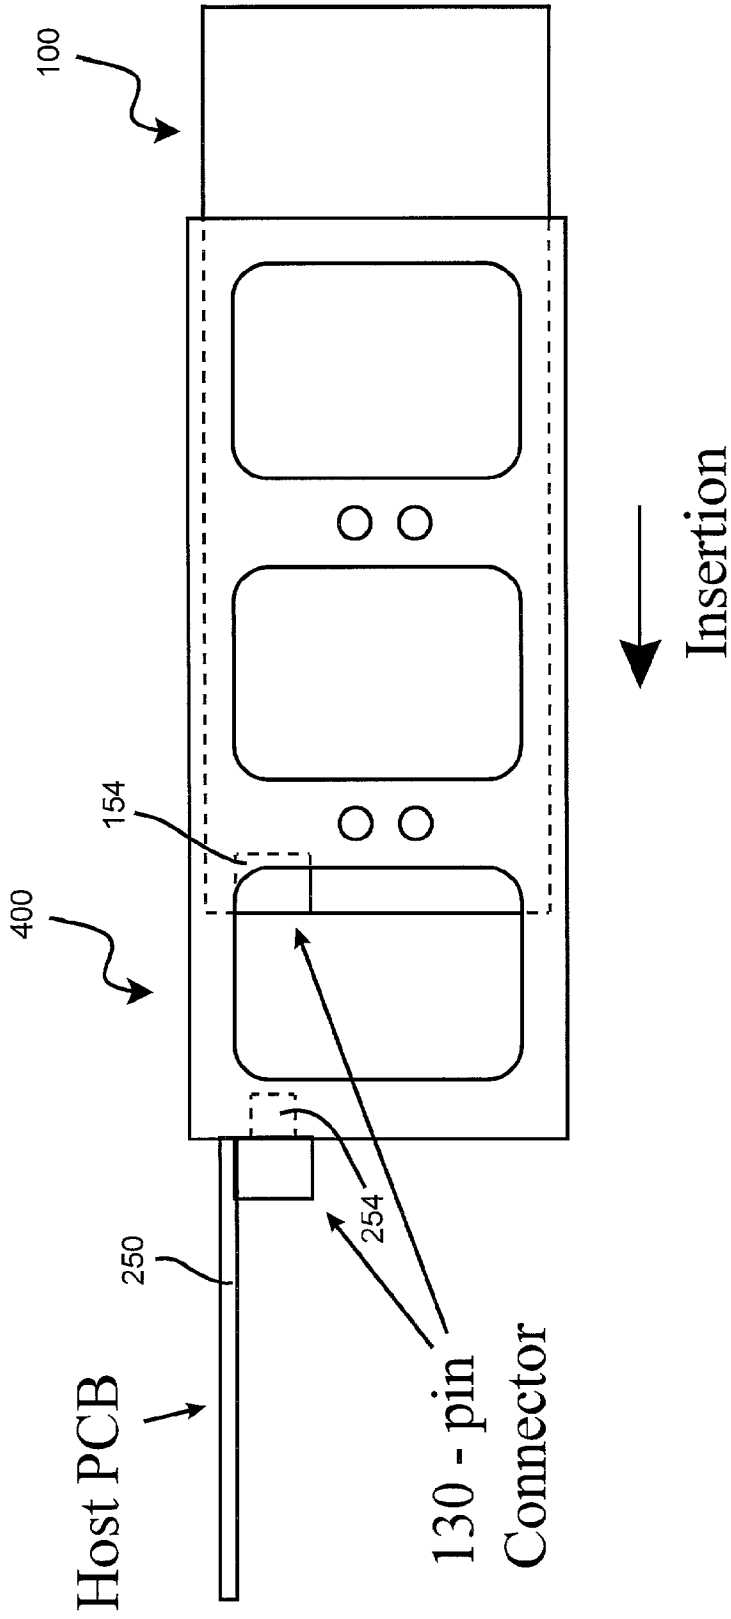


Fig. 12

INTEGRATED COMPUTER MODULE WITH EMI SHIELDING PLATE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The invention relates generally to integrated computer modules and, more specifically, to an integrated computer module of compact construction having an intermediate plate which captures a magnetic disk drive in the module and protects the disk drive from electromagnetic interference.

[0003] 2. Description of the Related Art

[0004] Today's personal computers (PC's) are usually sold in a desktop configuration or a notebook configuration. Desktop PC's are generally housed in a relatively large chassis containing a main printed circuit board or "motherboard" and other components that are incorporated into or connected to the motherboard. The components may be located inside or outside of the chassis. Typical internal components include a power supply, a central processing unit (CPU), random access memory (RAM), a mass storage device such as a magnetic disk drive, expansion cards connected to a bus on the motherboard, and various peripherals mounted on "rails" in "bays" within the chassis and electrically connected to the motherboard or an associated expansion card by a ribbon cable or the like. Typical expansion cards are a SCSI adapter, a sound adapter, and a network adapter. Typical bay-mounted peripherals are a magnetic disk drive, a floppy drive, a tape drive or a CD-ROM drive. Typical external "peripherals" include user input devices such as a keyboard, a mouse, a microphone, a joystick, a graphics tablet or a scanner) and user output devices such as speakers a printer, and a video display device (e.g. a CRT display or an LCD display). The video adapter that controls the display, as with other adapters, may be integrated into the motherboard or provided on a separate expansion card.

[0005] The users of desktop PC's may be divided into two divergent groups: (1) experienced users who understand the individual components and tend to frequently upgrade their PC's by replacing such components, and (2) new users who do not understand or even want to understand the individual components. The latter group may prefer to replace the entire PC, if they upgrade at all. With respect to both groups, however, it has been observed that the need or desire to upgrade occurs far sooner with respect to some components than with respect to other components. In particular, users more frequently upgrade the CPU, the RAM, the magnetic disk drive, and the video adapter. These upgrades tend to provide more capacity and more speed because of rapid technological advancements on the part of manufacturers in response to ever-increasing demands from ever more complicated and more graphics intensive software applications and an associated increase in file sizes. Both user-types less frequently need or desire to upgrade the monitor, the speakers, the keyboard or the power supply, however, because these latter components have withstood the test of time and employ technologies that are less prone to obsolescence.

[0006] These inventors expect that the computer paradigm will move from a large chassis full of individual components of different manufacture toward a readily upgraded system

consisting of two primary components: (1) an integrated computer module that compactly houses the frequently upgraded components (e.g. the CPU, the memory, the disk drive, and the video adapter) and provides a module connector for interfacing the module's electronics with peripherals, and (2) a "host assembly" with a docking bay that receives the module and provides a host connector that mates with the module connector. The host assembly can comprise any "shell" that includes the bay that receives the integrated computer module. The docking bay may be in a host assembly that doubles as a peripheral or in an intermediate assembly that is connected to conventional peripherals. The host assembly, for example, may function and appear generally like a conventional CRT display, save for the addition of the docking bay. A CRT-like host assembly of this nature would also provide a first connector for receiving input from a keyboard and, in all likelihood, a second connector for receiving input from a mouse. As another example, the host assembly may appear like a conventional tower chassis that contains a docking bay for receiving the module, and suitable electronics (e.g. a PCB, cables, and so on) to interface the integrated computer module to conventional expansion cards via an expansion bus, and to conventional peripherals like a display, a keyboard, and a mouse, via connector ports built-in to the host assembly or carried by an expansion card.

[0007] There are a number of challenges associated with packing computer components and storage capability into a small integrated computer module. One such challenge is attaching the magnetic disk drive within the module in a secure, cost-effective manner. Another challenge is making sure the analog circuitry associated with the magnetic disk drive, which operates at low voltage levels and is very sensitive to EMI, functions properly in the vicinity of the microprocessor which operates at very high power and at very high clock speeds.

[0008] Computer modules and associated bays have already been proposed. For example, in U.S. Pat. No. 5,463,742 that issued to Kobayashi in 1995, assigned to Hitachi, the inventor discloses a "personal processor module" (PPM) that fits within a notebook type docking station or a desktop type docking station, or simply attaches to a docking housing 6 that is cabled to a keyboard and a monitor. (See FIG. 1). The '742 Patent discloses an embodiment in FIGS. 10 and 11 where a magnetic disk drive and a PCB which carries a microprocessor are situated in a stacked arrangement. The '742 Patent, however, does not show any particular structure for mounting the magnetic disk drive in the PPM, nor does it teach or suggest using an EMI shield between the magnetic disk drive and the PCB.

[0009] In U.S. Pat. No. 5,550,710 that issued in 1996 to Rahamim et al., also assigned to Hitachi, the inventors also disclose a PPM wherein a disk drive and main PCB are stacked. The '710 Patent, however, focuses on a particular cooling structure for a PPM, and also does not disclose any particular structure for mounting the magnetic disk drive in the PPM or for shielding the drive from EMI emanating from the main PCB.

[0010] There remains a need, therefore, for an integrated computer module with a simple, rugged mechanism for securing the disk drive in the module and for effectively

protecting the analog electronics associated with the disk drive from EMI generated by the microprocessor and associated circuitry.

SUMMARY OF THE INVENTION

[0011] In a first aspect, the invention may be regarded as an integrated computer module adapted for removable insertion into a docking bay within a host assembly, and upon such insertion for connecting to a host connector and thereby controlling a display device, the integrated computer module comprising: an enclosure defined by a front wall, a back wall opposite the front wall, a first side wall, a second side wall opposite the first guide wall, a floor wall and a ceiling wall; a main printed circuit board assembly (main PCBA) located in the enclosure, the main PCBA including a microprocessor clocked at high frequency and generating electromagnetic interference (EMI); a module connector electrically connected to the main PCBA and supported at the enclosure's back wall for connection to the host connector upon insertion of the integrated module into the docking bay in the host assembly; a disk drive including a casting and a controller PCBA mounted on one side of the casting, the controller PCBA including integrated circuits that define a hard disk storage control subsystem that operates with relatively low amplitude signals that are subject to distortion from EMI; a conductor assembly electrically connecting the main PCBA to the controller PCBA; and an intermediate plate including a central section, a front edge, a back edge opposite the front edge, a first side edge, and a second side edge opposite the first side edge, the intermediate plate located between the disk drive's controller PCBA and the main PCBA and attached to the enclosure to capture the disk drive in the enclosure and to protect the controller PCBA from EMI generated by the main PCBA. In the preferred embodiment, the main PCBA and the disk drive are located in a stacked arrangement within the enclosure, with the disk drive's controller PCBA facing the main PCBA to reduce the length of the conductor assembly and minimize signal degradation

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The just summarized invention may best be understood with reference to the Figures of which:

[0013] FIG. 1 is a perspective view of an integrated computer module that may be used with a host assembly according to this invention;

[0014] FIG. 2 is an exploded view of the integrated computer module of FIG. 1;

[0015] FIG. 2A shows a partially assembled integrated computer module with emphasis on the intermediate plate and its interconnection to the tub;

[0016] FIG. 2B is an exploded view of the integrated computer module of FIG. 2A;

[0017] FIG. 3 is a rear view of the integrated computer module of FIG. 1;

[0018] FIG. 4 is a section view of FIG. 3 taken along section lines 4-4;

[0019] FIG. 5 is a rear perspective view of a host assembly that contains a CRT display and is configured to appear like a conventional CRT monitor;

[0020] FIG. 6 is a front perspective view of a host assembly configured to appear like a conventional tower chassis that may be connected to a monitor, a keyboard, and a mouse (not shown);

[0021] FIG. 7 is a generalize cutaway view of a docking bay according to this invention, suitable for use in a host assembly like those illustrated in FIGS. 5 and 6 and configured to receive, electrically mate with, and retain an integrated computer module like the one shown in FIG. 1;

[0022] FIG. 7A is a cutaway plan view of the integrated computer module partially inserted into a host assembly to illustrate engagement with the projecting member;

[0023] FIG. 8 is an elevational view of an adapter PCB for transforming a standard 5¼" peripheral bay of a conventional chassis into a docking bay according to this invention;

[0024] FIG. 9 is a side view of the adapter PCB of FIG. 8 and an associated adapter sleeve that is externally sized for insertion into a standard 5¼" drive bay and is internally sized for receiving an integrated computer module like the one shown in FIG. 1;

[0025] FIG. 10 is a top view of the adapter sleeve of FIG. 9;

[0026] FIG. 11 is a rear view of the adapter sleeve of FIG. 9; and

[0027] FIG. 12 is a side view of a preferred bay configuration (shown here in connection with an adapter sleeve) wherein the host connector is incorporated into the edge of a main host PCB;

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A. The Integrated Computer Module

[0028] FIG. 1 shows an integrated computer module (ICM) 100 that may be used in a host assembly having a docking bay according to this invention. From a structural point of view, the ICM 100 generally comprises a metal enclosure (not shown in FIG. 1, but see FIG. 2) that may be aesthetically surrounded by a case comprising, for example, a sleeve 180 and an associated bezel or faceplate 181. The preferred faceplate 181 includes cooling apertures 186 and a handle 182 for carrying the ICM 100 and for pushing or pulling the ICM 100 into or out of a docking bay (not shown in FIG. 1). The preferred sleeve 180 includes at least one key feature such as chamfered edge 189 that mates with a corresponding key feature in the docking bay. In the example shown, key feature 189 comprises a chamfered edge along one corner of the substantially rectangular periphery of the sleeve 180 which mates with a corresponding chamfered corner 389 (shown in FIGS. 5,6) of the docking bay. The sleeve 180 and faceplate 181 are preferably injection molded components made of any suitable material such as ABS, PVC, or engineered plastics.

[0029] The preferred ICM 100 of FIG. 1 also includes an aperture 184 in the faceplate 181 for exposing an optional PCI Mezzanine (PCM) card 160 that provides additional functionality such as an ethernet port, a SCSI port, or other desired function. A blank PCM cover plate (not shown) may be located in the aperture 184 in the absence of a PCM card 160.

[0030] FIG. 2 is an exploded view of the ICM 100 of FIG. 1, showing the presently preferred construction in more detail. The ICM 100 is designed so that it can be assembled by hand or more efficiently, and more cost effectively assembled using automated assembly techniques. In particular, the components of the preferred ICM 100 are generally assembled, from above, into an open-top case or "tub" 110. The preferred ICM 100, in other words, is assembled in a successively stacked, layer by layer arrangement. The tub 110 and all of the components therein are ultimately covered with a ceiling wall 119 and then, if appropriate for the desired application, enclosed in the sleeve 180 and faceplate 181 that form the outer case shown in FIG. 1. The preferred ceiling wall 119 makes a snap-on connection to the tub 110 to speed assembly and eliminate the necessity for any threaded fasteners or the like.

[0031] The tub 110 has a floor wall 111, a front wall 112, back wall 113 opposite the front wall, a first side wall 114, and a second side wall 115 opposite the first side wall. In order to define a space sized for receiving a disk drive 130, an intermediate wall 116 is also provided between the first side wall 114 and the second side wall 115. The tub 100 includes front and rear cooling apertures indicated at 107, 109 in the front and back walls respectively for passage of cooling air. The tub 110 is designed to minimize leakage of electromagnetic interference (EMI) in accordance with FCC requirements. Accordingly, the tub 110 and associated ceiling wall 119 are metallic and the cooling apertures 107, 109 are sized and configured to meet the desired EMI requirements at the frequencies of interest.

[0032] The ICM's internal components generally include a shock mount system 120, a disk drive 130 that is supported in the shock mount system 120 and may have a controller PCBA 131 mounted on one side thereof, an intermediate plate 140, a main PCBA 150, and an optional PCM expansion card 160 as mentioned above. Preferably, the main PCBA 150 includes a microprocessor such as an Intel Pentium (not shown) located beneath a suitable heat sink 153, first and second memory module connectors 156 for holding memory modules 157 of a suitable type and desired capacity (e.g. Single Inline Memory Modules, or Dual Inline Memory Modules), and a module connector 154 for interfacing the overall ICM 100 to a host assembly. Collectively, the components mounted on the main PCBA 150 comprise substantially all the circuits needed for a computing subsystem. The ICM 100 further includes a locking mechanism 190 that engages a projecting member (discussed below) in the docking bay. The preferred locking mechanism 190 mechanically snaps into a corner of the tub 110 between an upper slot 118 and a lower slot (not shown).

[0033] In a final assembly process, the tub 110 and its interior components are encased in the sleeve 180 and the associated faceplate 181. As the faceplate 181 includes a handle 182 for carrying the entire ICM, it is important that the faceplate 181 have a secure, mechanical connection to the tub 110. The presently preferred construction for such a positive, mechanical connection comprises two pairs of backwardly-extending fingers 187 having inwardly extending detents (not shown), one pair on each side of the faceplate 181, and two corresponding pairs of slots 117 on the first and second side walls 114, 115 of the tub 110. As suggested by FIG. 2, the faceplate 181 is initially pressed onto the tub 110 until the detents on its fingers 187 engage

the slots 117. Next, the tub 110 is inserted into the sleeve 180, the sleeve 180 thereby encasing the tub 110 and the fingers 187 so that they cannot splay outward and disengage from the slots 117.

[0034] FIG. 3 shows a rear view of a fully assembled ICM 100, the side that interfaces with a host assembly having a docking bay as described further below. As shown, substantially all of the back wall 113 is exposed at a rear end of the sleeve 180 to provide access to the module connector 154, the cooling apertures 109, and a module aperture 80.

[0035] FIG. 4 is a cross-sectional view of the preferred module aperture 80 in FIG. 3. In particular, FIG. 4 shows that the preferred module aperture 80 has radius edges 81 having a depth "D" that is greater than a width "W" of an annular groove 282 contained in a projecting member 280. We make "D" greater than "W" to ensure that the module aperture 80 does not accidentally hang up on the projecting member 280 as described more fully below in connection with the locking mechanism and the host assembly. The preferred module aperture 80 is formed by stamping or punching through the back wall 113.

[0036] Referring once more to FIG. 2, the preferred shock mount system 120 comprises four corner pieces 126 and four buttons 146 that are each formed from an elastomeric material, the preferred material being Sorbothane sold by Sorbothane, Inc. The corner pieces 126 each have a base and two intersecting, substantially perpendicular walls (not separately numbered) extending upwardly from the base (not separately numbered). During assembly, the corner pieces 126 are simply located with their bases on the floor wall 111 of the tub 110, and with their upstanding walls in the corners defined by the front wall 112, the back wall 113, the first side wall 114, and the intermediate wall 116. The upstanding walls of the corner pieces 126 are sized to provide a firm press fit relationship when compressed between the disk drive 130 and the surrounding walls 112, 113, 114, 116. The four button 146 are placed in wells (not shown) formed in the intermediate plate 140 to capture an opposite side of the disk drive 130 as described further below.

[0037] The presently preferred shock mounting system 120 requires us to orient the disk drive 130 with its controller board 131 facing upward, i.e. in a "board-up" orientation. The board-up orientation is preferred because it places the controller board 131 as close as possible to the main PCBA 150, thereby allowing a short cable with minimal signal degradation. A short cable is not especially important in the context of an IDE connection to the disk drive. Because of ever increasing CPU power, however, the CPU may control the disk drive via an ordinary expansion bus such as the PCI bus. A short cable is critical in the context of a PCI connection to a disk drive. The board-up orientation is also preferred because the shock mounts 126 will not block access to the connectors 132 that are on the controller board 131. It is also desirable to mount the disk drive 130 board-up because the other side of the disk drive presents a clean, solid volume for contact with the shock mount system 120.

[0038] The disk drive 130, therefore, is oriented board side up and then pressed down onto and in between the four corner pieces. Next, the intermediate plate 140 is snapped into the tub 110, between the first side wall 114 and an intermediate wall 116, to firmly hold the disk drive 130 downward on the corner pieces 126. Note that the controller

board **131** is recessed into the disk drive's aluminum casting **132**, leaving a pair of elongated casting rails **133** extending up above the board **131**. The upper shock mounts (elastomeric buttons) **146** are bonded to the intermediate plate **140**. The buttons **146** press down against the elongated rails **133** of the casting **132**. Consequently, the buttons **146** isolate the intermediate plate **140** from the rails **133**, thereby enabling the shock mount system **120** to mechanically couple the disk drive **130** to the tub **110** via a shock-isolating, elastomeric interface.

[0039] The intermediate plate **140** also protects the disk drive's controller board **131** from electromagnetic interference (EMI) emanating from the main PCBA **150**. The main PCBA **150** transmits significant amounts of RF energy over a wide frequency spectrum because it has synchronously clocked components that operate at relatively high power levels (e.g. greater than 5 watts) and at a plurality of relatively high clock frequencies (e.g. 66 MHz, 100 MHz, 500 MHz, and so on). The disk drive's controller PCBA **131**, on the other hand, contains circuitry that operates at relatively low millivolt levels that are associated with reading and writing data to and from the disk drive **130**. The intermediate plate **140**, therefore, beneficially functions as an EMI shield in addition to securing the disk drive **130** in the tub **110**. The preferred plate **140** is made of the same metallic material as the remainder of the tub **110** so that it represents an intermediate ground plane that tends to arrest conducted and radiated RF energy.

[0040] FIG. 2A shows the intermediate plate **140** and its interconnection to the tub **110** in more detail. As shown therein, the intermediate plate **140** has a central section, a front edge, a back edge opposite the front edge, a first side edge, and a second side edge opposite the first side edge. The preferred intermediate plate **140** has a pair of tabs **141** on its first side edge which interface with a corresponding pair of slots (not numbered) in the first side wall **114**. The second side of the plate includes a pair of downwardly-extending fingers **143** that mate with one side of the intermediate wall **116** and an elongated lip **144** that mates with an opposite side of the intermediate wall **116**. The downwardly-extending fingers **143** have detents (see FIG. 2B) which mate with slots (not shown) in the intermediate wall **116**.

[0041] FIG. 2B is an exploded view of FIG. 2A showing the preferred interconnection between the intermediate plate **140** and the disk drive **130** in the tub **110**. As shown, the intermediate plate **140** does not make direct contact with the disk drive **130**. Instead, four upper shock mounts **146** are bonded or otherwise attached to corresponding wells **145** in the intermediate plate **140**. The disk drive **130**, therefore, is encased and elastomerically supported between the tub **110** and the intermediate plate **140** by the lower shock mounts **126** (see FIG. 2) and the upper shock mounts **146**.

[0042] As best shown in FIG. 2, the main PCBA **150** is secured in the tub **110** above the intermediate plate **140**. In the presently preferred embodiment, the main PCBA **150** is secured with two screws (not shown) that pass downward through two apertures—a central aperture **155** and a side aperture **159**. The central screw mates with a threaded aperture in the top of a standoff (not shown) that has a threaded fastener that extends from its bottom and is screwed into a threaded boss **147** (see FIG. 2B) in the center of the intermediate plate **140**. The side screw mates with a

threaded aperture in the top of a similar standoff (also not shown) that screws into a threaded aperture located at one end of a shelf bracket (not shown) that is welded to the second side wall **115** of the tub **110**. The other end of the preferred shelf bracket has outwardly extending, vertically spaced fingers (not shown) that surround the top and bottom of the main PCBA **150** and thereby secure it at a third location. It is important, of course, to ground the main PCBA **150**. The preferred standoffs are conductive and make contact with corresponding traces that surround the main PCBA's central and side apertures to provide such grounding.

[0043] The main PCBA **150** may be divided into two upper portions and two lower portions. The upper left half of the main PCBA **150** carries the CPU and its heat sink **153**. The upper right half carries a standard pair of PCM connectors **158** for interfacing the PCBA **150** with any PCM expansion card **160** that may be present. The majority left portion of the lower side of the main PCBA **150** rests closely against the intermediate plate **140** via support tabs **142** located to either side thereof and via a conductive standoff located near the plate's center (not shown). This portion of the PCBA's underside may carry some low-profile components, but it does not have any extending components due to its close proximity to the intermediate plate **140**. The minority right portion of the main PCBA's underside, however, carries a pair of memory sockets **156** that support a pair of memory modules **157** which extend downwardly therefrom next to the disk drive **130**, in-between the intermediate wall **116** and the second side wall **115**. An aperture (not shown) and associated cover plate **158** are provided on the tub's floor wall **111** and aligned with the memory modules **157** to provide access to the modules after the ICM **100** has been assembled.

[0044] It is important to provide highly efficient cooling because of the high power dissipation and component density in the relatively low volume of the ICM **100**. Modern CPUs dissipate a significant amount of heat. For example, an Intel Pentium III processor operating at 500 MHz with a 512K L2 cache dissipates about 28 watts. The safe dissipation of this much heat requires a large, highly efficient heat sink **153**, the preferred heat sink being fabricated from aluminum because aluminum offers a good compromise between heat dissipation and cost. The main PCBA **150** is designed so that the CPU and its relatively large heat sink **153** extend upwardly from a topside of the PCBA **150** into an "air tunnel" (not numbered) located between the front and rear cooling apertures **107**, **109** in the front and back walls. The ICM's built-in cooling fan **170** moves air through the air tunnel, over the fins of the heat sink **153**, with velocity of greater than 300 linear feet per minute (LFM). The cooling fan **170** is preferably located next to the front wall **112** of the tub **110**, next to the front cooling apertures **107**, in order to save some space, but the fan **170** could be located on the opposite side of the tub **110** if desired.

B. The Host Assembly—Generally

[0045] FIGS. 5 and 6 show two host assemblies **200A**, **200B**. Both assemblies contain a power supply (not shown) for providing power to the host assembly and to the ICM **100** inserted therein. The first preferred host assembly **200A** of FIG. 5 contains a CRT display and is configured to appear like a conventional CRT monitor **201A**. The second pre-

ferred host assembly **200B** of **FIG. 6** is configured to appear like a conventional full-height tower chassis **201B** that has a conventional disk drive bay **320** and may be connected to a display, a keyboard, and a mouse (not shown). Other configurations are possible. These two are merely illustrative examples.

[0046] The preferred host assembly provides a docking bay that defines a cavity for receiving an ICM **100**. It is possible, however, to provide a docking module (not shown) that releasably connects an ICM **100** to other devices without providing a cavity **310** per se.

[0047] The **FIG. 5** host assembly **200A** uses a “built-in” docking bay **300** and associated cavity **310** having keying feature **389** for mating with module keying feature **189**. In operation, the user inserts the ICM **100** of **FIG. 1** into the cavity **310** until the ICM’s module connector **154** (see **FIG. 3**) mates with a host connector **254** (shown in **FIG. 7**) at the rear of the cavity **310**.

[0048] The **FIG. 6** host assembly **200B**, on the other hand, uses a “retrofit” docking bay adapter **400** that fits in a standard disk drive bay **320** and defines a cavity **410** having a host connector (not shown) and the keying feature **389** for receiving an ICM **100**. The cavity **410** in the retrofit adapter **400** also provides a host connector **254** (shown in **FIG. 7**) such that the user may insert the ICM **100** into the cavity **410**.

C. The Host Assembly—Bay Details

[0049] **FIG. 7** is a generalized cutaway view of a built-in docking bay **300** or retrofit adapter **400** according to this invention, the docking bay suitable for use in a host assembly **200A**, **200B** like those illustrated in **FIGS. 5 and 6** and configured to receive, electrically mate with, and retain an ICM **100** like the one shown in **FIG. 1**.

[0050] The docking bay has a cavity **310** defined by a continuous periphery, preferably rectangular, extending from a front opening (not separately numbered) to a back end **313** opposite the front opening. The cavity **310** may be regarded as having an insertion axis (arrow) that is perpendicular to the periphery. Two items of interest are located at the back end **313** of the cavity **310**: a host connector **254** for mating with the module connector **154** and a projecting member **280** for providing a data security function and an alignment function.

[0051] The host connector **254** is located a particular XY (horizontal and vertical coordinate reference) connector location at the back end **313** of the cavity **310** so that it mates with the ICM’s module connector **154** located at the same XY connector location when the ICM **100** is inserted into the cavity **310**. The host connector **254** may be centered on the back end **313** of the cavity, but the XY connector location is preferably asymmetric so that, in the absence of a key feature **189**, mating only occurs if the ICM **100** is in the “correct” orientation.

[0052] The projecting member **280** extends into the cavity **310** in parallel with the insertion axis so that it may be received in a corresponding aperture **80** in the rear wall **113** of the ICM **100**. The projecting member **280** may be located at an asymmetric XY location at the back end **313** of the cavity to prevent the user from fully inserting an unkeyed ICM **100** into the cavity **310** in the wrong orientation. In

either case, the preferred projecting member **280** is located at the lower right corner of the cavity’s back end **313** so that the ICM **100** may conveniently receive it near the ICM’s second side **115** (see **FIG. 2**). Other locations are possible.

[0053] If the ICM **100** and docking bay **300**, **400** are keyed, then the projecting member **280** will always mate with the aperture **80** in the rear wall **113** of the ICM **100**. In this preferred embodiment, the projecting member **280** provides a guiding function and a locking function, but it does not impact the ICM **100** because misalignment is not possible.

[0054] In the case of an unkeyed ICM **100**, however, alignment is not assured. If the unkeyed ICM **100** is inserted in the correct orientation where the connectors **154**, **254** are aligned for mating, then the projecting member **280** is simply received by the module aperture **80** in the rear wall **113** of the ICM’s tub **110** (see **FIG. 2**). If the unkeyed ICM **100** is inserted upside down, however, then a solid portion of the rear wall **113** will contact the projecting member **280** before the ICM’s rear wall **113** contacts and potentially damages the host connector **254** and before the cavity’s rear end **313** contacts and potentially damages the module connector **154**.

[0055] **FIG. 7A** shows the ICM **100** partially inserted into the docking bay **300**, **400**. Note that the projecting member **280** extends beyond position “A,” i.e. beyond the farthest most point of the host connector **254**. This length ensures that the projecting member **280** contacts the ICM’s rear wall **113** before the host connector **254** contacts the rear wall **113** if the ICM is inserted upside down.

[0056] The projecting member **280** also provides an alignment function that is best understood with reference to **FIGS. 7 and 7A**. As shown, the preferred projecting member **280** has an annular taper **284** at its tip that slidably mates with the radius edge **81** of the module aperture **80**. The radius edge **81** essentially defines an annular beveled recess that guides the module aperture **80** onto the projecting member **280**, and thereby further aligns the overall ICM **100** for mating the module connector **154** to the host connector **254**. The projecting member **280** must extend beyond position “A,” however, if it also to provide such an alignment function in cooperation with the module aperture **80**. As shown, in fact, the preferred projecting member **280** extends beyond reference position “A” to a farther reference position “B” to ensure that the module aperture **80** envelops the projecting member **280** before the module connector **154** begins to mate with the host connector **254**. A benefit of this additional length is that ICM **100** contacts the projecting member **280** well before the position that the ICM **100** ordinarily sits when mounted in the bay. Accordingly, the user is given very obvious feedback, both tactile and visual, that the ICM **100** is not corrected situated.

[0057] Suitably, the preferred connectors **154**, **254** themselves include further complementary alignment features to ensure that a truly “blind” insertion is possible. A wide variety of cooperating connector styles may be used, including but not limited to, pin and socket types, card edge types, and spring contact types.

[0058] Although not shown, the inventors contemplate an alternative embodiment of the ICM **100** that is secured to a host assembly in a semi-permanent arrangement. For cost

reasons, the semi-permanent embodiment would omit the sleeve **180** and associated faceplate **181** and would replace the blind mating connector **154** with a more cost effective PCBA edge connector having conductive fingers made plated with minimal amounts of gold.

[0059] FIGS. 7 and 7A also show that the projecting member **280** provides a data integrity feature in connection with the locking mechanism **190** contained inside of the ICM **100**. The projecting member **280**, in particular, includes a retention notch **282** located on the side thereof. The preferred retention notch **282** is provided in the form of an annular groove **282** that encircles the entire projecting member **280** and the preferred locking mechanism **190** includes a moveable pawl **194** that locks the ICM **100** into the docking bay **300**, **400** by engaging the projecting member's annular groove **292**.

[0060] The preferred projecting member **280** is made of a conductive material and is grounded so that it may serve as a means for managing ESD. It is generally desirable to discharge electrostatic energy through a resistance to reduce the magnitude of an associated current spike. Accordingly, the projecting member **280** itself may be comprised of a moderately conductive material such as carbon impregnated plastic or the projecting member **280** may be made of a highly conductive material such as metal and connected to ground through a discharge resistor as shown in FIG. 7A. In either case, the desired resistance is about 1-10 megohms.

[0061] FIGS. 8-11 show a presently preferred construction for a "retrofit" docking bay adapter **400** as might be used in the standard drive bay **230** in the host assembly **200B** of FIG. 6. As shown, the retrofit adapter **400** comprises an adapter sleeve **420** and an adapter PCB **430** that is mounted to a back end of the adapter sleeve. The adapter sleeve **420** includes a suitable means for mounting to a standard drive bay **320** such as, for example, a plurality of threaded mounting holes **421** that are sized and spaced to interface with screws and corresponding through holes **321** (see FIG. 6) in a standard 5/4" drive bay **320**. The preferred adapter sleeve **420** is formed of injection molded plastic. It includes a number of openings **425**, therefore, to reduce the required amount of plastic material.

[0062] The adapter PCB **430**, shown from the rear in FIG. 8 and from the side in FIG. 9, carries the host connector **254**, the projecting member **280**, and suitable circuitry **434** for interfacing the adapter PCB **430** to other components in the host adapter.

[0063] FIG. 12 is a side view of a preferred structure for supporting the host connector **254**. Here, instead of being supported on a separate PCB **430** as in FIGS. 8 and 9, the host connector **254** is incorporated into the edge of a main host PCB **250** in order to simplify the construction and reduce costs. FIG. 12 shows such structure in connection with an adapter sleeve **400**, but is probably more applicable for use with a "custom" built-in docking bay **300** as used in a host assembly **200A** like that shown in FIG. 5, where more control can be exercised over the construction of the main host PCB **250** contained in the host assembly **200A**.

We claim:

1. An integrated computer module adapted for removable insertion into a docking bay within a host assembly, and

upon such insertion for connecting to a host connector and thereby controlling a display device, the integrated computer module comprising:

- an enclosure defined by a front wall, a back wall opposite the front wall, a first side wall, a second side wall opposite the first side wall, a floor wall and a ceiling wall;
 - a main printed circuit board assembly (main PCBA) located in the enclosure, the main PCBA including a microprocessor and associated circuitry generating electromagnetic interference (EMI);
 - a module connector electrically connected to the main PCBA and supported at the enclosure's back wall for connection to the host connector upon insertion of the integrated module into the docking bay in the host assembly;
 - a disk drive including a casting and a controller PCBA mounted on one side of the casting, the controller PCBA including integrated circuits that define a hard disk storage control subsystem that operates with relatively low amplitude signals that are subject to distortion from the EMI;
 - a conductor assembly electrically connecting the main PCBA to the controller PCBA; and
 - an intermediate plate including a central section, a front edge, a back edge opposite the front edge, a first side edge, and a second side edge opposite the first side edge, the intermediate plate located between the disk drive's controller PCBA and the main PCBA, and attached to the enclosure to capture the disk drive in the enclosure and to insulate the controller PCBA from the EMI generated by the main PCBA.
2. The integrated computer module of claim 1 wherein the main PCBA and the disk drive are located in the enclosure in a stacked arrangement with one another, the disk drive oriented such that its controller PCBA is facing the main PCBA to reduce the length of the conductor assembly and minimize signal degradation.
3. The integrated computer module of claim 1 wherein the enclosure further comprises an intermediate wall between the first side wall and the second side wall and wherein the intermediate plate's first side edge is attached to the enclosure's first side wall and wherein the intermediate plate's second side edge is attached to the enclosure's intermediate wall.
4. The integrated computer module of claim 1 further comprising a space between the enclosure's front wall and the front edge of the Intermediate plate located between the main PCBA and the controller PCBA, and wherein the conductor assembly electrically connecting the main PCBA to the controller PCBA passes through the space.
5. The integrated computer module of claim 1 wherein the conductor assembly is flexible.
6. The integrated computer module of claim 5 wherein the conductor assembly is a ribbon cable.
7. The integrated computer module of claim 1 further comprising:
- a pair of spaced slots in the enclosure's first side wall; and
 - a pair of spaced tabs at the first edge of the Intermediate plate, the tabs providing a snap-in connection between the Intermediate plate and the enclosure's first side wall

8. The integrated computer module of claim 1 wherein the enclosure and the Intermediate plate are made of a conductive material.

9. The integrated computer module of claim 8 wherein the enclosure and the intermediate plate are made of metal.

10. The integrated computer module of claim 8 wherein the enclosure and Intermediate plate are grounded.

11. The integrated computer module of claim 10 further comprising:

means for mechanically supporting the main PCBA on the intermediate plate; and

means for grounding the main PCBA via the mechanical supporting means.

12. The integrated computer module of claim 1 wherein the module connector is card edge connector comprising a plurality of conductive traces that are formed on the main PCBA.

13. The integrated computer module of claim 1 wherein the module connector is a discrete plug and socket type connector that is soldered to the main PCBA

* * * * *