




(86) Date de dépôt PCT/PCT Filing Date: 1994/07/25
(87) Date publication PCT/PCT Publication Date: 1995/02/02
(45) Date de délivrance/Issue Date: 2005/01/04
(85) Entrée phase nationale/National Entry: 1996/01/25
(86) N° demande PCT/PCT Application No.: US 1994/008069
(87) N° publication PCT/PCT Publication No.: 1995/003247
(30) Priorité/Priority: 1993/07/26 (08/097,153) US

(51) Cl.Int.⁶/Int.Cl.⁶ B65D 25/38
(72) Inventeur/Inventor:
MICHELSON, GARY KARLIN, US
(73) Propriétaire/Owner:
MICHELSON, GARY KARLIN, US
(74) Agent: SMART & BIGGAR

(54) Titre : DISPOSITIF SERVANT A EXPULSER LE CONTENU D'UN CONTENANT
(54) Title: CONTAINER CONTENT REMOVAL DEVICE

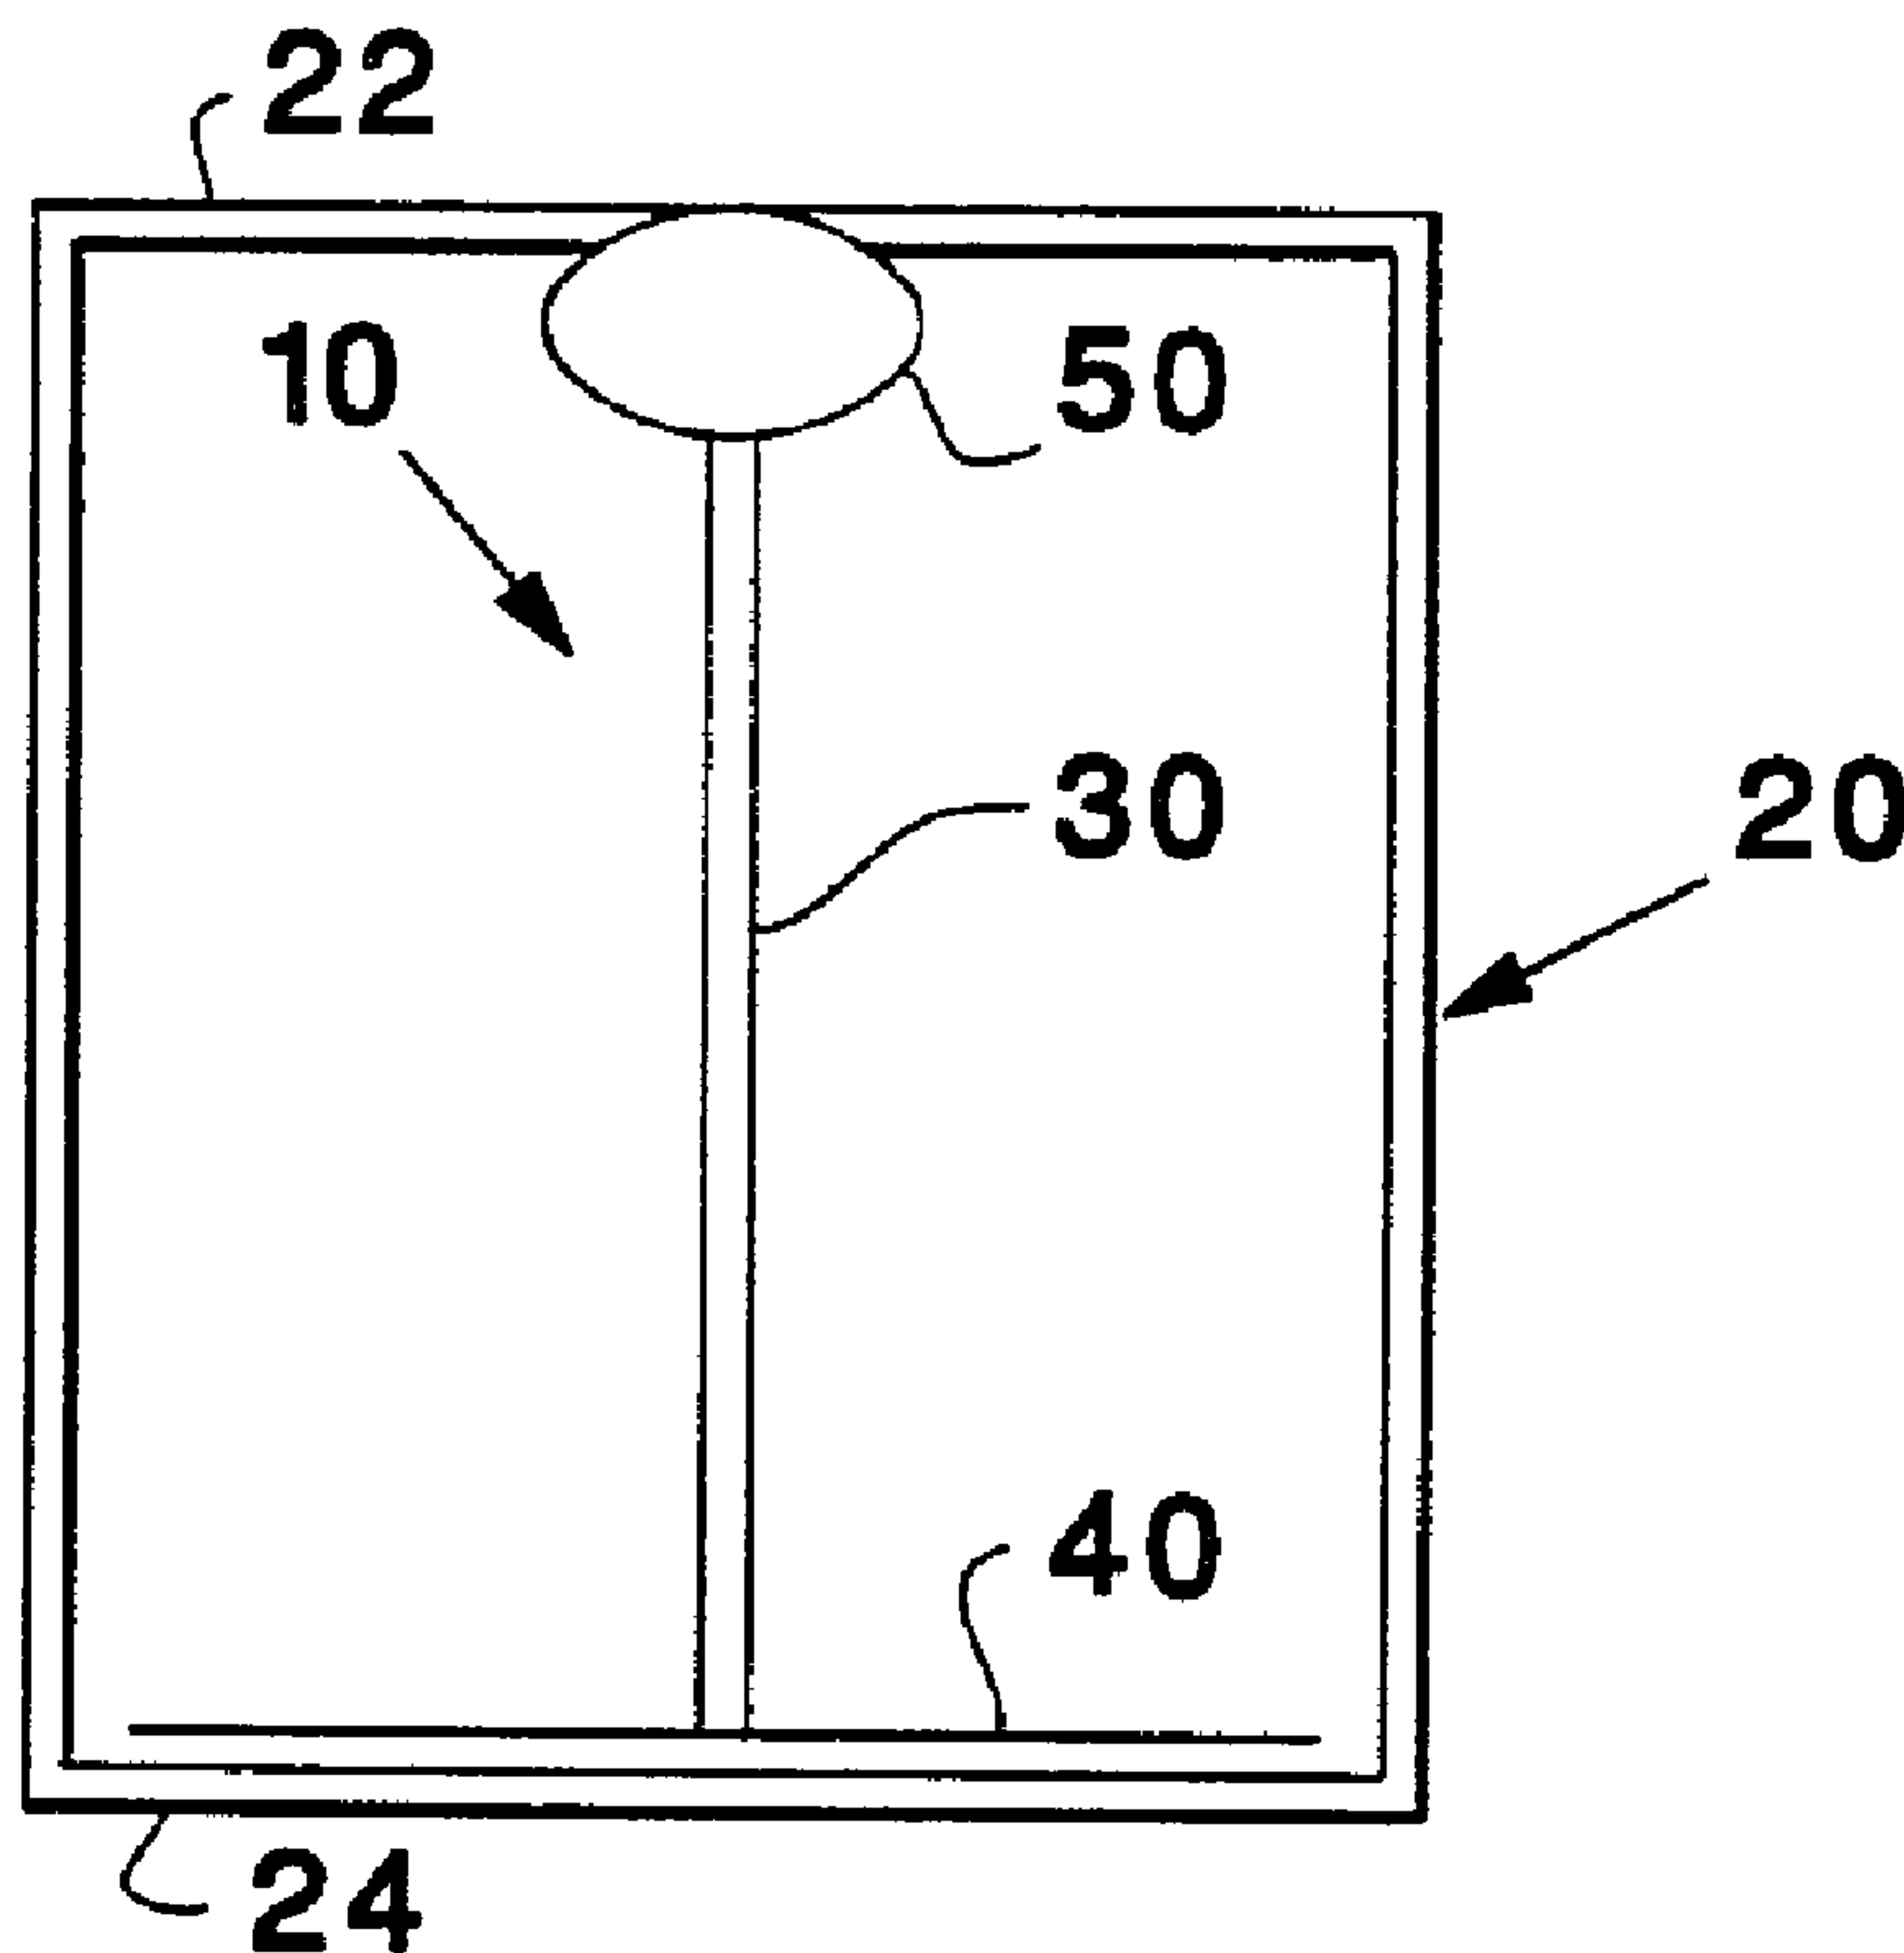

(57) Abrégé/Abstract:

A container assembly (20) includes a central connecting member (30) that extends to an attached support plate (40) at the bottom of the container. After opening the top of the container, lifting the connecting member results in the contents of the container being pulled up by the support plate for ease of use. The assembly is particularly useful for materials having a thick consistency such as dog food, cat food or sparkling paste which are difficult to remove from their containers. In the preferred embodiment, the support plate includes openings (42) to drain any liquid from the contents of the container as the contents are being lifted from the container.



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

B67D 5/42

A1

(11) International Publication Number:

WO 95/03247

(43) International Publication Date:

2 February 1995 (02.02.95)

(21) International Application Number:

PCT/US94/08069

(22) International Filing Date:

25 July 1994 (25.07.94)

(30) Priority Data:

08/097,153

26 July 1993 (26.07.93)

US

(71)(72) Applicant and Inventor: MICHELSON, Gary, Karlin
[US/US]; 438 Sherman Canal, Venice, CA 90291 (US).

(74) Agent: SCHELLIN, Eric, P.; Suite 704, 2121 Crystal Drive,
Arlington, VA 22202 (US).

(81) Designated States: AU, BB, BG, BR, BY, CA, CN, CZ, FI, HU, JP, KP, KR, KZ, LK, LV, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SK, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

2168129

(54) Title: CONTAINER CONTENT REMOVAL DEVICE

(57) Abstract

A container assembly (20) includes a central connecting member (30) that extends to an attached support plate (40) at the bottom of the container. After opening the top of the container, lifting the connecting member results in the contents of the container being pulled up by the support plate for ease of use. The assembly is particularly useful for materials having a thick consistency such as dog food, cat food or spackling paste which are difficult to remove from their containers. In the preferred embodiment, the support plate includes openings (42) to drain any liquid from the contents of the container as the contents are being lifted from the container.

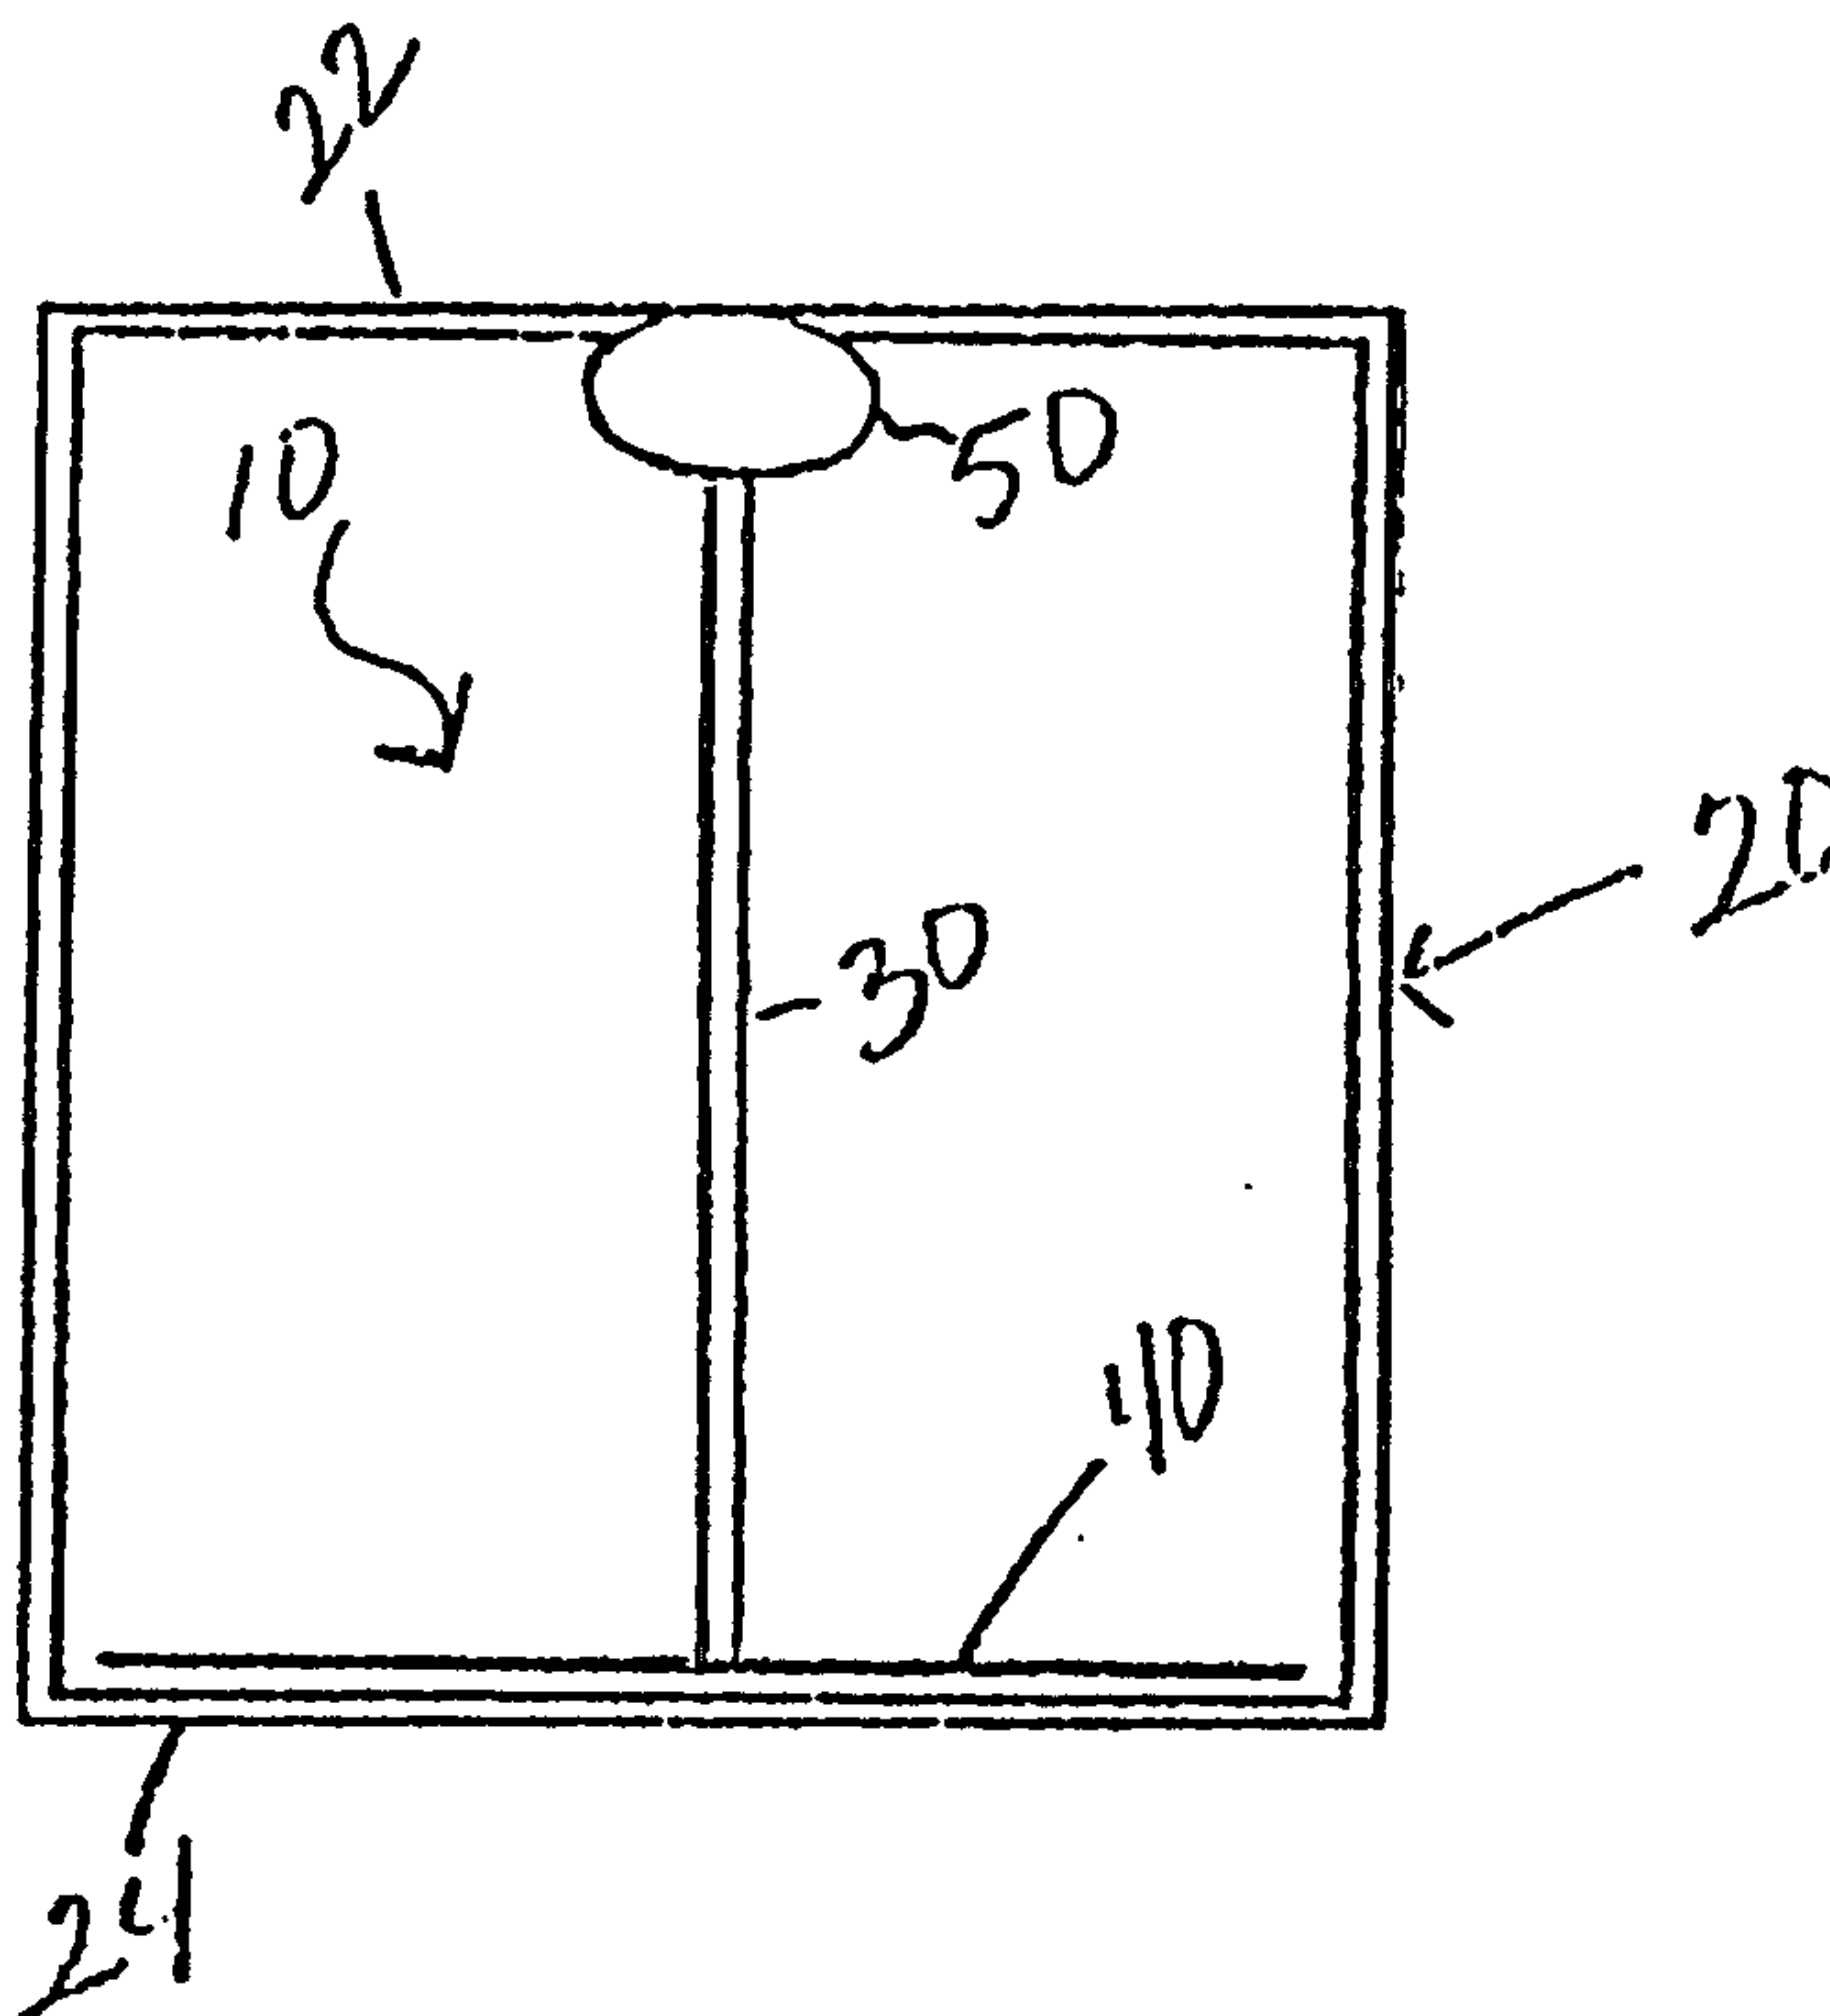

CONTAINER CONTENT REMOVAL DEVICE

BACKGROUND5 Field of the invention

This invention relates to container assemblies and in particular to an improved container assembly with means for easily removing the contents of a container.

10 Description of the Related Art

It has long been a recognized problem that foods having a thick consistency such as canned meats, including dog or cat foods, or even tomato paste, are difficult to remove from a container. Once the container is opened it is necessary to use a spoon or other utensil to scoop out the food from the container. Alternatively, it is necessary to use a knife to cut around the sides of the food to break the seal and cohesiveness between the food and the sides of the container. Other methods of removing the food from the container consist of opening both the top and the bottom ends of the container and then pushing the bottom lid through the container in order to push out the entire contents of the container. Similar problems have also been recognized in containers for non-food items such as putty or spackling paste.

It is also recognized that it is common to use only a portion of the contents of a food container. Therefore, it is undesirable to destroy the container in the process of removing a portion of the contents, such as opening both ends of the container.

30 SUMMARY OF INVENTION

A container constructed with a connecting member that attaches to a support plate at the bottom of the container and extends substantially to the top of the container. The contents of the container, such as dog or cat food or any other material having a similar consistency, surrounds the connecting member and covers the support plate. The connecting member is attached at its other end to a finger engaging handle which protrudes from the top surface of the

78406-6

-2-

contents of the container. The container is then sealed in the conventional manner. When it is desired to remove the contents of the container, the top cover of the container is removed in the conventional manner and the connecting member
5 that extends above the top surface of the contents of the container is lifted, thereby lifting the lower support plate and the contents of the container contained above the lower support plate. The amount of the contents of the container desired to be removed is cut or scooped off into a separate
10 container, such as a dish.

In the preferred embodiment of the present invention the connecting member is flexible, such as a string, wire or a hollow flexible tube, so that it may be rested on the top of the remaining portion of the contents
15 of the container when only a portion of the contents of the container is removed. The container would then be covered by a typical well-known cover, such as a plastic lid, and stored for future use. When it is desired to remove additional contents of the container at a later date the
20 flexible connecting member would be grasped and pulled up again to lift out the contents remaining in the container.

The invention may be summarized according to one aspect as a container comprising: a side wall, and top and bottom covers formed integrally with said side wall; an
25 internal support plate for supporting contents within said container, said support plate being movable in relationship to said top and bottom covers; and a hollow connecting member for eliminating a vacuum seal existing between the contents of said container and said bottom cover, said
30 connecting member having a lower end attached to said support plate and an upper end opposite to said lower end, said connecting member being at least in part flexible.

78406-6

-2a-

According to another aspect the invention provides a container comprising: a side wall, and top and bottom covers formed integrally with said side wall; an internal support plate for supporting contents within said container, 5 said support plate being movable in relationship to said top and bottom covers; and a connecting member having a lower end attached to said support plate and an upper end extending from said support plate substantially to said top cover, said upper end of said connecting member being 10 adapted to be removably coupled to said top cover.

OBJECTS OF THE INVENTION

It is an object of the present invention to provide an improved container construction that is easy to use;

15 It is another object of the present invention to provide an improved container construction with a content removal assembly that is easy to assemble;

It is yet another object of the present invention to provide an improved container construction with a content 20 removal assembly that is inexpensive to manufacture;

It is yet another object of the present invention to provide an improved container construction with a content removal assembly that is reliable; and

It is a further object of the present invention to 25 provide a container construction with a content removal assembly that avoids waste at the bottom of a container.

These and other objects of the present invention will be apparent from a review of the detailed description of the drawings and the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a side view of a cylindrical container containing the content removal assembly of the preferred embodiment.

5 Figure 2 is a bottom end view of the support plate of the content removal assembly of the present invention.

Figure 3 is a bottom end view of an alternative embodiment of the support plate of the content removal assembly container of the present invention.

10 Figure 4 is a side view of a container containing an alternative embodiment of a content removal assembly which has a raised lip at its circumference.

Figure 5 is a perspective view of the content removal assembly of the present invention.

15 Figure 6 is a perspective view of the content removal assembly of the present invention showing a means for connecting the connecting member to the support plate.

Figure 7 is a side view of a cylindrical container containing the content removal assembly of the present invention attached to the top cover of the container.

20 Figure 8 is a top view of a container having a pop-top removal lid with an opening tab riveted to the lid.

Figure 9 is a bottom view of the lid in Figure 8 with the finger engaging handle connected to the bottom of the rivet in the lid.

25 Figure 10 is a bottom view of the lid in Figure 8 with the bottom of the rivet having a hook extension for engaging the finger engaging handle.

DETAILED DESCRIPTION OF THE DRAWING

30 Referring to Figures 1-10 the content removal assembly is referred to generally as 10. A container 20, such as a dog food container, is constructed so that a connecting member 30 attaches to a low support plate 40 at the bottom 24 of the container 20 and extends substantially to the top 22 of the container 20. Connecting member 30 of a flexible material such as plastic, rubber or metal. The connecting member container may be a wire, a string or thread, a hollow flexible tube or even a solid post. One end of the connecting member 30 is connected to the support plate 40

and the other end of connecting member 30 is secured to a finger engaging handle 50. The finger engaging handle 50 may be made of the same material as the connecting member 30 or may also be made of any other non-toxic or
5 non-corrosive material such as metal suitable for canned foods or plastic.

The lower support plate 40 is made of a rigid material capable of supporting the contents of the container when the finger engaging handle 50 is pulled. The support plate
10 40 may be shaped to conform to the shape of the container in which it is used. As shown in Figure 2, the support plate 40 for use in a cylindrical container 20 is circular and conforms to the shape of the container 20. The diameter of the support plate 40 is slightly smaller than
15 the diameter of the container 20 so that it may easily slide and fit inside the container 20. The support plate 40 also has openings 42 so that any liquid from the contents of the container 20 may be drained as the support plate 40 is lifted from the container 20. The openings 42
20 may be circular openings as shown in Figure 2 or may be in any other shape such as elongated slots. In a slot configuration, the openings 42 are suitably sized so as not to permit the contents of the container to slip therethrough.

25 The support plate 40 also has a central aperture 45 through which the connecting member 30 may be threaded and then attached to a stopper 46 having a larger diameter than the central aperture 45 as shown in Figure 6. The stopper 46 is positioned at the bottom of the support plate 40 and
30 acts as a means for engaging the support plate when the connecting member 30 is lifted.

In an alternative embodiments of the present invention, instead of the being circular, the lower support plate 40 comprises of a number of fan-like side extensions
35 44 as shown in Figure 3. The fan-like side extensions 44 would be used when the contents of the container 20 have a thick consistency such as canned meats. As canned meats tend to stick together and retain the shape of the interior of the container 20, it is not necessary to have a circular

-5-

support plate 40 as shown in Figure 2. A support plate 40 as shown in Figure 3 would be adequate to lift the canned meats out from the container 20.

As shown in Figure 4, the support plate 40 may also have an upstanding lip 48 at its circumference to scrape the sides on the inside of container 20 as the support plate 40 is lifted from the container 20 in order to avoid leaving any contents of the container 20 on the bottom or on the sides of the container 20.

As shown in Figure 7, as an alternative embodiment of the present invention, the connecting member 30 may be a hollow flexible tube and may have a length that is substantially longer than the distance between the support plate 40 and the top 22 of the container 20 so the connection between the finger engaging handle 50 and the support plate 40 is slack as shown in Figure 7. As the finger engaging handle 50 is lifted, the connecting member 30 is pulled taut to remove the slack in the connecting member. As the slack is removed, the connecting member 30 being, a hollow flexible tube, creates an air channel throughout the contents of the container 20. The air channel permits air from the exterior of the container 20 to flow through the connecting member 20 and to communicate with the space S below the support plate 40 through the central aperture 45. In the space S, between the bottom of the contents within the container and the bottom 24 of the container 20, a vacuum exists which acts to pull and keep the contents of the container from being removed from the container 20. The vacuum in the container is eliminated by the communication of air through the connecting member 30 to the space S. As a result, the contents of the container 20 may be easily removed by lifting the support plate 40. Once the contents of the container 20 are lifted by the support plate 40, the amount of the contents desired to be removed is cut or scooped off into a separate container, such as an animals's food dish.

As an alternative, an air channel may be created through the contents of container 20 by a connecting member 30 that is a string or a wire instead of a hollow tube.

-6-

When the string or wire of the connecting member 30 is lifted, an air channel is created in the contents of the container 20 so that air flows from the exterior of the container, through the air channel and through the central aperture 45 of the support plate 40 to eliminate the vacuum between the contents of the container and the bottom 24 of the container 20.

As it is possible that the finger engaging handle 50 might sink into the top surface of the contents of the container during shipping or inversion of the container, the finger engaging handle 50 may be removably affixed by a ring 52 to the inside of the top 22 of the container 20 as shown in Figure 7. When the top 22 of the container 20 is removed, it lifts the finger engaging handle 50 out of the contents of the container 20. The user may then remove the finger engaging handle 50 from the ring 52 and commence pulling on the finger engaging handle 50 or the user may continue to lift the top 22 in order to raise the supporting plate 40 and the food supported thereon out of the container 20.

Referring to Figure 8-10, in containers having a "pop" top" removable top 22, an external tab T used to pry open the top 22 and then to pull the top 22 back is typically riveted to the top 22. A portion 60 of the rivet R which passes through the top 22 and fastens to the interior surface 21 of the top 22 may be attached to the finger engaging handle 50 so that when the top 22 is pulled back, the connecting member 30 is also pulled. Once the top 22 is separated from the container, the contents of the container may be lifted out.

As shown in Figure 10, as an alternative, the portion 60 of the rivet R may have a hook member 62, extending from the interior surface 21, for engaging the finger engaging handle 50 once the top 22 of the pop-top container is removed. The hook member 62 avoids the need for the user of the container 20 to use his fingers to engage the finger engaging handle 50.

-7-

During assembly, the container assembly 10 of the present invention is inserted in the container 20 at the time the container 20 is filled with the contents to be stored therein. The support plate 40 with the flexible connecting member 30 already attached is inserted so that it is seated at the bottom of the container 20. The contents of the container 20, such as dog or cat food, tomato paste, or other non-food material are then poured into the container 20 and surround the connecting member 30 and cover the surface 32 of support plate 40. If the connecting member 30 is a hollow flexible tube as shown in Figure 7, it is placed within the contents of the container so that it is not fully extended in order to maintain a slack between the finger engaging handle 50 and the support plate 40. The finger engaging handle 50 is then placed so that it protrudes from the top surface of the contents of the container or may be attached to the top 22 as described above. The container 20 is then sealed in the conventional manner.

When it is desired to remove the contents of the container 20, the top cover 22 is removed in the conventional manner and connecting member 30 that extends above the top layer of the contents of the container is lifted either manually or by the top 22 if attached thereto, thereby lifting the support plate 30 the contents of the container 20 contained above the lower support plate 40.

While the present invention has been described in detail with respect to its preferred embodiment, it is appreciated that other variations of the present invention may be devised which do not depart from the inventive concept of the present invention.

For example, the container 20 instead of being cylindrical may be in the shape of an oval, rectangle, or a square. The food assembly 10 of the present invention would then be shaped to correspond to the shape of the container 20. The food container 20 may also be made of a plastic material, coated paper or any other suitable material.

78406-6

-8-

CLAIMS:

1. A container comprising:

a side wall, and top and bottom covers formed integrally with said side wall;

5 an internal support plate for supporting contents within said container, said support plate being movable in relationship to said top and bottom covers; and

a hollow connecting member for eliminating a vacuum seal existing between the contents of said container
10 and said bottom cover, said connecting member having a lower end attached to said support plate and an upper end opposite to said lower end, said connecting member being at least in part flexible.

2. A container comprising:

15 a side wall, and top and bottom covers formed integrally with said side wall;

an internal support plate for supporting contents within said container, said support plate being movable in relationship to said top and bottom covers; and

20 a connecting member having a lower end attached to said support plate and an upper end extending from said support plate substantially to said top cover, said upper end of said connecting member being adapted to be removably coupled to said top cover.

25 3. The container of claim 1, wherein said hollow tube extends from said support plate substantially to said top cover.

78406-6

-9-

4. The container of claim 2, wherein said connecting member is flexible.

5. The container of claim 2, wherein said connecting member is a wire.

5 6. The container of claim 2, wherein said connecting member is a string.

7. The container of claim 2, wherein said connecting member is a post.

8. The container of claim 2, wherein said connecting
10 member forms a channel for communicating air through the contents of the container so that when said connecting member is lifted out of the container air flows from the exterior of the container through said connecting member and through an aperture in said support plate to break a vacuum
15 seal that normally exists between the bottom cover of the container and the contents of the container.

9. The container of either claim 1 or 2, wherein said connecting member is a hollow tube.

10. The container of either claim 1 or 2, wherein said
20 connecting member is placed within the contents of the container in a loosely folded manner.

11. The container of any one of claims 1-10, wherein said support plate is a thin flat plate.

12. The container of any one of claims 1-11, wherein
25 said support plate has openings permitting liquid to drain through said support plate to the bottom of the container.

13. The container of claim 12, wherein one of said openings is an aperture through which said connecting member passes.

78406-6

-10-

14. The container of claim 12, wherein at least one of said openings is circular-shaped.

15. The container of claim 12, wherein at least one of said openings is an elongated slot.

5 16. The container of any one of claims 1-15, wherein said upper end of said connecting member forms a finger engaging means.

17. The container of claim 16, wherein said finger engaging means is secured to said top cover of said
10 container.

18. The container of either claim 16 or 17, wherein said top cover includes means for removably engaging said finger engaging means.

19. The container of claim 18, wherein said means for
15 removably engaging said finger engaging means is attached to said top cover of said container.

20. The container of either claim 18 or 19, wherein said means for removably engaging said finger engaging means is a hook member.

20 21. The container of either claim 1 or 2, wherein said lower end of said connecting member is removably attached to said support plate.

22. The container of either claim 1 or 2, wherein said lower end of said connecting member is adapted for threaded
25 engagement with said support plate.

23. The container of any one of claims 1-22, wherein said support plate includes at least one side extension on said support plate.

78406-6

-11-

24. The container of any one of claims 1-23, wherein said side wall of said container has an interior surface and said support plate has an outer perimeter including a lip for scraping against said interior surface of said side wall.

25. The container of any one of claims 1-24, wherein said container is cylindrical.

26. The container of any one of claims 1-24, wherein said container is oval-shaped.

27. The container of any one of claims 1-24, wherein said container is rectangular.

28. The container of any one of claims 1-27, wherein said container includes a plastic material.

29. The container of any one of claims 1-27, wherein said container includes a coated paper material.

30. The container of any one of claims 1-29, wherein said top and bottom covers are substantially the same size.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

1/6

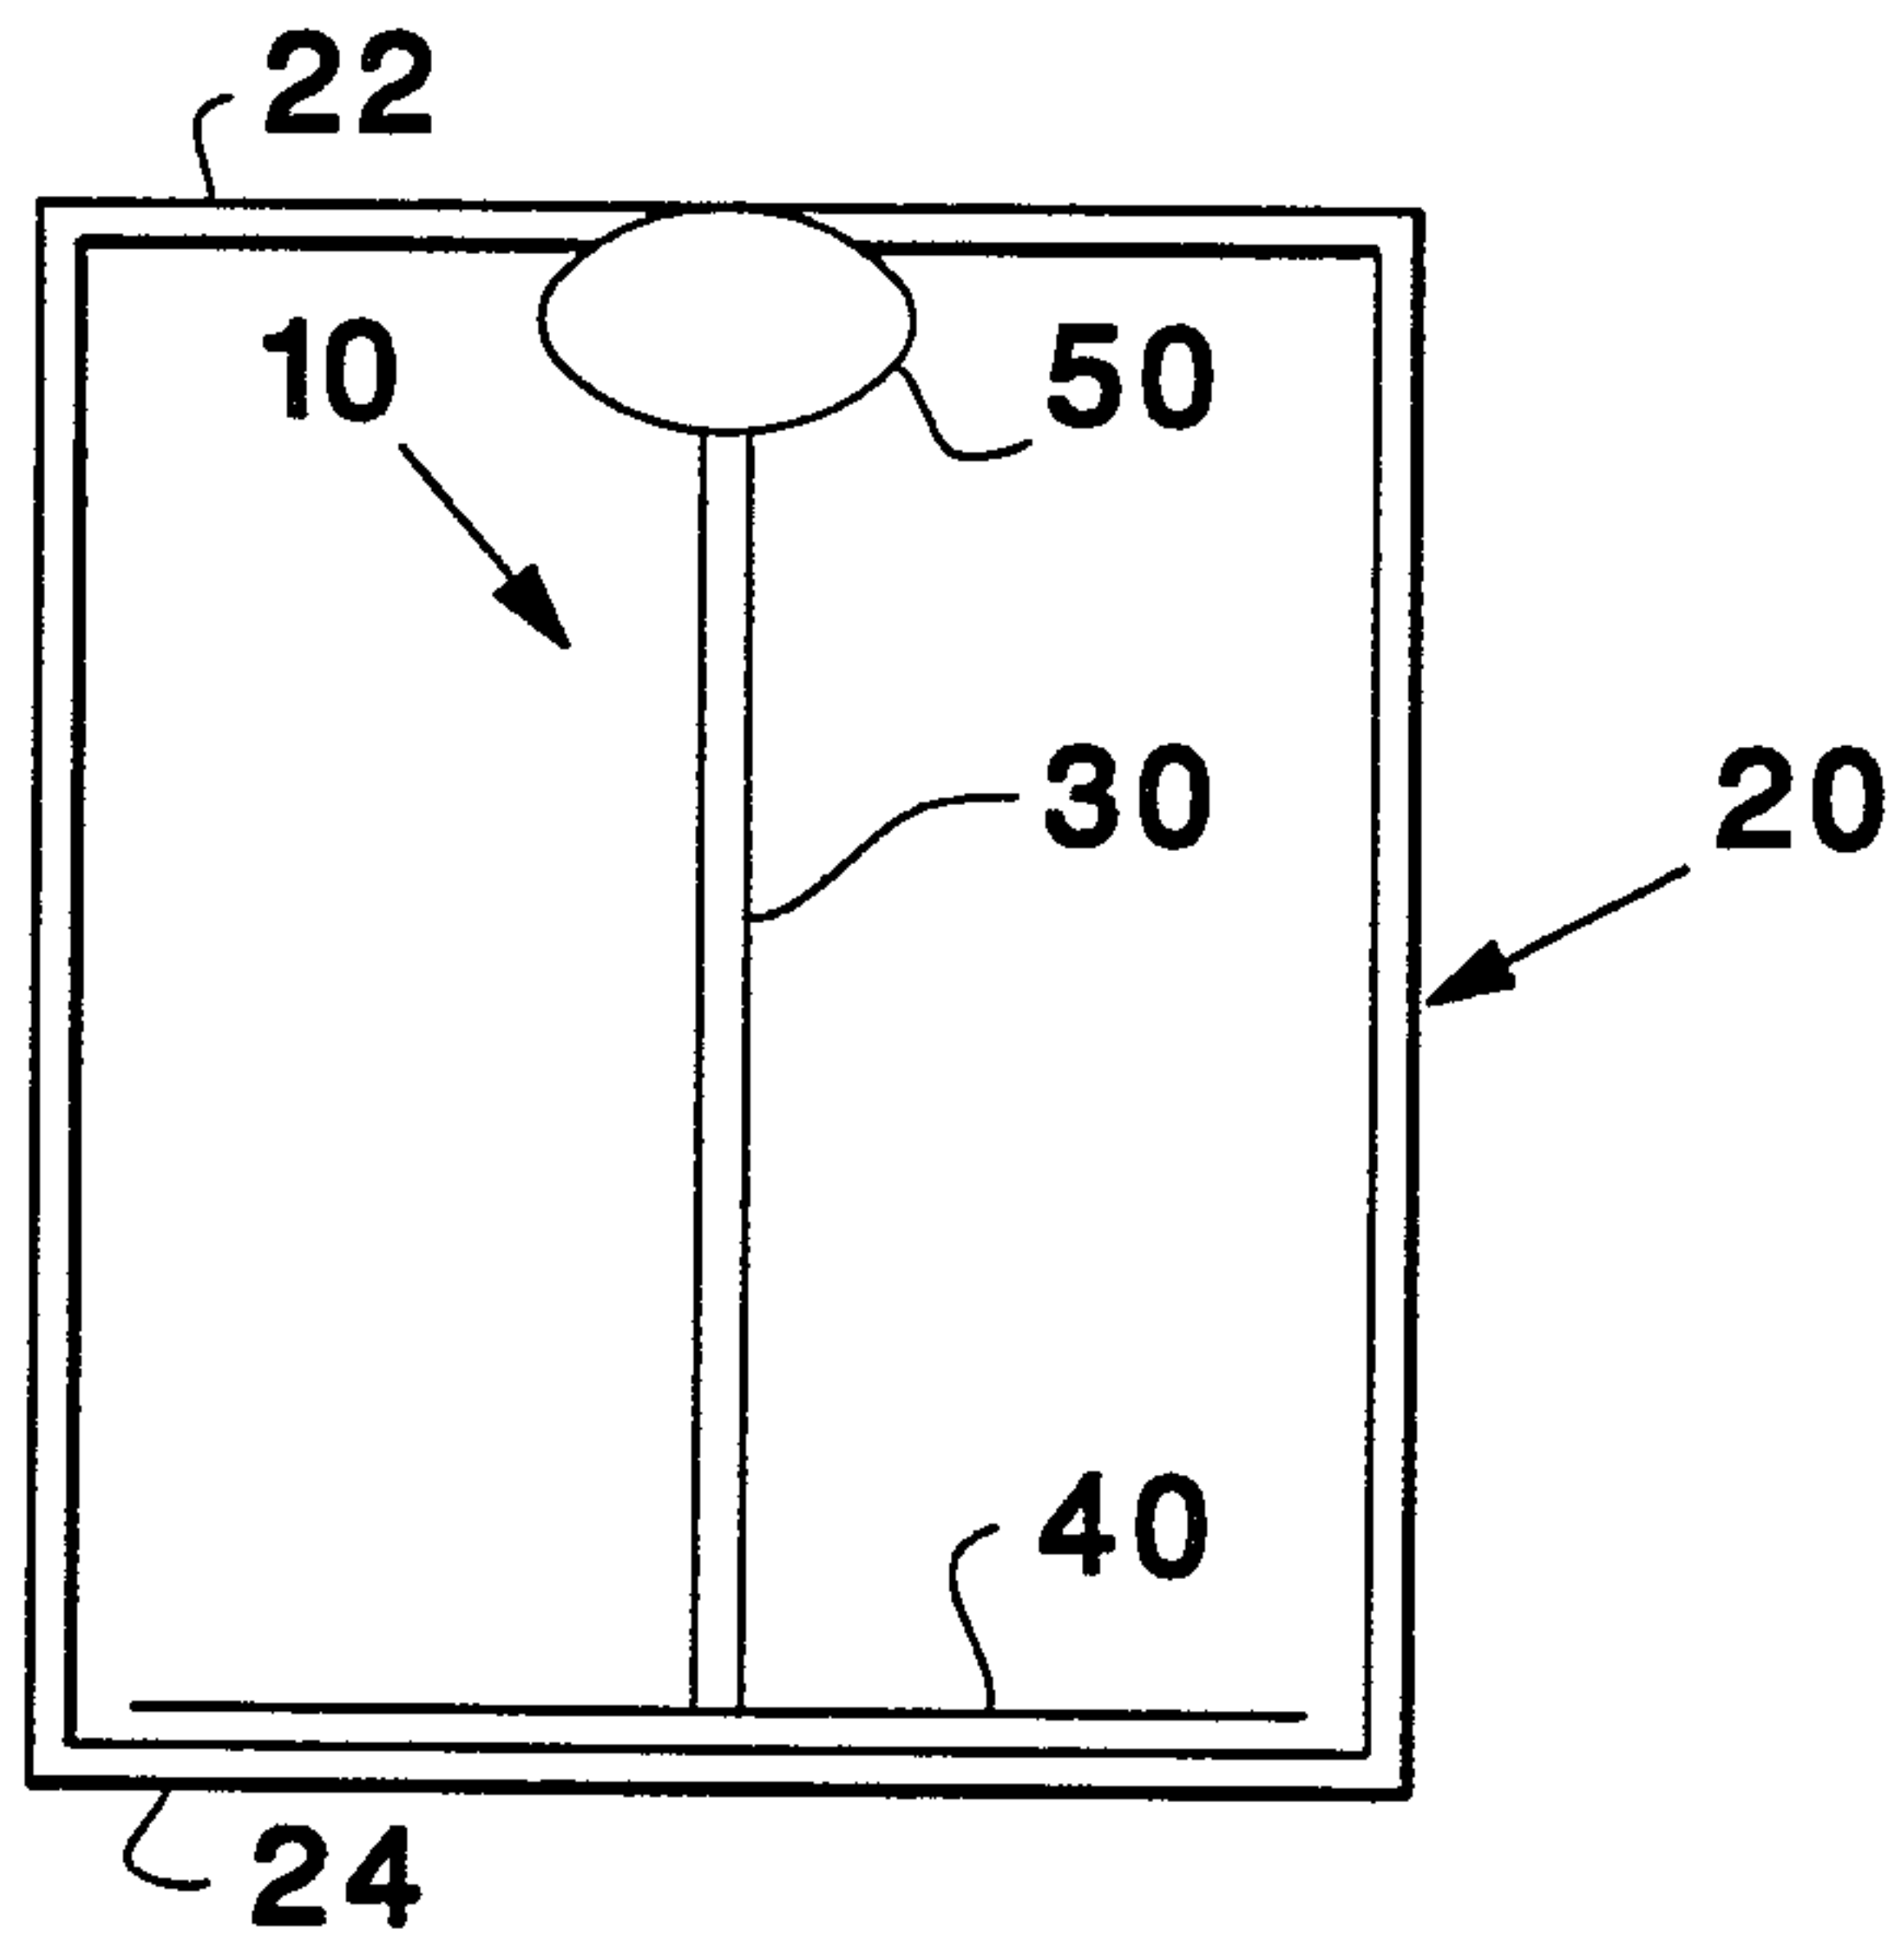


Fig. 1

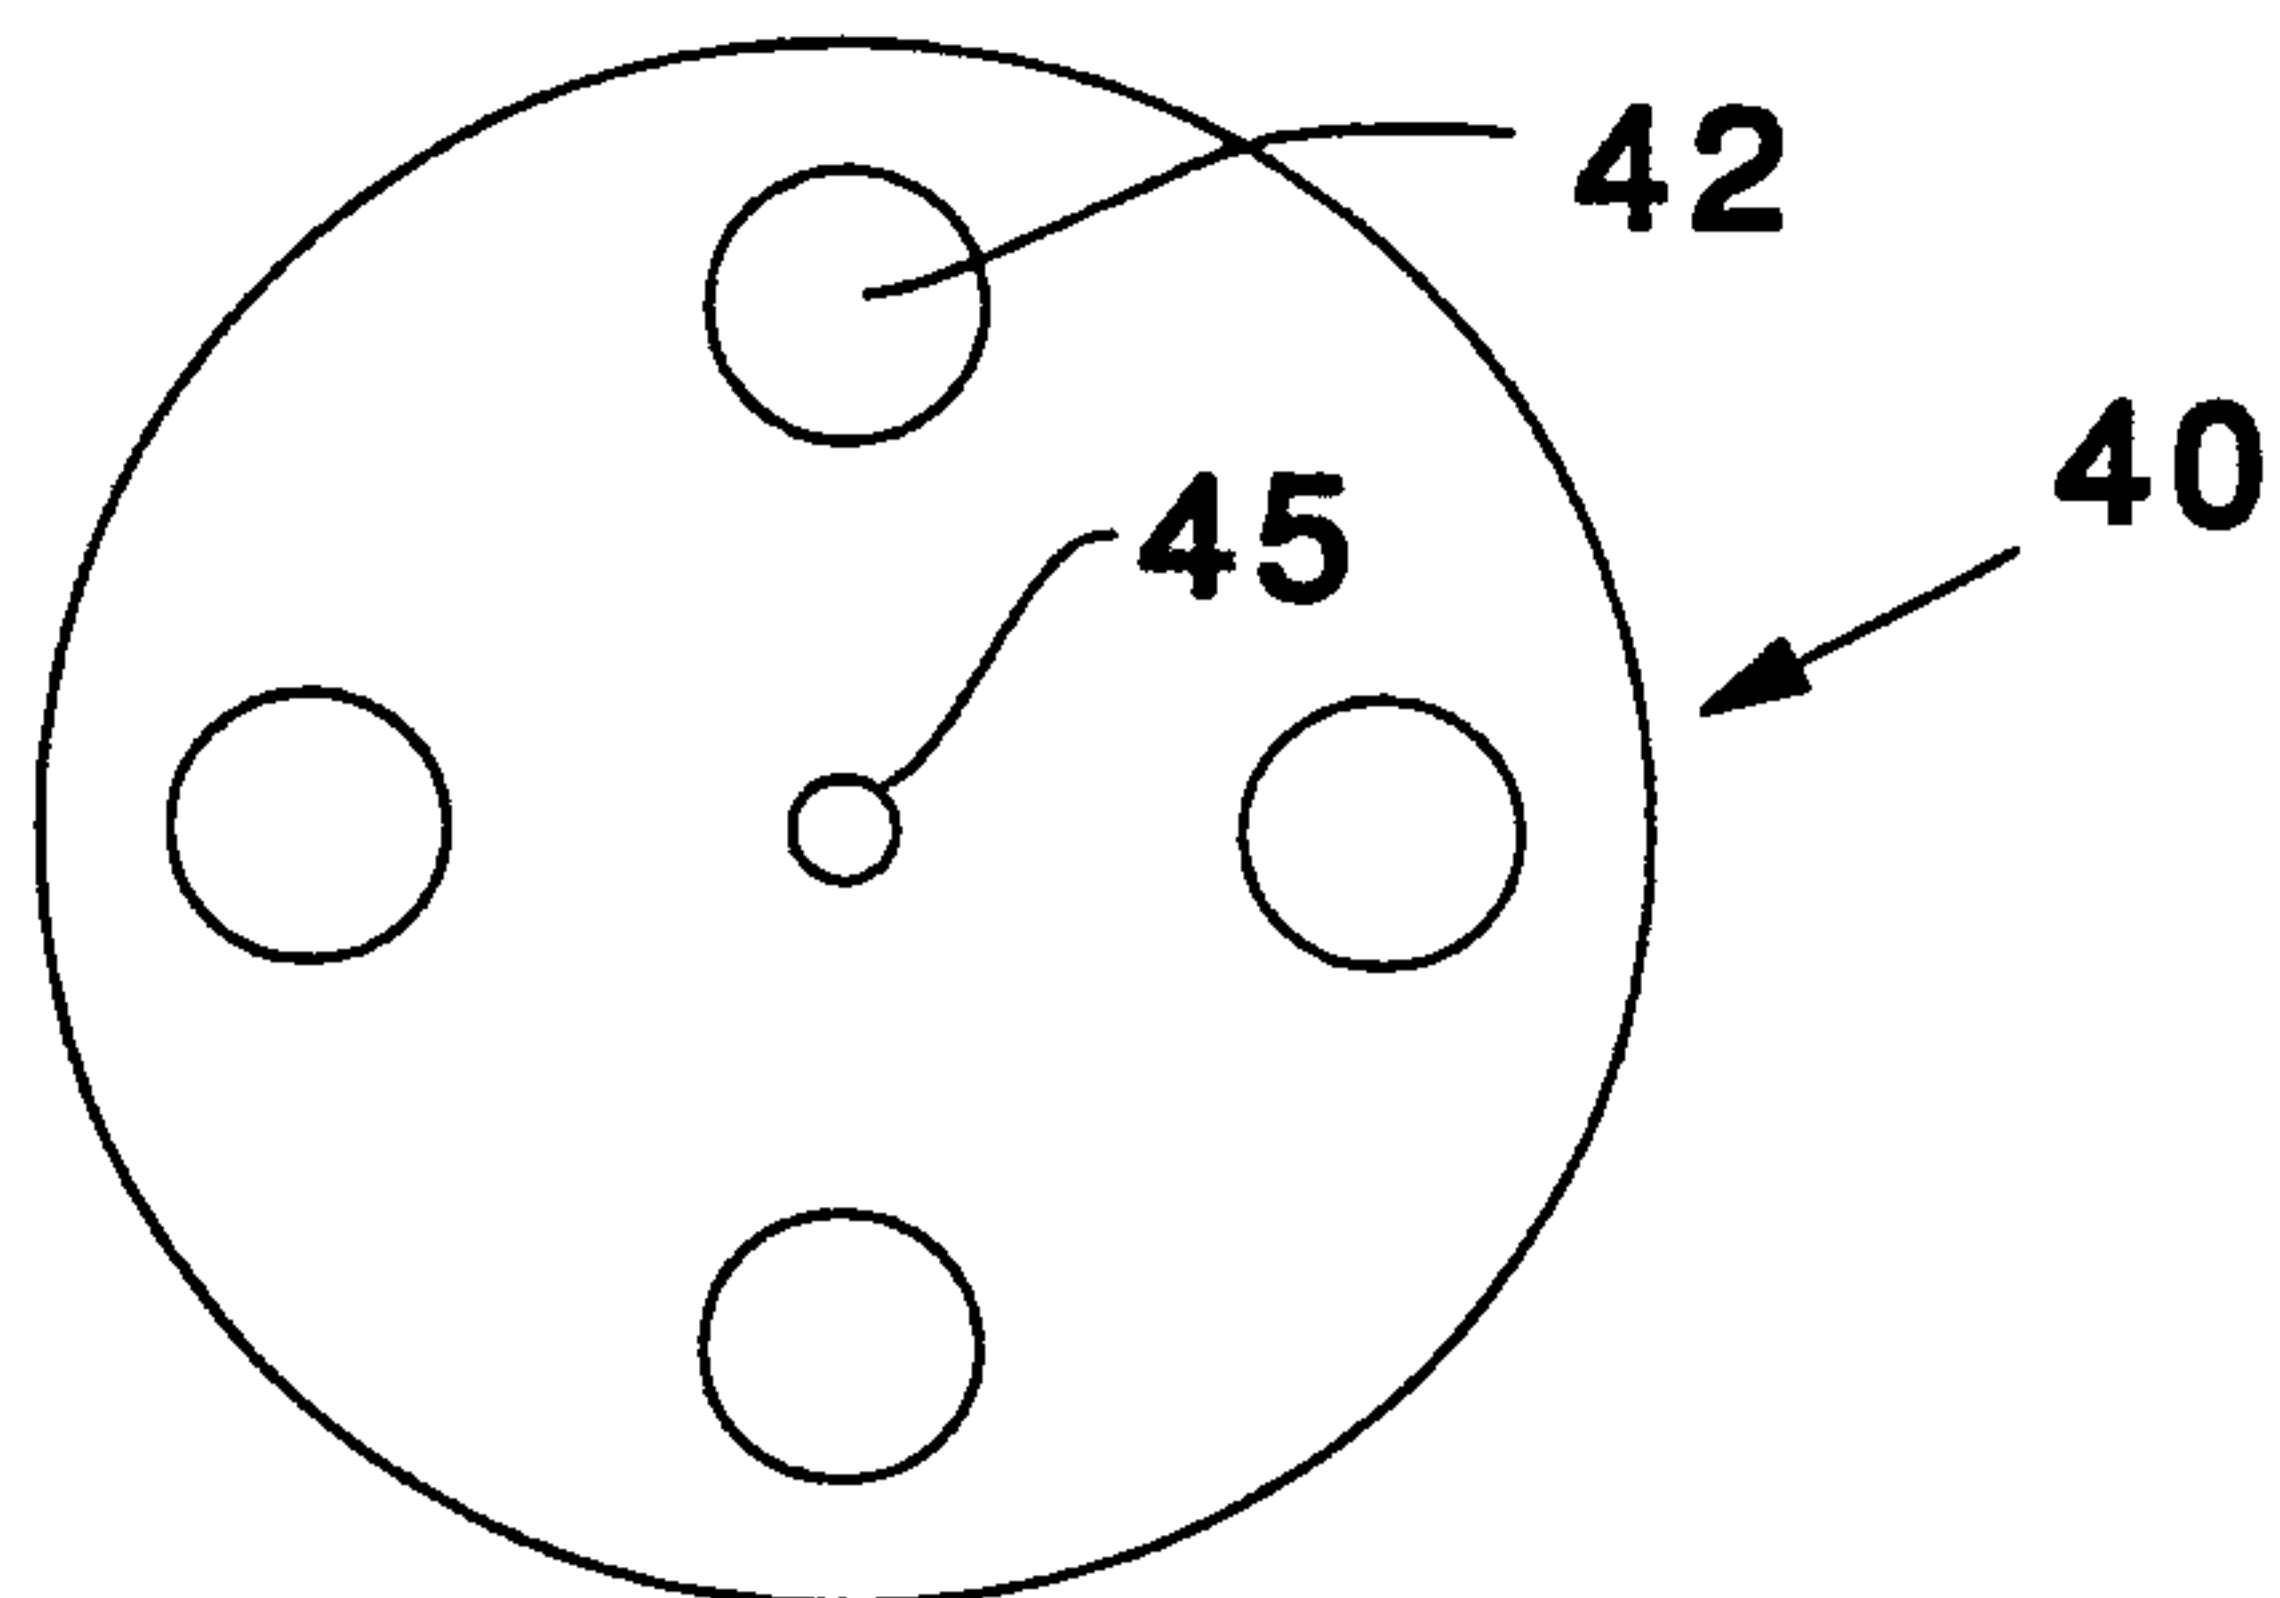


Fig. 2

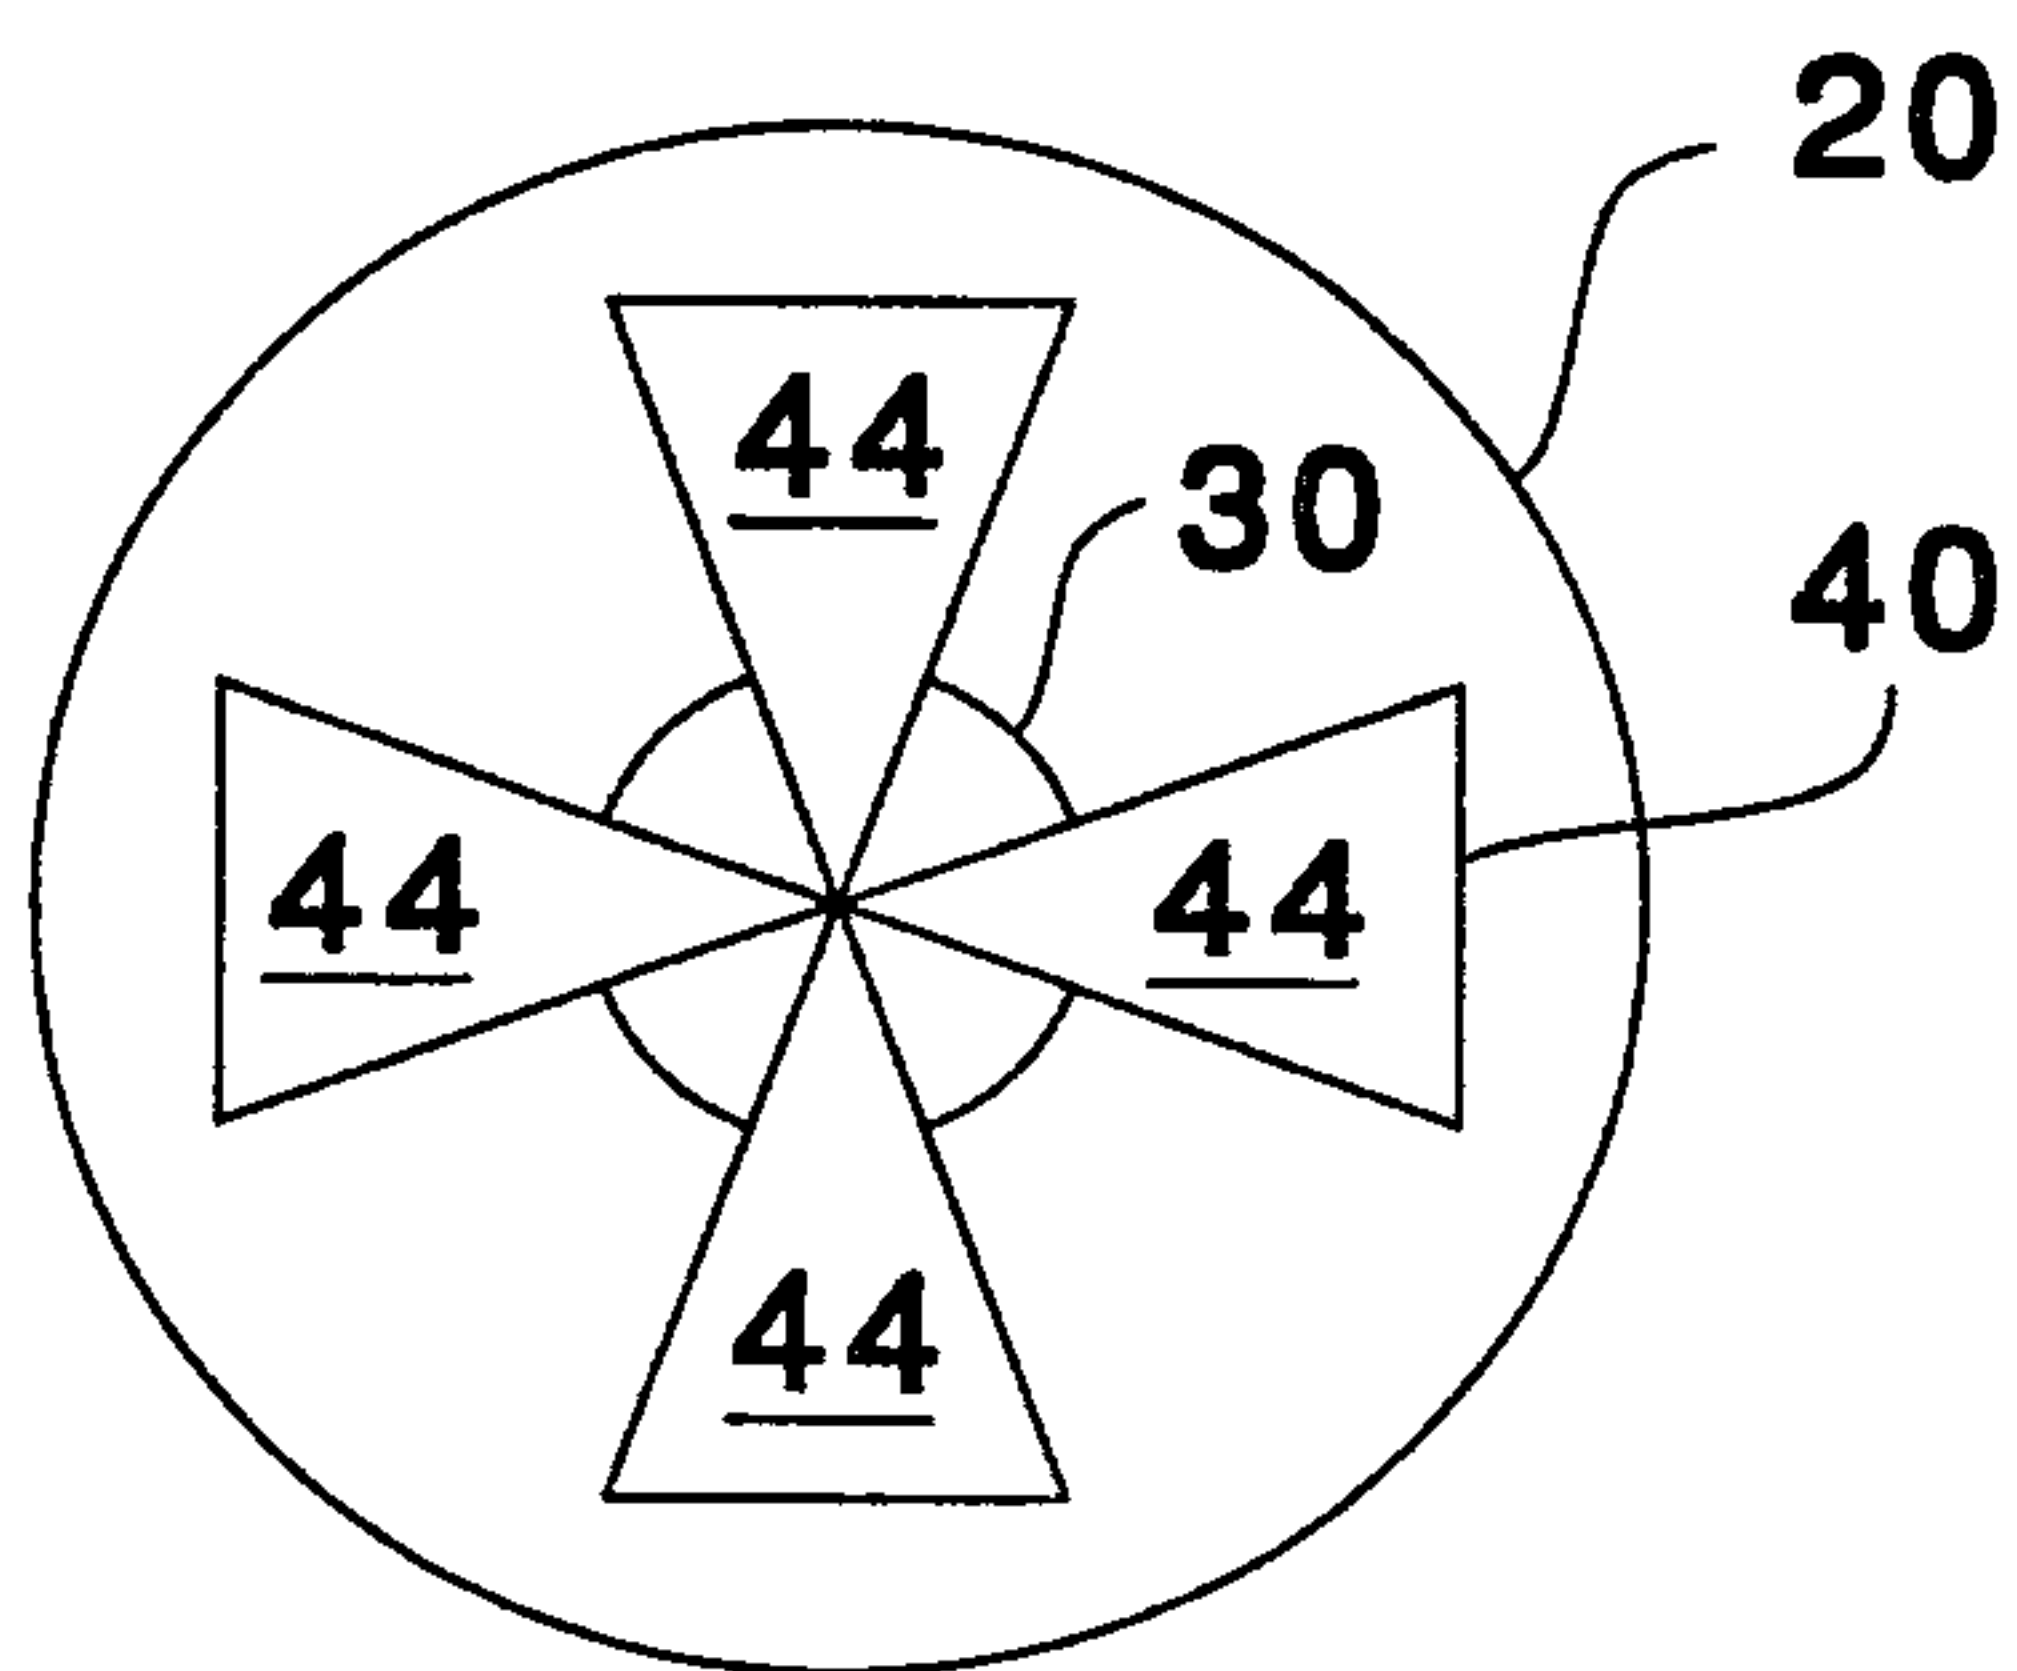


Fig. 3

2/6

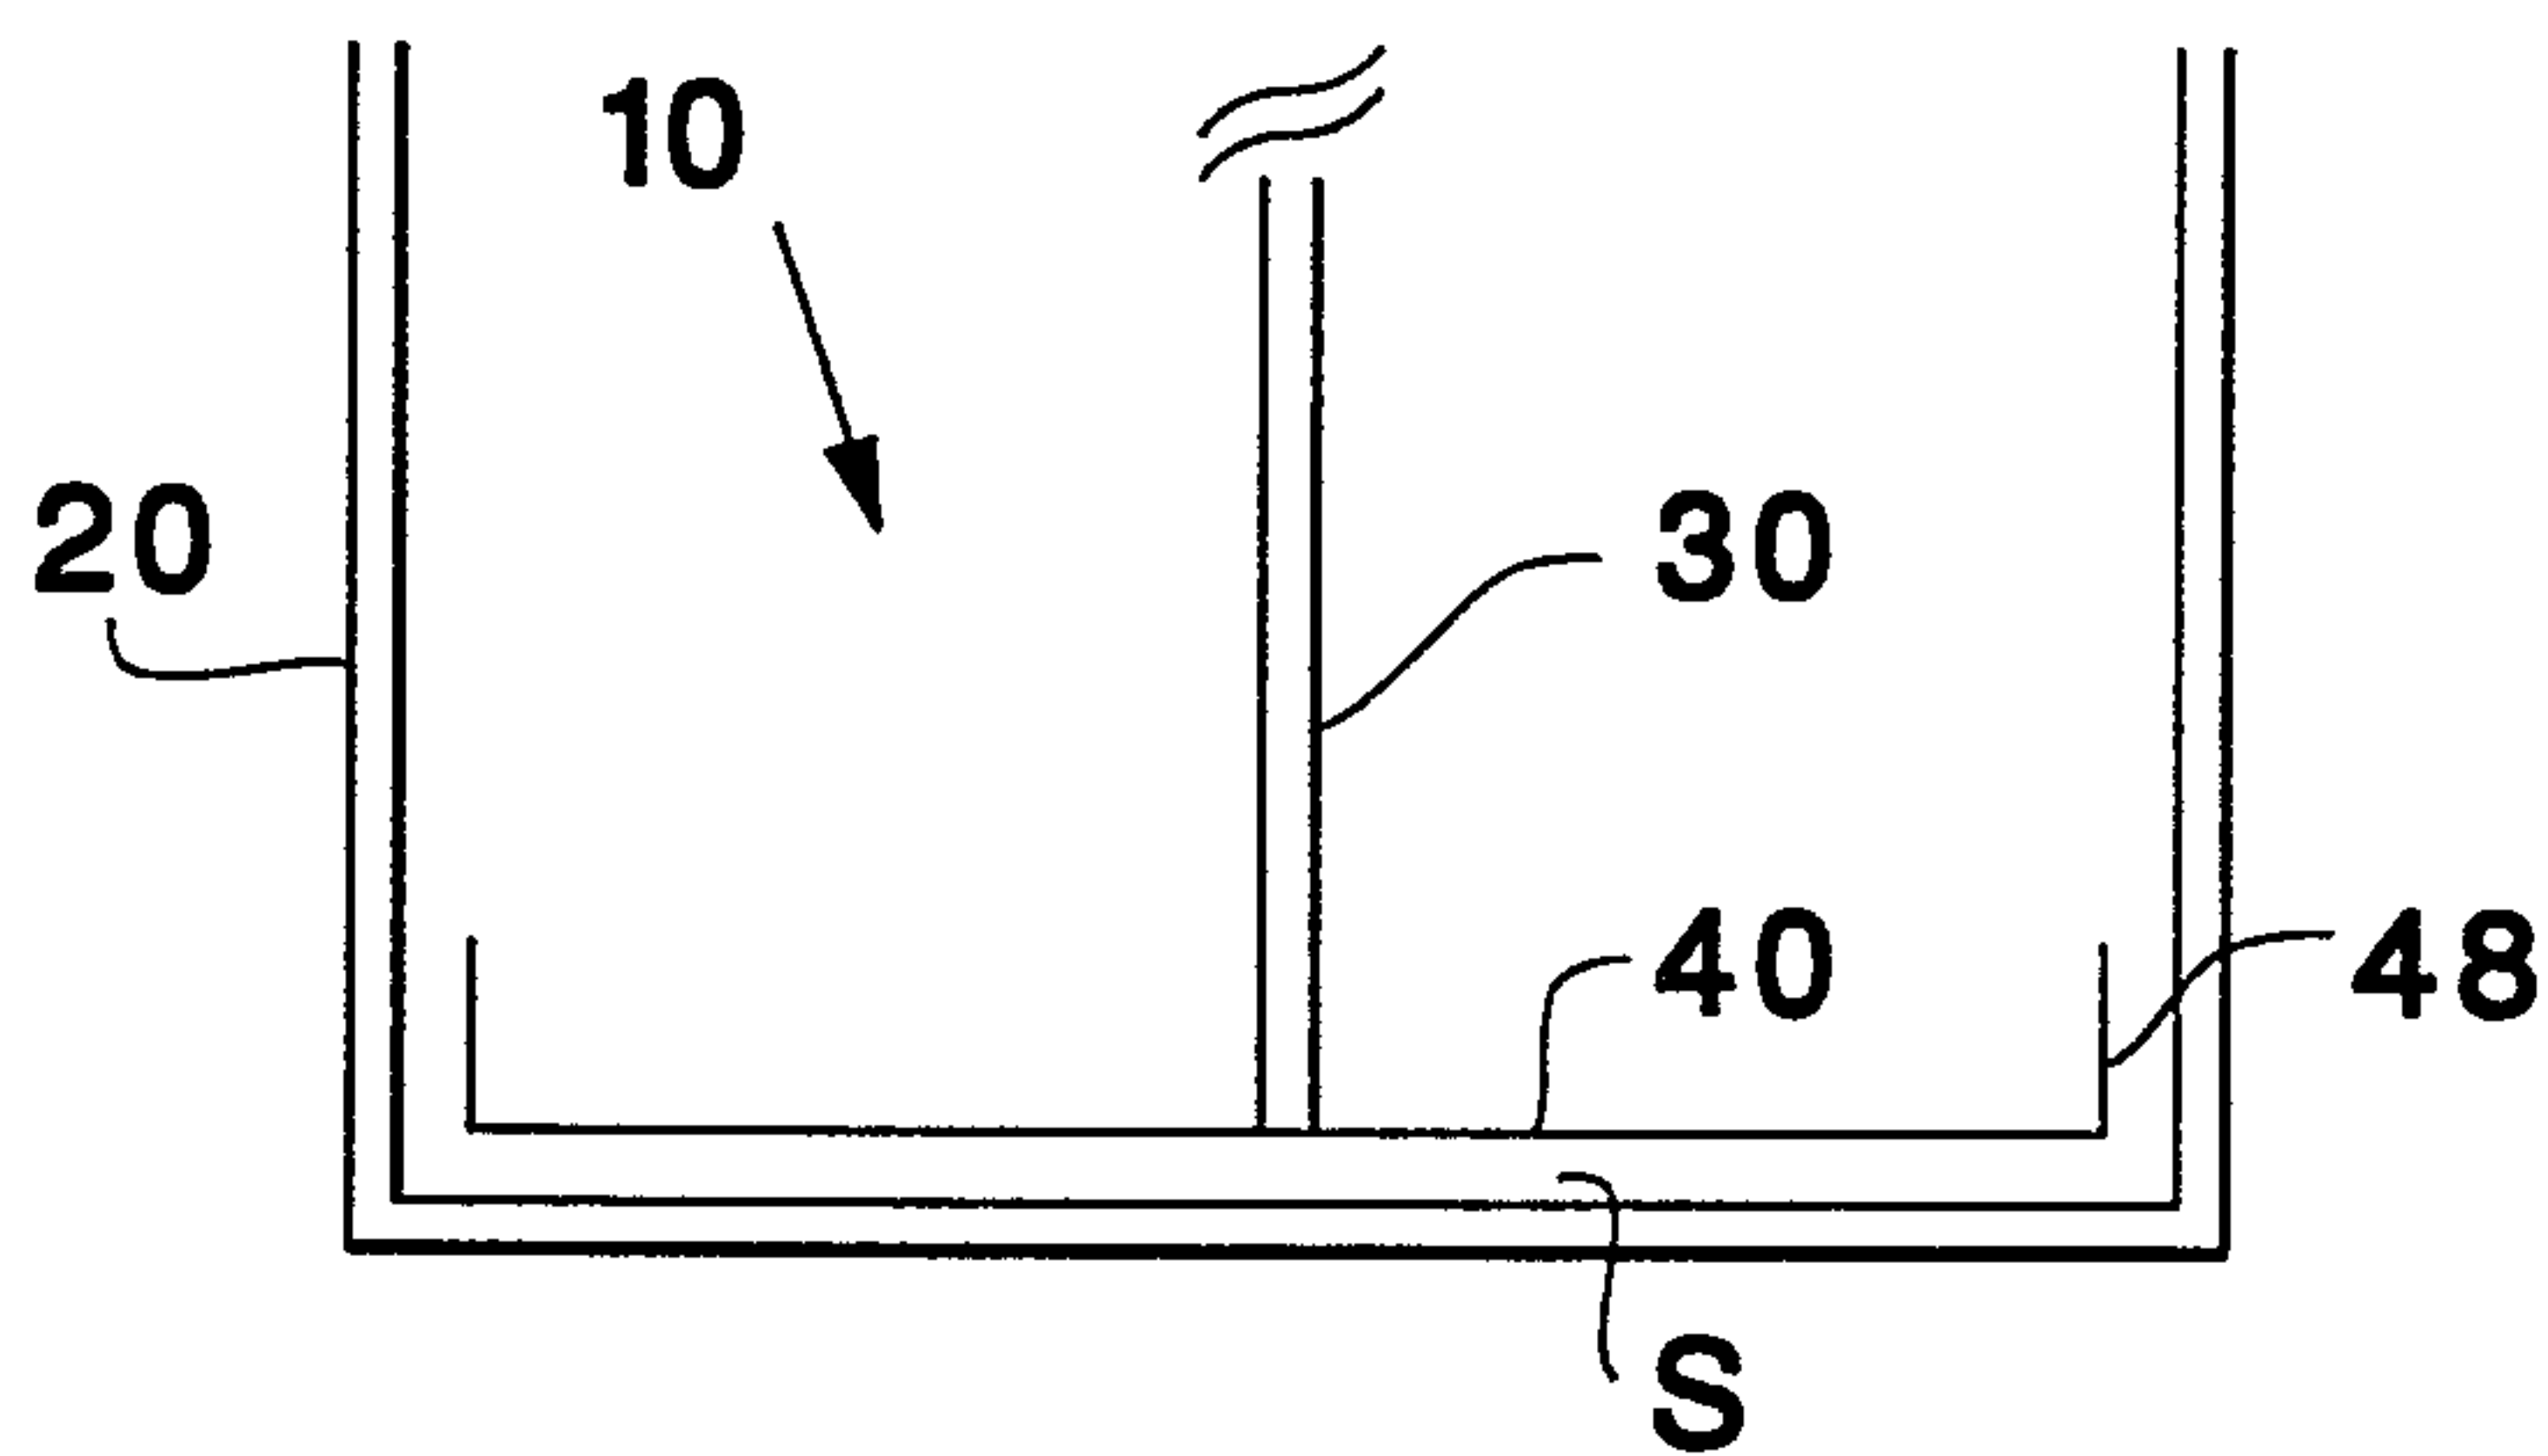


Fig. 4

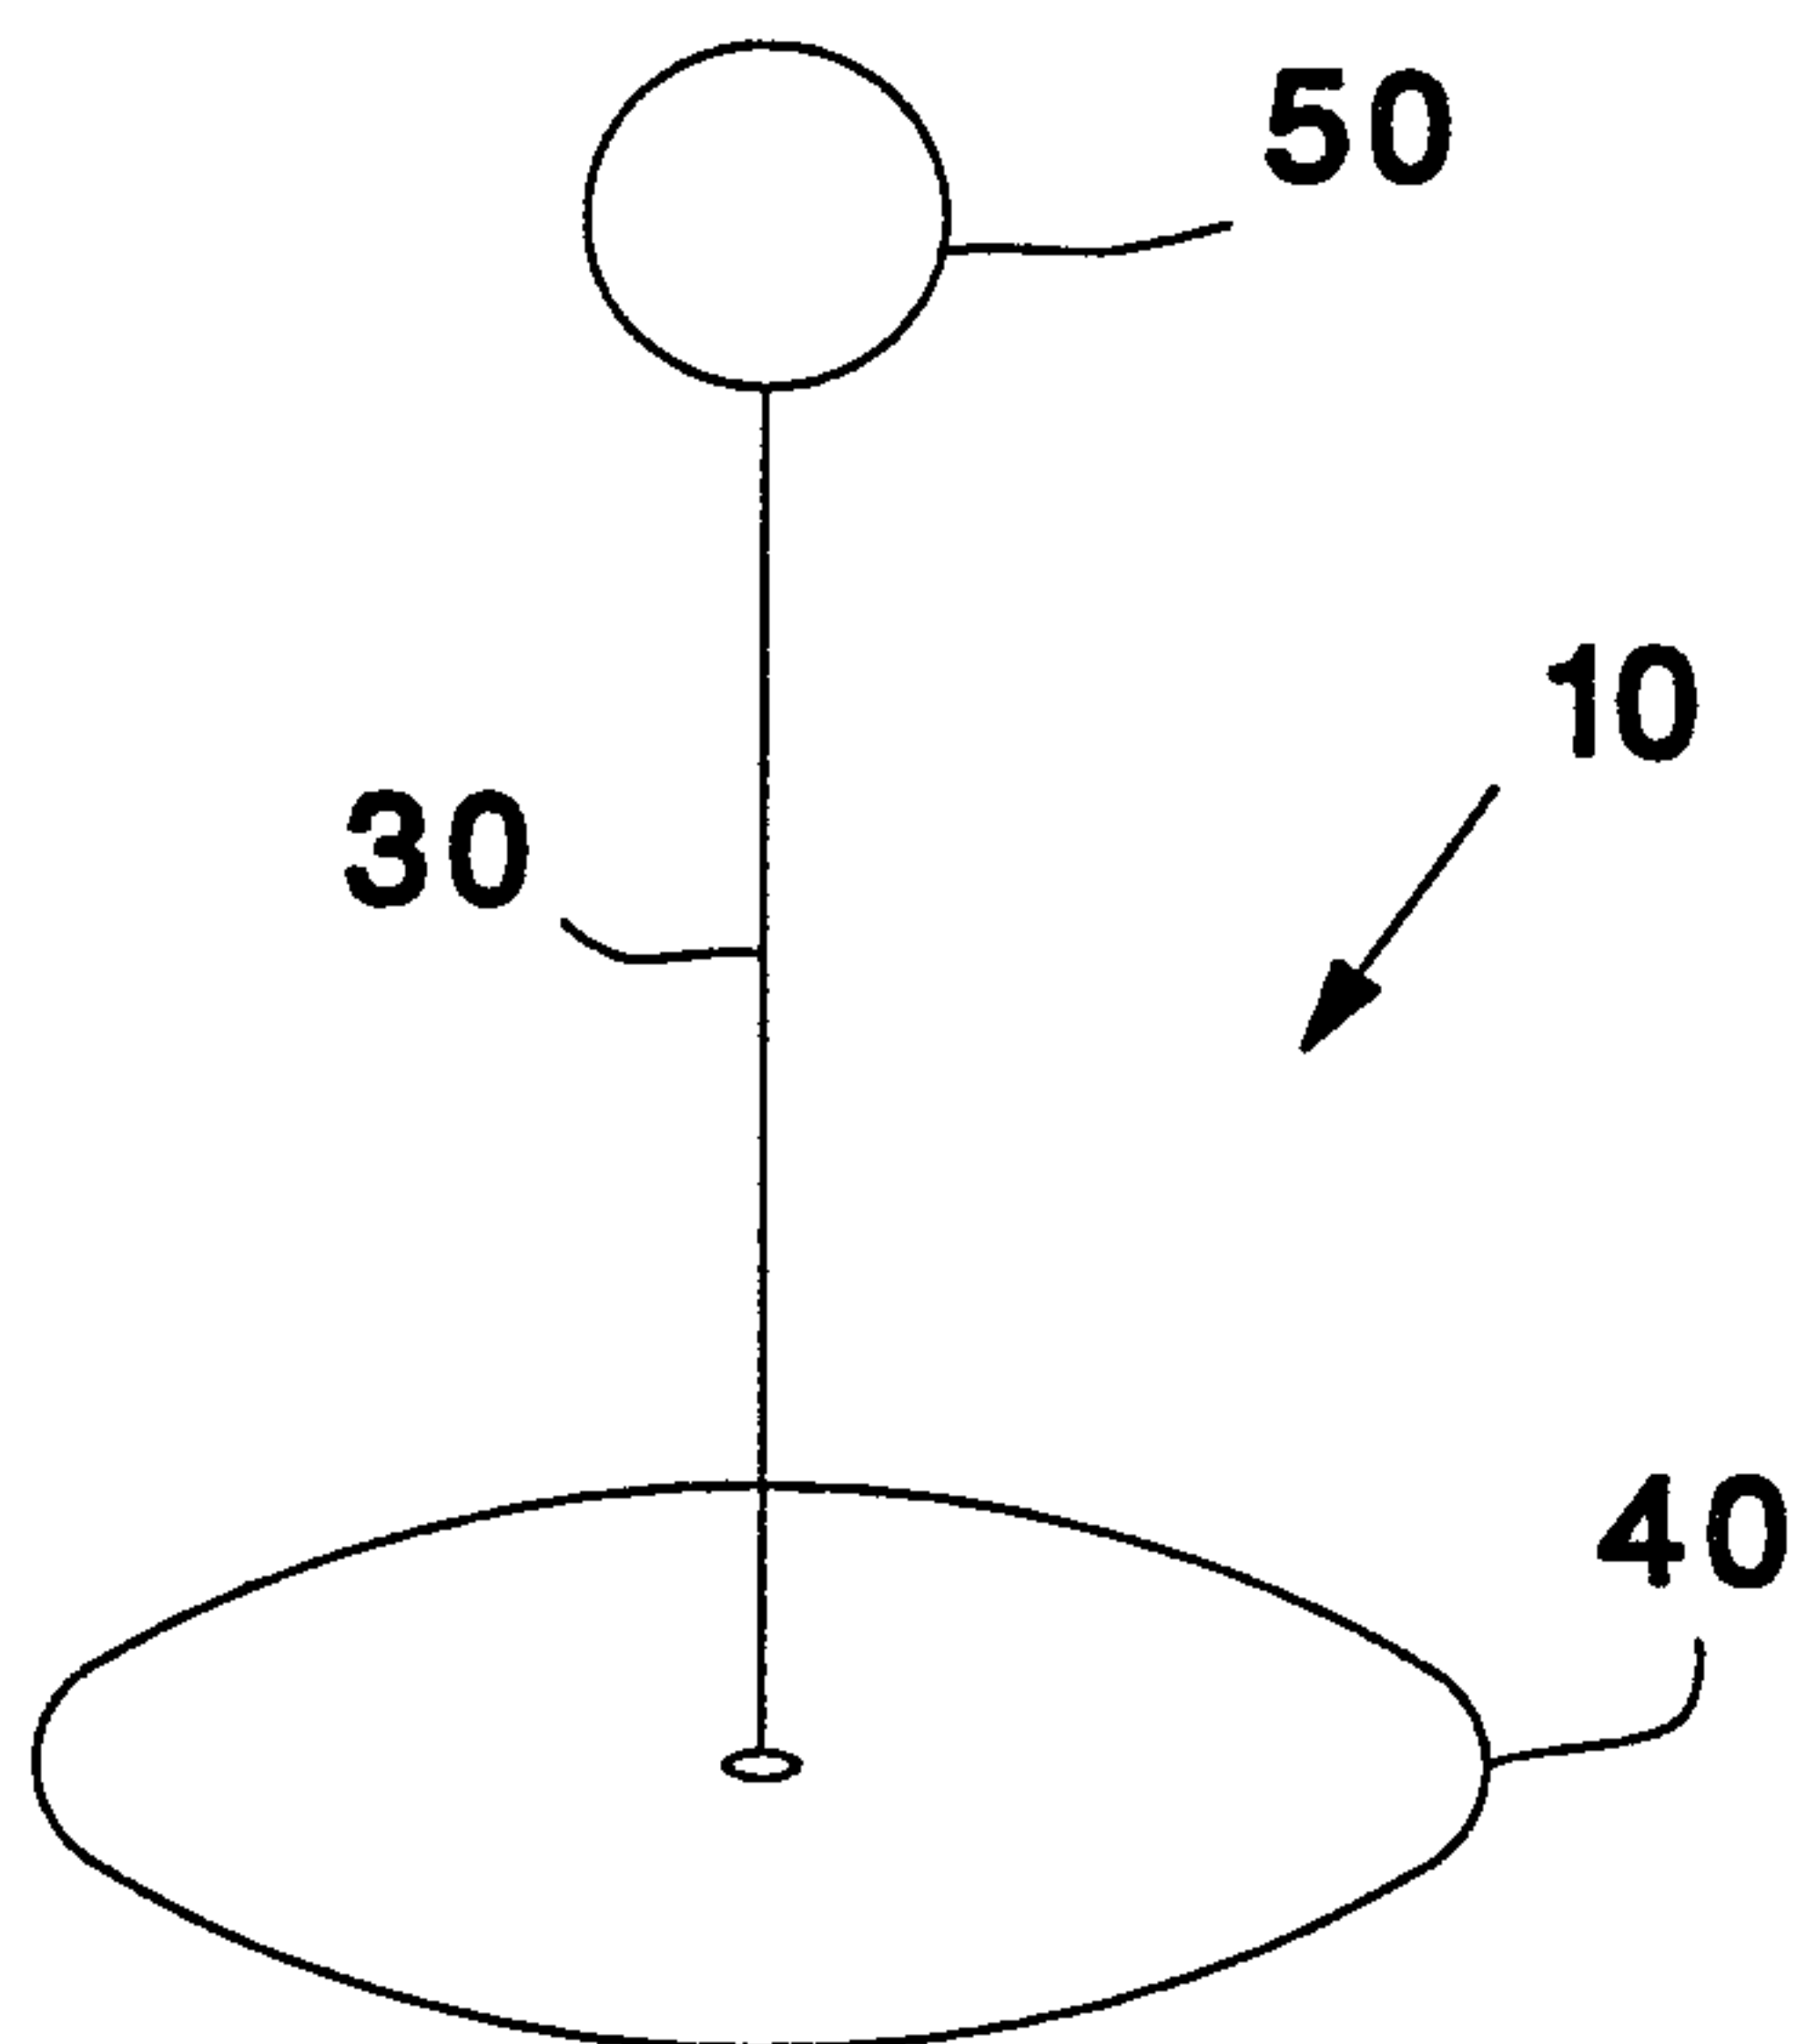


Fig. 5

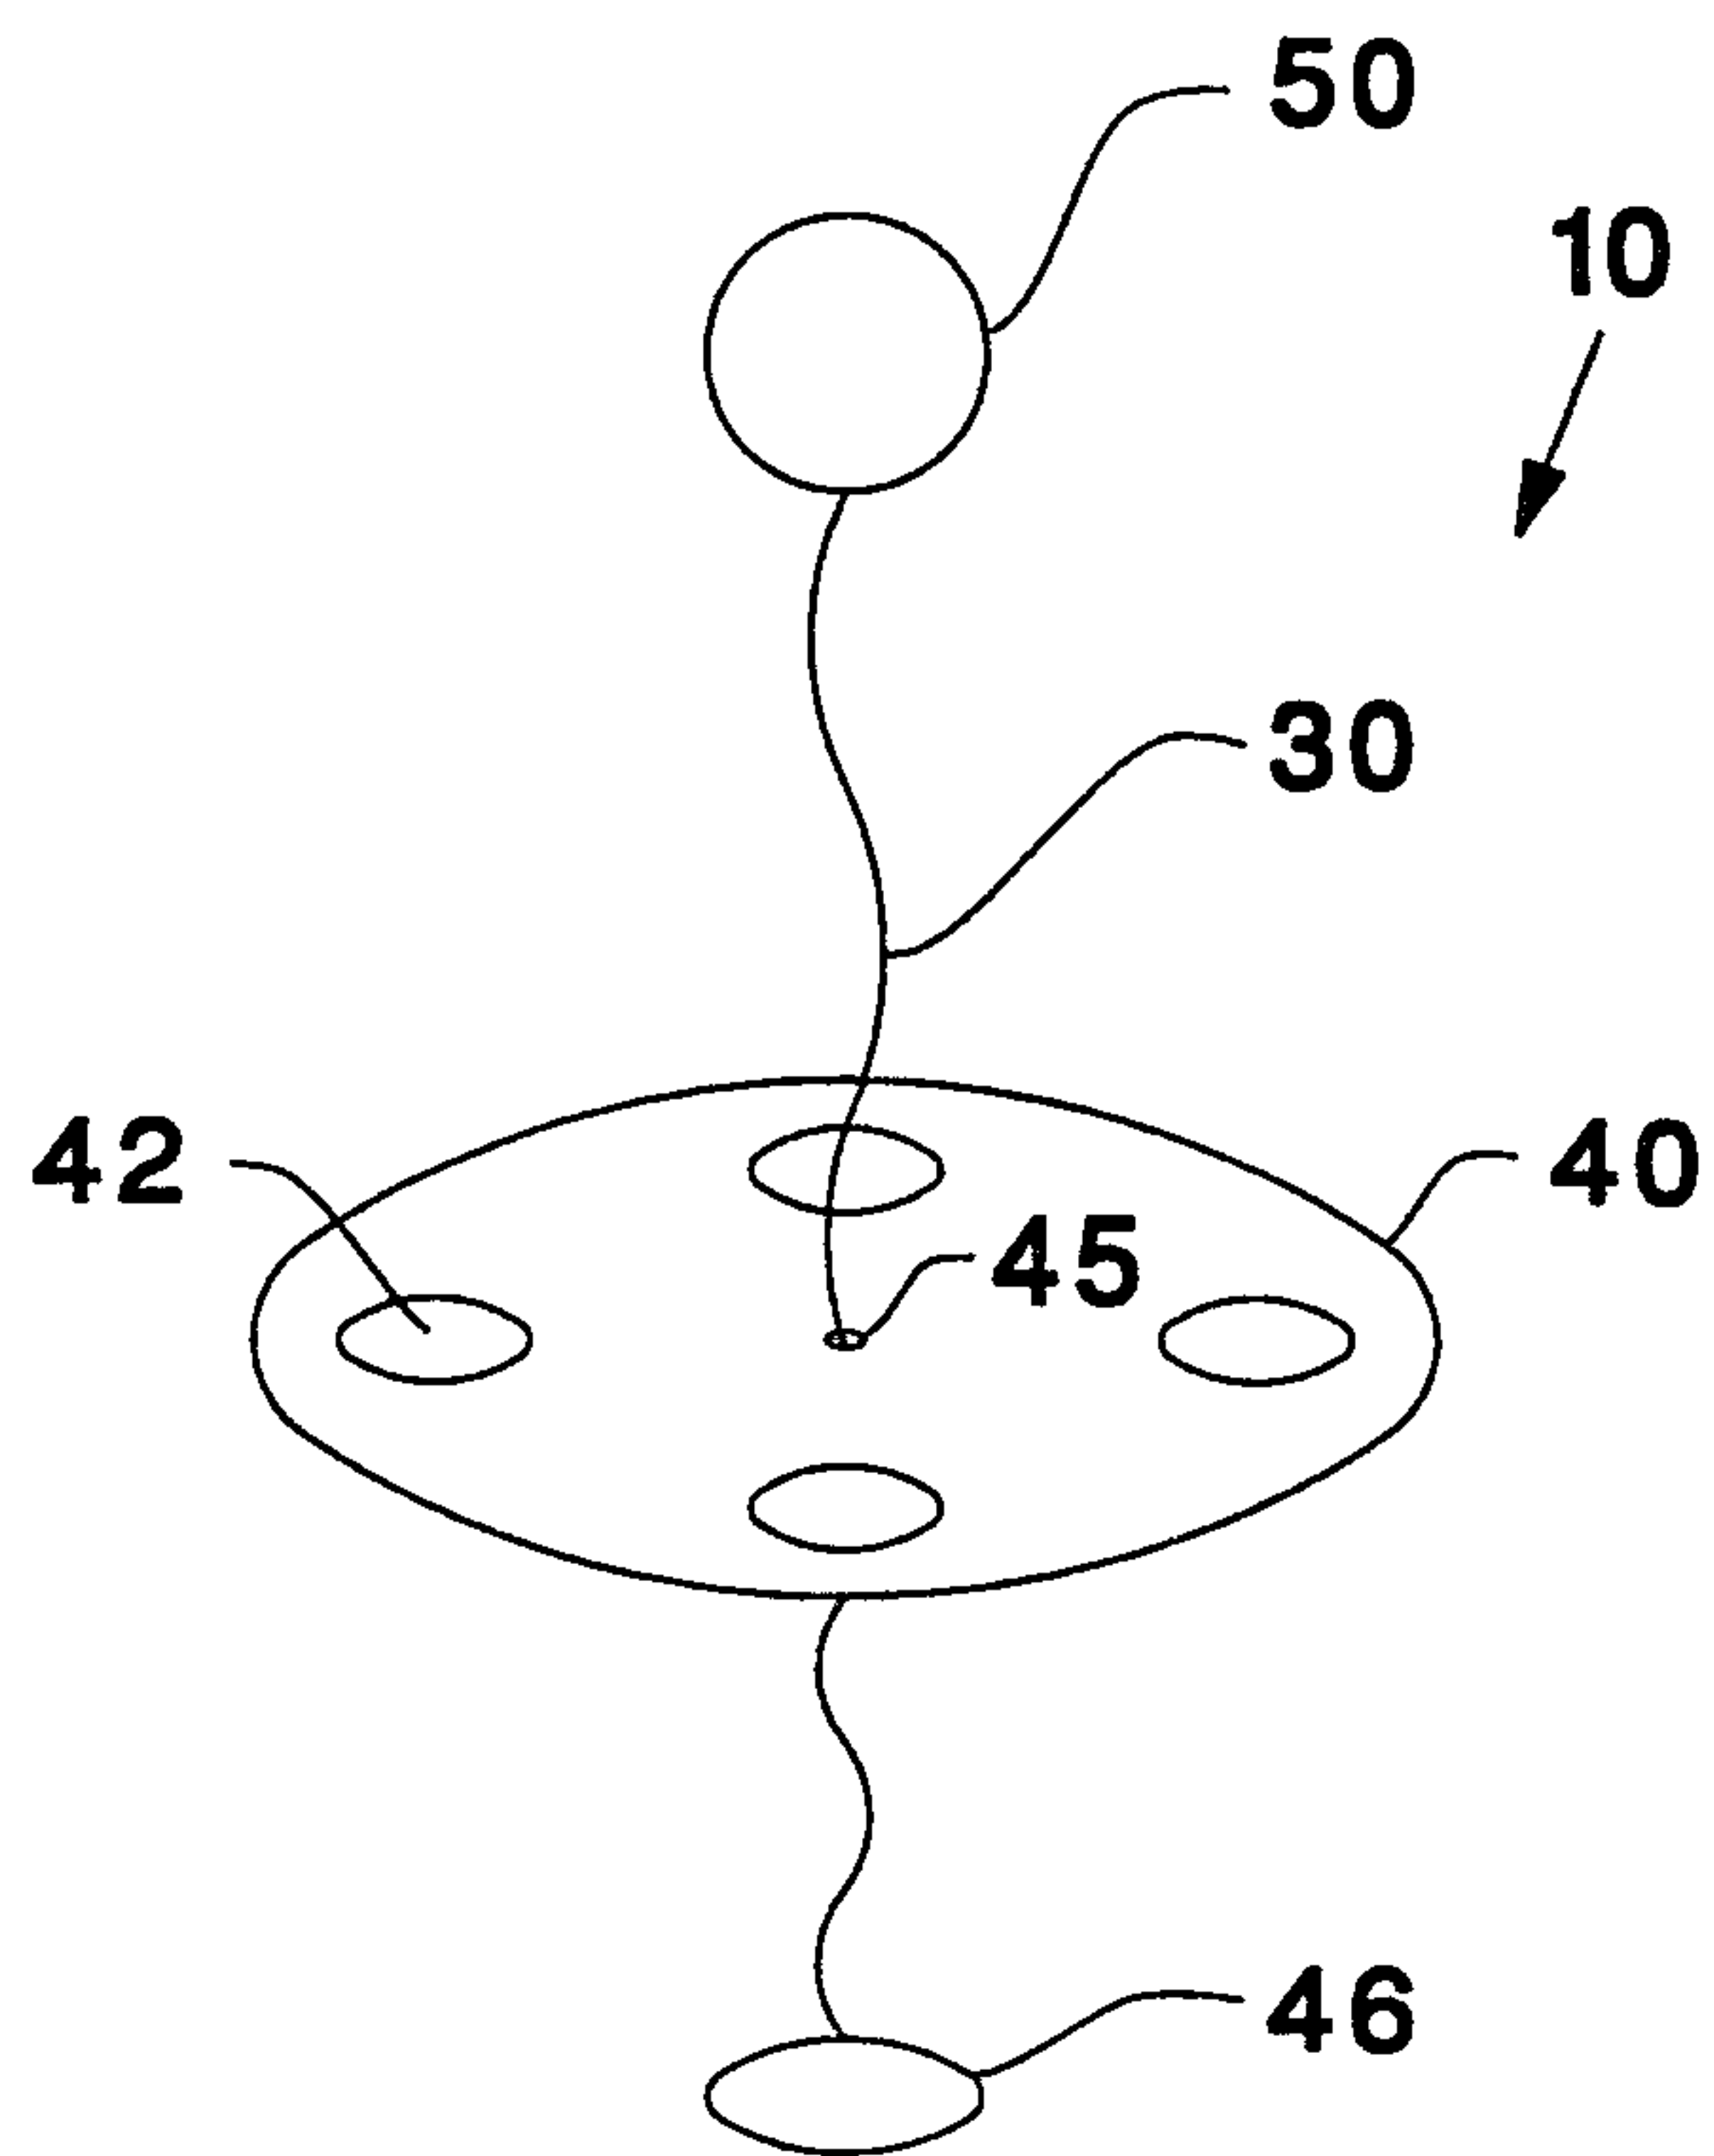


Fig. 6

SUBSTITUTE SHEET (RULE 26)

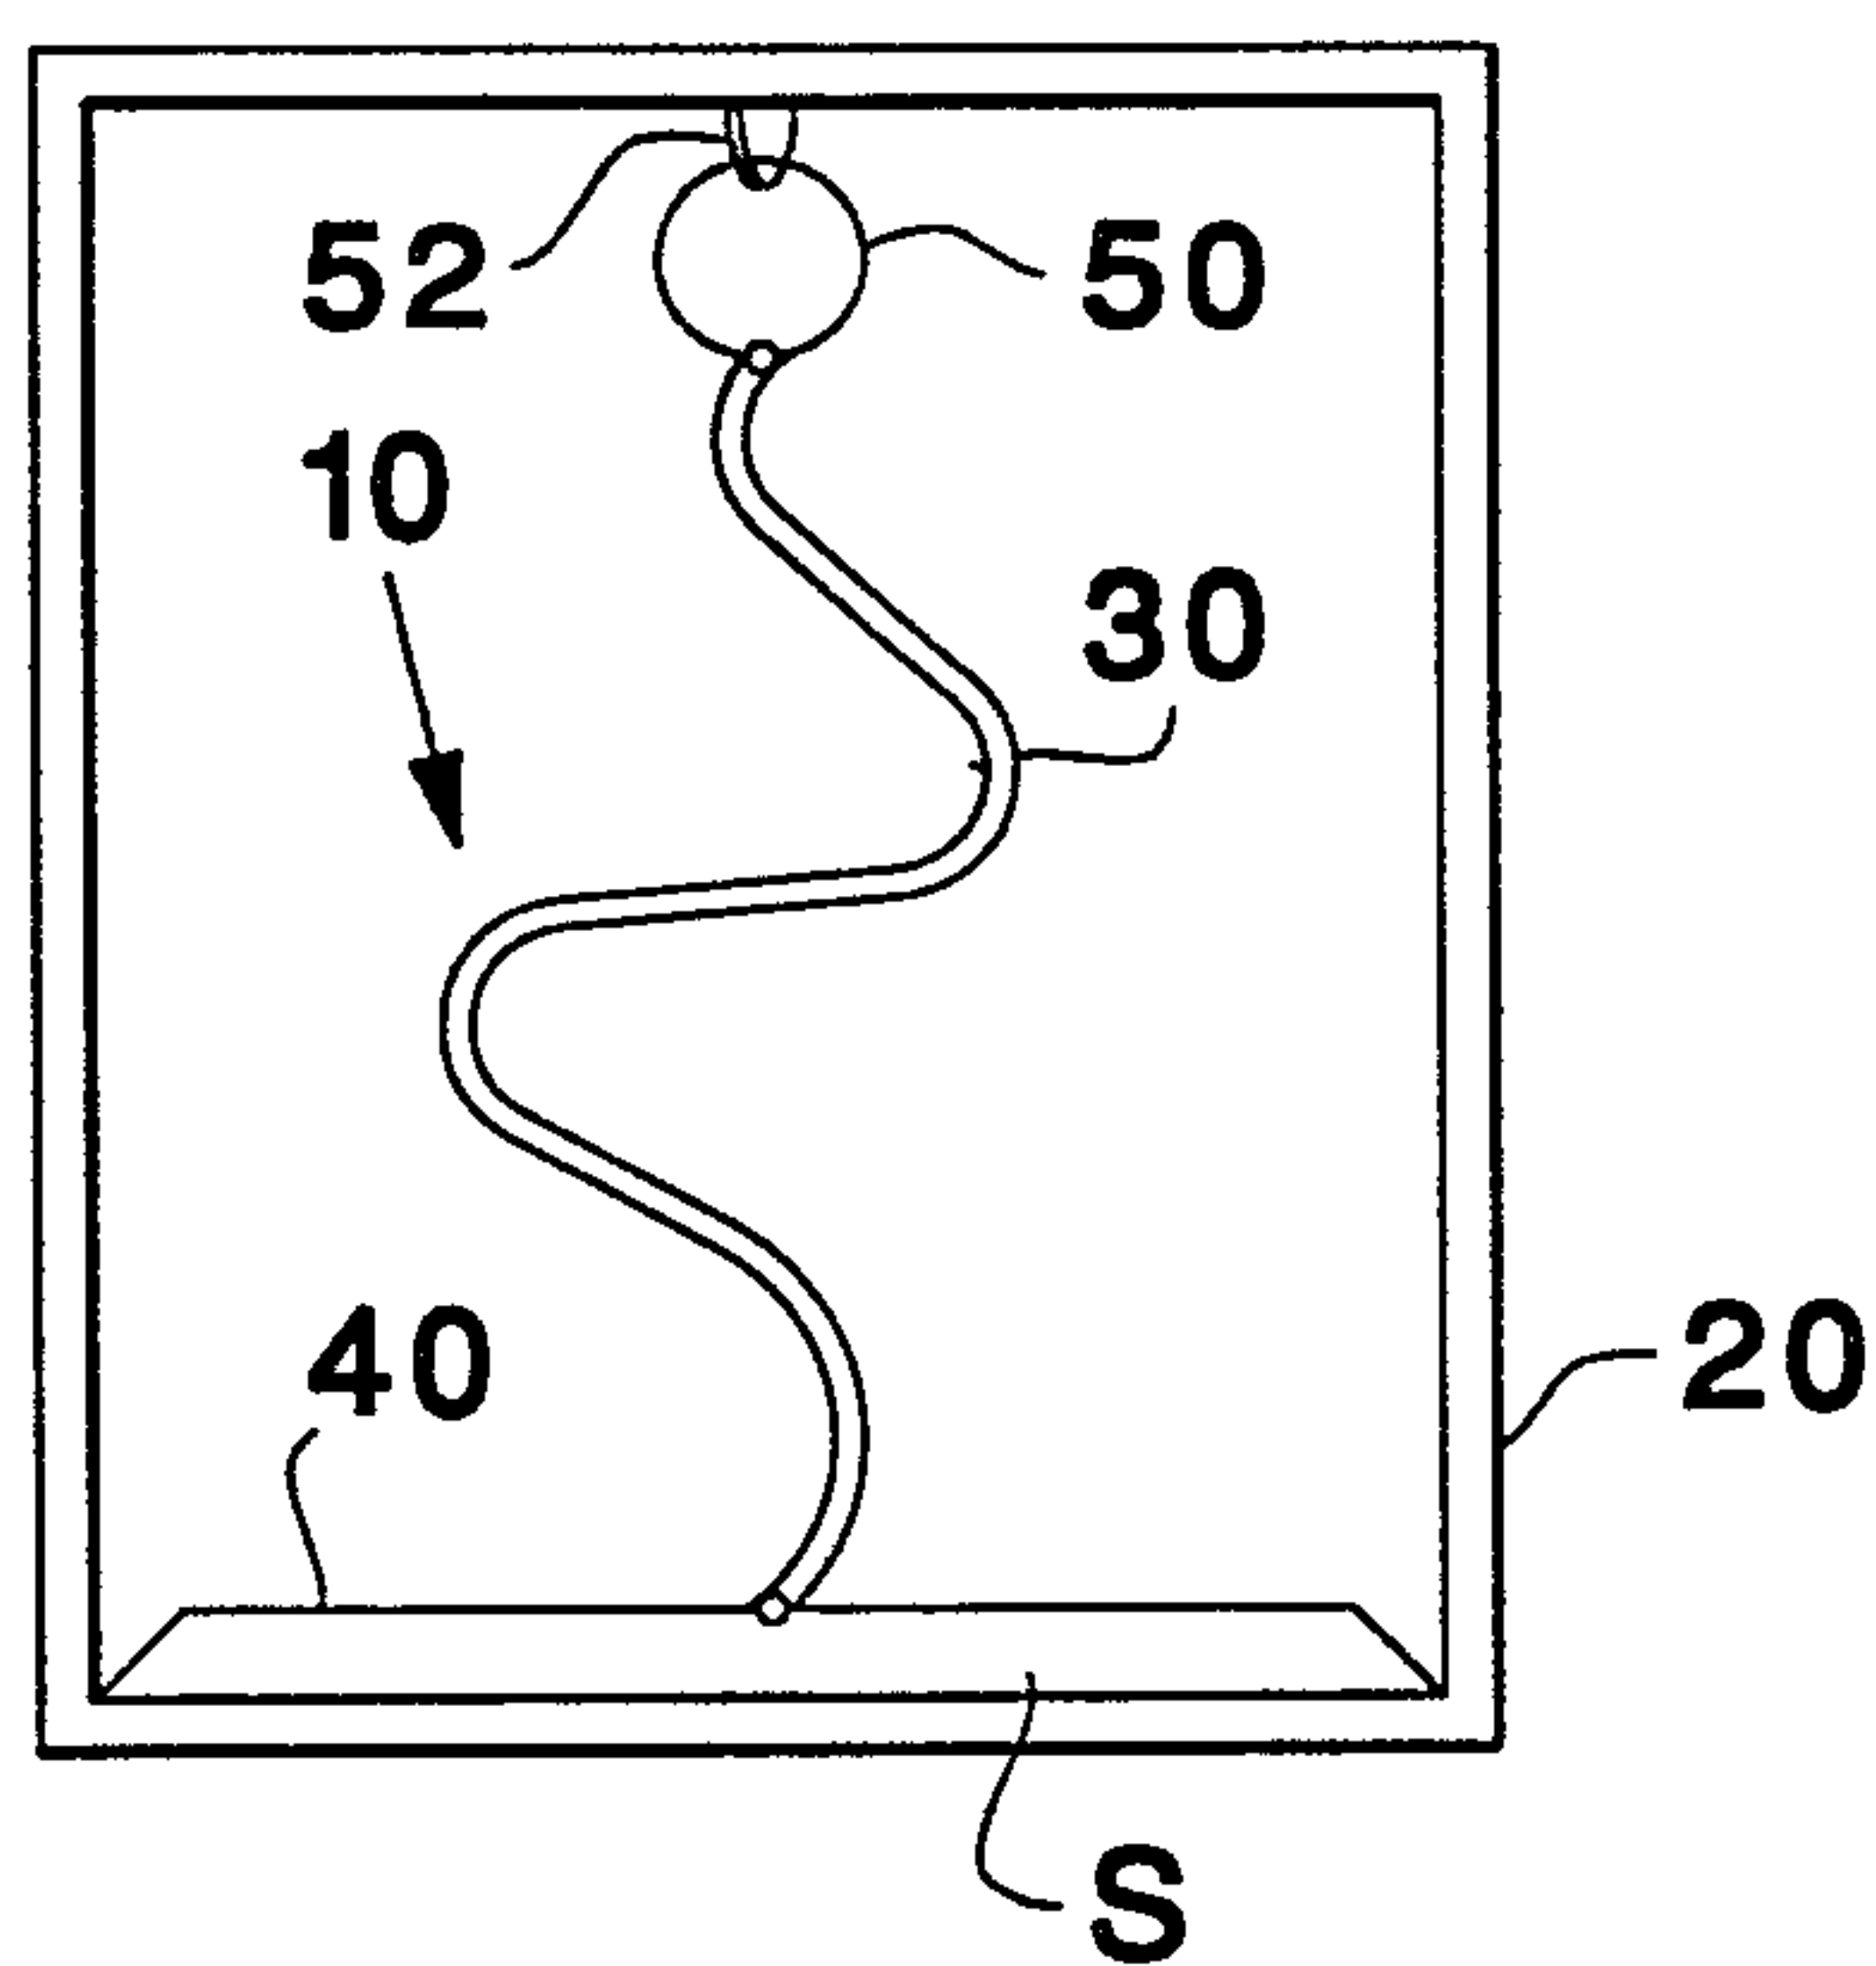


Fig. 7

5/6

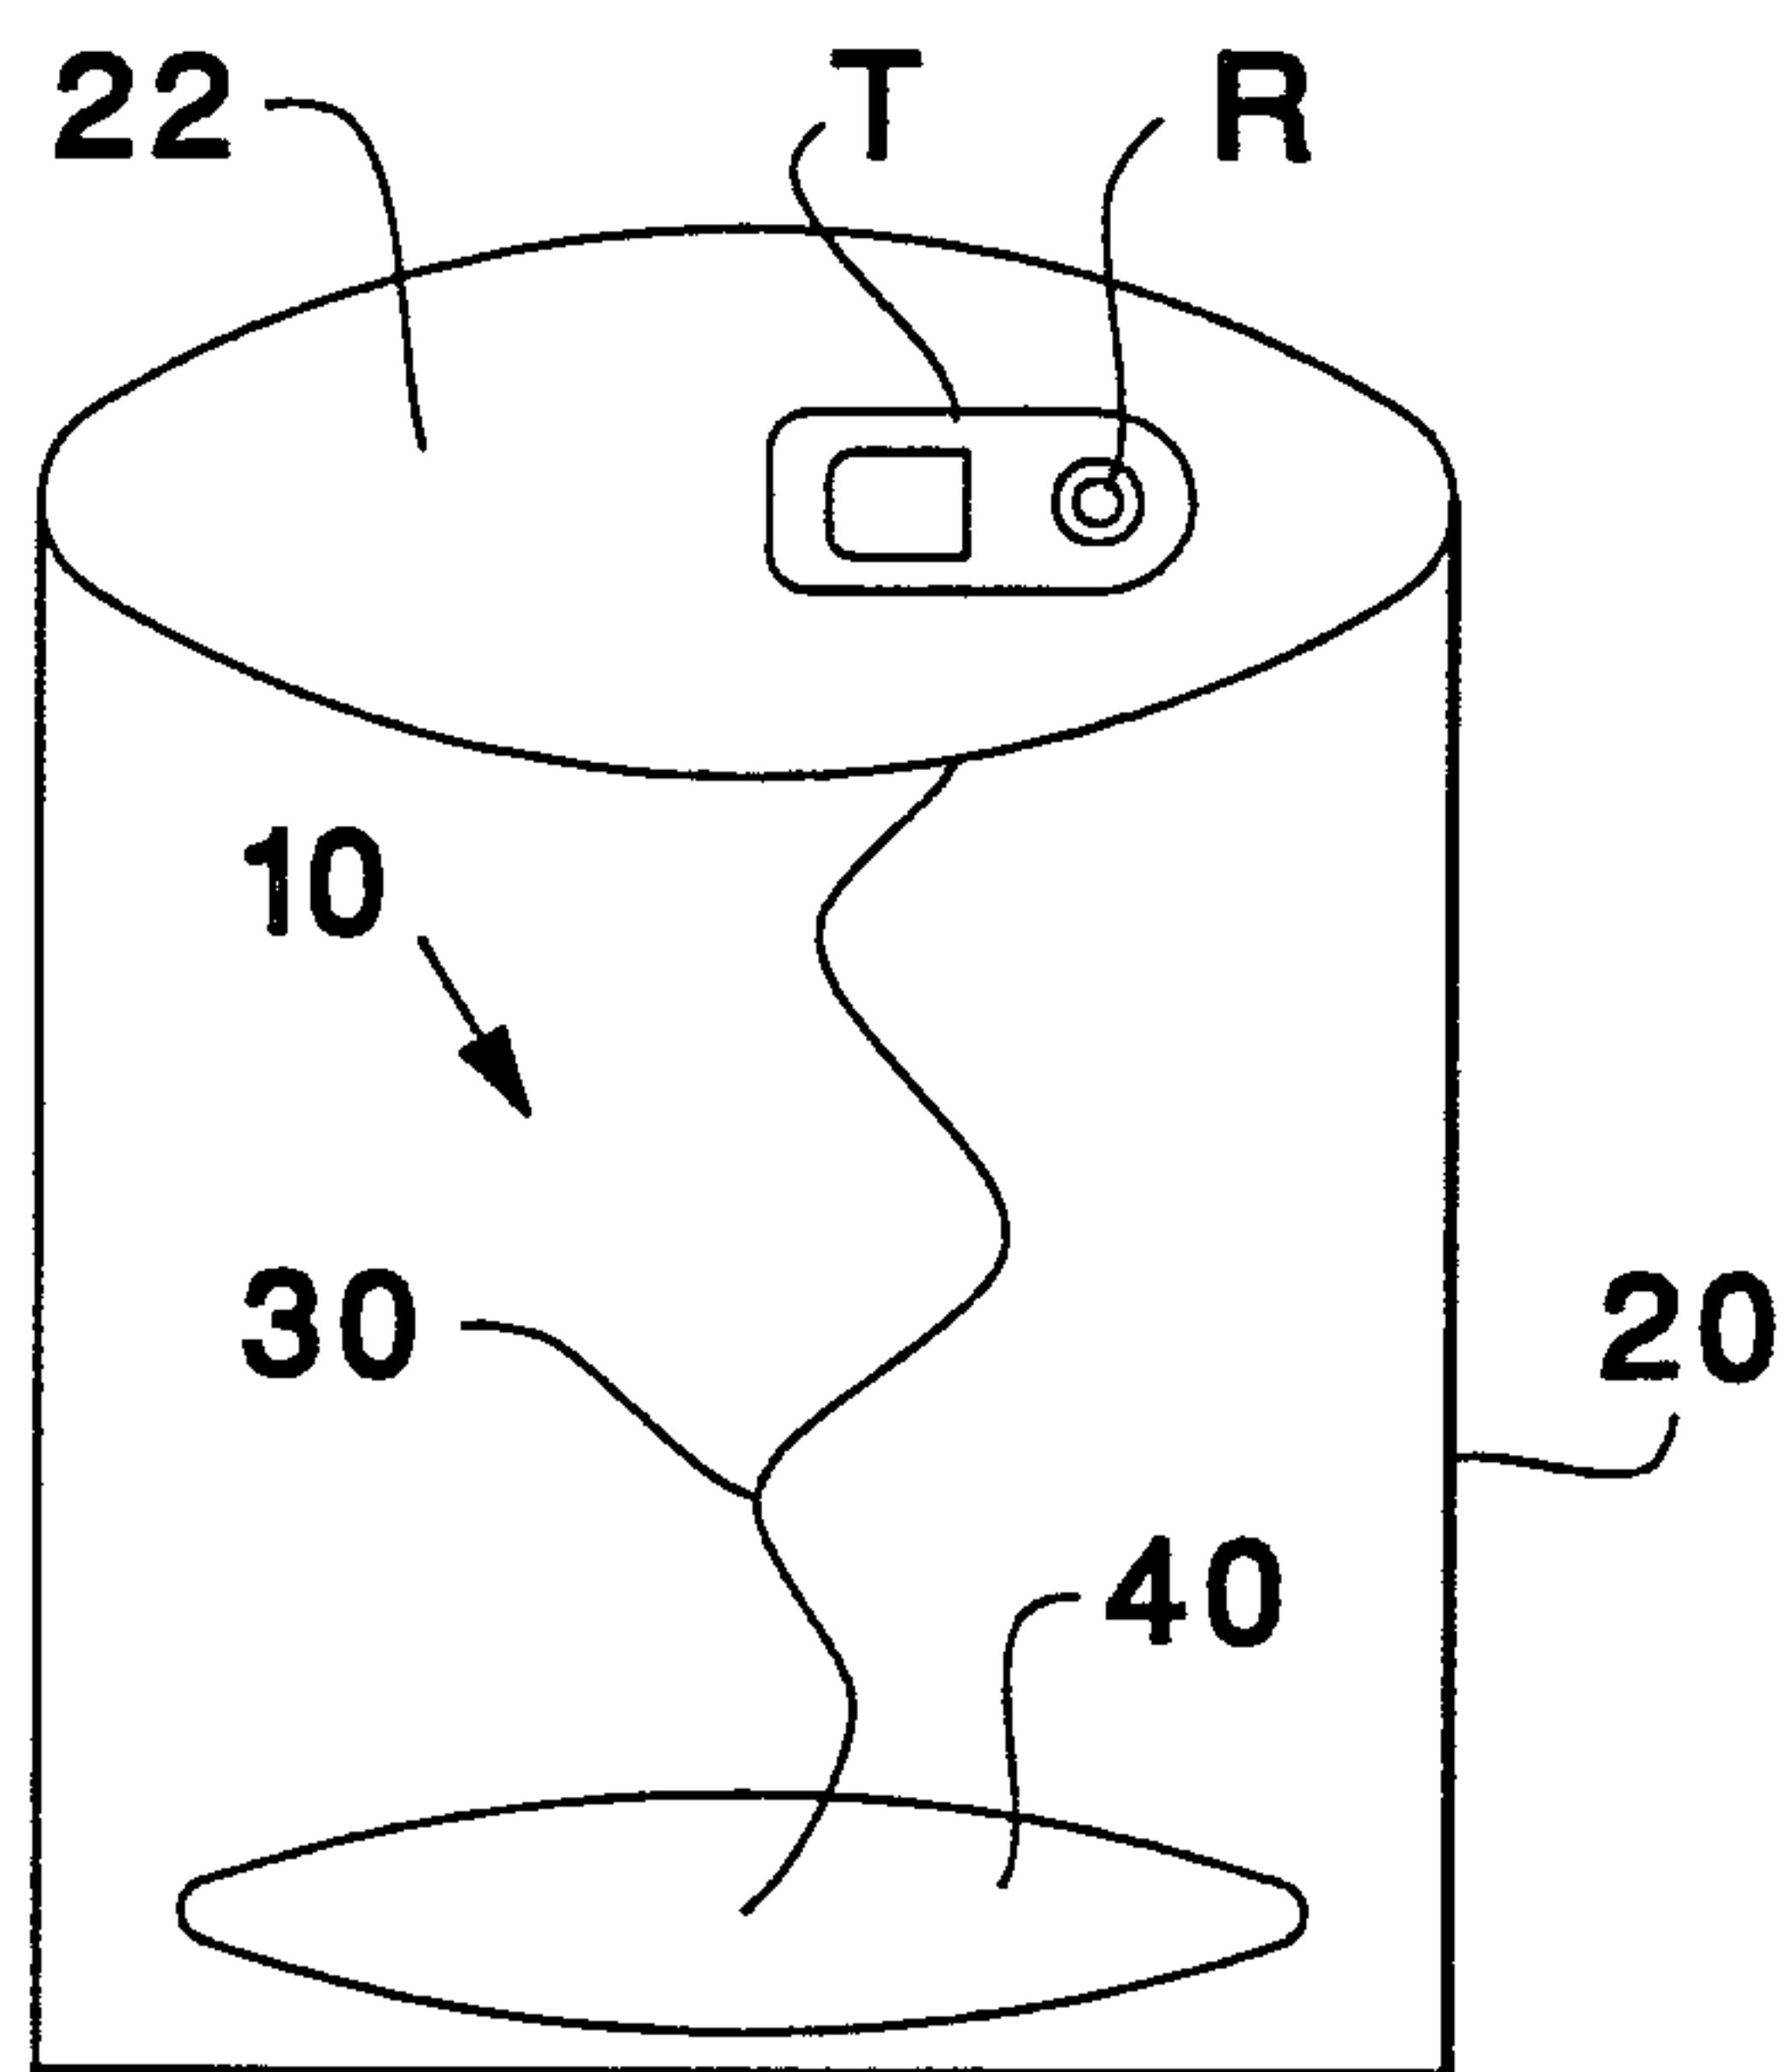


Fig. 8

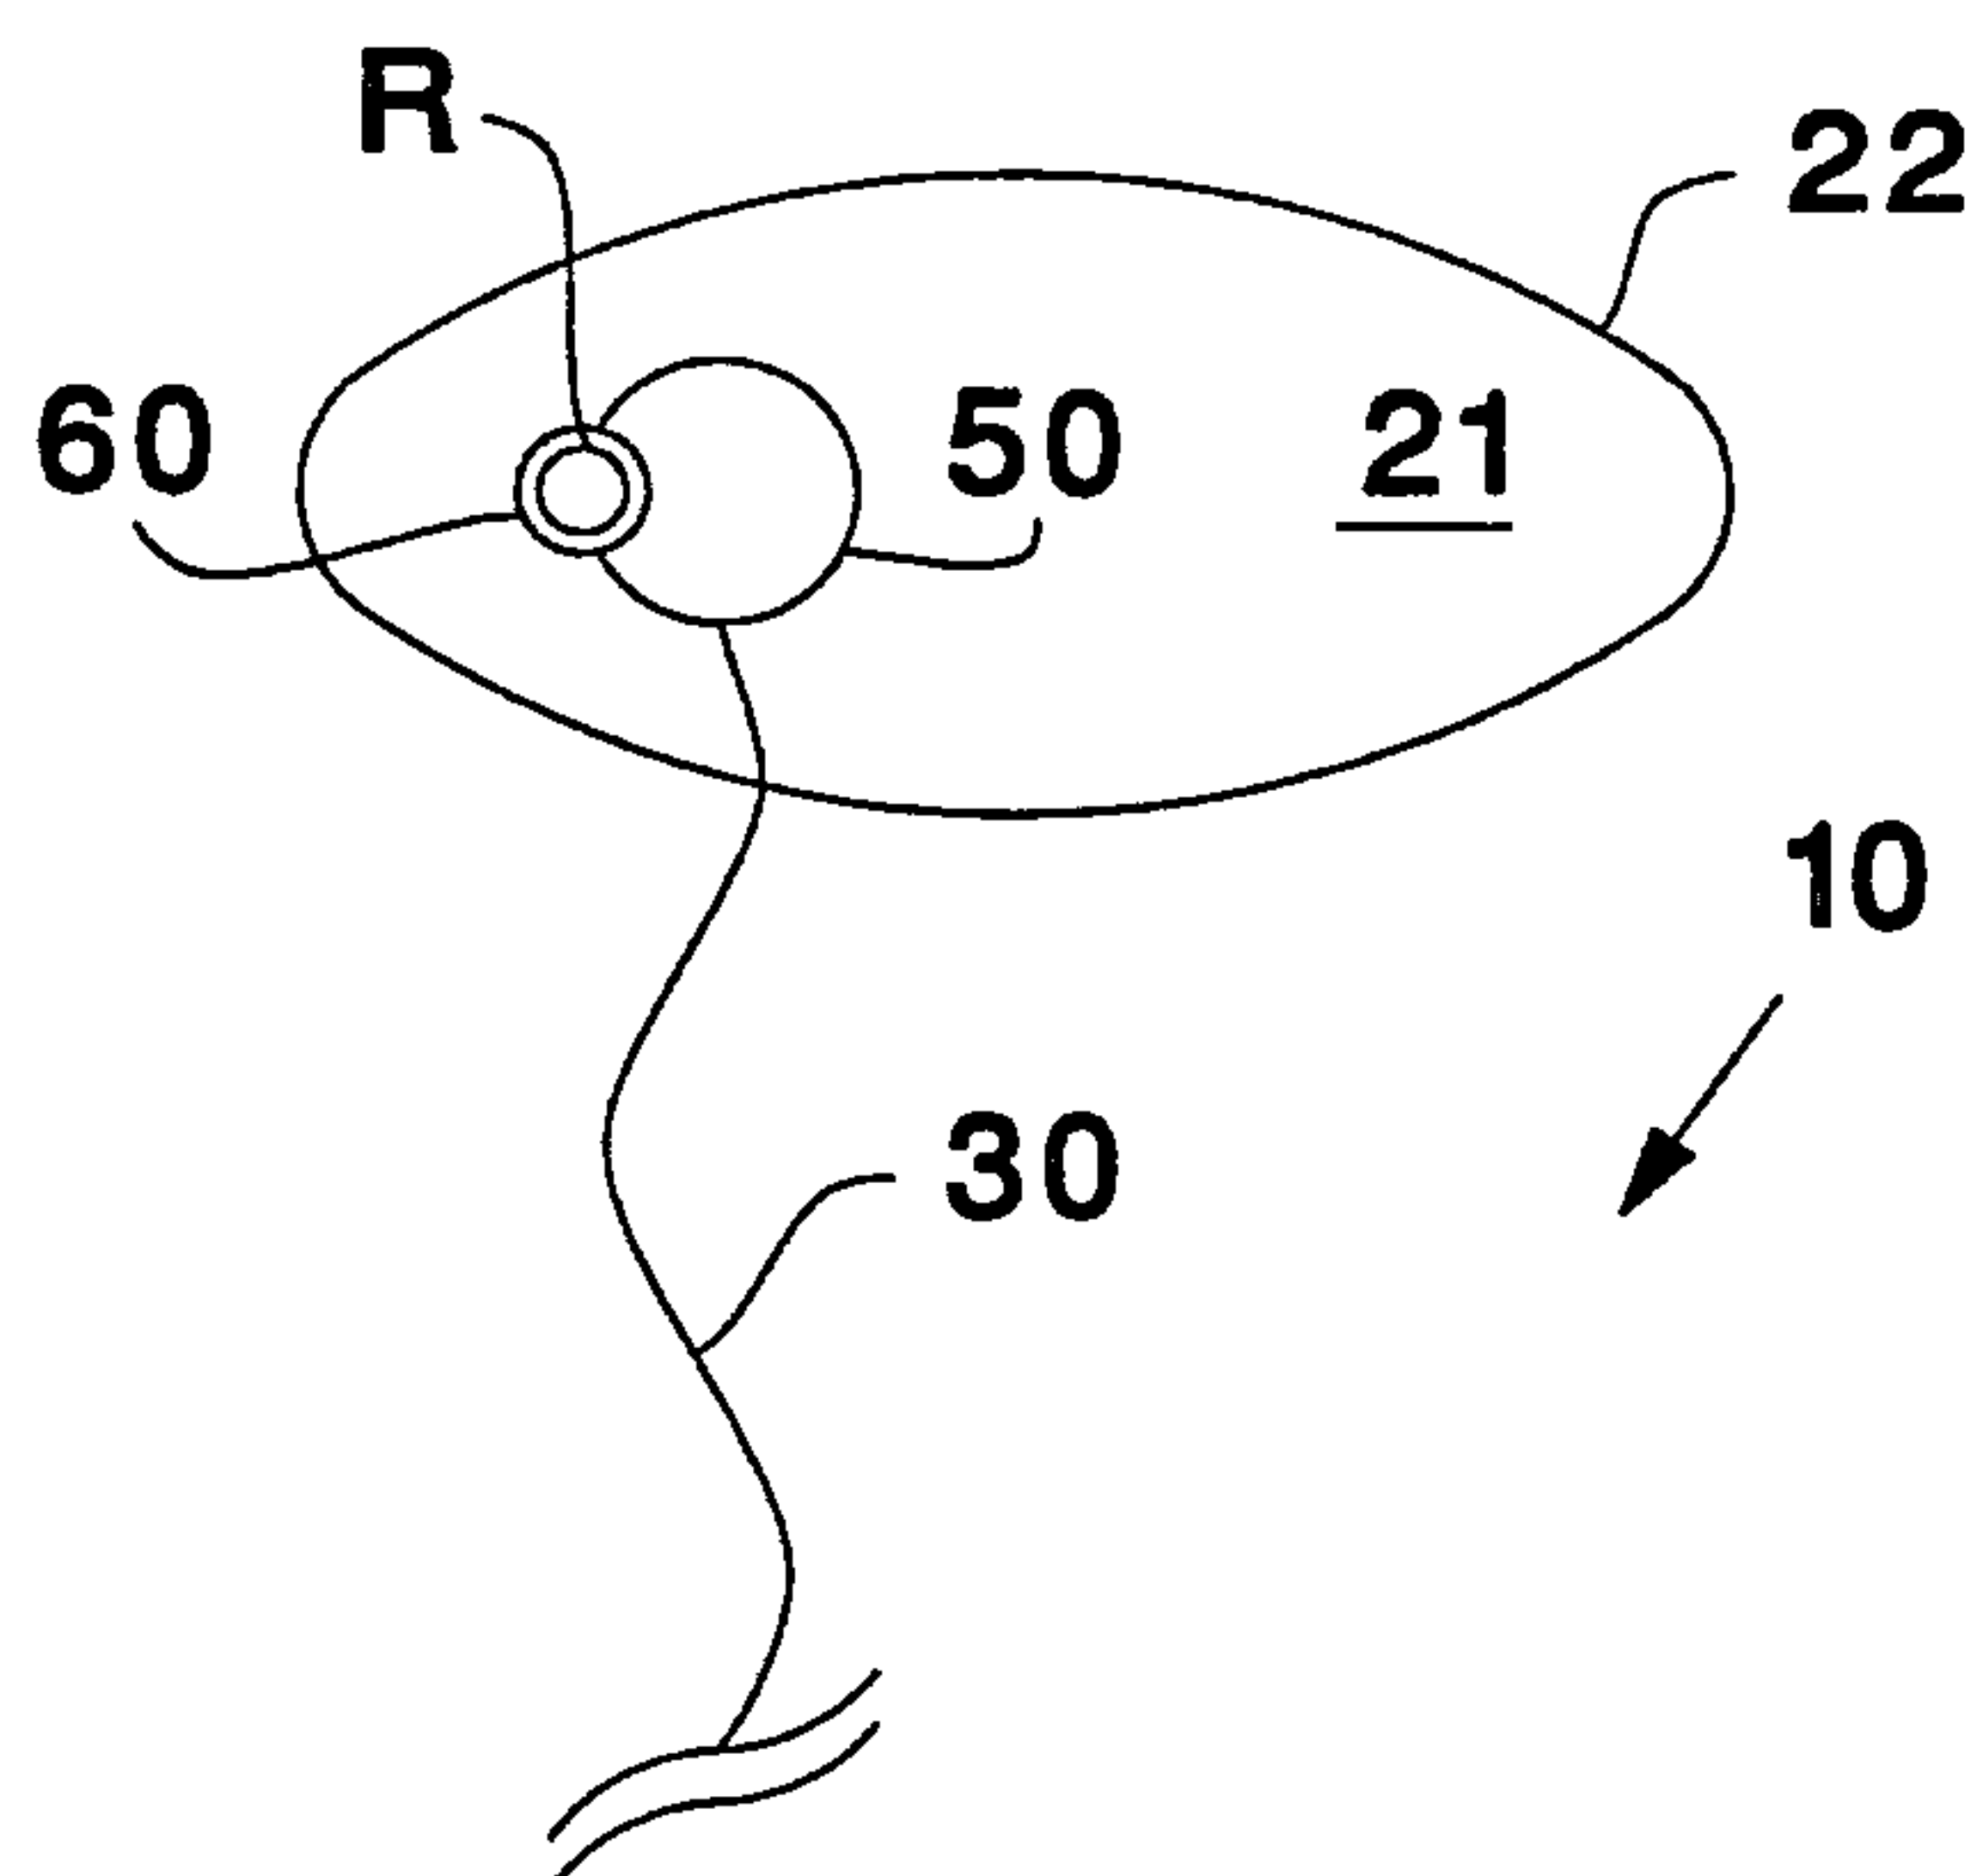


Fig. 9

SUBSTITUTE SHEET (RULE 26)

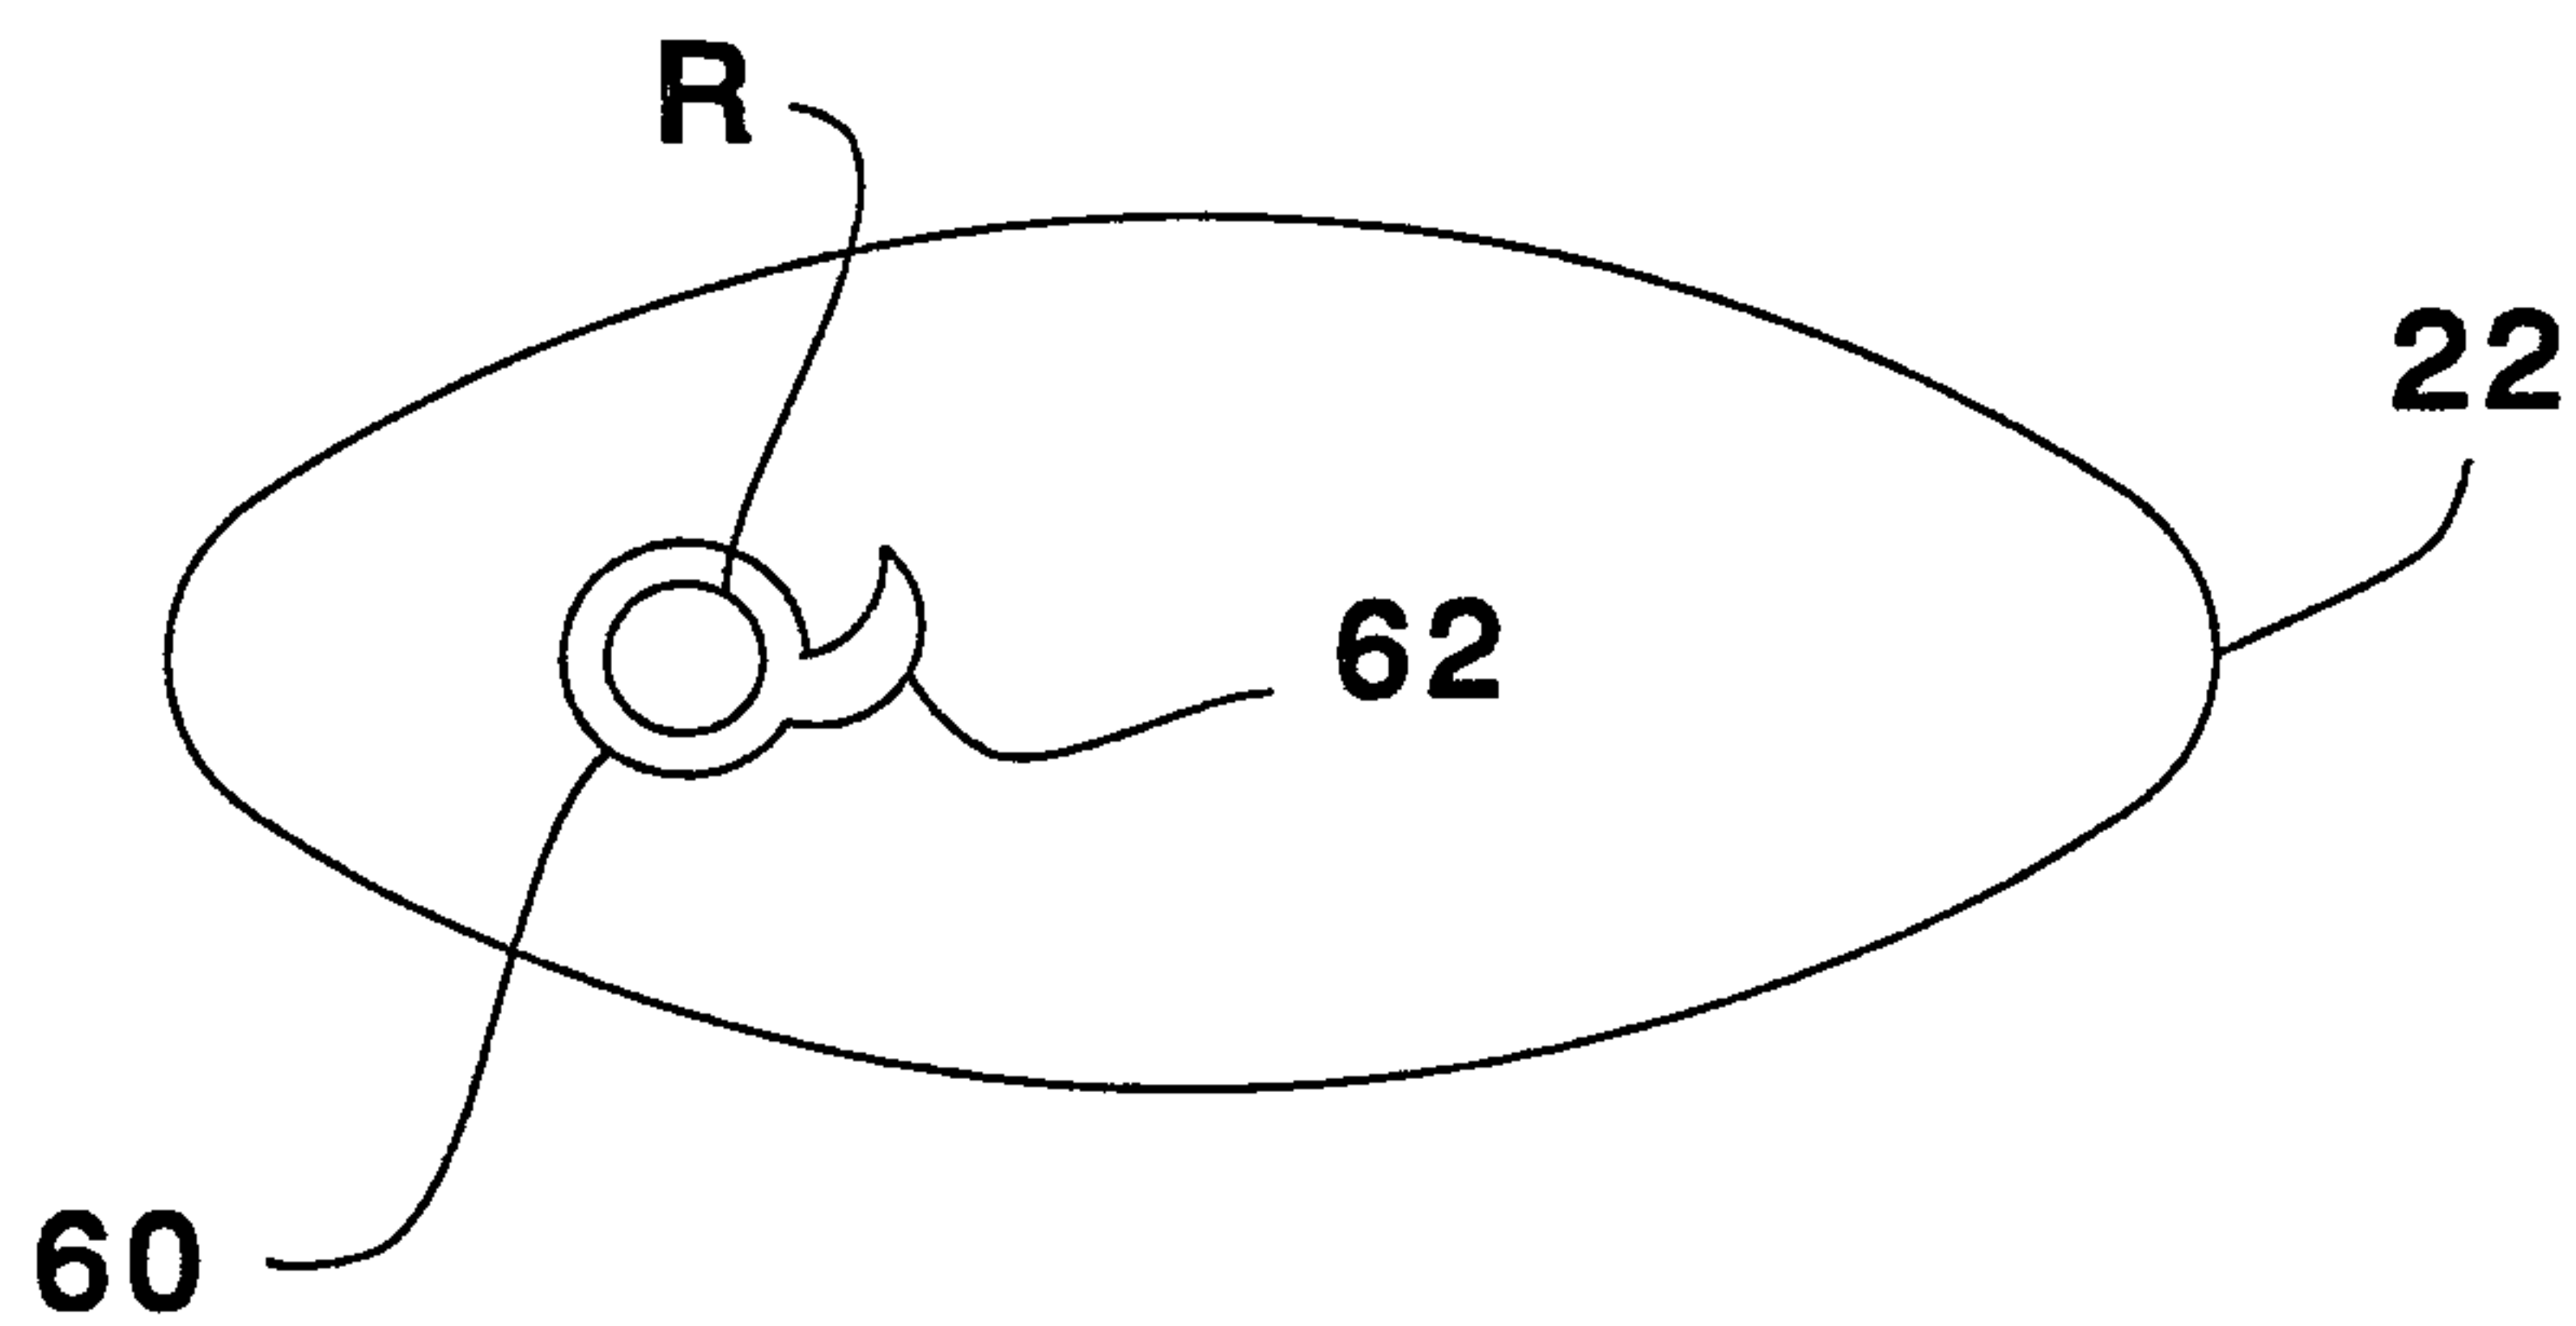


Fig. 10

