



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.03.2017 Bulletin 2017/11

(51) Int Cl.:
F24H 1/43 (2006.01) **F24H 9/00** (2006.01)
F28F 9/013 (2006.01) **F28D 7/02** (2006.01)
F28F 1/16 (2006.01)

(21) Application number: **16187754.3**

(22) Date of filing: **08.09.2016**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **CASIRAGHI, Stefano**
23875 OSNAGO (IT)
• **CIOFOLO, Noè**
23816 BARZIO (IT)

(74) Representative: **Eccetto, Mauro et al**
Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)


(30) Priority: **08.09.2015 IT UB20153489**

(71) Applicant: **Riello S.p.A.**
37045 Legnago (IT)

(54) **SPACING COMB, AND HEAT EXCHANGER COMPRISING SAID SPACING COMB, AND METHOD FOR MAKING SAID SPACING COMB**

(57) A spacing comb (10) is configured so as to keep the coils (4) of a tubular member (3) of a heat exchanger (1) at a given distance apart from one another and being made from a metal sheet blank (20), which extends along a longitudinal axis (A1) and comprises a base (15); a plurality of tabs (11), which are placed partially side by side along the longitudinal axis (A1), and are configured for being bent at right angles with respect to the base (15) so as to define a plurality of spacers supported by the base (15).

FIG. 1

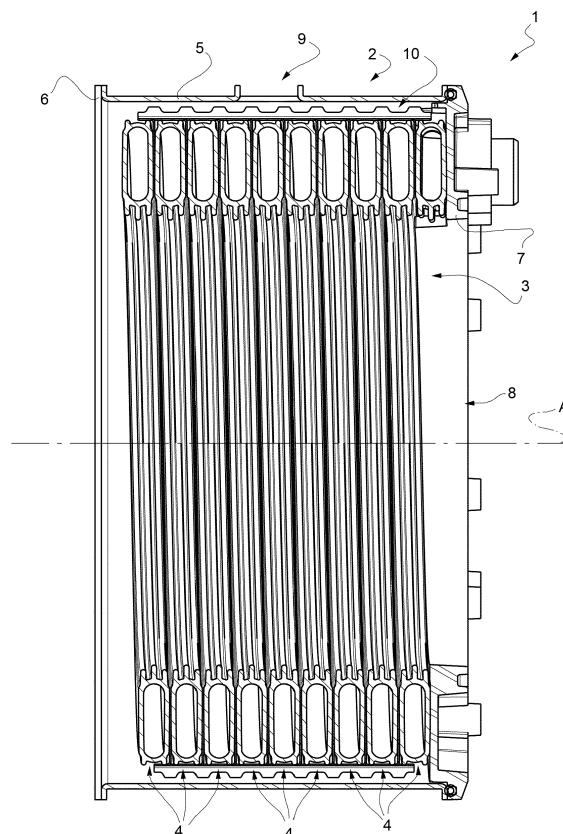

Description

[0001] The present invention relates to a spacing comb for a heat exchanger. In particular, the present invention relates to a spacing comb used to space the coils of a tubular member of a heat exchanger of a water heater or domestic boiler.

[0002] A very commonly found heat exchanger for heating water in water heaters or domestic boilers comprises a casing; and a tubular member wound in a helix around a given axis so as to form a plurality of adjacent coils housed inside the casing. A liquid, generally water, passes through the helically wound tubular member, while combustion fumes, or, more generically, hot gases, containing water vapour flow through the casing, releasing most of the heat to the liquid and condensing the water vapour. The coils are spaced apart from each other so as to form gaps for the path of the combustion fumes. In particular, the heat exchanger of the type identified above is configured to define a path for the hot gases that extends between adjacent coils so as to optimize the heat exchange between the hot gases and the liquid. In this regard, the dimensions of the tubular member, the shape of the cross section of the tubular member, and the size of the gap between adjacent coils are very important design parameters in order to optimize the heat exchange. Examples of spacing combs used for spacing the coils of heat exchangers are shown in the documents EP 1,627,190 B1, and GB 914,083.

[0003] The purpose of the present invention is to provide a spacing comb that is easy to make and at the same time is capable of satisfying the heat exchanger's design parameters.

[0004] A spacing comb for a heat exchanger is achieved in accordance with the present invention, wherein the heat exchanger comprises a tubular member which is configured to convey water to be heated, and is wound in a helix about a given axis in order to form a plurality of adjacent coils and housed in the casing; the spacing comb being configured so as to keep the adjacent coils a given distance apart and being made from a metal sheet blank which extends along a longitudinal axis and comprises a base; a plurality of tabs, which are placed partially side by side along the longitudinal axis and are configured for being bent at right angles with respect to the base so as to define a plurality of spacers supported by the base. The spacing comb in accordance with the present invention enables it to be made starting from a blank sheet of the tabs, i.e. of the spacers, each having a length greater than the pitch of the tabs themselves.

[0005] In particular, the tabs are V-shaped and are inserted one into the other, partly, along the longitudinal axis. The particular V-shape configuration makes it possible to give the tabs a particular solidity and to make tabs having a length greater than the pitch of the tabs.

[0006] In particular, the tabs are bent about bend lines perpendicular to the longitudinal axis.

[0007] In particular the bending lines are distributed along the longitudinal axis with a constant pitch.

[0008] In particular, the spacing comb comprises two end wings, which are bent with respect to the base around further bending lines parallel to the longitudinal axis and extending from opposite sides of the tabs with respect to the base. The end wings give the spacing comb greater stiffness along the longitudinal axis A1. In this case, the wings also have a fluid dynamic function.

[0009] A further purpose of the present invention is to provide a heat exchanger.

[0010] In accordance with the present invention a heat exchanger for a water heater or domestic boiler is provided, the heat exchanger comprising a casing and a tubular member, which is configured to convey the water, and is wound in a helix around a given axis to form a plurality of adjacent coils and is housed within the casing; and at least two spacing combs with at least one of the salient characteristics identified above.

[0011] In particular, the helically wound tubular member defines a cylindrical compartment inside the casing into which hot gases are admitted and an annular compartment from which the gases are evacuated.

[0012] A further purpose of the present invention is to provide a method for making a spacing comb.

[0013] In accordance with the present invention, a method is provided for making a spacing comb, the method comprising the steps of:

- selecting a metal sheet having a thickness equal to the dimensions of the interstices between the adjacent coils of a heat exchanger;
- shearing a blank from the metal sheet extending along a longitudinal axis and comprising a base; a plurality of tabs, which are placed partially side by side along the longitudinal axis; and
- bending the tabs at right angles with respect to the base so as to define a plurality of spacers supported by the base.

[0014] The method according to the present invention makes it possible to provide tabs having a length greater than the pitch of the tabs.

[0015] The method also provides for bending the tabs about folding lines perpendicular to the longitudinal axis and distributed uniformly along the longitudinal axis.

[0016] The method also provides for the step of bending two end wings with respect to the base about further folding lines parallel to the longitudinal axis so that the end wings extend on the opposite sides of the tabs with respect to the base.

[0017] Further characteristics and advantages of the present invention will become apparent from the following description of a non-limiting example of an embodiment with reference to the Figures of the accompanying drawings, wherein:

- Figure 1 is a longitudinal cross-section view, with

parts removed for clarity, of a heat exchanger made in accordance with the present invention;

- Figure 2 is a cross-section view, in enlarged scale and with parts removed for clarity, of a detail of the heat exchanger of Figure 1;
- Figure 3 is a front view, with parts removed for clarity, of a spacing comb made in accordance with the present invention;
- Figure 4 is a side view, with parts removed for clarity, of the spacing comb of Figure 3;
- Figure 5 is a plan view, with parts removed for clarity, of the spacing comb of Figure 3;
- Figure 6 is a plan view, with parts removed for clarity, of a metal sheet and a metal sheet blank and configured to make the spacing comb of Figure 3; and
- Figure 7 is a perspective view, with parts removed for clarity and in enlarged scale, of the spacing comb of Figure 3.

[0018] With reference to Figure 1, 1 denotes in its entirety a heat exchanger, which in this case is a condensing heat exchanger for heating water in a water heater or a domestic boiler. The heat exchanger 1 comprises a casing 2 of cylindrical shape; and a tubular member 3, which is wound, partly, in a helix around an axis A to form the coils 4. In particular, the tubular member 3 is made from aluminium or an aluminium based alloy, extruded and then wound in a helix. The casing 2 comprises a side wall 5 of substantially cylindrical shape and preferably made from a metallic material such as aluminium, or a plastic material; an end wall 6 being substantially disc-shaped and an end wall 7 having a substantially annular shape. The end walls 6 and 7 are attached to the side wall 5 so as to form the casing 2 and a combustion fumes flow chamber. In this case, the end wall 7 has a central aperture 8 and is configured to support a cylindrically-shaped burner, not shown in the attached Figures, which is arranged, partly, within the combustion fumes flow chamber. Alternatively, the hot fumes are conveyed through the central aperture 8. The side wall 5 comprises an aperture 9 through which combustion fumes are extracted and an aperture, not shown, for extracting the condensate. As a whole, the helically wound tubular member 3 defines a cylindrical compartment inside the casing 2 into which hot gases are admitted and an annular compartment from which gases are evacuated. In use, the gas flows from the cylindrical compartment to a tubular compartment through the interstices between the coils and is then evacuated through the aperture 9. The heat exchanger 1 further comprises two spacing combs 10 each of which has a plurality of tabs 11 arranged between the coils 4 and which function as spacers to precisely define the interstices, as better illustrated in Figure 2.

[0019] With reference to Figure 2, the cross-section of the tubular member 3 is very flattened and has two walls 12 facing each other with a very large radius of curvature

and two walls 13 facing each other with a much smaller radius of curvature than the radius of curvature of the walls 12 and which are much shorter than the walls 12. The tubular member 3 also has wings 14 along the walls 13. Accordingly, the cross-section as a whole has much larger dimensions in the radial direction with respect to the axis A (Figure 1) than in its axial dimensions with respect to the axis A (Figure 1). Furthermore, in accordance with the design parameters, the spacing of the coils 4 is very small. In the light of these design parameters of the heat exchanger 1, the length L of the tabs 11 is significantly greater than the pitch P of the tabs 11.

[0020] With reference to Figures 3, 4, 5, and 7 the spacing comb 10 extends along a longitudinal axis A1, and comprises a base 15 for supporting the plurality of tabs 11 and two wings 16. Each tab 11 forms a right angle with respect to the base 15 corresponding with a respective bending line 17 perpendicular to the longitudinal axis A1. In particular, each tab is V-shaped and is attached to the base 15 corresponding with two section of the folding line 17, while the apex of the V defines the free end.

[0021] Each end wing 16 forms an angle with the base 15 corresponding with a respective folding line 18 parallel to the longitudinal axis A1. The end wings 16 have the function of stiffening the spacing comb 10 and, at the same time, the function of slowing down the flow of the gases in the circumferential direction along the tubular compartment. In fact, the distance between the free end of the end wing 16 and the cylindrical part defines the section in which the gases travel in a circumferential direction. The free ends of the end wings 16 have an indented profile.

[0022] The spacing comb 10 is obtained by shearing and bending a metal sheet 19 as better shown in Figure 6. The method involves selecting a sheet 19 with a thickness equal to the size of the gaps. Subsequently, a blank 20 is sheared from the sheet metal 19, which comprises the base 15, the tabs 11 lying in the same plane as the base 15, and the wings 16 lying on the same plane of the base 15. In this case, the wings 16 are located side by side, partly along the longitudinal axis A1, and are joined to the base solely corresponding with the folding lines 17. Subsequently, the tabs 11 and the wings 16 are folded about the respective fold lines 17 and 18 on opposite sides with respect to the base 15.

[0023] Finally, it is apparent that the comb of the present invention may be subject to modifications and variations without departing from the scope of the appended claims.

Claims

1. A spacing comb for a heat exchanger, wherein the heat exchanger (1) comprises a tubular member (3), which is configured to convey water, and is wound in a helix about a given axis (A) in order to form a plurality of adjacent coils (4); the spacing comb (10)

being configured so as to keep the adjacent coils (4) a given distance apart and being made from a metal sheet blank (20), which extends along a longitudinal axis (A1) and comprises a base (15); a plurality of tabs (11), which are placed partially side by side along the longitudinal axis (A1), and are configured for being bent at right angles with respect to the base (15) so as to define a plurality of spacers supported by the base (15).

2. The spacing comb as claimed in claim 1, wherein the tabs (15) are V-shaped are partially inserted one in the other along the longitudinal axis (A1).
3. The spacing comb as claimed in claim 1 or 2, wherein the tabs (11) are bent about folding lines (17) perpendicular to the longitudinal axis (A1).
4. The spacing comb as claimed in any one of the foregoing claims, and comprising two end wings (16), which are bent with respect to the base (15) about further folding lines (18) parallel to the longitudinal axis (A1) and extend on the opposite side of the tabs (11) with respect to the base (15).
5. The spacing comb as claimed in claim 4, wherein each end wing (16) has a free, indented edge.
6. A heat exchanger for a domestic boiler or a water heater, the heat exchanger comprising a casing (2); and a tubular member (3), which is configured to convey water, and is wound in a helix about a given axis (A) in order to form a plurality of adjacent coils (4) housed in the casing (2); and at least two spacing combs (10), each of which has the features claimed in any one of the claims from 1 to 5, wherein each tab (11) is compressed between two adjacent coils (4).
7. The heat exchanger as claimed in claim 6, wherein the tubular member (3) wound in a helix defines a cylindrical compartment inside the casing (2) into which hot gases are admitted and an annular compartment from which the gases are evacuated.
8. A method for making a spacing comb, the method comprising the steps of:
 - selecting a metal sheet (19) having a thickness equal to the dimensions of the interstices between the adjacent coils (4) of a heat exchanger (1);
 - shearing a blank (20) from the metal sheet (19) extending along a longitudinal axis (A1) and comprising a base (15); a plurality of tabs (11), which are placed partially side by side along the longitudinal axis (A1); and
 - bending the tabs (11) at right angles with re-

spect to the base (15) so as to define a plurality of spacers supported by the base (15).

9. The method as claimed in claim 8, and comprising the step of bending the tabs (11) about folding lines (17) perpendicular to the longitudinal axis (A1) and distributed uniformly along the longitudinal axis (A1).
10. The method as claimed in claim 8 or 9, and comprising the step of bending two end wings (16) with respect to the base (15) about further folding lines (18) parallel to the longitudinal axis (A1) so that the end wings (16) extend on the opposite sides of the tabs (11) with respect to the base (15).

FIG. 1

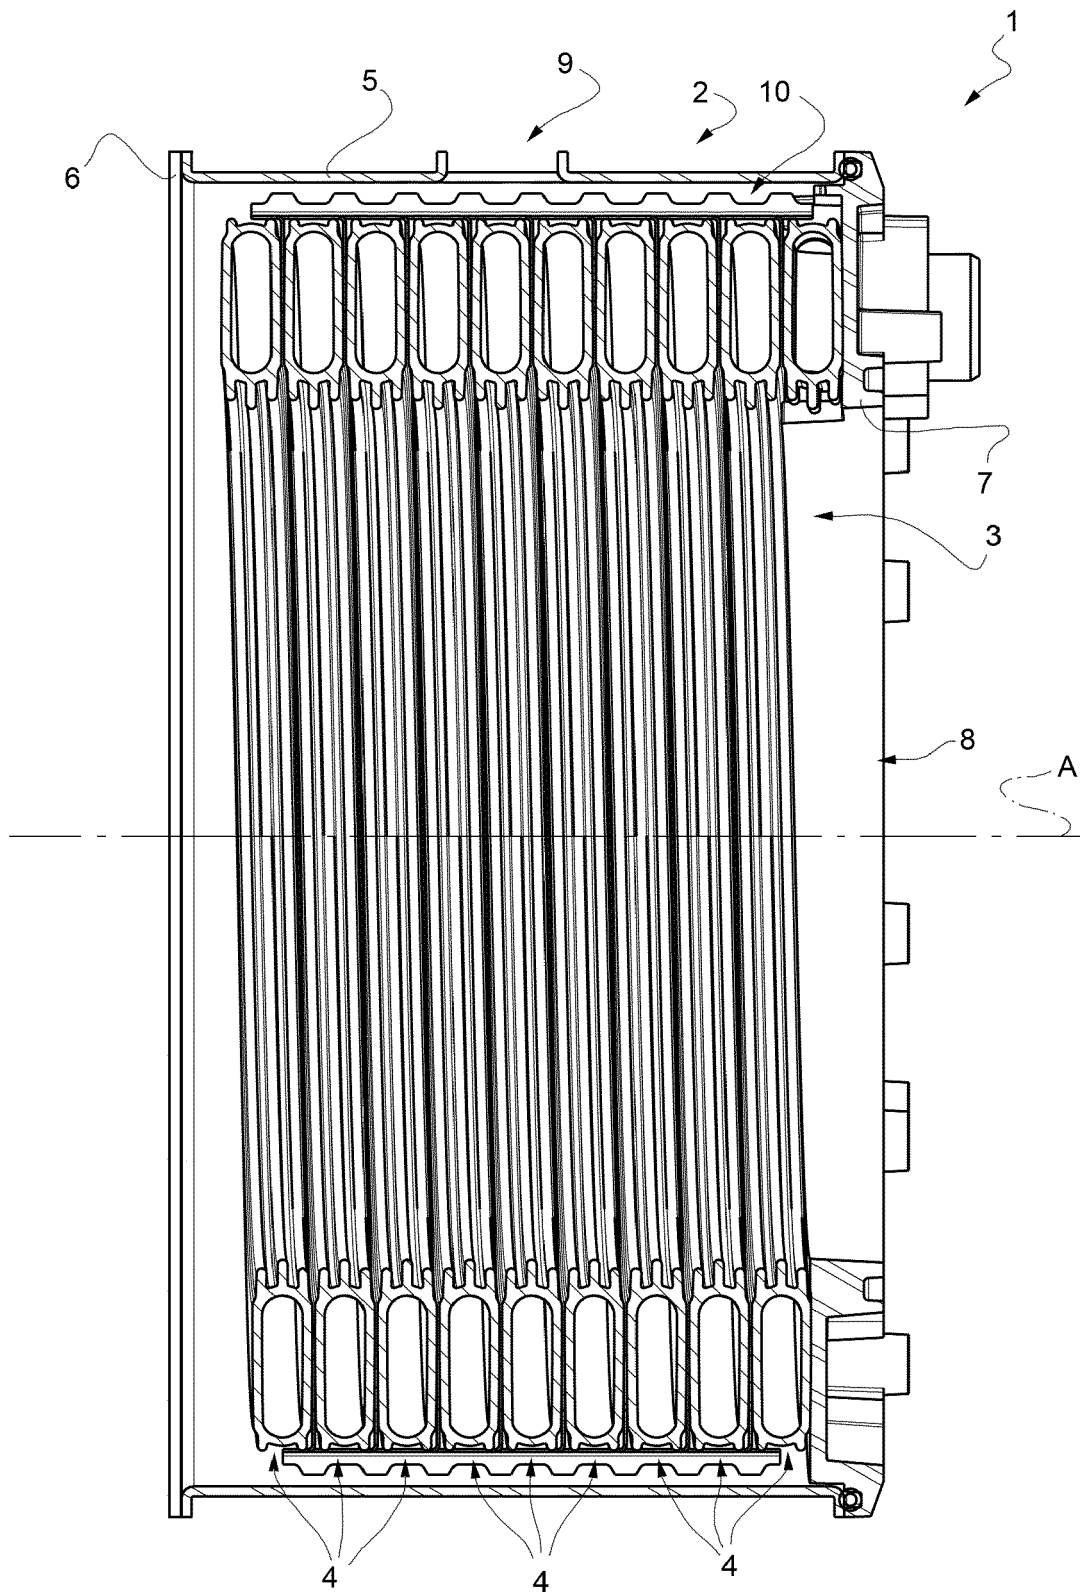


FIG. 2

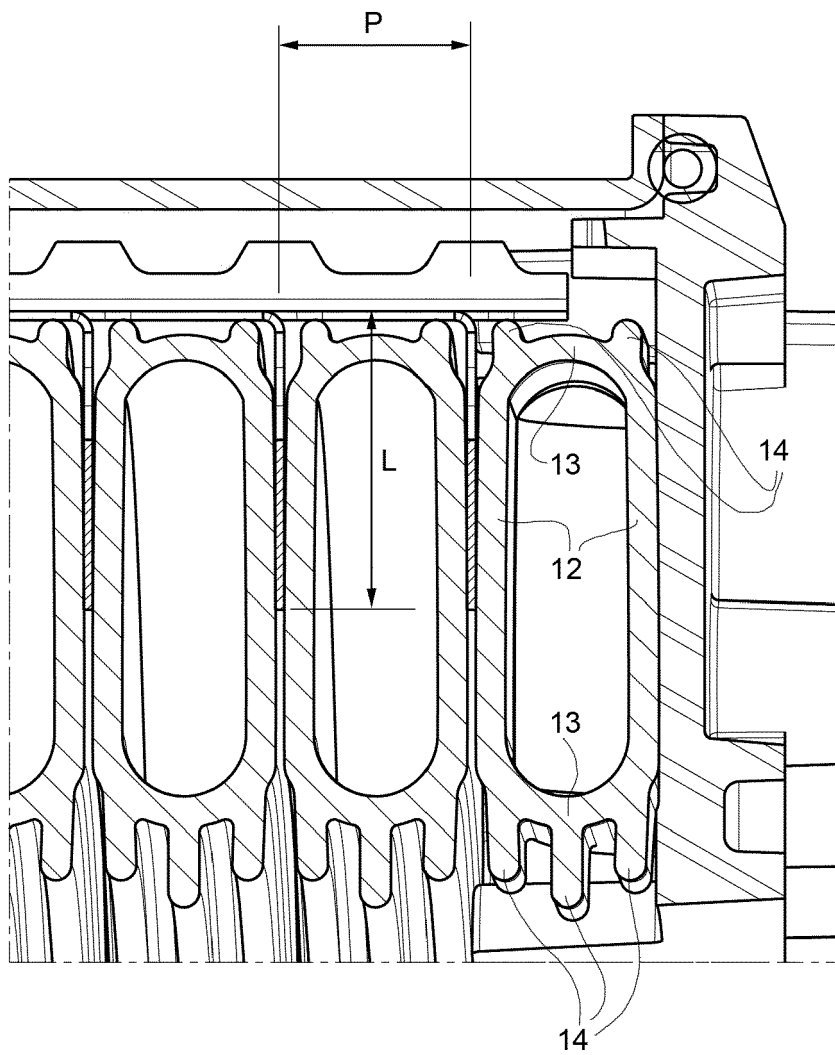


FIG. 3

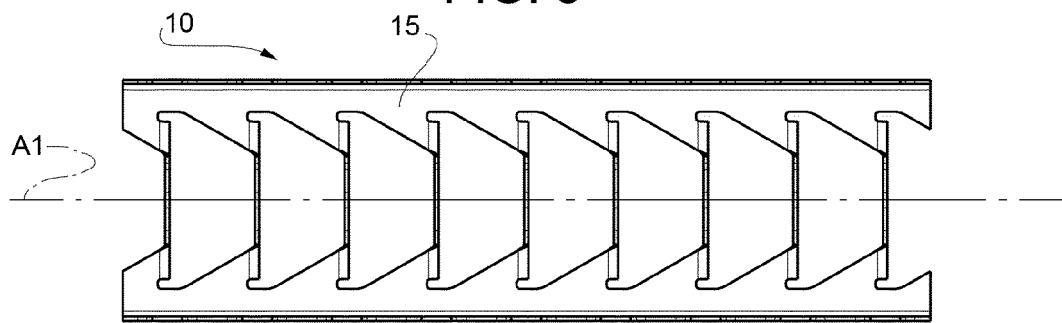


FIG. 4

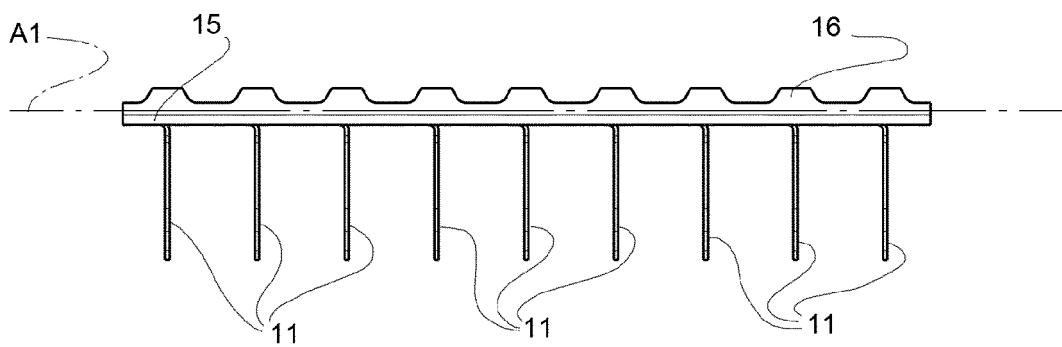


FIG. 5




FIG. 6


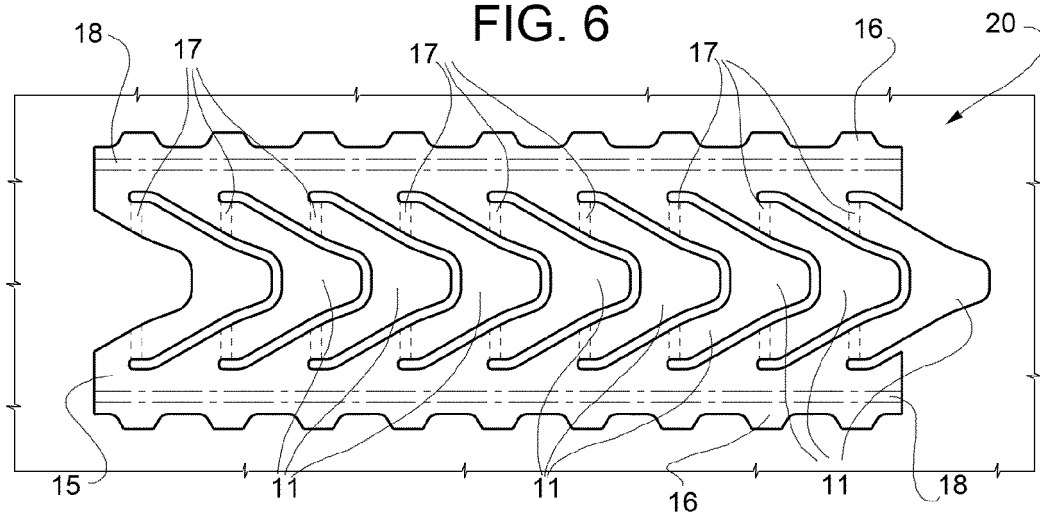


FIG. 7



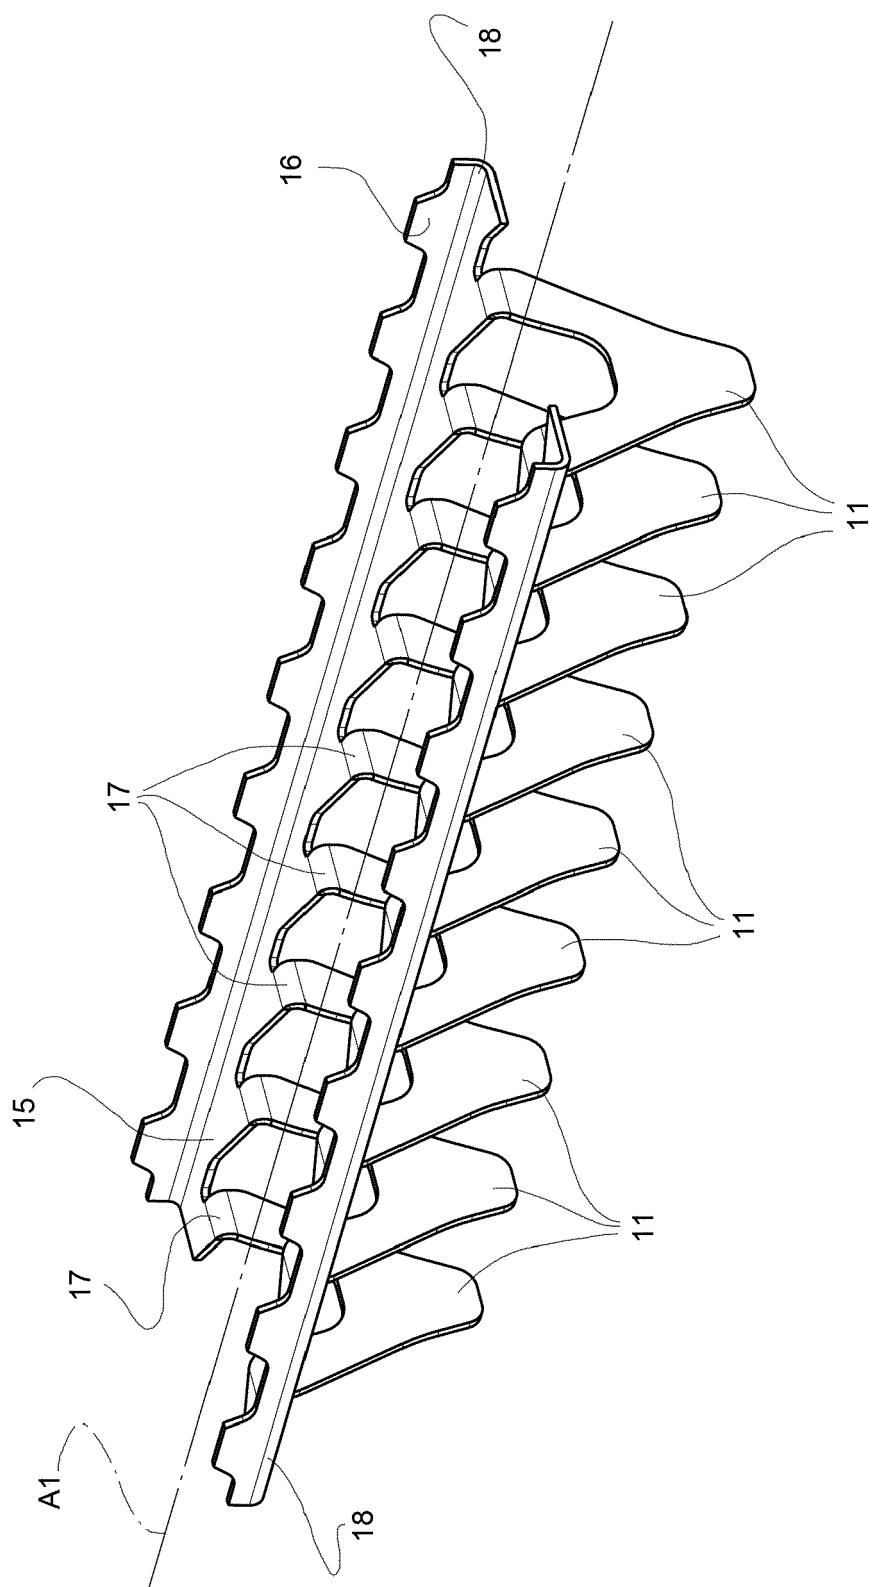

EUROPEAN SEARCH REPORT

Application Number
EP 16 18 7754

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	JP 2006 317036 A (NORITZ CORP) 24 November 2006 (2006-11-24)	1-3,6-9	INV. F24H1/43
A	* paragraph [0072]; figures 3,6,7,23 * -----	4,5,10	F24H9/00 F28F9/013
X	KR 101 496 361 B1 (JINGON K (KR)) 26 February 2015 (2015-02-26)	1-3,6-9	F28D7/02 F28F1/16
A	* abstract; figures 12-15 * -----	4,5,10	
			TECHNICAL FIELDS SEARCHED (IPC)
			F24H F28F F28D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 January 2017	Examiner Degen, Marcello
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 18 7754

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-01-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2006317036 A	24-11-2006	NONE	

KR 101496361 B1	26-02-2015	NONE	

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1627190 B1 [0002]
- GB 914083 A [0002]