



(22) **Date de dépôt/Filing Date:** 2003/11/07

(41) **Mise à la disp. pub./Open to Public Insp.:** 2004/05/27

(45) **Date de délivrance/Issue Date:** 2016/08/23

(62) **Demande originale/Original Application:** 2 505 566

(30) **Priorité/Priority:** 2002/11/08 (US60/425,275)

(51) **Cl.Int./Int.Cl.** *G01C 11/36* (2006.01)

(72) **Inventeurs/Inventors:**

SCHULTZ, STEPHEN, US;
GIUFFRIDA, FRANK, US;
GRAY, ROBERT, US;
MONDELLO, CHARLES, US


(73) **Propriétaire/Owner:**

PICTOMETRY INTERNATIONAL CORP., US

(74) **Agent:** MARKS & CLERK

(54) **Titre : SYSTEME DE LOCALISATION GEOGRAPHIQUE ET DE MESURE A PARTIR D'IMAGES OBLIQUES**

(54) **Title: OBLIQUE GEOLOCATION AND MEASUREMENT SYSTEM**

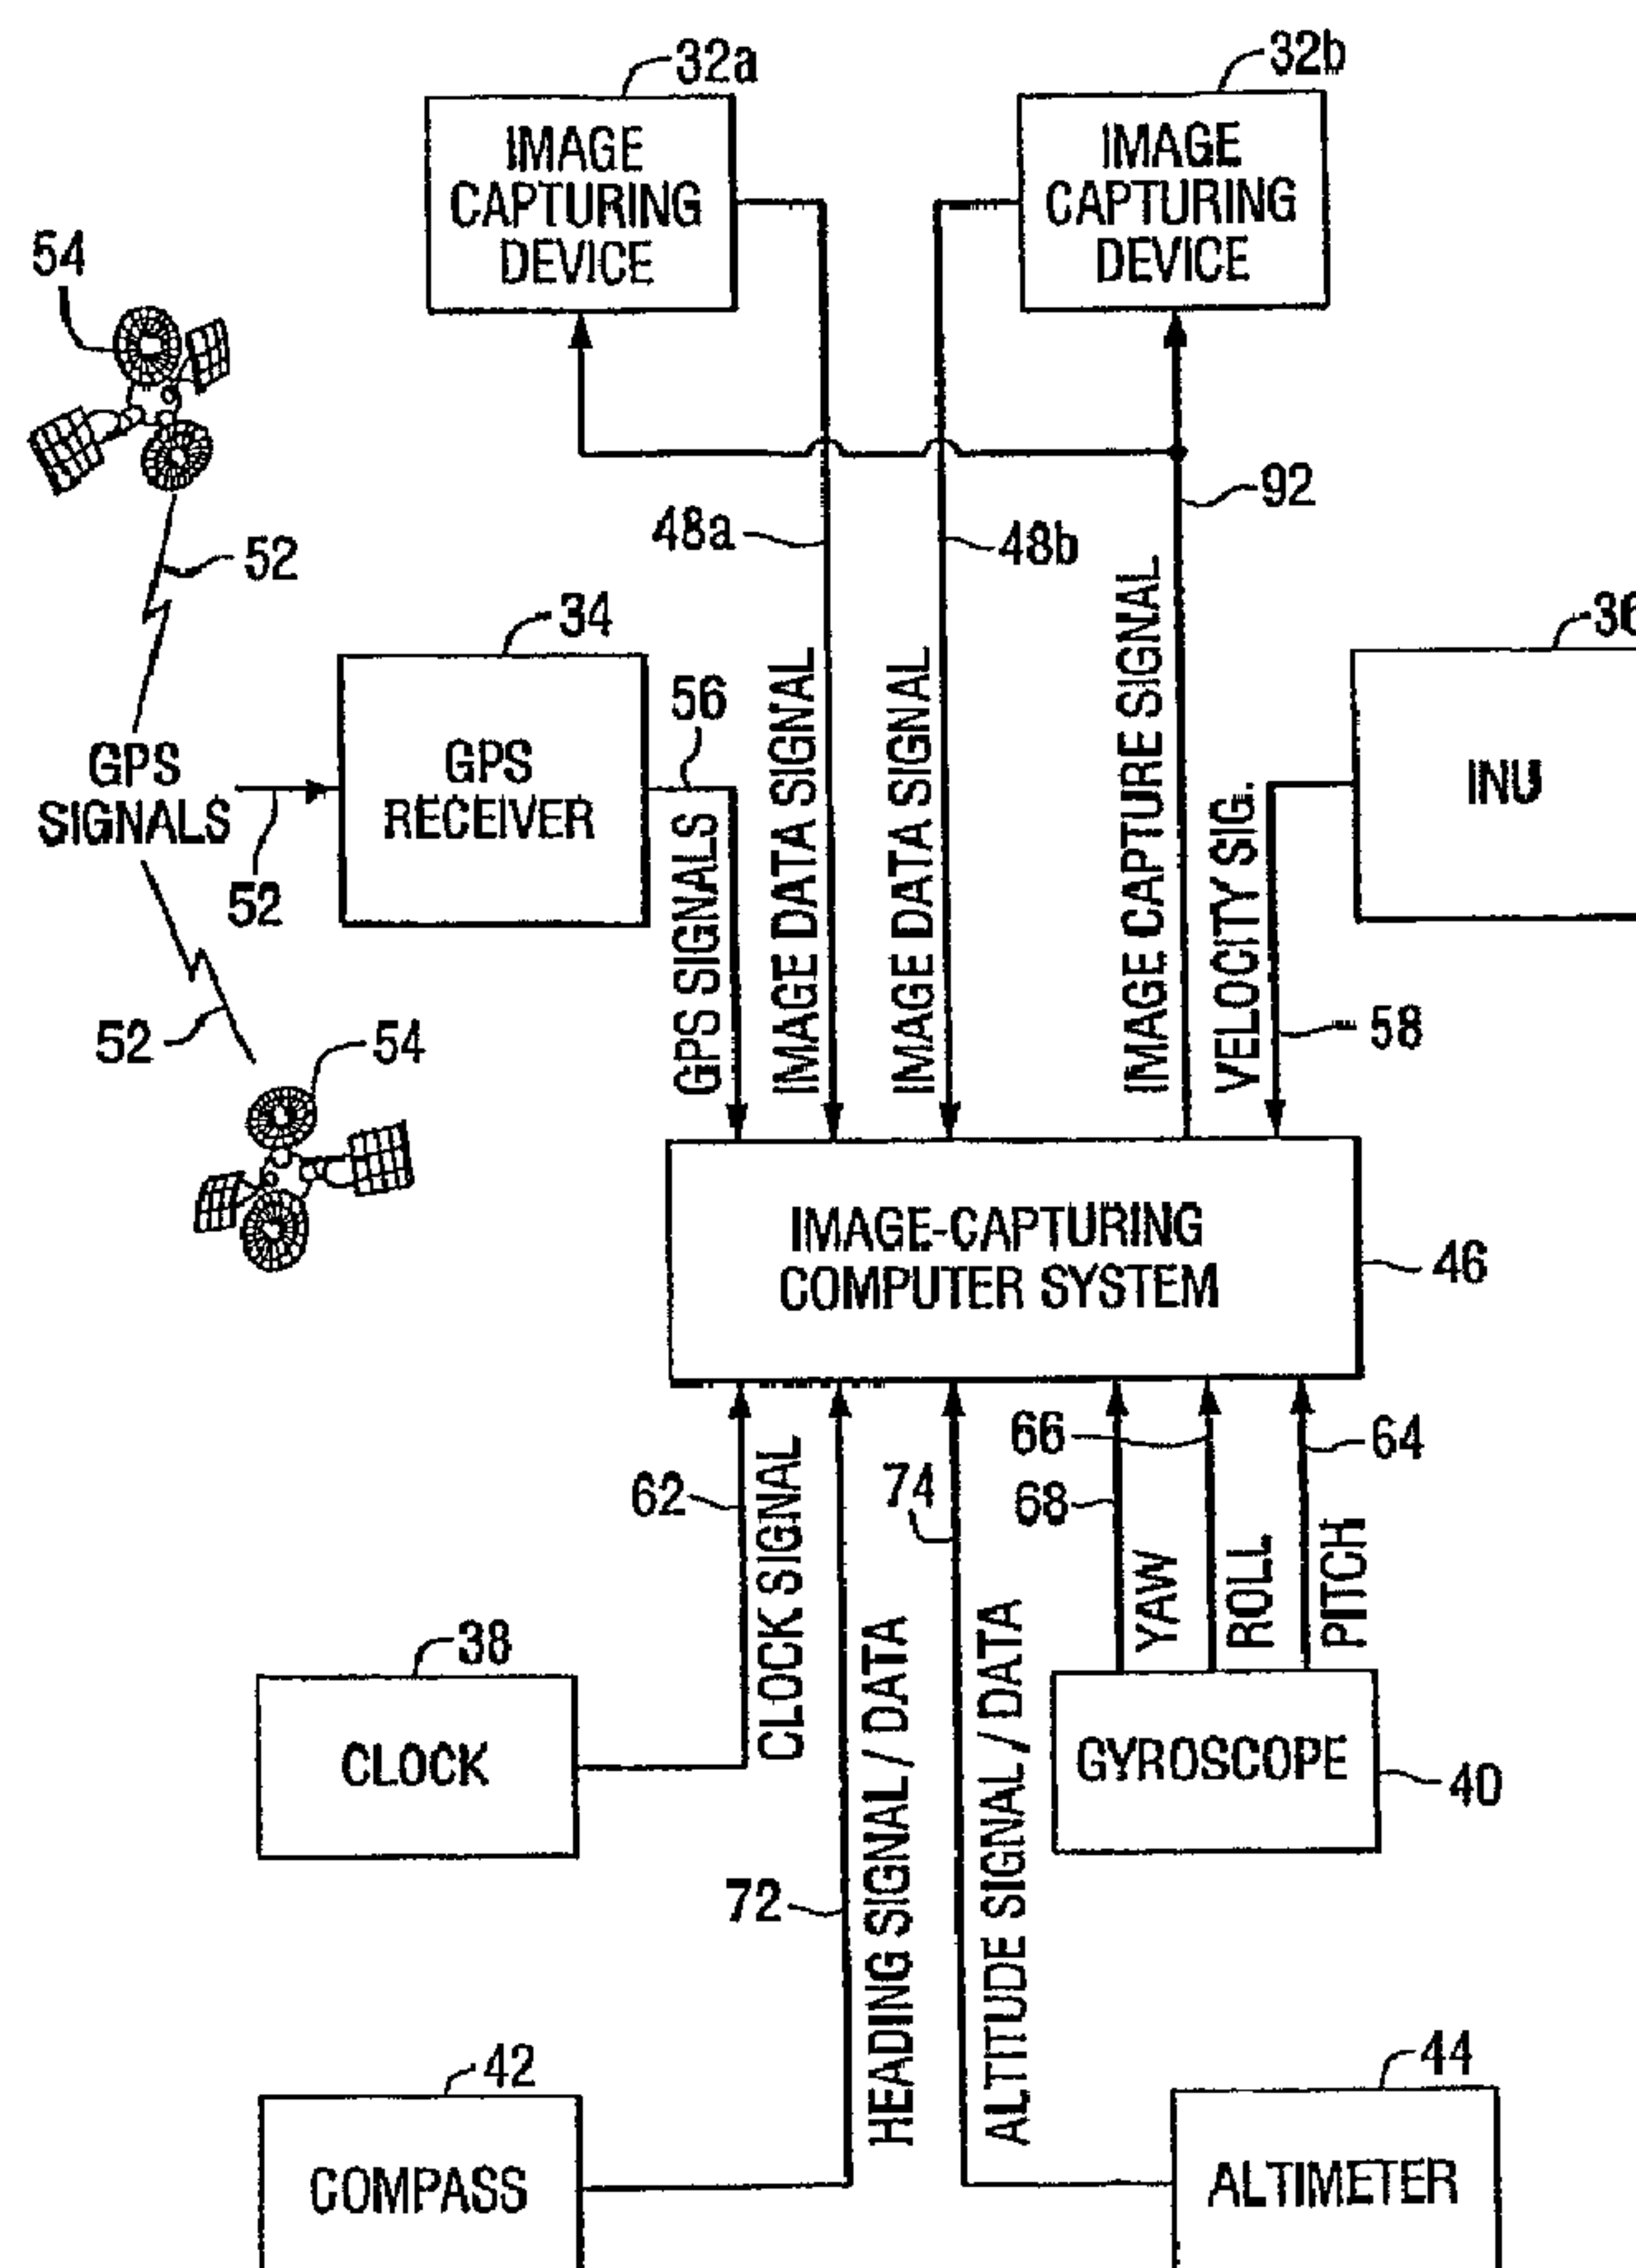

(57) **Abrégé/Abstract:**

A computerized system (46) for displaying, geolocating, and taking measurements from captured oblique images (32a and 32b) includes a data file accessible by the computer system. The data file includes a plurality of image files corresponding to a plurality of



(57) Abrégé(suite)/Abstract(continued):

captured oblique images (32a and 32b), and positional data corresponding to the images. Image display and analysis software is executed by the system (46) for reading the data file and displaying at least a portion of the captured oblique images. The software retrieves the positional data for one or more user-selected points on the displayed image, and calculates a separation distance between any two or more selected points. The separation distance calculation is user-selectable to determine various parameters including linear distance between, area encompassed within, relative elevation of, and height difference between selected points.

ABSTRACT

A computerized system (46) for displaying, geolocating, and taking measurements from captured oblique images (32a and 32b) includes a data file accessible by the computer system. The data file includes a plurality of image files corresponding to a plurality of captured oblique images (32a and 32b), and positional data corresponding to the images. Image display and analysis software is executed by the system (46) for reading the data file and displaying at least a portion of the captured oblique images. The software retrieves the positional data for one or more user-selected points on the displayed image, and calculates a separation distance between any two or more selected points. The separation distance calculation is user-selectable to determine various parameters including linear distance between, area encompassed within, relative elevation of, and height difference between selected points.

OBLIQUE GEOLOCATION AND MEASUREMENT SYSTEM

This is a divisional application of Canadian Patent Application Serial No. 2,505,566 filed on November 7, 2003.

5

TECHNICAL FIELD

The present invention relates to photogrammetry. More particularly, the present invention relates to a method and apparatus for capturing oblique images and for measuring the objects and distances between the objects depicted therein.

10

It should be understood that the expression “the invention” and the like used herein may refer to subject matter claimed in either the parent or the divisional applications.

15 BACKGROUND

Photogrammetry is the science of making measurements of and between objects depicted within photographs, especially aerial photographs. Generally, photogrammetry involves taking images of terrestrial features and deriving data therefrom, such as, for example, data indicating relative distances between and
20 sizes of objects within the images. Photogrammetry may also involve coupling the photographs with other data, such as data representative of latitude and longitude. In effect, the image is overlaid and conformed to a particular spatial coordinate system.

Conventional photogrammetry involves the capture and/or acquisition of
25 orthogonal images. The image-capturing device, such as a camera or sensor, is

WO 2004/044692

PCT/US2003/035528

orthogonal images. The image-capturing device, such as a camera or sensor, is carried by a vehicle or platform, such as an airplane or satellite, and is aimed at a nadir point that is directly below and/or vertically downward from that platform. The point or pixel in the image that corresponds to the nadir point is the only point/pixel that is truly
5 orthogonal to the image-capturing device. All other points or pixels in the image are actually oblique relative to the image-capturing device. As the points or pixels become increasingly distant from the nadir point they become increasingly oblique relative to the image-capturing device and the ground sample distance (i.e., the surface area corresponding to or covered by each pixel) also increases. Such obliqueness in an
10 orthogonal image causes features in the image to be distorted, especially images relatively distant from the nadir point.

Such distortion is removed, or compensated for, by the process of ortho-rectification which, in essence, removes the obliqueness from the orthogonal image by fitting or warping each pixel of an orthogonal image onto an orthometric grid or
15 coordinate system. The process of ortho-rectification creates an image wherein all pixels have the same ground sample distance and are oriented to the north. Thus, any point on an ortho-rectified image can be located using an X, Y coordinate system and, so long as the image scale is known, the length and width of terrestrial features as well as the relative distance between those features can be calculated.

20 Although the process of ortho-rectification compensates to a degree for oblique distortions in an orthogonal image, it introduces other undesirable distortions and/or

WO 2004/044692

PCT/US2003/035528

inaccuracies in the ortho-rectified orthogonal image. Objects depicted in ortho-rectified orthogonal images may be difficult to recognize and/or identify since most observers are not accustomed to viewing objects, particularly terrestrial features, from above. To an untrained observer an ortho-rectified image has a number of distortions. Roads that
5 are actually straight appear curved and buildings may appear to tilt. Further, ortho-rectified images contain substantially no information as to the height of terrestrial features. The interpretation and analysis of orthogonal and/or ortho-rectified orthogonal images is typically performed by highly-trained analysts whom have undergone years of specialized training and experience in order to identify objects and
10 terrestrial features in such images.

Thus, although orthogonal and ortho-rectified images are useful in photogrammetry, they lack information as to the height of features depicted therein and require highly-trained analysts to interpret detail from what the images depict.

Oblique images are images that are captured with the image-capturing device
15 aimed or pointed generally to the side of and downward from the platform that carries the image-capturing device. Oblique images, unlike orthogonal images, display the sides of terrestrial features, such as houses, buildings and/or mountains, as well as the tops thereof. Thus, viewing an oblique image is more natural and intuitive than viewing an orthogonal or ortho-rectified image, and even casual observers are able to recognize
20 and interpret terrestrial features and other objects depicted in oblique images. Each pixel in the foreground of an oblique image corresponds to a relatively small area of the

WO 2004/044692

PCT/US2003/035528

surface or object depicted (i.e., each foreground pixel has a relatively small ground sample distance) whereas each pixel in the background corresponds to a relatively large area of the surface or object depicted (i.e., each background pixel has a relatively large ground sample distance). Oblique images capture a generally trapezoidal area or view of the subject surface or object, with the foreground of the trapezoid having a substantially smaller ground sample distance (i.e., a higher resolution) than the background of the trapezoid.

Oblique images are considered to be of little or no use in photogrammetry. The conventional approach of forcing the variously-sized foreground and background pixels of an oblique image into a uniform size to thereby warp the image onto a coordinate system dramatically distorts the oblique image and thereby renders identification of objects and the taking of measurements of objects depicted therein a laborious and inaccurate task. Correcting for terrain displacement within an oblique image by using an elevation model further distorts the images thereby increasing the difficulty with which measurements can be made and reducing the accuracy of any such measurements.

Thus, although oblique images are considered as being of little or no use in photogrammetry, they are easily interpreted and contain information as to the height of features depicted therein.

Therefore, what is needed in the art is a method and apparatus for photogrammetry that enable geo-location and accurate measurements within oblique

WO 2004/044692

PCT/US2003/035528

images.

Moreover, what is needed in the art is a method and apparatus for photogrammetry that enable the measurement of heights and relative heights of objects within an image.

5 Furthermore, what is needed in the art is a method and apparatus for photogrammetry that utilizes more intuitive and natural images.

SUMMARY OF THE INVENTION

The present invention provides a method and apparatus for capturing,
10 displaying, and making measurements of objects and distances between objects depicted within oblique images.

The present invention comprises, in one form thereof, a computerized system for displaying, geolocating, and taking measurements from captured oblique images. The system includes a data file accessible by the computer system. The data file includes a
15 plurality of image files corresponding to a plurality of captured oblique images, and positional data corresponding to the images. Image display and analysis software is executed by the system for reading the data file and displaying at least a portion of the captured oblique images. The software retrieves the positional data for one or more user-selected points on the displayed image, and calculates a separation distance
20 between any two or more selected points. The separation distance calculation is user-selectable to determine various parameters including linear distance between, area

encompassed within, relative elevation of, and height difference between selected points.

In one aspect, the invention provides a computerized system for displaying, geolocating, and making measurements based upon captured oblique
5 images, the system comprising:

a computer system having a memory;

an image and data file accessible by said system and including a plurality of image files corresponding to a plurality of captured oblique images, said image and data file further including positional data corresponding to said plurality of
10 image files;

a ground plane data file representing a tessellated ground plane, said ground plane data file accessible by said computer system, said ground plane data file representing a tessellated ground plane that closely approximates at least a portion of the terrain depicted within said captured oblique images, said
15 tessellated ground plane further comprising a plurality of interconnected facets with the size of the facets defined using a uniform number of pixels in the captured oblique images; and

image display and analysis software executed by said system for reading said image and data file and displaying at least a portion of the captured oblique
20 images as a displayed oblique image, said software calculating the geo-location of one or more selected points within said displayed image, said software calculating a separation distance between any two or more selected points within said displayed image.

In one aspect, the invention provides a computerized method for taking
25 measurements within a displayed oblique image, the method comprising:

selecting with an input device a starting point and an end point on the displayed image;

retrieving from a data file positional data corresponding to said starting point and said end point;

referencing a ground plane data file corresponding to a tessellated ground plane having a plurality of facets, each of said facets having a respective pitch and slope, said tessellated ground plane closely matching a terrain of said displayed oblique image;

connecting said starting and end points with line segments, said line segments conforming to said pitch and slope of said facets to thereby follow said terrain; and

calculating the linear distance along said line segments between said starting and end points thereby taking into account said pitch and slope of said facets.

In one aspect, the invention provides a computerized method for taking measurements from an oblique image displayed on a computer system, at least one input device connected to said computer system, an image data file accessible by said computer system, said image data file including captured images and positional data corresponding thereto, said computerized method comprising:

placing the computer system into a desired one of a plurality of measurement modes, the desired measurement mode configured for calculating a desired measurement;

selecting a starting point on the displayed image;

retrieving the positional data corresponding to said starting point;

selecting an end point on the displayed image;

retrieving the positional data corresponding to said end point; and

calculating the desired measurement dependent at least in part upon said positional data of said starting and end points.

In one aspect, the invention provides a computerized system for displaying and making measurements based upon captured oblique images, the
5 system comprising:

a computer system executing image display and analysis software
reading:

a plurality of captured oblique images having corresponding geo-
location data; and

10 a data table storing ground plane data that closely approximates at
least a portion of the terrain depicted within said captured oblique images;
wherein the image display and analysis software when executed by the
computer system causes the computer system to receive a starting point
selected by a user, receive an end point selected by the user and calculate a
15 desired measurement between the starting and end points dependent upon the
geo-location data and ground plane data; and

wherein the desired measurement is selected from a group consisting of a
distance measuring mode calculating a distance between the starting point and
the end point, a height measuring mode calculating a height difference between
20 the starting point and the end point, and a relative elevation measuring mode
calculating the difference in elevation of the starting point and the end point.

In one aspect, the invention provides a computerized system, comprising:

a computer system storing a database of captured oblique images, one of
the oblique images being a first oblique image, and another one of the oblique
25 images being a second oblique image, each of the first and second oblique
images having corresponding geo-location data, and a data table storing ground
plane data, the ground plane data comprising a plurality of facets, the facets
having a plurality of elevation data that conforms to at least a portion of the

terrain depicted within the captured oblique images, the computer system further having computer executable logic that when executed by a processor causes the computer system to receive a selection of a geographic point from a user, search the database to find oblique images that contain the selected point, and make
5 the oblique images available to the user.

In one aspect, the invention provides a computerized system, comprising:
a computer system calculating a plurality of elevations of a tessellated ground plane for an oblique image having pixels using positional data corresponding to the oblique image, and data indicative of topography
10 represented by the oblique image, the elevations of the tessellated ground plane conforming to the topography for the oblique image, and associating the tessellated ground plane with the oblique image.

In one aspect, the invention provides a computerized system, comprising:
a computer system running image display and analysis software that
15 when executed by the computer system causes the computer system to display an oblique image, reference positional data for the oblique image, and a pre-calculated ground plane for the oblique image, the pre-calculated ground plane comprising a plurality of facets, the facets having a plurality of elevation data, and conforming to the topography of an area captured within the oblique image,
20 receive a selection of at least two pixels within the oblique image and calculate a desired measurement that takes into account changes within the topography of the area captured within the oblique image.

In one aspect, the invention provides a computerized system for displaying and making measurements based upon captured oblique images,
25 comprising:

a computer system executing image display and analysis software

reading:

a plurality of captured oblique images having corresponding geo-location data; and

5 a data table storing ground plane data that closely approximates at least a portion of the terrain depicted within said captured oblique images; wherein the image display and analysis software when executed by the computer system causes the computer system to receive a starting point selected by a user, receive an end point selected by the user and calculate a
10 desired measurement between the starting and end points dependent upon the geo-location data and ground plane data, and

wherein the desired measurement is selected from a group consisting of a distance measuring mode calculating a distance between the starting point and the end point, a height measuring mode calculating a height difference between
15 the starting point and the end point, and a relative elevation measuring mode calculating the difference in elevation of the starting point and the end point, and an area measurement mode calculating an area encompassed by at least three points.

In one aspect, the invention provides a computerized system for
20 displaying and making measurements, comprising:

a computer system executing image display and analysis software

reading:

at least one oblique image having corresponding geo-location data;

and

a data table storing ground plane data that closely approximates at least a portion of the terrain depicted within said captured oblique image; wherein the image display and analysis software when executed by the computer system causes the computer system to display the oblique image, and
5 calculate an area encompassed by at least three points on an object within the oblique image using the geo-location data and the ground plane data.

In one aspect, the invention provides a computerized system for displaying and making measurements, comprising:

a computer system executing image display and analysis software

10 reading:

at least one oblique image having corresponding geo-location position data;

wherein the image display and analysis software when executed by the computer system causes the computer system to display the oblique image, and
15 calculate an area of a vertical or pitched surface encompassed by at least three points on an object within the oblique image using the geo-location position data associated with the image, and;

wherein a first point of the at least three points has a first elevation, and a second point of the at least three points has a second elevation, and wherein the
20 first elevation and the second elevation are different.

In one aspect, the invention provides a computerized system for displaying and making measurements based upon captured oblique images, the system comprising:

a computer system executing image display and analysis software

25 reading:

a plurality of captured oblique images having corresponding geo-location data; and

a data table storing ground plane data that closely approximates at least a portion of the terrain depicted within said captured oblique images;

5 wherein the image display and analysis software when executed by the computer system causes the computer system to receive a starting point selected by a user, receive an end point selected by the user and calculate a desired measurement between the starting and end points dependent upon the geo-location data and ground plane data; and

10 wherein the desired measurement is a relative elevation measuring mode calculating the difference in elevation of the starting point and the end point.

In one aspect, the invention provides a computerized system for displaying and making measurements based upon captured oblique images, comprising:

15 a computer system executing image display and analysis software reading:

a plurality of captured oblique images having corresponding geo-location data; and

20 a data table storing ground plane data that closely approximates at least a portion of the terrain depicted within said captured oblique images;

wherein the image display and analysis software when executed by the computer system causes the computer system to receive a starting point selected by a user, receive an end point selected by the user and calculate a desired measurement between the starting and end points dependent upon the
25 geo-location data and ground plane data, and

wherein the desired measurement is an area measurement mode calculating an area encompassed by at least three points.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become apparent and be more completely understood by reference to the following description of one embodiment of the invention when read in conjunction with the accompanying drawings, wherein:

FIG. 1 illustrates one embodiment of a platform or vehicle carrying an image-
10 capturing system of the present invention, and shows exemplary orthogonal and oblique images taken thereby;

FIG. 2 is a diagrammatic view of the image-capturing system of FIG. 1;

FIG. 3 is a block diagram of the image-capturing computer system of Fig. 2;

FIG. 4 is a representation of an exemplary output data file of the image-
15 capturing system of Fig. 1;

FIG. 5 is a block diagram of one embodiment of an image display and measurement computer system of the present invention for displaying and taking measurements of and between objects depicted in the images captured by the image-capturing system of Fig. 1;

20 FIG. 6 depicts an exemplary image displayed on the system of Fig. 5, and illustrates one embodiment of the method of the present invention for the measurement

WO 2004/044692

PCT/US2003/035528

of and between objects depicted in such an image;

FIGS. 7 and 8 illustrate one embodiment of a method for capturing oblique images of the present invention;

FIGS. 9 and 10 illustrate a second embodiment of a method for capturing oblique
5 images of the present invention.

Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate one preferred embodiment of the invention, in one form, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

10

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, and particularly to Fig. 1, one embodiment of an apparatus for capturing and geolocating oblique images of the present invention is shown. Apparatus 10 includes a platform or vehicle 20 that carries image-capturing
15 and geolocating system 30.

Platform 20, such as, for example, an airplane, space shuttle, rocket, satellite, or any other suitable vehicle, carries image-capturing system 30 over a predefined area of and at one or more predetermined altitudes above surface 31, such as, for example, the earth's surface or any other surface of interest. As such, platform 20 is capable of
20 controlled movement or flight, either manned or unmanned, along a predefined flight path or course through, for example, the earth's atmosphere or outer space. Image-

capturing platform 20 includes a system for generating and regulating power (not shown) that includes, for example, one or more generators, fuel cells, solar panels, and/or batteries, for powering image-capturing system 30.

Image-capturing and geo-locating system 30, as best shown in Fig. 2, includes
 5 image capturing devices 32a and 32b, a global positioning system (GPS) receiver 34, an inertial navigation unit (INU) 36, clock 38, gyroscope 40, compass 42 and altimeter 44, each of which are interconnected with image-capturing computer system 46.

Image-capturing devices 32a and 32b, such as, for example, conventional cameras, digital cameras, digital sensors, charge-coupled devices, or other suitable
 10 image-capturing devices, are capable of capturing images photographically or electronically. Image-capturing devices 32a and 32b have known or determinable characteristics including focal length, sensor size and aspect ratio, radial and other distortion terms, principal point offset, pixel pitch, and alignment. Image-capturing devices 32a and 32b acquire images and issue image data signals (IDS) 48a and 48b,
 15 respectively, corresponding to the particular images or photographs taken and which are stored in image-capturing computer system 46, as will be more particularly described hereinafter.

As best shown in Fig. 1, image-capturing devices 32a and 32b have respective central axes A_1 and A_2 , and are mounted to platform 20 such that axes A_1 and A_2 are
 20 each at an angle of declination θ relative to a horizontal plane P . Declination angle θ is virtually any oblique angle, but is preferably from approximately 20° (twenty degrees) to

WO 2004/044692

PCT/US2003/035528

approximately 60° (sixty degrees) and is most preferably from approximately 40° (forty degrees) to approximately 50° (fifty degrees).

GPS receiver 34 receives global positioning system signals 52 that are transmitted by one or more global positioning system satellites 54. The GPS signals 52, in known fashion, enable the precise location of platform 20 relative to surface 31 to be determined. GPS receiver 34 decodes GPS signals 52 and issues location signals/data 56, that are dependent at least in part upon GPS signals 52 and which are indicative of the precise location of platform 20 relative to surface 31. Location signals/data 56 corresponding to each image captured by image-capturing devices 32a and 32b are received and stored by image-capturing computer system 46.

INU 36 is a conventional inertial navigation unit that is coupled to and detects changes in the velocity, including translational and rotational velocity, of image-capturing devices 32a and 32b and/or platform 20. INU 36 issues velocity signals/data 58 indicative of such velocities and/or changes therein to image-capturing computer system 46, which stores velocity signals/data 58 corresponding to each image captured by image-capturing devices 32a and 32b are received and stored by image-capturing computer system 46.

Clock 38 keeps a precise time measurement (time of validity) that is used to synchronize events within image-capturing and geo-locating system 30. Clock 38 provides time data/clock signal 62 that is indicative of the precise time that an image is taken by image-capturing devices 32a and 32b. Time data 62 is also provided to and

WO 2004/044692

PCT/US2003/035528

stored by image-capturing computer system 46. Alternatively, clock 38 is integral with image-capturing computer system 46, such as, for example, a clock software program.

Gyroscope 40 is a conventional gyroscope as commonly found on airplanes and/or within commercial navigation systems for airplanes. Gyroscope 40 provides
5 signals including pitch signal 64, roll signal 66 and yaw signal 68, which are respectively indicative of pitch, roll and yaw of platform 20. Pitch signal 64, roll signal 66 and yaw signal 68 corresponding to each image captured by image-capturing devices 32a and 32b are received and stored by image-capturing computer system 46.

Compass 42, such as, for example, a conventional electronic compass, indicates
10 the heading of platform 20. Compass 42 issues heading signal/data 72 that is indicative of the heading of platform 20. Image-capturing computer system 46 receives and stores the heading signals/data 72 that correspond to each image captured by image-capturing devices 32a and 32b.

Altimeter 44 indicates the altitude of platform 20. Altimeter 44 issues altitude
15 signal/data 74, and image-capturing computer system 46 receives and stores the altitude signal/data 74 that correspond to each image captured by image-capturing devices 32a and 32b.

As best shown in Fig. 3, image-capturing computer system 46, such as, for example, a conventional laptop personal computer, includes memory 82, input devices
20 84a and 84b, display device 86, and input and output (I/O) ports 88. Image-capturing computer system 46 executes image and data acquiring software 90, which is stored in

WO 2004/044692

PCT/US2003/035528

memory 82. Memory 82 also stores data used and/or calculated by image-capturing computer system 46 during the operation thereof, and includes, for example, non-volatile read-only memory, random access memory, hard disk memory, removable memory cards and/or other suitable memory storage devices and/or media. Input

5 devices 84a and 84b, such as, for example, a mouse, keyboard, joystick, or other such input devices, enable the input of data and interaction of a user with software being executed by image-capturing computer system 46. Display device 86, such as, for example, a liquid crystal display or cathode ray tube, displays information to the user of image-capturing computer system 46. I/O ports 88, such as, for example, serial and

10 parallel data input and output ports, enable the input and/or output of data to and from image-capturing computer system 46.

Each of the above-described data signals is connected to image-capturing computer system 46. More particularly, image data signals 48, location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals 64, 66 and 68,

15 respectively, heading signal 72 and altitude signal 74 are received via I/O ports 88 by and stored within memory 82 of image-capturing computer system 46.

In use, image-capturing computer system 46 executes image and data acquiring software 90, which, in general, controls the reading, manipulation, and storing of the above-described data signals. More particularly, image and data acquiring software 90

20 reads image data signals 48a and 48b and stores them within memory 82. Each of the location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals

WO 2004/044692

PCT/US2003/035528

64, 66 and 68, respectively, heading signal 72 and altitude signal 74 that represent the conditions existing at the instant an image is acquired or captured by image-capturing devices 32a and 32b and which correspond to the particular image data signals 48a and 48b representing the captured images are received by image-capturing computer
5 system 46 via I/O ports 88. Image-capturing computer system 46 executing image and data acquiring software 90 issues image-capture signal 92 to image-capturing devices 32a and 32b to thereby cause those devices to acquire or capture an image at predetermined locations and/or at predetermined intervals which are dependent at least in part upon the velocity of platform 20.

10 Image and data acquiring software 90 decodes as necessary and stores the aforementioned signals within memory 82, and associates the data signals with the corresponding image signals 48a and 48b. Thus, the altitude, orientation in terms of roll, pitch, and yaw, and the location of image-capturing devices 32a and 32b relative to surface 31, i.e., longitude and latitude, for every image captured by image-capturing
15 devices 32a and 32b is known.

Platform 20 is piloted or otherwise guided through an image-capturing path that passes over a particular area of surface 31, such as, for example, a predefined area of the surface of the earth or of another planet. Preferably, the image-capturing path of platform 20 is at right angles to at least one of the boundaries of the area of interest.

20 The number of times platform 20 and/or image-capturing devices 32a, 32b pass over the area of interest is dependent at least in part upon the size of the area and the

WO 2004/044692

PCT/US2003/035528

amount of detail desired in the captured images. The particular details of the image-capturing path of platform 20 are described more particularly hereinafter.

As platform 20 passes over the area of interest a number of oblique images are captured by image-capturing devices 32a and 32b. As will be understood by those of
5 ordinary skill in the art, images are captured or acquired by image-capturing devices 32a and 32b at predetermined image capture intervals which are dependent at least in part upon the velocity of platform 20.

Image data signals 48a and 48b corresponding to each image acquired are received by and stored within memory 82 of image-capturing computer system 46 via
10 I/O ports 88. Similarly, the data signals (i.e., image data signals 48, location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals 64, 66 and 68, respectively, heading signal 72 and altitude signal 74) corresponding to each captured image are received and stored within memory 82 of image-capturing computer system 46 via I/O ports 88. Thus, the location of image-capturing device 32a and 32b relative
15 to surface 32 at the precise moment each image is captured is recorded within memory 82 and associated with the corresponding captured image.

As best shown in Fig. 1, the location of image-capturing devices 32a and 32b relative to the earth corresponds to the nadir point *N* of orthogonal image 102. Thus, the exact geo-location of the nadir point *N* of orthogonal image 102 is indicated by
20 location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals 64, 66 and 68, respectively, heading signal 72 and altitude signal 74. Once the nadir

point N of orthogonal image 102 is known, the geo-location of any other pixel or point within image 102 is determinable in known manner.

When image-capturing devices 32a and 32b are capturing oblique images, such as oblique images 104a and 104b (Fig. 1), the location of image-capturing devices 32a and 32b relative to surface 31 is similarly indicated by location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals 64, 66 and 68, respectively, heading signal 72, altitude signal 74 and the known angle of declination θ of the primary axes A_1 and A_2 of image-capturing devices 32a and 32b, respectively.

It should be particularly noted that a calibration process enables image and data acquiring software 90 to incorporate correction factors and/or correct for any error inherent in or due to image-capturing device 32, such as, for example, error due to calibrated focal length, sensor size, radial distortion, principal point offset, and alignment.

Image and data acquiring software 90 creates and stores in memory 82 one or more output image and data files 120. More particularly, image and data acquiring software 90 converts image data signals 48a, 48b and the orientation data signals (i.e., image data signals 48, location signals 56, velocity signals 58, time data signal 62, pitch, roll and yaw signals 64, 66 and 68, respectively, heading signal 72 and altitude signal 74) into computer-readable output image and data files 120. As best shown in Fig. 4, output image and data file 120 contains a plurality of captured image files $I_1, I_2, \dots, I_n$ corresponding to captured oblique images, and the positional data $C_{PD1}, C_{PD2}, \dots$

WO 2004/044692

PCT/US2003/035528

, C_{PDn} corresponding thereto.

Image files $I_1, I_2, \dots, I_n$ of the image and data file 120 are stored in virtually any computer-readable image or graphics file format, such as, for example, JPEG, TIFF, GIF, BMP, or PDF file formats, and are cross-referenced with the positional data $C_{PD1}, C_{PD2}, \dots, C_{PDn}$ which is also stored as computer-readable data. Alternatively, positional data $C_{PD1}, C_{PD2}, \dots, C_{PDn}$ is embedded within the corresponding image files $I_1, I_2, \dots, I_n$ in known manner. Image data files 120 are then processed, either by image and data acquiring software 90 or by post-processing, to correct for errors, such as, for example, errors due to flight path deviations and other errors known to one of ordinary skill in the art. Thereafter, image data files 120 are ready for use to display and make measurements of and between the objects depicted within the captured images, including measurements of the heights of such objects.

Referring now to Fig. 5, image display and measurement computer system 130, such as, for example, a conventional desktop personal computer or a mobile computer terminal in a police car, includes memory 132, input devices 134a and 134b, display device 136, and network connection 138. Image-capturing computer system 130 executes image display and analysis software 140, which is stored in memory 132. Memory 132 includes, for example, non-volatile read-only memory, random access memory, hard disk memory, removable memory cards and/or other suitable memory storage devices and/or media. Input devices 134a and 134b, such as, for example, a mouse, keyboard, joystick, or other such input devices, enable the input of data and

WO 2004/044692

PCT/US2003/035528

interaction of a user with image display and analysis software 140 being executed by image display and measurement computer system 130. Display device 136, such as, for example, a liquid crystal display or cathode ray tube, displays information to the user of image display and measurement computer system 130. Network connection 138
5 connects image display and measurement computer system 130 to a network (not shown), such as, for example, a local-area network, wide-area network, the Internet and/or the World Wide Web.

In use, and referring now to Fig. 6, image display and measurement computer system 130 executing image display and analysis software 140 accesses one or more
10 output image and data files 120 that have been read into memory 132, such as, for example, via network connection 138, a floppy disk drive, removable memory card or other suitable means. One or more of the captured images $I_1, I_2, \dots, I_n$ of output image and data files 120 is thereafter displayed as displayed oblique image 142 under the control of image display and analysis software 140. At approximately the same
15 time, one or more data portions $C_{PD1}, C_{PD2}, \dots, C_{PDn}$ corresponding to displayed oblique image 142 are read into a readily-accessible portion of memory 132.

It should be particularly noted that displayed oblique image 142 is displayed substantially as captured, i.e., displayed image 142 is not warped or fitted to any coordinate system nor is displayed image 142 ortho-rectified. Rather than warping
20 displayed image 142 to a coordinate system in order to enable measurement of objects depicted therein, image display and analysis software 140, in general, determines the

WO 2004/044692

PCT/US2003/035528

geo-locations of selected pixels only as needed, or “on the fly”, by referencing data portions C_{PD1} , C_{PD2} , . . . , C_{PDn} of output image and data files 120 and calculating the position and/or geo-location of those selected pixels using one or more projection equations as is more particularly described hereinafter.

- 5 Generally, a user of display and measurement computer system 130 takes measurements of and between objects depicted in displayed oblique image 142 by selecting one of several available measuring modes provided within image display and analysis software 140. The user selects the desired measurement mode by accessing, for example, a series of pull-down menus or toolbars M , or via keyboard commands.
- 10 The measuring modes provided by image display and analysis software 140 include, for example, a distance mode that enables measurement of the distance between two or more selected points, an area mode that enables measurement of the area encompassed by several selected and interconnected points, a height mode that enables measurement of the height between two or more selected points, and an
- 15 elevation mode that enables the measurement of the change in elevation of one selected point relative to one or more other selected points.

After selecting the desired measurement mode, the user of image display and analysis software 140 selects with one of input devices 134a, 134b a starting point or starting pixel 152 and an ending point or pixel 154 on displayed image 142, and image

20 display and analysis software 140 automatically calculates and displays the quantity sought, such as, for example, the distance between starting pixel 152 and ending pixel

154.

When the user selects starting point/pixel 152, the geo-location of the point corresponding thereto on surface 31 is calculated by image display and analysis software 140 which executes one or more projection equations using the data portions
5 $C_{PD1}, C_{PD2}, \dots, C_{PDn}$ of output image and data files 120 that correspond to the particular image being displayed. The longitude and latitude of the point on surface 31 corresponding to pixel 152 are then displayed by image display and analysis software 140 on display 136, such as, for example, by superimposing the longitude and latitude on displayed image 142 adjacent the selected point/pixel or in pop-up display box
10 elsewhere on display 136. The same process is repeated by the user for the selection of the end pixel/point 154, and by image display and analysis software 140 for the retrieval and display of the longitude and latitude information.

The calculation of the distance between starting and ending points/pixels 152, 154, respectively, is accomplished by determining the geo-location of each selected
15 pixel 152, 154 "on the fly". The data portions $C_{PD1}, C_{PD2}, \dots, C_{PDn}$ of output image and data file 120 corresponding to the displayed image are retrieved, and the geo-location of the point on surface 31 corresponding to each selected pixel are then determined. The difference between the geo-locations corresponding to the selected pixels determines the distance between the pixels.

20 As an example of how the geo-location of a given point or pixel within displayed oblique image 142 is determined, we will assume that displayed image 142

WO 2004/044692

PCT/US2003/035528

corresponds to orthogonal image 104a (Fig. 1). The user of image display and analysis software 140 selects pixel 154 which, for simplicity, corresponds to center C (Fig. 1) of oblique image 104a. As shown in Fig. 1, line 106 extends along horizontal plane G from a point 108 thereon that is directly below image-capturing device 32a to the center C of the near border or edge 108 of oblique image 104a. An extension of primary axis A_1 intersects with center C. Angle $\emptyset$ is the angle formed between line 106 the extension of primary axis A_1 . Thus, a triangle (not referenced) is formed having vertices at image-capturing device 32a, point 108 and center C, and having sides 106, the extension of primary axis A_1 and vertical (dashed) line 110 between point 108 and image-capturing device 32a.

Ground plane G is a substantially horizontal, flat or non-sloping ground plane (and which typically will have an elevation that reflects the average elevation of the terrain), and therefore the above-described triangle includes a right angle between side/line 110 and side/line 106. Since angle $\emptyset$ and the altitude of image-capturing device 32 (i.e., the length of side 110) are known, the hypotenuse (i.e., the length of the extension of primary axis A_1) and remaining other side of the right triangle are calculated by simple geometry. Further, since the exact position of image-capturing device 32a is known at the time the image corresponding to displayed image 142 was captured, the latitude and longitude of point 108 are also known. Knowing the length of side 106, calculated as described above, enables the exact geo-location of pixel 154 corresponding to center C of oblique image 104a to be determined by image display

WO 2004/044692

PCT/US2003/035528

and analysis software 140. Once the geo-location of the point corresponding to pixel 154 is known, the geo-location of any other pixel in displayed oblique image 142 is determinable using the known camera characteristics, such as, for example, focal length, sensor size and aspect ratio, radial and other distortion terms, etc.

5 The distance between the two or more points corresponding to two or more selected pixels within displayed image 142 is calculated by image display and analysis software 140 by determining the difference between the geo-locations of the selected pixels using known algorithms, such as, for example, the Gauss formula and/or the vanishing point formula, dependent upon the selected measuring mode. The
10 measurement of objects depicted or appearing in displayed image 142 is conducted by a substantially similar procedure to the procedure described above for measuring distances between selected pixels. For example, the lengths, widths and heights of objects, such as, for example, buildings, rivers, roads, and virtually any other geographic or man-made structure, appearing within displayed image 142 are
15 measured by selecting the appropriate/desired measurement mode and selecting starting and ending pixels.

It should be particularly noted that in the distance measuring mode of image display and analysis software 140 the distance between the starting and ending points/pixels 152, 154, respectively, is determinable along virtually any path, such as,
20 for example, a "straight-line" path *P1* or a path *P2* that involves the selection of intermediate points/pixels and one or more "straight-line" segments interconnected

WO 2004/044692

PCT/US2003/035528

therewith.

It should also be particularly noted that the distance measuring mode of image display and analysis software 140 determines the distance between selected pixels according to a "walk the earth" method. The "walk the earth method" creates a series
5 of interconnected line segments, represented collectively by paths *P1* and *P2*, that extend between the selected pixels/points and which lie upon or conform to the planar faces of a series of interconnected facets that define a tessellated ground plane. The tessellated ground plane, as will be more particularly described hereinafter, closely follows or recreates the terrain of surface 31, and therefore paths *P1* and *P2* also
10 closely follow the terrain of surface 31. By measuring the distance along the terrain simulated by the tessellated ground plane, the "walk the earth" method provides for a more accurate and useful measurement of the distance between selected points than the conventional approach, which warps the image onto a flat earth or average elevation plane system and measures the distance between selected points along the
15 flat earth or plane and substantially ignores variations in terrain between the points.

For example, a contractor preparing to bid on a contract for paving a roadway over uneven or hilly terrain can determine the approximate amount or area of roadway involved using image display and analysis software 140 and the "walk the earth" measurement method provided thereby. The contractor can obtain the approximate
20 amount or area of roadway from his or her own office without having to send a surveying crew to the site to obtain the measurements necessary.

In contrast to the "walk the earth" method provided by the present invention, the "flat earth" or average elevation distance calculating approaches include inherent inaccuracies when measuring distances between points and/or objects disposed on uneven terrain and when measuring the sizes and/or heights of objects similarly disposed. Even a modest slope or grade in the surface being captured results in a difference in the elevation of the nadir point relative to virtually any other point of interest thereon. Thus, referring again to Fig. 1, the triangle formed by line 106, the extension of primary axis A_1 and the vertical (dashed) line 110 between point 108 and image-capturing device 32a may not be a right triangle. If such is the case, any geometric calculations assuming that triangle to be a right triangle would contain errors, and such calculations would be reduced to approximations due to even a relatively slight gradient or slope between the points of interest.

For example, if surface 31 slopes upward between nadir point N and center C at the near or bottom edge 108 of oblique image 104 then second line 110 intersects surface 31 before the point at which such intersection would occur on a level or non-sloping surface 31. If center C is fifteen feet higher than nadir point N and with a declination angle θ equal to 40° (forty degrees), the calculated location of center C would be off by approximately 17.8 feet without correction for the change in elevation between the points.

As generally discussed above, in order to compensate at least in part for changes in elevation and the resultant inaccuracies in the measurement of and

WO 2004/044692

PCT/US2003/035528

between objects within image 142, image display and analysis software 140 references, as necessary, points within displayed image 142 and on surface 31 to a pre-calculated tessellated or faceted ground plane generally designated 160 in Fig. 6. Tessellated ground plane 160 includes a plurality of individual facets 162a, 162b, 162c, etc., each of which are interconnected to each other and are defined by four vertices (not referenced, but shown as points) having respective elevations. Adjacent pairs of facets 162a, 162b, 162c, etc., share two vertices. Each facet 162a, 162b, 162c, etc., has a respective pitch and slope. Tessellated ground plane 160 is created based upon various data and resources, such as, for example, topographical maps, and/or digital raster graphics, survey data, and various other sources.

Generally, the geo-location of a point of interest on displayed image 142 is calculated by determining which of facets 162a, 162b, 162c, etc., correspond to that point of interest. Thus, the location of the point of interest is calculated based on the characteristics, i.e., elevation, pitch and slope, of facets 162a, 162b, 162c, etc., rather than based upon a flat or average-elevation ground plane. Error is introduced only in so far as the topography of surface 31 and the location of the point of interest thereon deviate from the planar surface of the facet 162a, 162b, 162c, etc, within which the point of interest lies. That error is reducible through a bilinear interpolation of the elevation of the point of interest within a particular one of facets 162a, 162b, 162c, etc., and using that interpolated elevation in the location calculation performed by image display and analysis software 140.

WO 2004/044692

PCT/US2003/035528

To use tessellated ground plane 160, image display and analysis software 140 employs a modified ray-tracing algorithm to find the intersection of the ray projected from the image-capturing device 32a or 32b towards surface 31 and tessellated ground plane 160. The algorithm determines not only which of facets 162a, 162b, 162c, etc., is intersected by the ray, but also where within the facet the intersection occurs. By use of bi-linear interpolation, a fairly precise ground location can be determined. For the reverse projection, tessellated ground plane 160 is used to find the ground elevation value for the input ground location also using bi-linear interpolation. The elevation and location are then used to project backwards through a model of the image-capturing device 32a or 32b to determine which of the pixels within displayed image 142 corresponds to the given location.

More particularly, and as an example, image display and analysis software 140 performs and/or calculates the geo-location of point 164 by superimposing and/or fitting tessellated ground plane 160 to at least a portion 166, such as, for example, a hill, of surface 31. It should be noted that only a small portion of tessellated ground plane 160 and facets 162a, 162b, 162c, etc., thereof is shown along the profile of portion 166 of surface 31. As discussed above, each of facets 162a, 162b, 162c, etc., are defined by four vertices, each of which have respective elevations, and each of the facets have respective pitches and slopes. The specific position of point 164 upon the plane/surface of the facet 162a, 162b, 162c, etc., within which point 164 (or its projection) lies is determined as described above.

WO 2004/044692

PCT/US2003/035528

Tessellated ground plane 160 is preferably created outside the operation of image display and measurement computer system 130 and image display and analysis software 140. Rather, tessellated ground plane 160 takes the form of a relatively simple data table or look-up table 168 stored within memory 132 of and/or accessible to
5 image display and measurement computer system 130. The computing resources required to calculate the locations of all the vertices of the many facets of a typical ground plane do not necessarily have to reside within image display and measurement computer system 130. Thus, image display and measurement computer system 130 is compatible for use with and executable by a conventional personal computer without
10 requiring additional computing resources.

Calculating tessellated ground plane 160 outside of image display and measurement computer system 130 enables virtually any level of detail to be incorporated into tessellated ground plane 160, i.e., the size and/or area covered by or corresponding to each of facets 162a, 162b, 162c, etc., can be as large or as small as
15 desired, without significantly increasing the calculation time, slowing the operation of, nor significantly increasing the resources required by image display and measurement computer system 130 and/or image display and analysis software 140. Display and measurement computer system 130 can therefore be a relatively basic and uncomplicated computer system.

20 The size of facets 162a, 162b, 162c, etc., are uniform in size throughout a particular displayed image 142. For example, if displayed image 142 corresponds to an

WO 2004/044692

PCT/US2003/035528

area that is approximately 750 feet wide in the foreground by approximately 900 feet deep, the image can be broken into facets that are approximately 50 square feet, thus yielding about 15 facets in width and 18 facets in depth. Alternatively, the size of facets 162a, 162b, 162c, etc., are uniform in terms of the number of pixels contained therein, 5 i.e., each facet is the same number of pixels wide and the same number of pixels deep.

Facets in the foreground of displayed image 142, where the pixel density is greatest, would therefore be dimensionally smaller than facets in the background of displayed image 142 where pixel density is lowest. Since it is desirable to take most measurements in the foreground of a displayed image where pixel density is greatest, 10 creating facets that are uniform in terms of the number of pixels they contain has the advantage of providing more accurate measurements in the foreground of displayed image 142 relative to facets that are dimensionally uniform.

Another advantage of using pixels as a basis for defining the dimensions of facets 162a, 162b, 162c, etc., is that the location calculation (pixel location to ground 15 location) is relatively simple. A user operates image display and measurement computer system 130 to select a pixel within a given facet, image display and analysis software 140 looks up the data for the facet corresponding to the selected pixel, the elevation of the selected pixel is calculated as discussed above, and that elevation is used within the location calculation.

20 Generally, the method of capturing oblique images of the present invention divides an area of interest, such as, for example, a county, into sectors of generally

WO 2004/044692

PCT/US2003/035528

uniform size, such as, for example, sectors that are approximately one square mile in area. This is done to facilitate the creation of a flight plan to capture oblique images covering every inch of the area of interest, and to organize and name the sectors and/or images thereof for easy reference, storage and retrieval (a process known in the art as

5 "sectorization"). Because the edges of any geographic area of interest, such as a county, rarely falls on even square mile boundaries, the method of capturing oblique images of the present invention provides more sectors than there are square miles in the area of interest – how many more depends largely on the length of the county borders as well as how straight or jagged they are. Typically, you can expect one extra

10 sector for every two to three miles of border. So if a county or other area of interest is roughly 20 miles by 35 miles, or 700 square miles, the area will be divided into approximately from 740 to 780 sectors.

The method of capturing oblique images of the present invention, in general, captures the oblique images from at least two compass directions, and provides full

15 coverage of the area of interest from at least those two compass directions. Referring now to Figs. 7 and 8, a first embodiment of a method for capturing oblique images of the present invention is shown. For sake of clarity, Fig. 7 and 8 is based on a system having only one image-capturing device. However, it is to be understood that two or more image-capturing devices can be used.

20 The image-capturing device captures one or more oblique images during each pass over area 200. The image-capturing device, as discussed above, is aimed at an

WO 2004/044692

PCT/US2003/035528

angle over area 200 to capture oblique images thereof. Area 200 is traversed in a back-and-forth pattern, similar to the way a lawn is mowed, by the image-carrying device and/or the platform to ensure double coverage of area 200.

More particularly, area 200 is traversed by image-carrying device 32 and/or platform 20 following a first path 202 to thereby capture oblique images of portions 202a, 202b, and 202c of area 200. Area 200 is then traversed by image-carrying device 32 and/or platform 20 following a second path 204 that is parallel and spaced apart from, and in an opposite direction to, i.e., 180° (one-hundred and eighty degrees) from, first path 202, to thereby capture oblique images of portions 204a, 204b, 204c of area 200. By comparing Figs. 7 and 8, it is seen that a portion 207 (Fig. 8) of area 200 is covered by images 202a-c captured from a first direction or perspective, and by images 204a-c captured from a second direction or perspective. As such, the middle portion of area 200 is 100% (one-hundred percent) double covered. The above-described pattern of traversing or passing over area 200 along opposing paths that are parallel to paths 202 and 204 is repeated until the entirety of area 200 is completely covered by at least one oblique image captured from paths that are parallel to, spaced apart from each other as dictated by the size of area 200, and in the same direction as paths 202 and 204 to thereby one-hundred percent double cover area 200 from those perspectives/directions.

If desired, and for enhanced detail, area 200 is covered by two additional opposing and parallel third and fourth paths 206 and 208, respectively, that are

WO 2004/044692

PCT/US2003/035528

perpendicular to paths 202 and 204 as shown in Figs. 9 and 10. Area 200 is therefore traversed by image-carrying device 32 and/or platform 20 following third path 206 to capture oblique images of portions 206a, 206b and 206c of area 200, and is then traversed along fourth path 208 that is parallel, spaced apart from, and opposite to third path 206 to capture oblique images of portions 208a, 208b and 208c of area 200. This pattern of traversing or passing over area 200 along opposing paths that are parallel to paths 206 and 208 is similarly repeated until the entirety of area 200 is completely covered by at least one oblique image captured from paths that are parallel to, spaced apart from as dictated by the size of area 200, and in the same direction as paths 206 and 208 to thereby one-hundred percent double cover area 200 from those directions/perspectives.

As described above, image-carrying device 32 and/or platform 20, traverses or passes over area 200 along a predetermined path. However, it is to be understood that image-carrying device and/or platform 20 do not necessarily pass or traverse directly over area 200 but rather may pass or traverse an area adjacent, proximate to, or even somewhat removed from, area 200 in order to ensure that the portion of area 200 that is being imaged falls within the image-capture field of the image-capturing device. Path 202, as shown in Fig. 7, is such a path that does not pass directly over area 200 but yet captures oblique images thereof.

The present invention is capable of capturing images at various levels of resolution or ground sample distances. A first level of detail, hereinafter referred to as a

WO 2004/044692

PCT/US2003/035528

community level, has a ground sample distance of, for example, approximately two-feet per pixel. For orthogonal community-level images, the ground sample distance remains substantially constant throughout the image. Orthogonal community-level images are captured with sufficient overlap to provide stereo pair coverage. For oblique
5 community-level images, the ground sample distance varies from, for example, approximately one-foot per pixel in the foreground of the image to approximately two-feet per pixel in the mid-ground of the image, and to approximately four-feet per pixel in the background of the image. Oblique community-level images are captured with sufficient overlap such that each area of interest is typically covered by at least two
10 oblique images from each compass direction captured. Approximately ten oblique community-level images are captured per sector.

A second level of detail, hereinafter referred to as a neighborhood level, is significantly more detailed than the community-level images. Neighborhood-level images have a ground sample distance of, for example, approximately six-inches per
15 pixel. For orthogonal neighborhood-level images, the ground sample distance remains substantially constant. Oblique neighborhood-level images have a ground sample distance of, for example, from approximately four-inches per pixel in the foreground of the image to approximately six-inches per pixel in the mid-ground of the image, and to approximately ten-inches per pixel in the background of the image. Oblique
20 neighborhood-level images are captured with sufficient overlap such that each area of interest is typically covered by at least two oblique images from each compass direction

captured, and such that opposing compass directions provide 100% overlap with each other. Approximately one hundred (100) oblique area images are captured per sector.

It should be particularly noted that capturing oblique community and/or neighborhood-level images from all four compass directions ensures that every point in the image will appear in the foreground or lower portion of at least one of the captured oblique images, where ground sample distance is lowest and image detail is greatest.

In the embodiment shown, image-capturing and geo-locating system 30 includes a gyroscope, compass and altimeter. However, it is to be understood that the image-capturing and geo-locating system of the present invention can be alternately configured, such as, for example, to derive and/or calculate altitude, pitch, roll and yaw, and compass heading from the GPS and INU signals/data, thereby rendering one or more of the gyroscope, compass and altimeter unnecessary.

In the embodiment shown, image-capturing devices are at an equal angle of declination relative to a horizontal plane. However, it is to be understood that the declination angles of the image-capturing devices do not have to be equal.

In the embodiment shown, image-capturing computer system executes image and data acquiring software that issues a common or single image-capture signal to the image-capturing devices to thereby cause those devices to acquire or capture an image. However, it is to be understood that the present invention can be alternately configured to separately cause the image-capturing devices to capture images at different instants and/or at different intervals.

In the embodiment shown, the method of the present invention captures oblique images to provide double coverage of an area of interest from paths/perspectives that are substantially opposite to each other, i.e., 180° (one-hundred and eighty degrees) relative to each other. However, it is to be understood that the method of the present invention can be alternately configured to provide double coverage from paths/perspectives that are generally and/or substantially perpendicular relative to each other.

While the present invention has been described as having a preferred design, the invention can be further modified within the scope of this disclosure. Moreover, this disclosure is intended to encompass any departures from the subject matter disclosed that come within the known or customary practice in the pertinent art and which fall within the limits of the appended claims.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A computerized system for displaying, geolocating, and making measurements based upon captured oblique images, the system comprising:
 - a computer system having a memory;
 - an image and data file accessible by said system and including a plurality of image files corresponding to a plurality of captured oblique images, said image and data file further including positional data corresponding to said plurality of image files;
 - a ground plane data file accessible by said computer system, said ground plane data file representing a tessellated ground plane that closely approximates at least a portion of terrain depicted within said captured oblique images, said tessellated ground plane further comprising a plurality of interconnected facets with size of the facets defined using a uniform number of pixels in the captured oblique images; and
 - image display and analysis software executed by said system for reading said image and data file and displaying at least a portion of the captured oblique images as a displayed oblique image, said software calculating a geo-location of one or more selected points within said displayed image, said software calculating a separation distance between any two or more selected points within said displayed image.

2. The system of claim 1, wherein each of said plurality of facets has a respective pitch and slope.
3. The system of claim 2, wherein said ground plane data file comprises a plurality of vertices, each of said plurality of vertices having respective elevations and defining corners of said plurality of interconnected facets, two of said plurality of vertices shared by each of said interconnected facets.
4. The system of claim 3, wherein said image display and analysis software identifies which of said plurality of facets corresponds to a selected point on said displayed image, and calculates an elevation of said selected point dependent at least in part upon the elevation of the vertices of the facet corresponding to the selected point, said image display and analysis software using said calculated elevation for calculating said separation distance between said selected point and one or more further selected points.
5. The system of claim 4, wherein said image display and analysis software calculates a height of an object within said displayed image by calculating the separation distance between two or more selected points.
6. The system of any one of claims 2 to 5, wherein said tessellated ground plane is one of superimposed upon and fit to said displayed image.

7. The system of any one of claims 1 to 6, wherein said image display and analysis software includes user-selectable measuring modes accessible through pull-down menus, toolbars or keyboard commands or any combination thereof.

8. The system of any one of claims 1 to 7, wherein each of said images were captured by an image-capturing device and at respective image capturing events, said positional data of said image and data file including:

time data representing a time of each image-capturing event;

location data representing a location of the image-capturing device at each image-capturing event;

orientation data representing an orientation of the image-capturing device at each image-capturing event;

correction data representing correction factors for the image-capturing device; and

elevation data representing an average elevation of a surface captured by the image-capturing device.

9. The system of claim 8, wherein said location data includes latitude, longitude, and altitude of the image-capturing device at each image-capturing event.

10. The system of claim 8, wherein said orientation data includes roll, pitch, yaw and heading of said image-capturing device at each image-capturing event.

11. The system of claim 8, wherein said image-capturing device is a camera and said correction data includes focal length, sensor size, aspect ratio, principle point offset, distortion, or pixel pitch or any combination thereof.

12. A computerized method for taking measurements within a displayed oblique image, the method comprising:

selecting with an input device a starting point and an end point on the displayed image;

retrieving from a data file positional data corresponding to said starting point and said end point;

referencing a ground plane data file corresponding to a tessellated ground plane having a plurality of facets, each of said facets having a respective pitch and slope, said tessellated ground plane closely matching a terrain of said displayed oblique image;

connecting said starting and end points with line segments, said line segments conforming to said pitch and slope of said facets to thereby follow said terrain; and

calculating a linear distance along said line segments between said starting and end points thereby taking into account said pitch and slope of said facets.

13. The method of claim 12, wherein said tessellated ground plane is superimposed upon said displayed oblique image.

14. The method of claim 12 or 13, comprising the further steps of:

selecting with an input device one or more intermediate points on the displayed image;

retrieving from said data file positional data corresponding to said one or more intermediate points; and

connecting adjacent intermediate points to each other, and connecting said starting and end points to adjacent intermediate points, with line segments, said line segments conforming to said pitch and slope of said facets to thereby follow said terrain; and

calculating the distance along said line segments between said starting and end points.

15. The method of any one of claims 12 to 14, wherein said plurality of facets each correspond to equal areas of said displayed oblique image.

16. The method of any one of claims 12 to 14, wherein said plurality of facets each includes an equal number of pixels of said displayed oblique image.

1/7

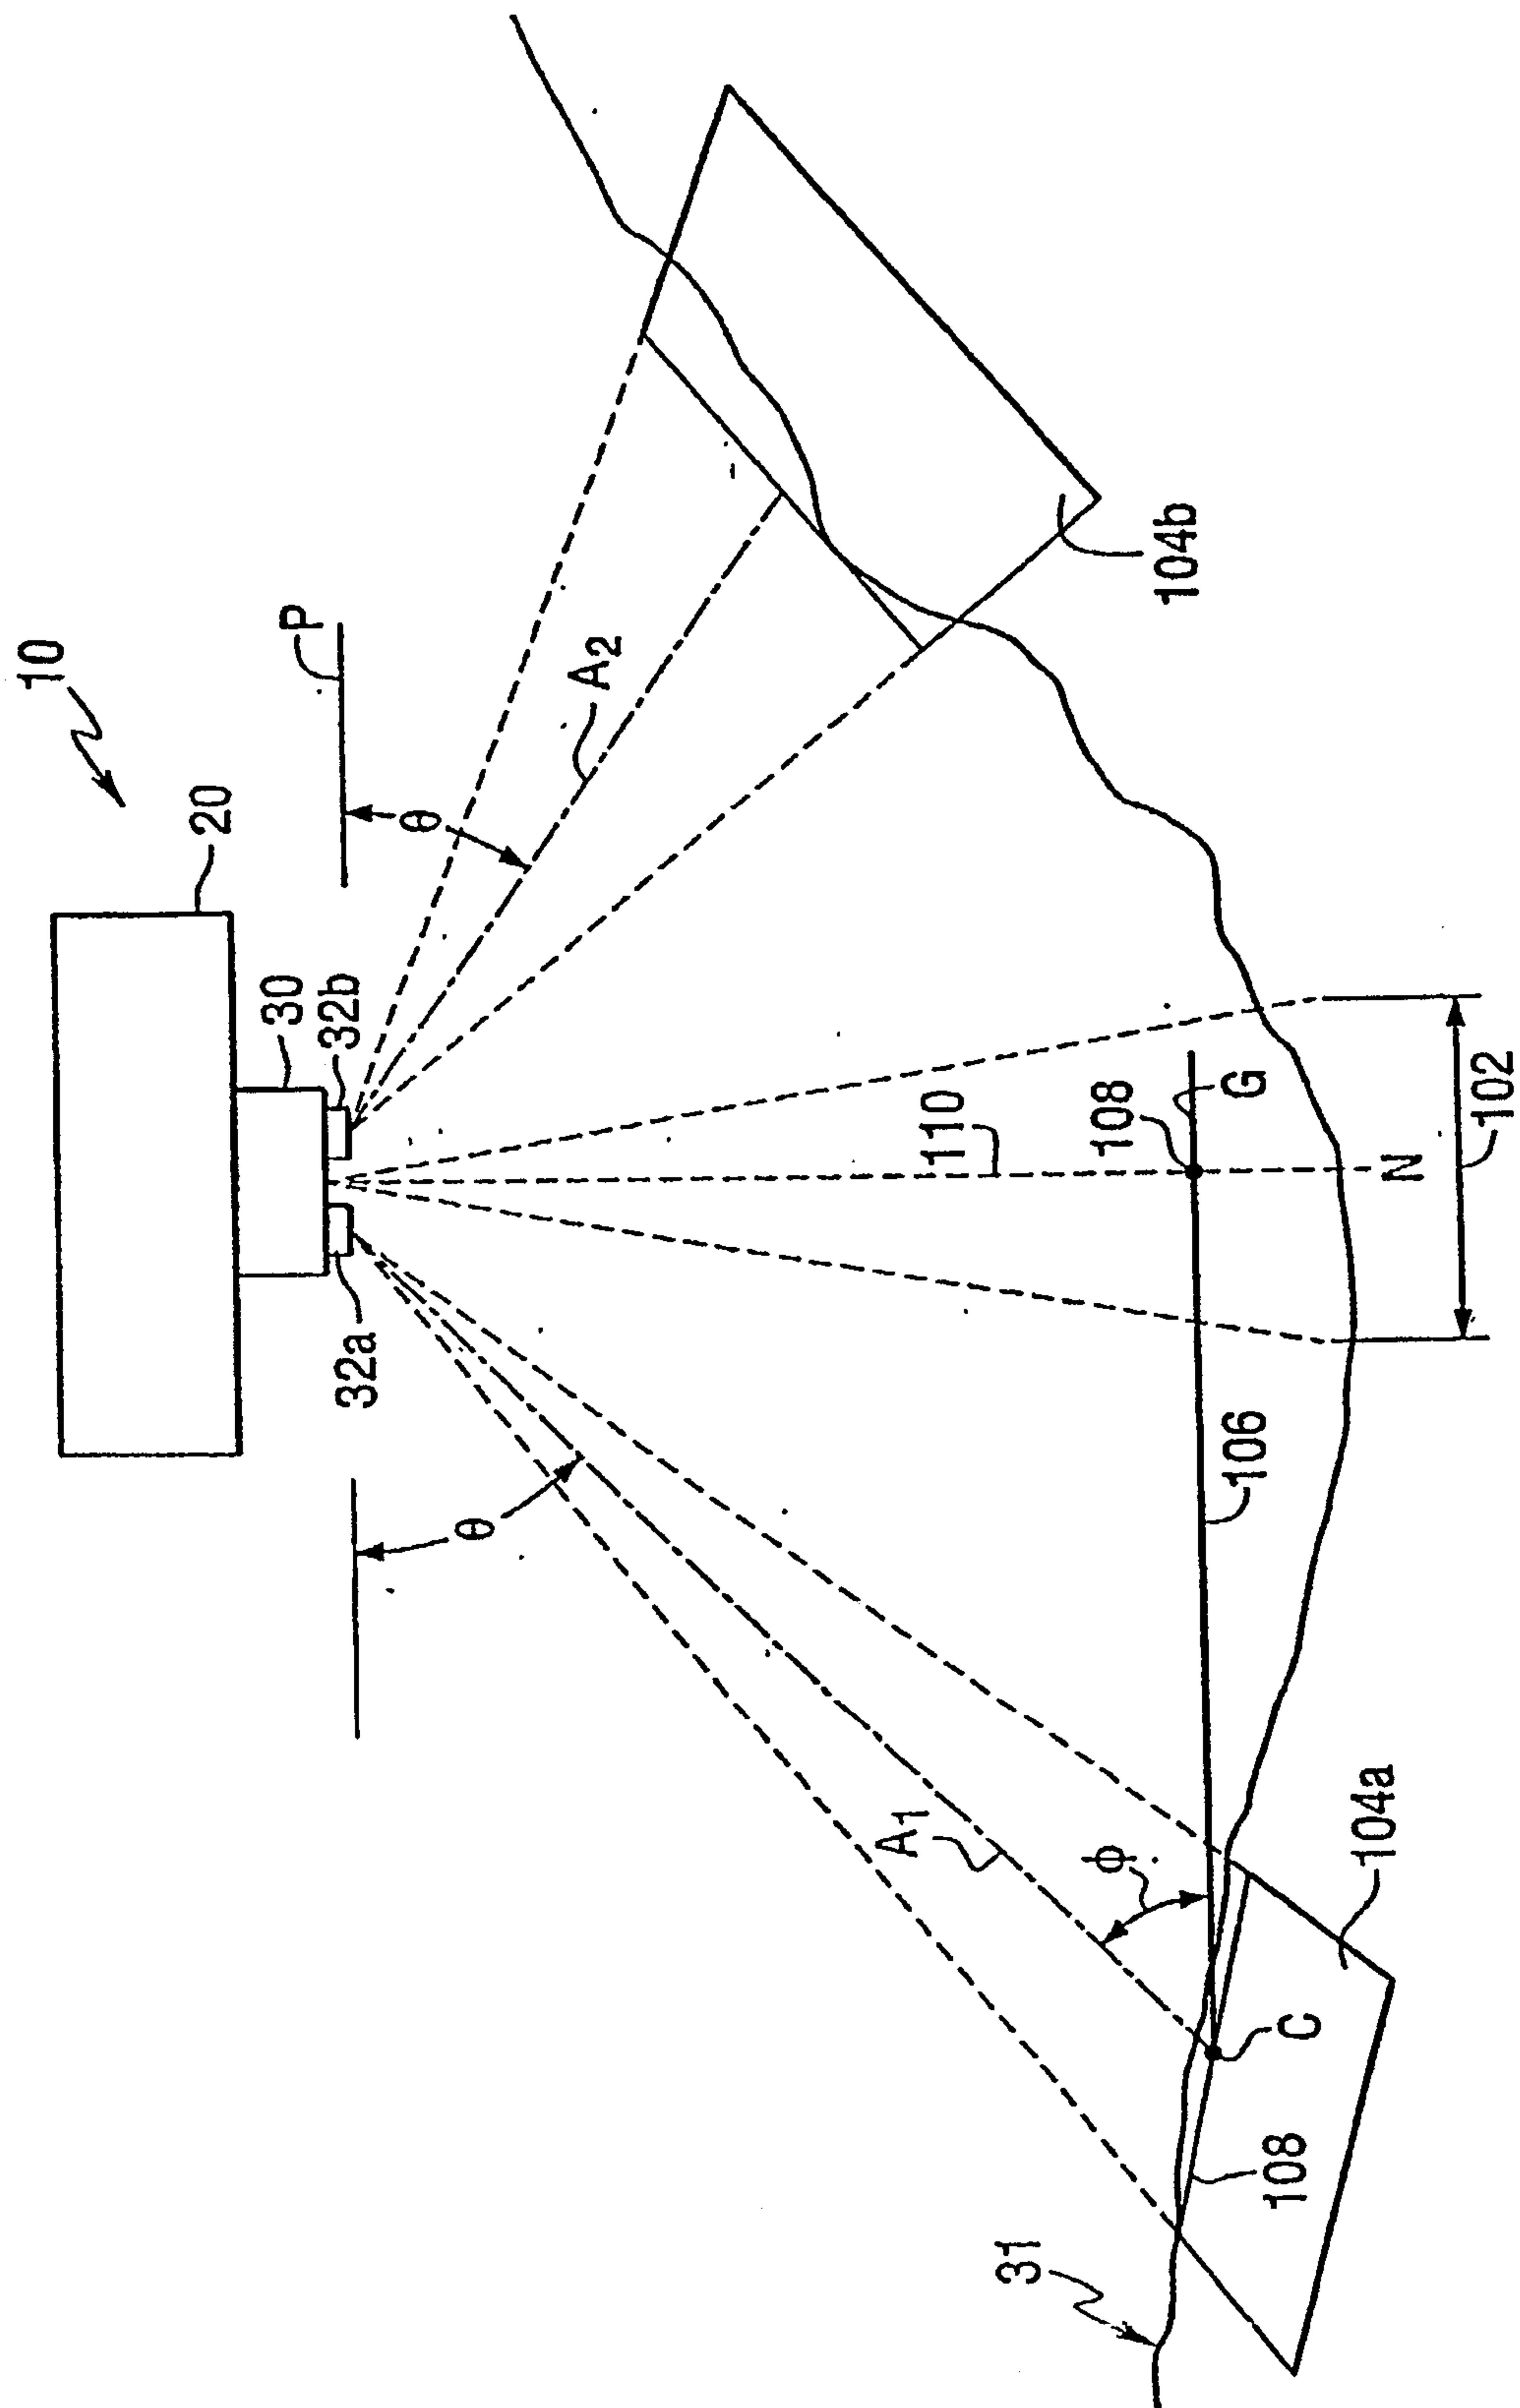


FIG. 1

2/7

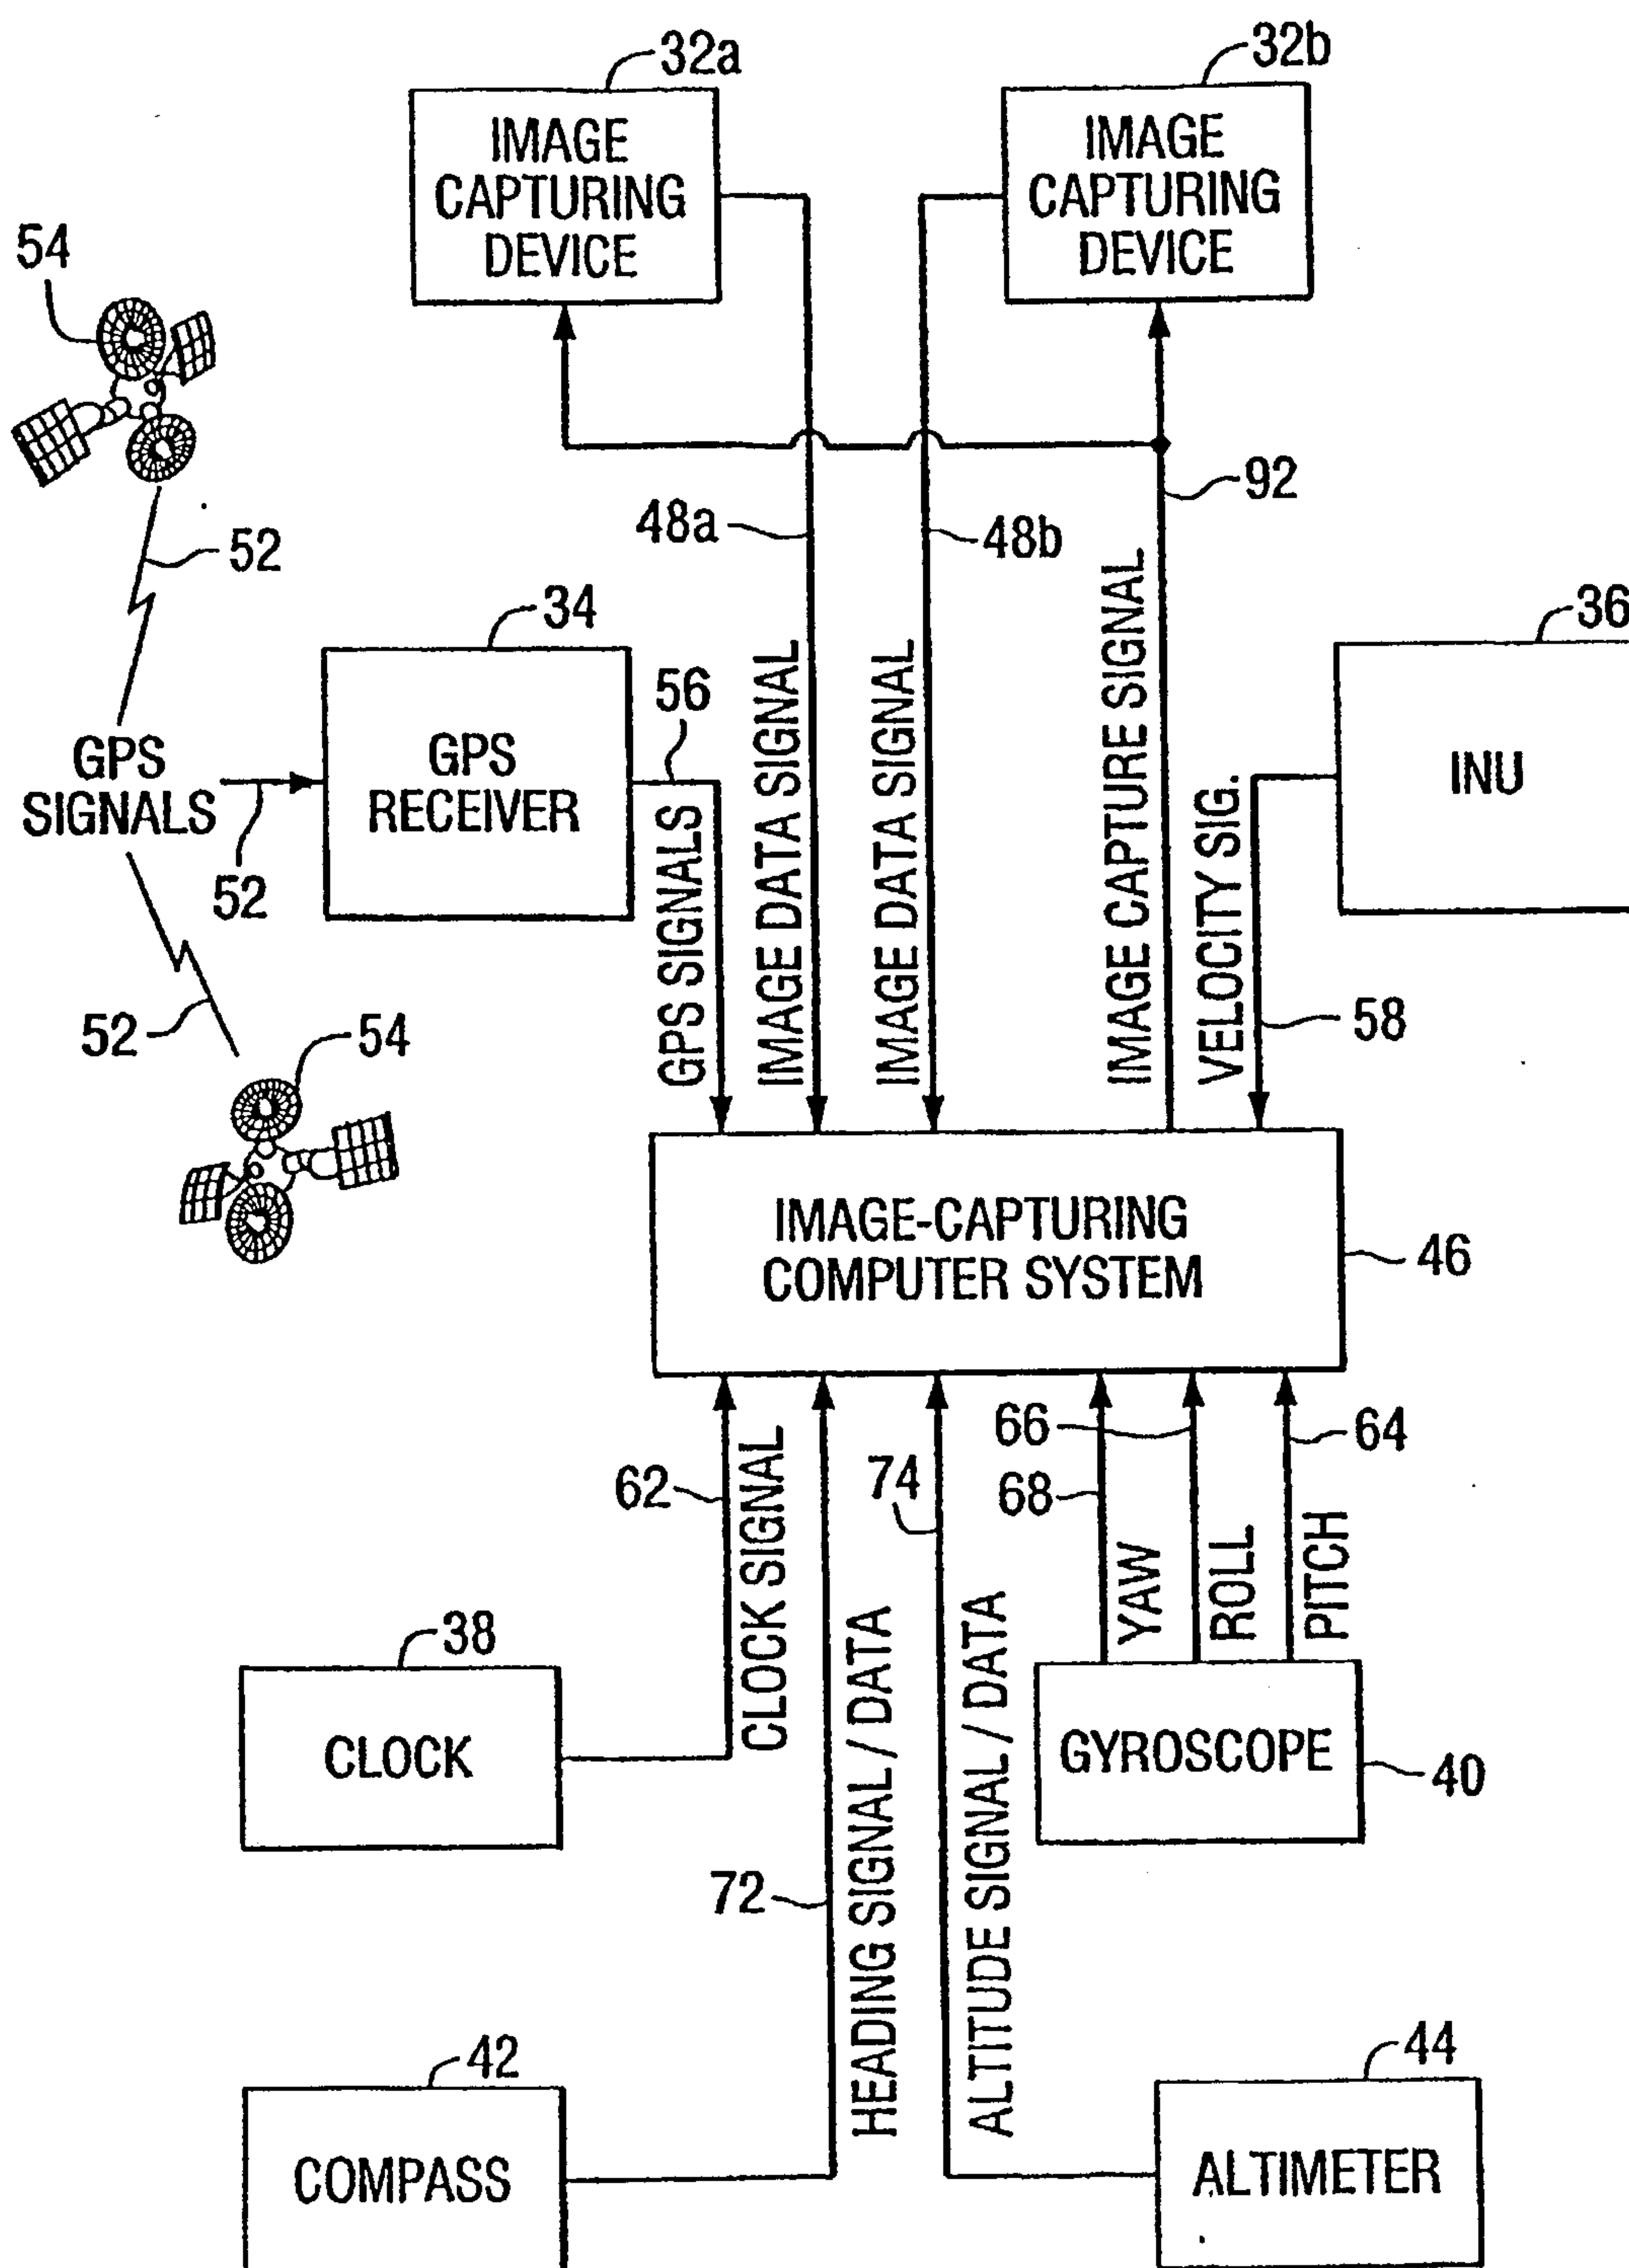


FIG. 2

3/7

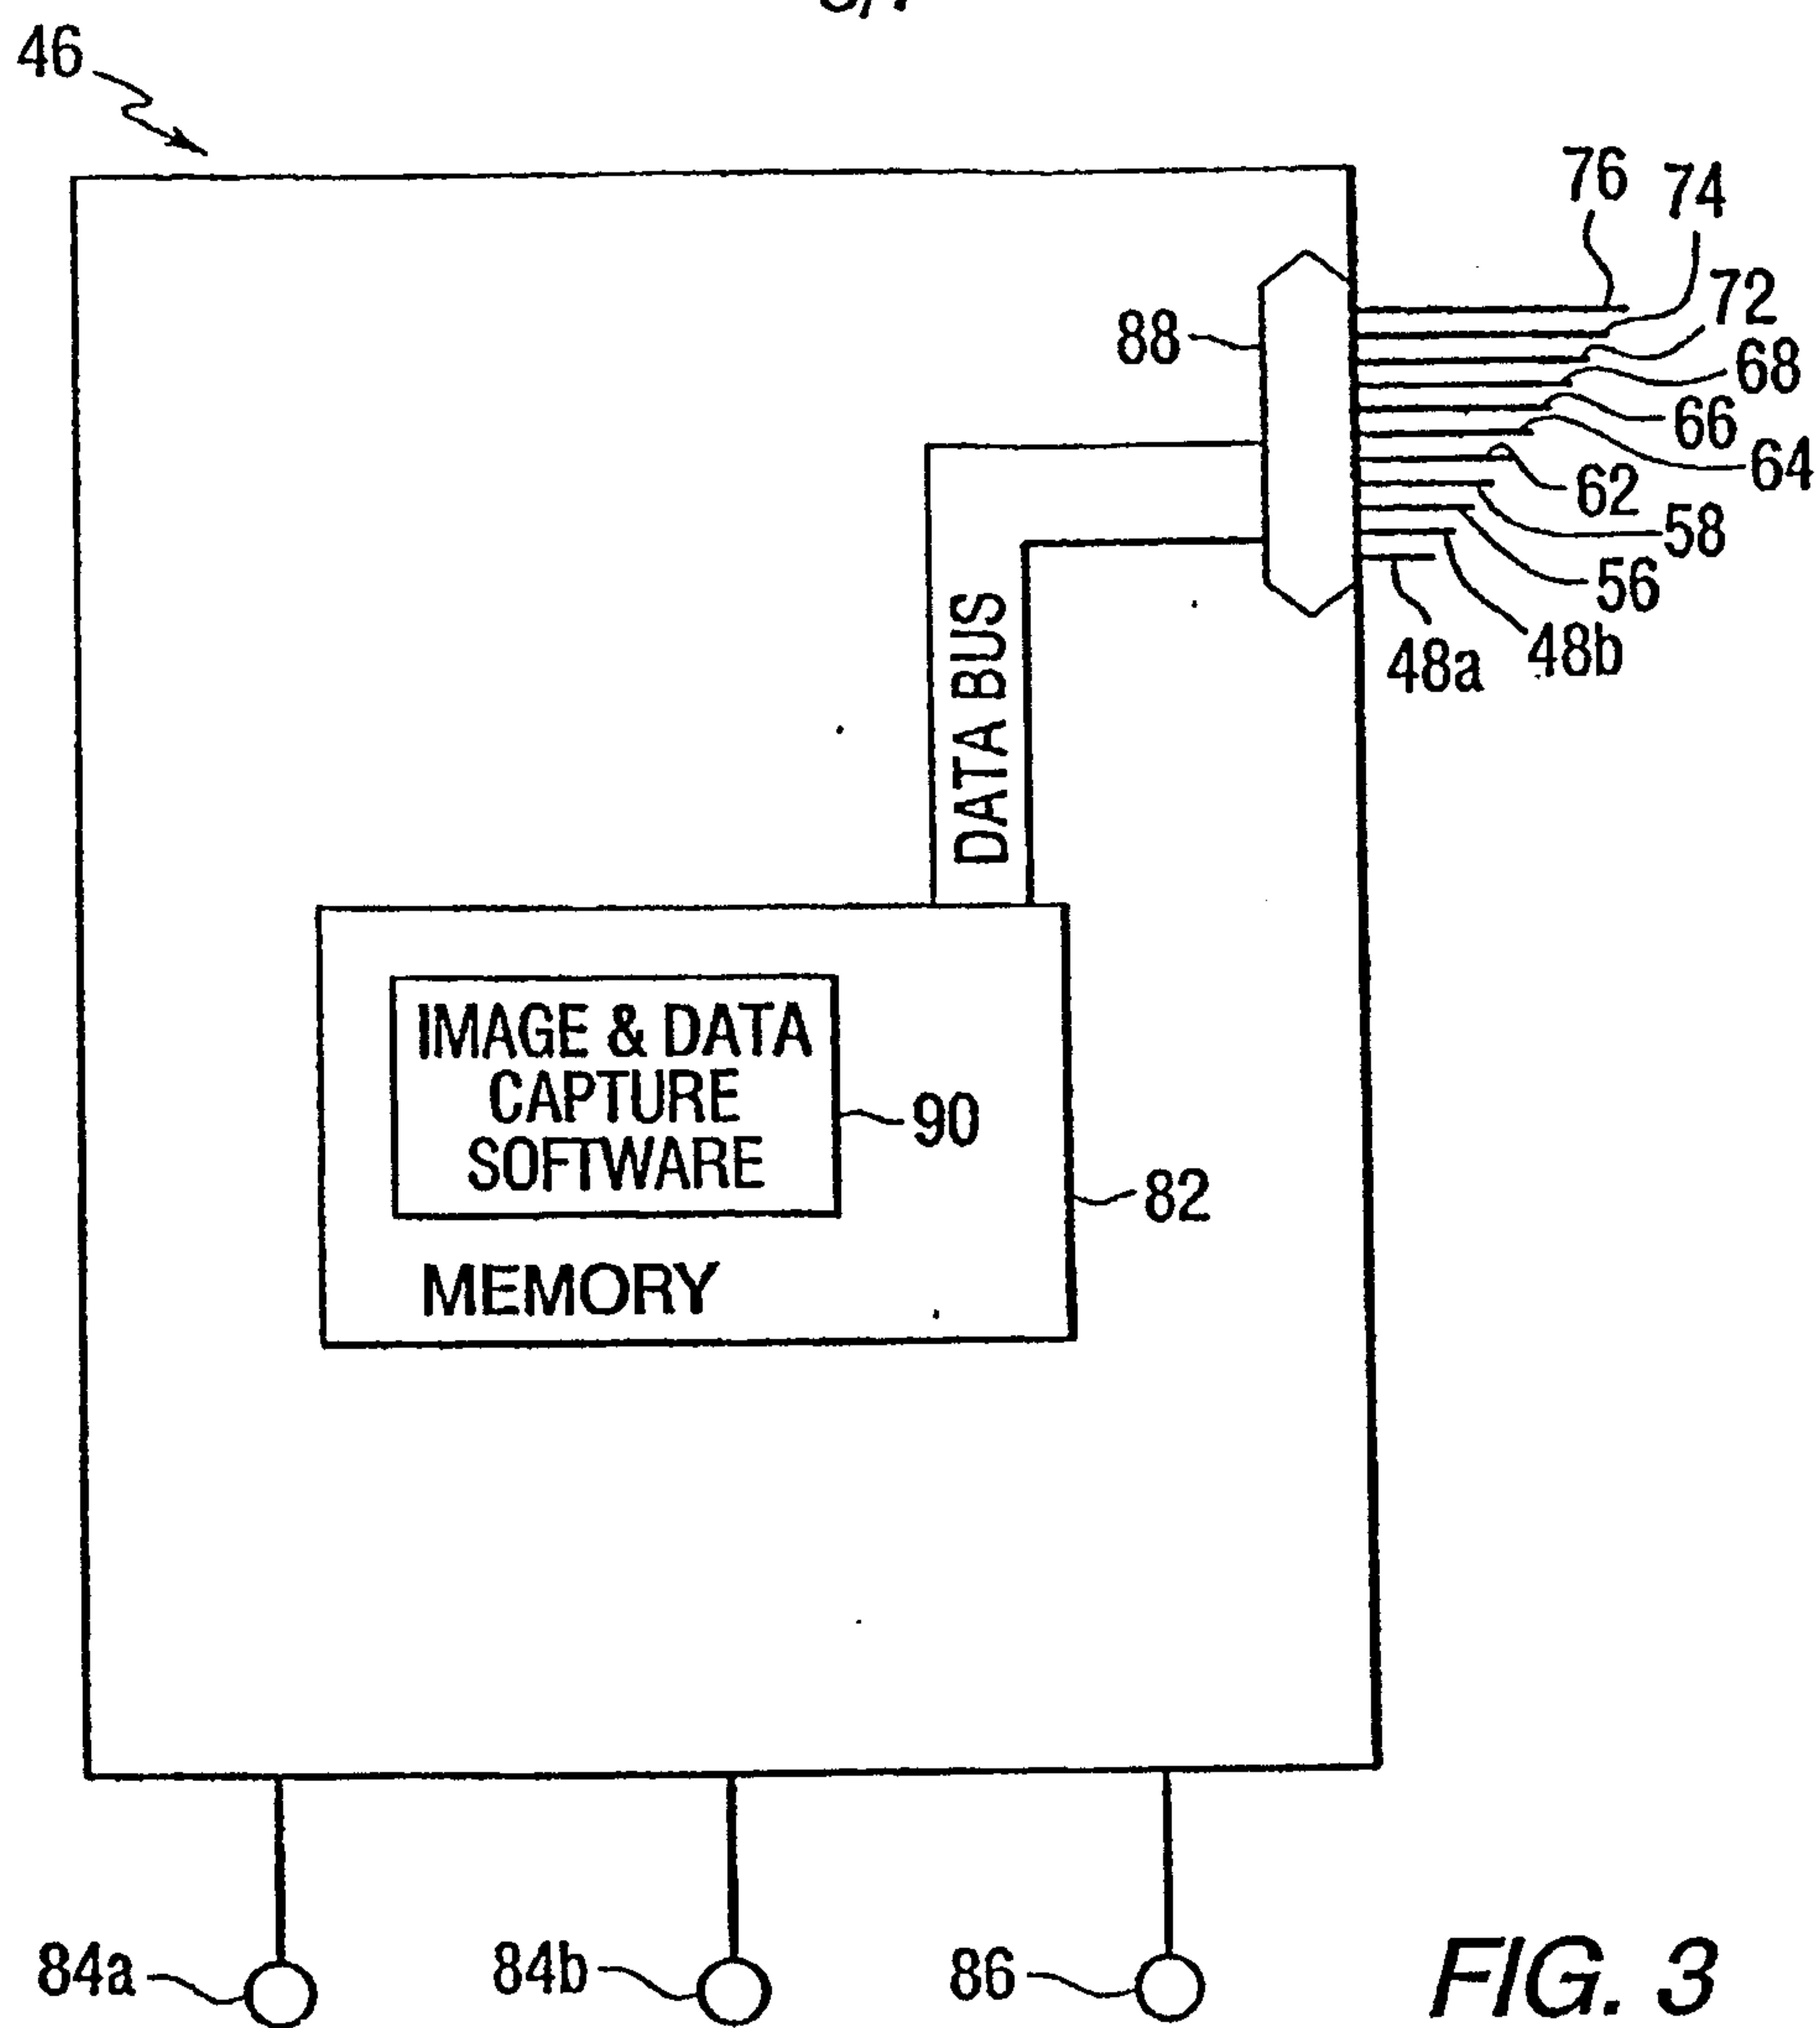


FIG. 3

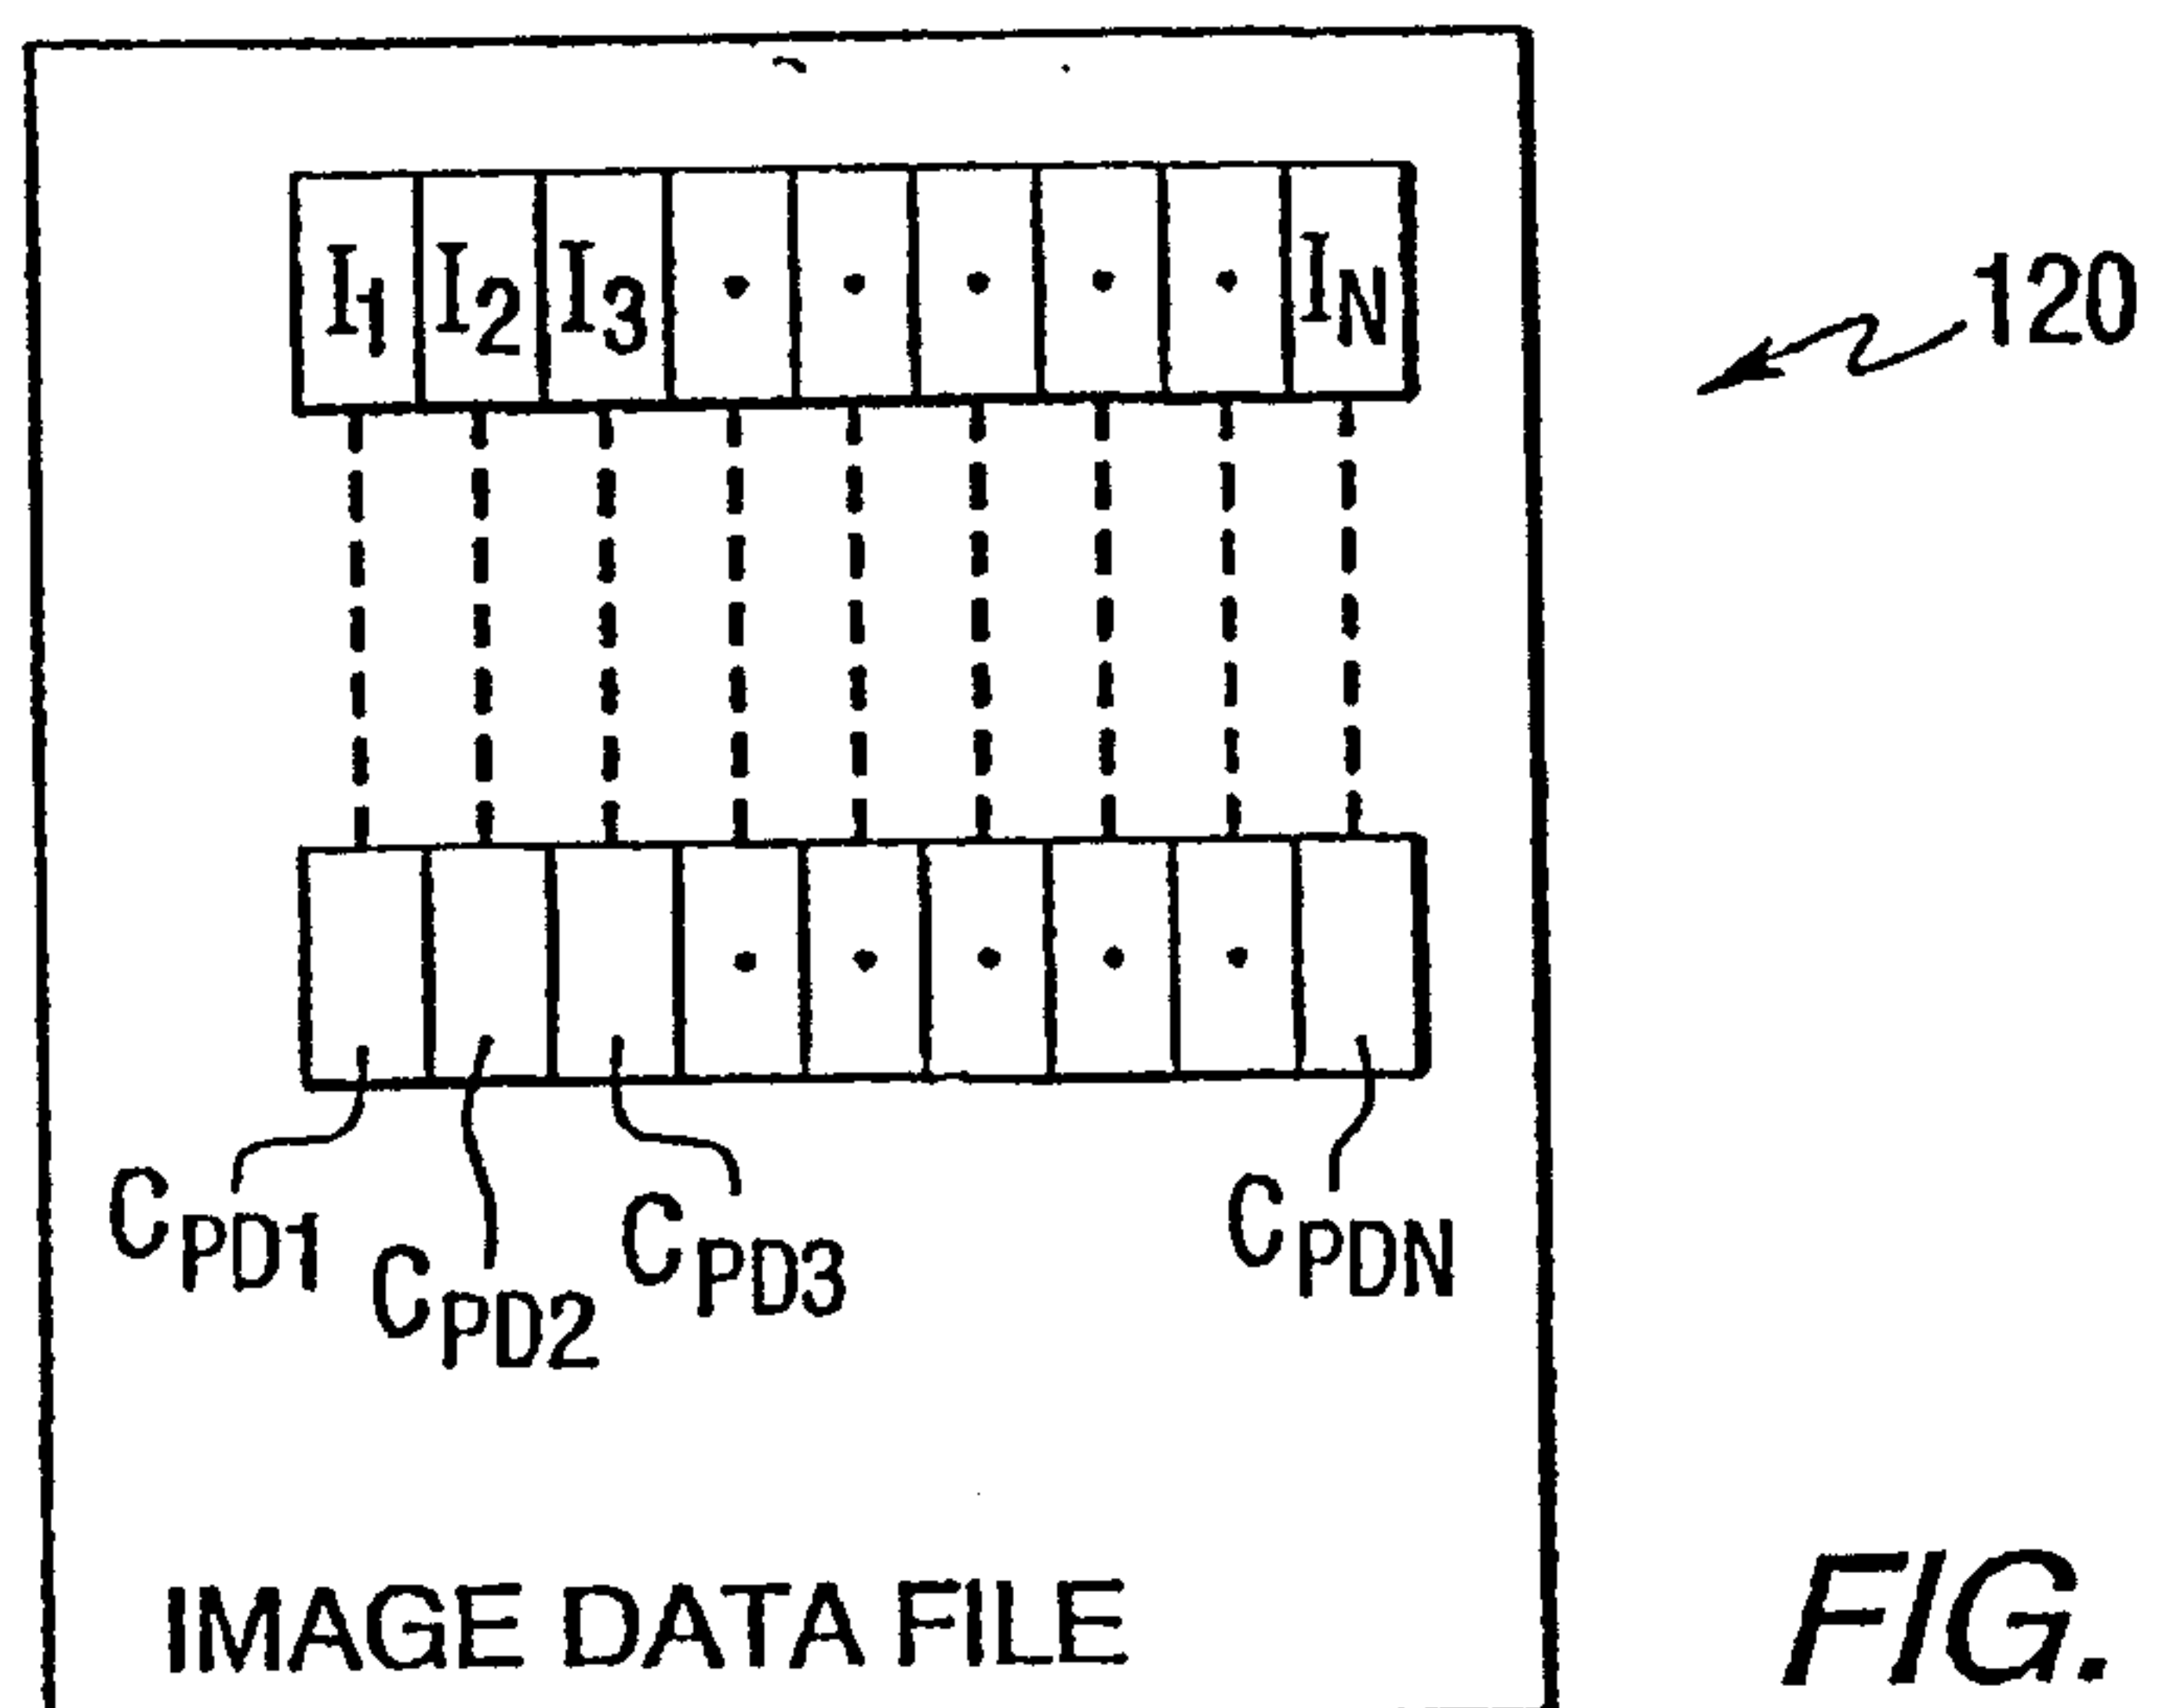


FIG. 4

4/7


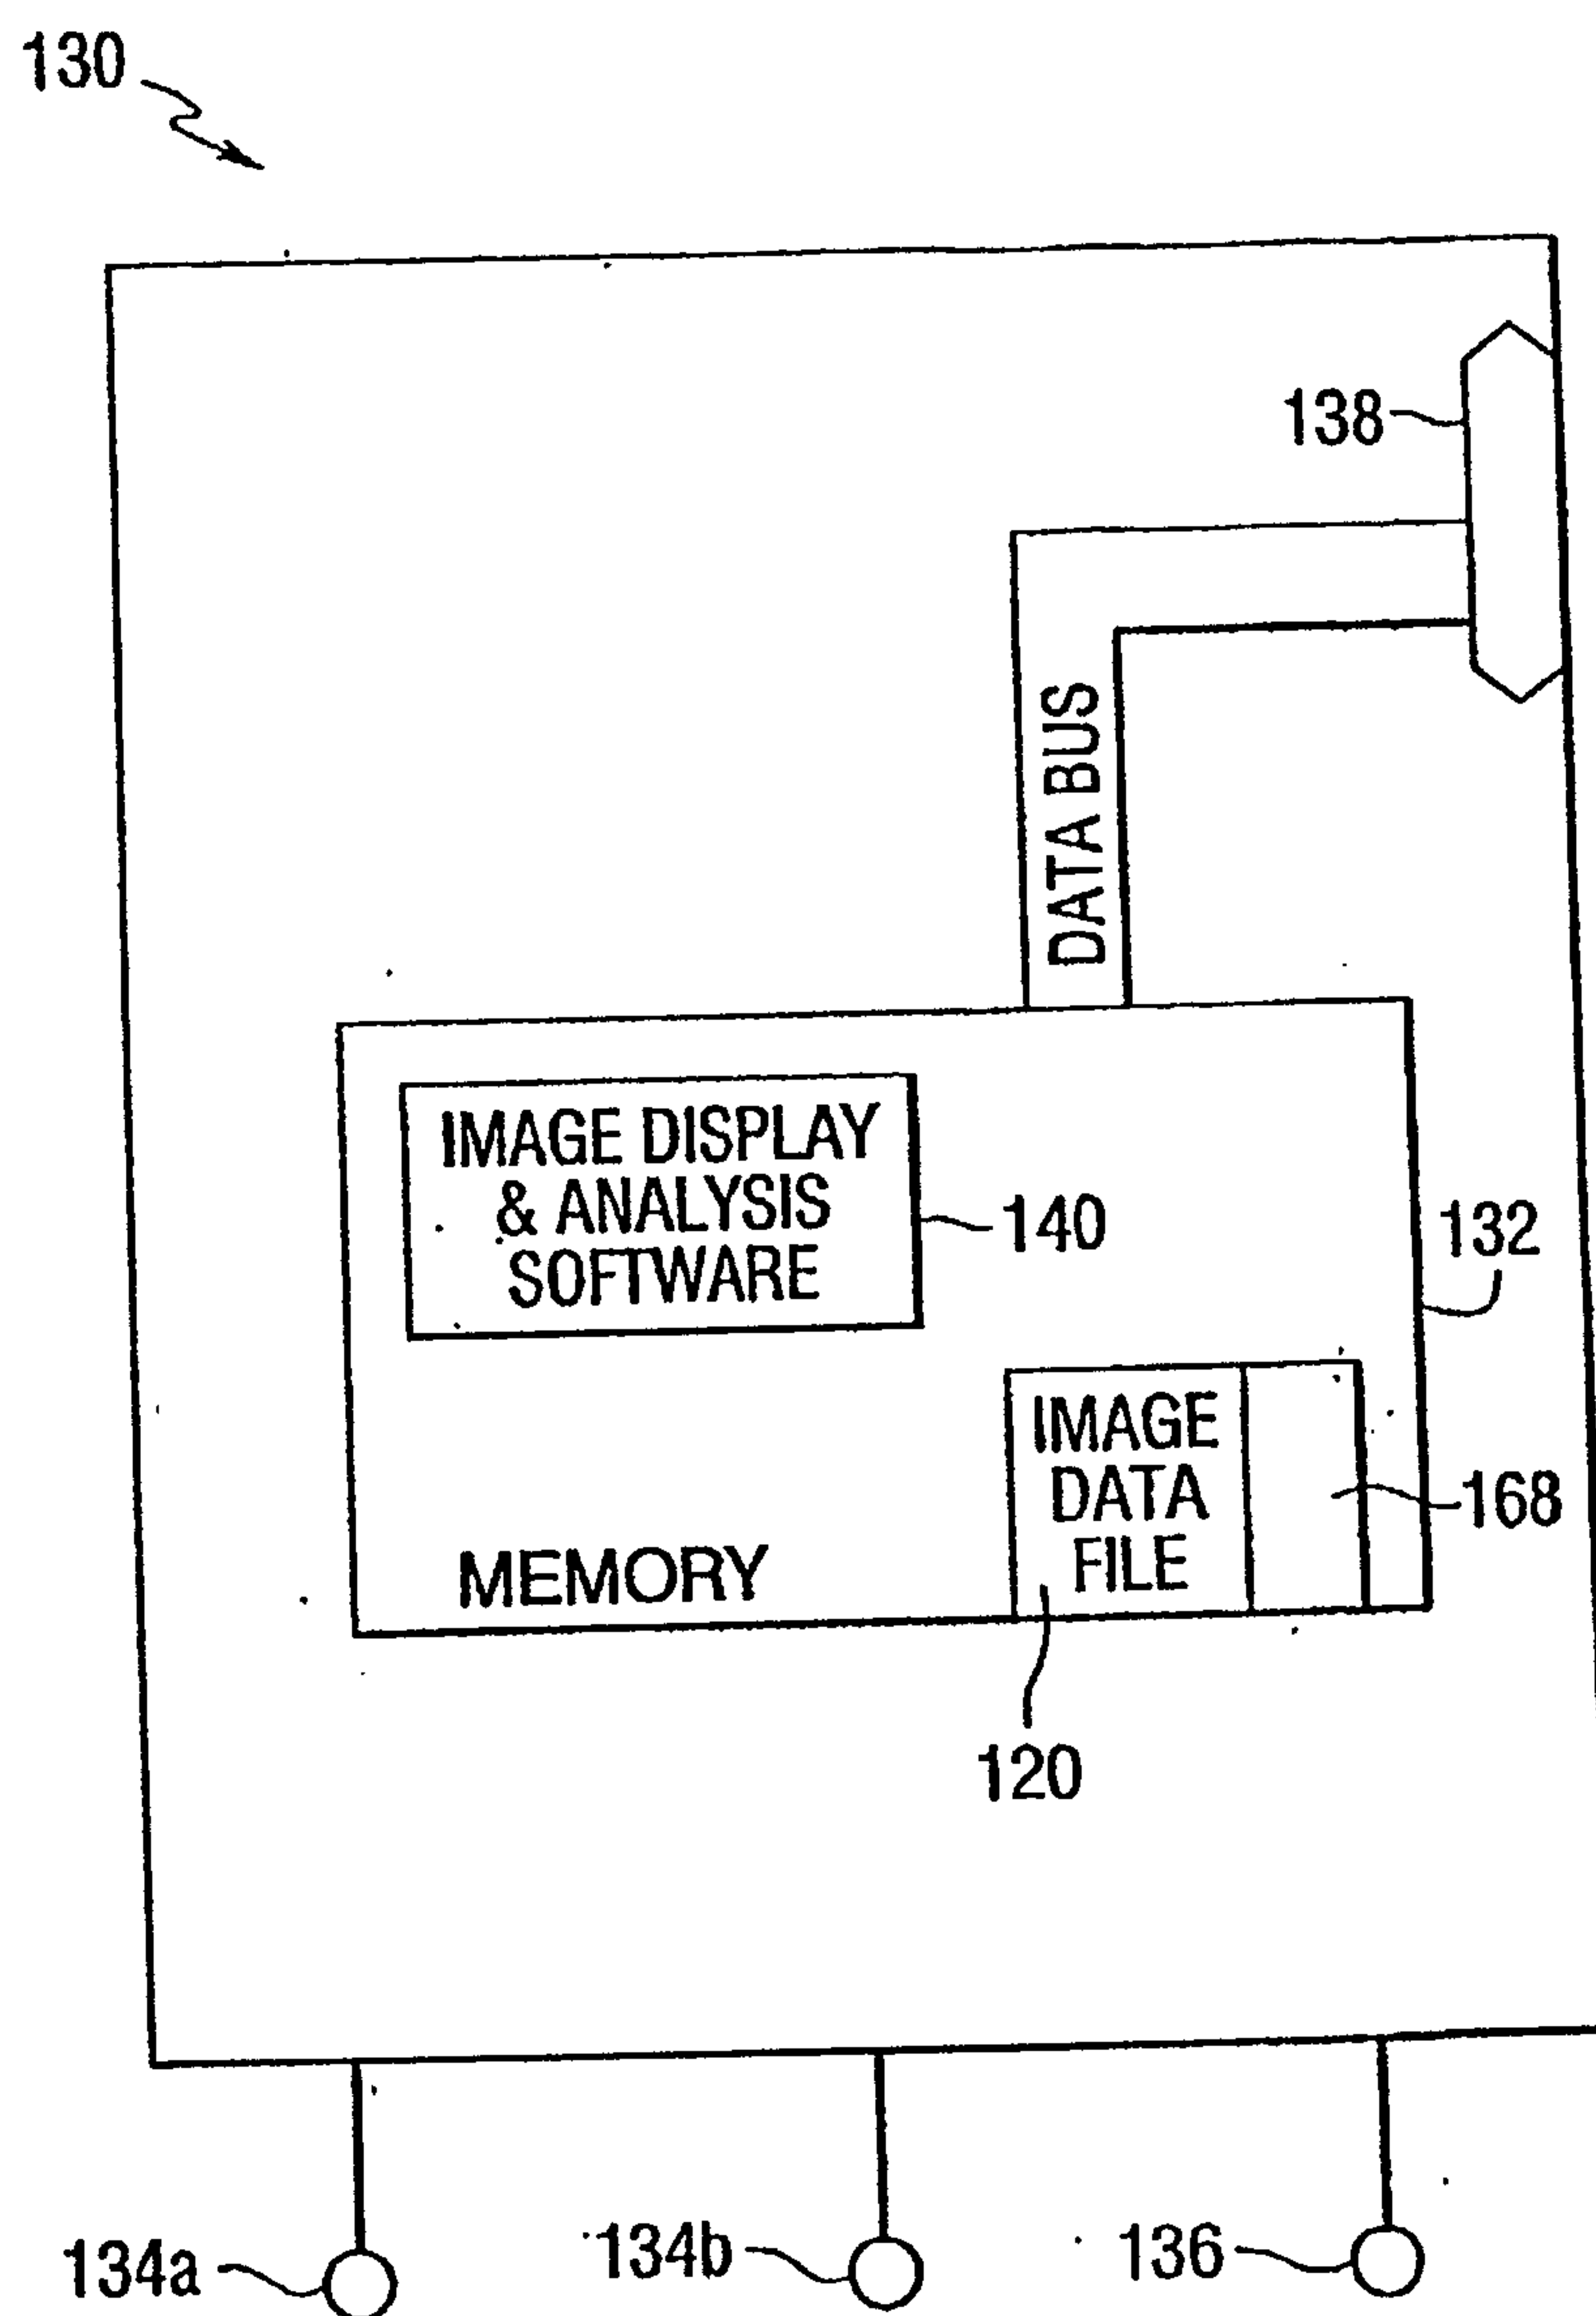


FIG. 5

5/7

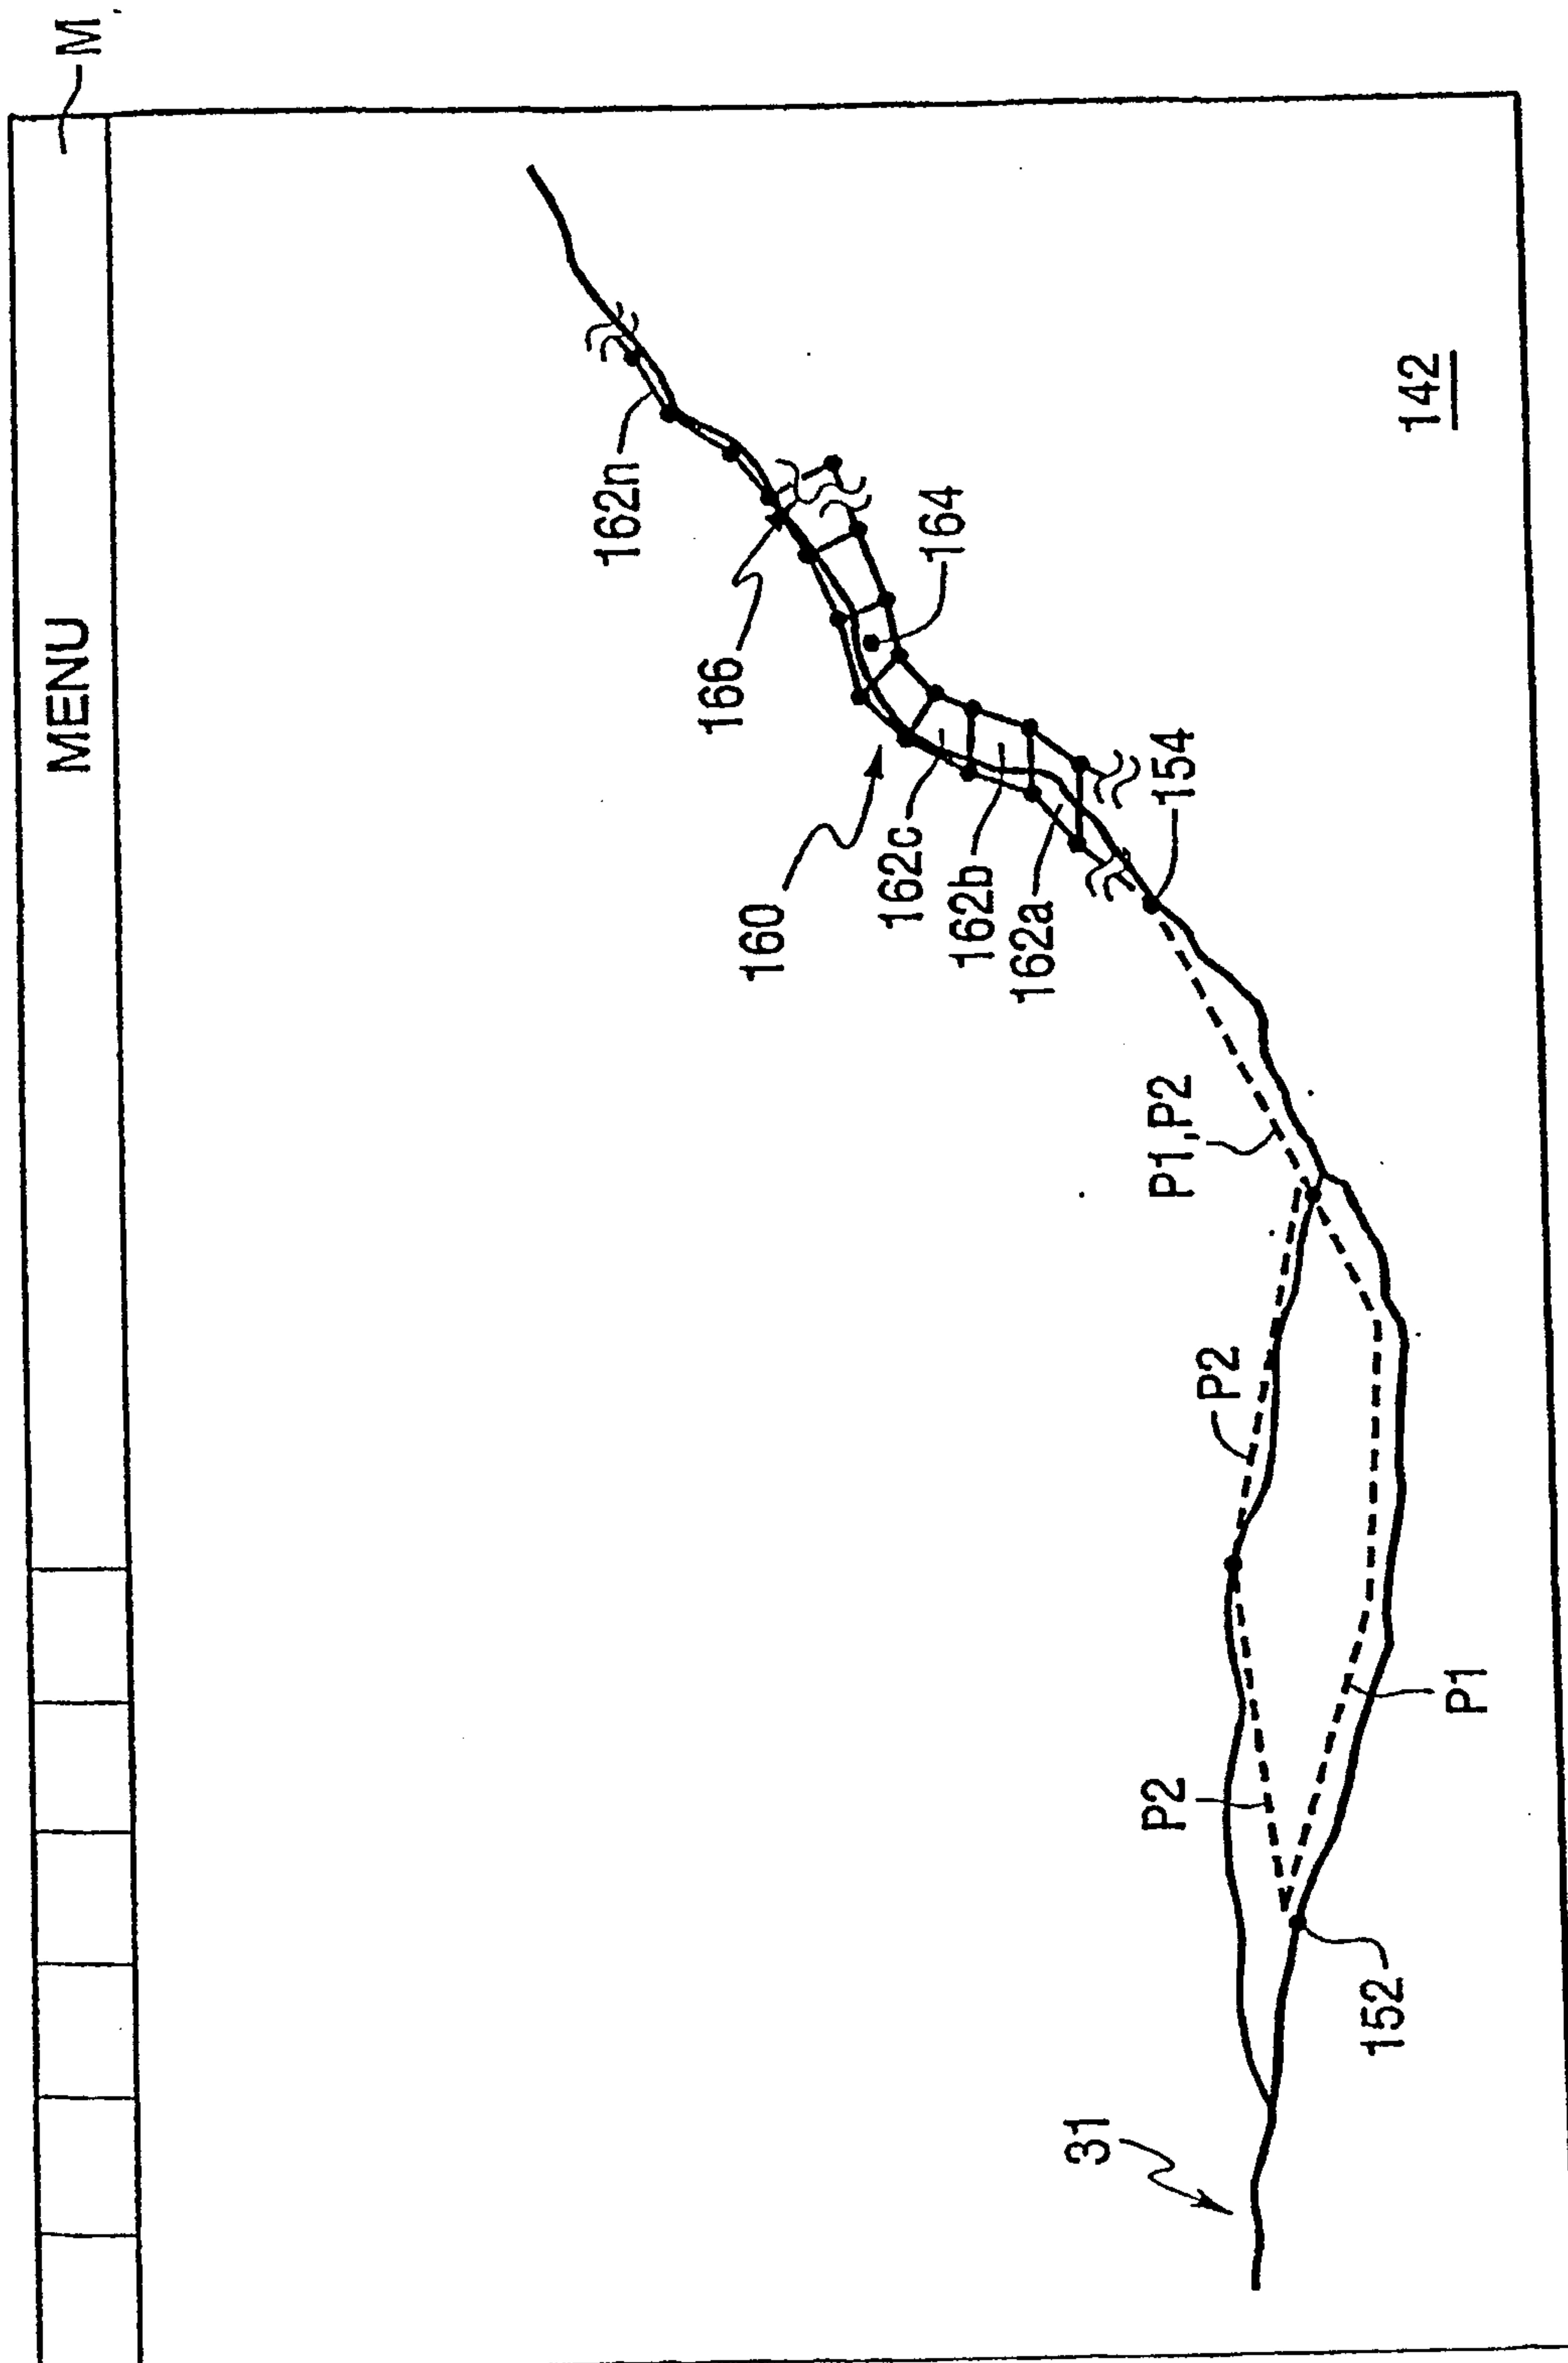

6/7

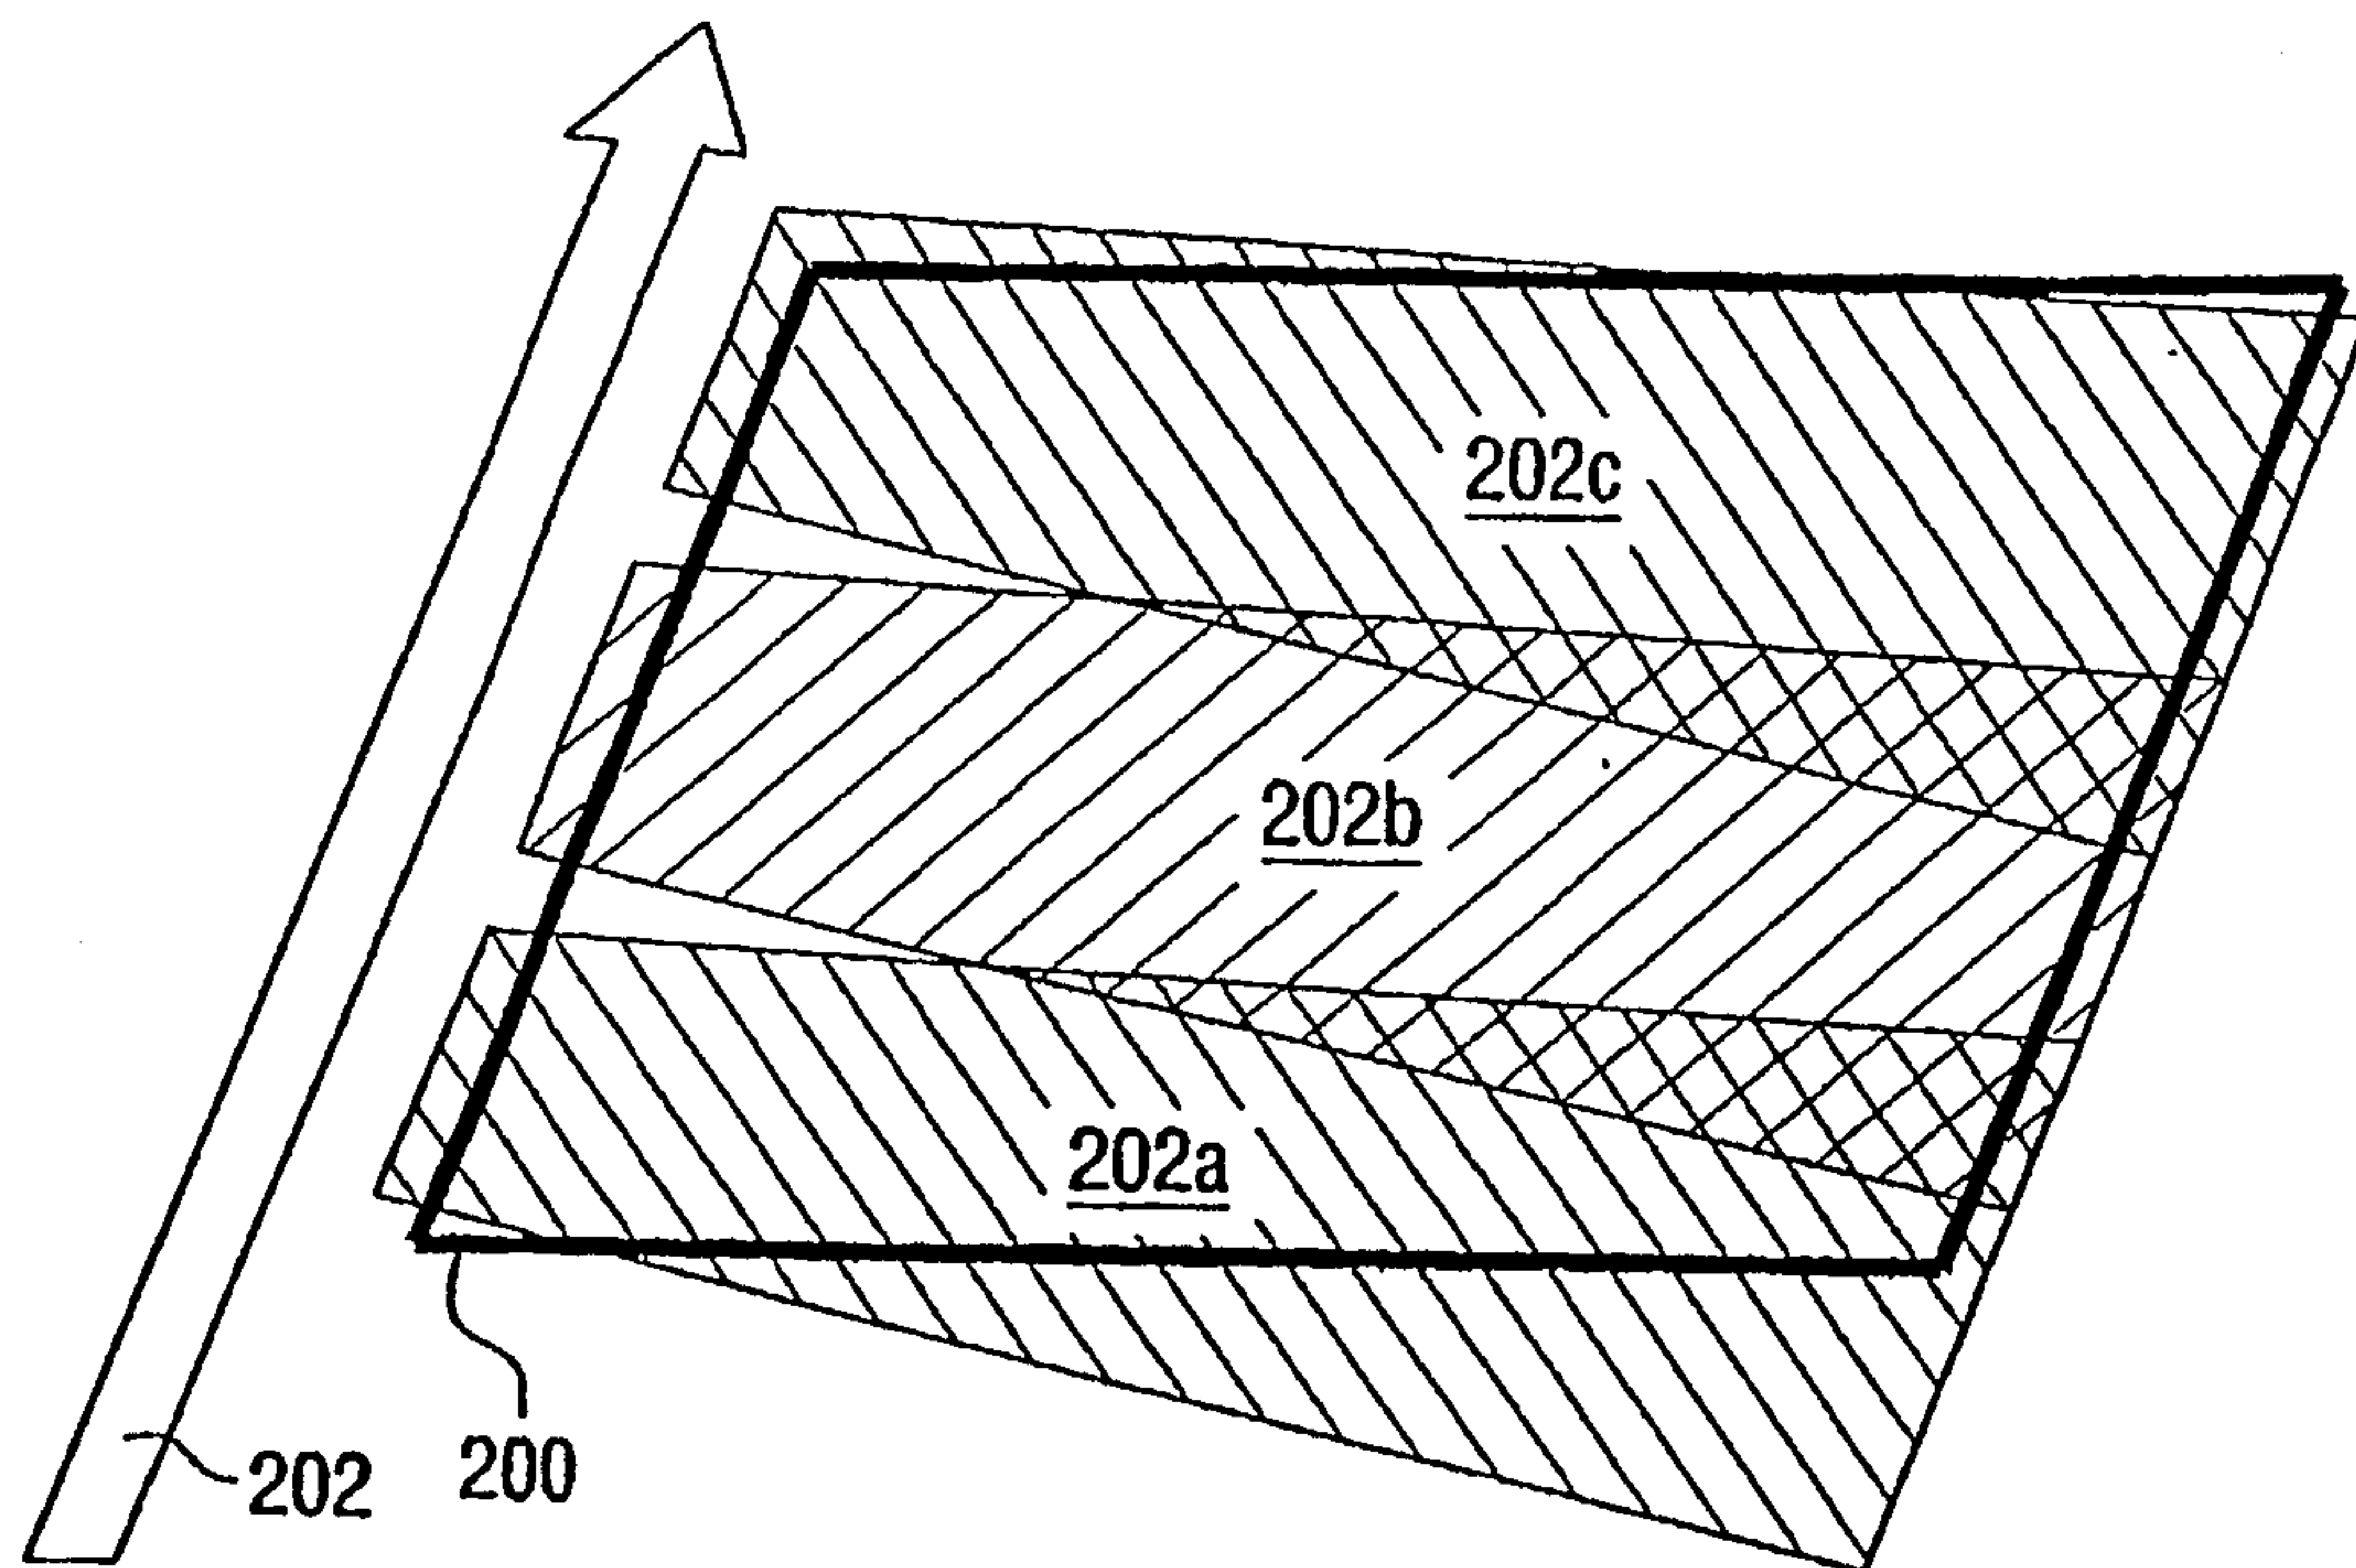


FIG. 7

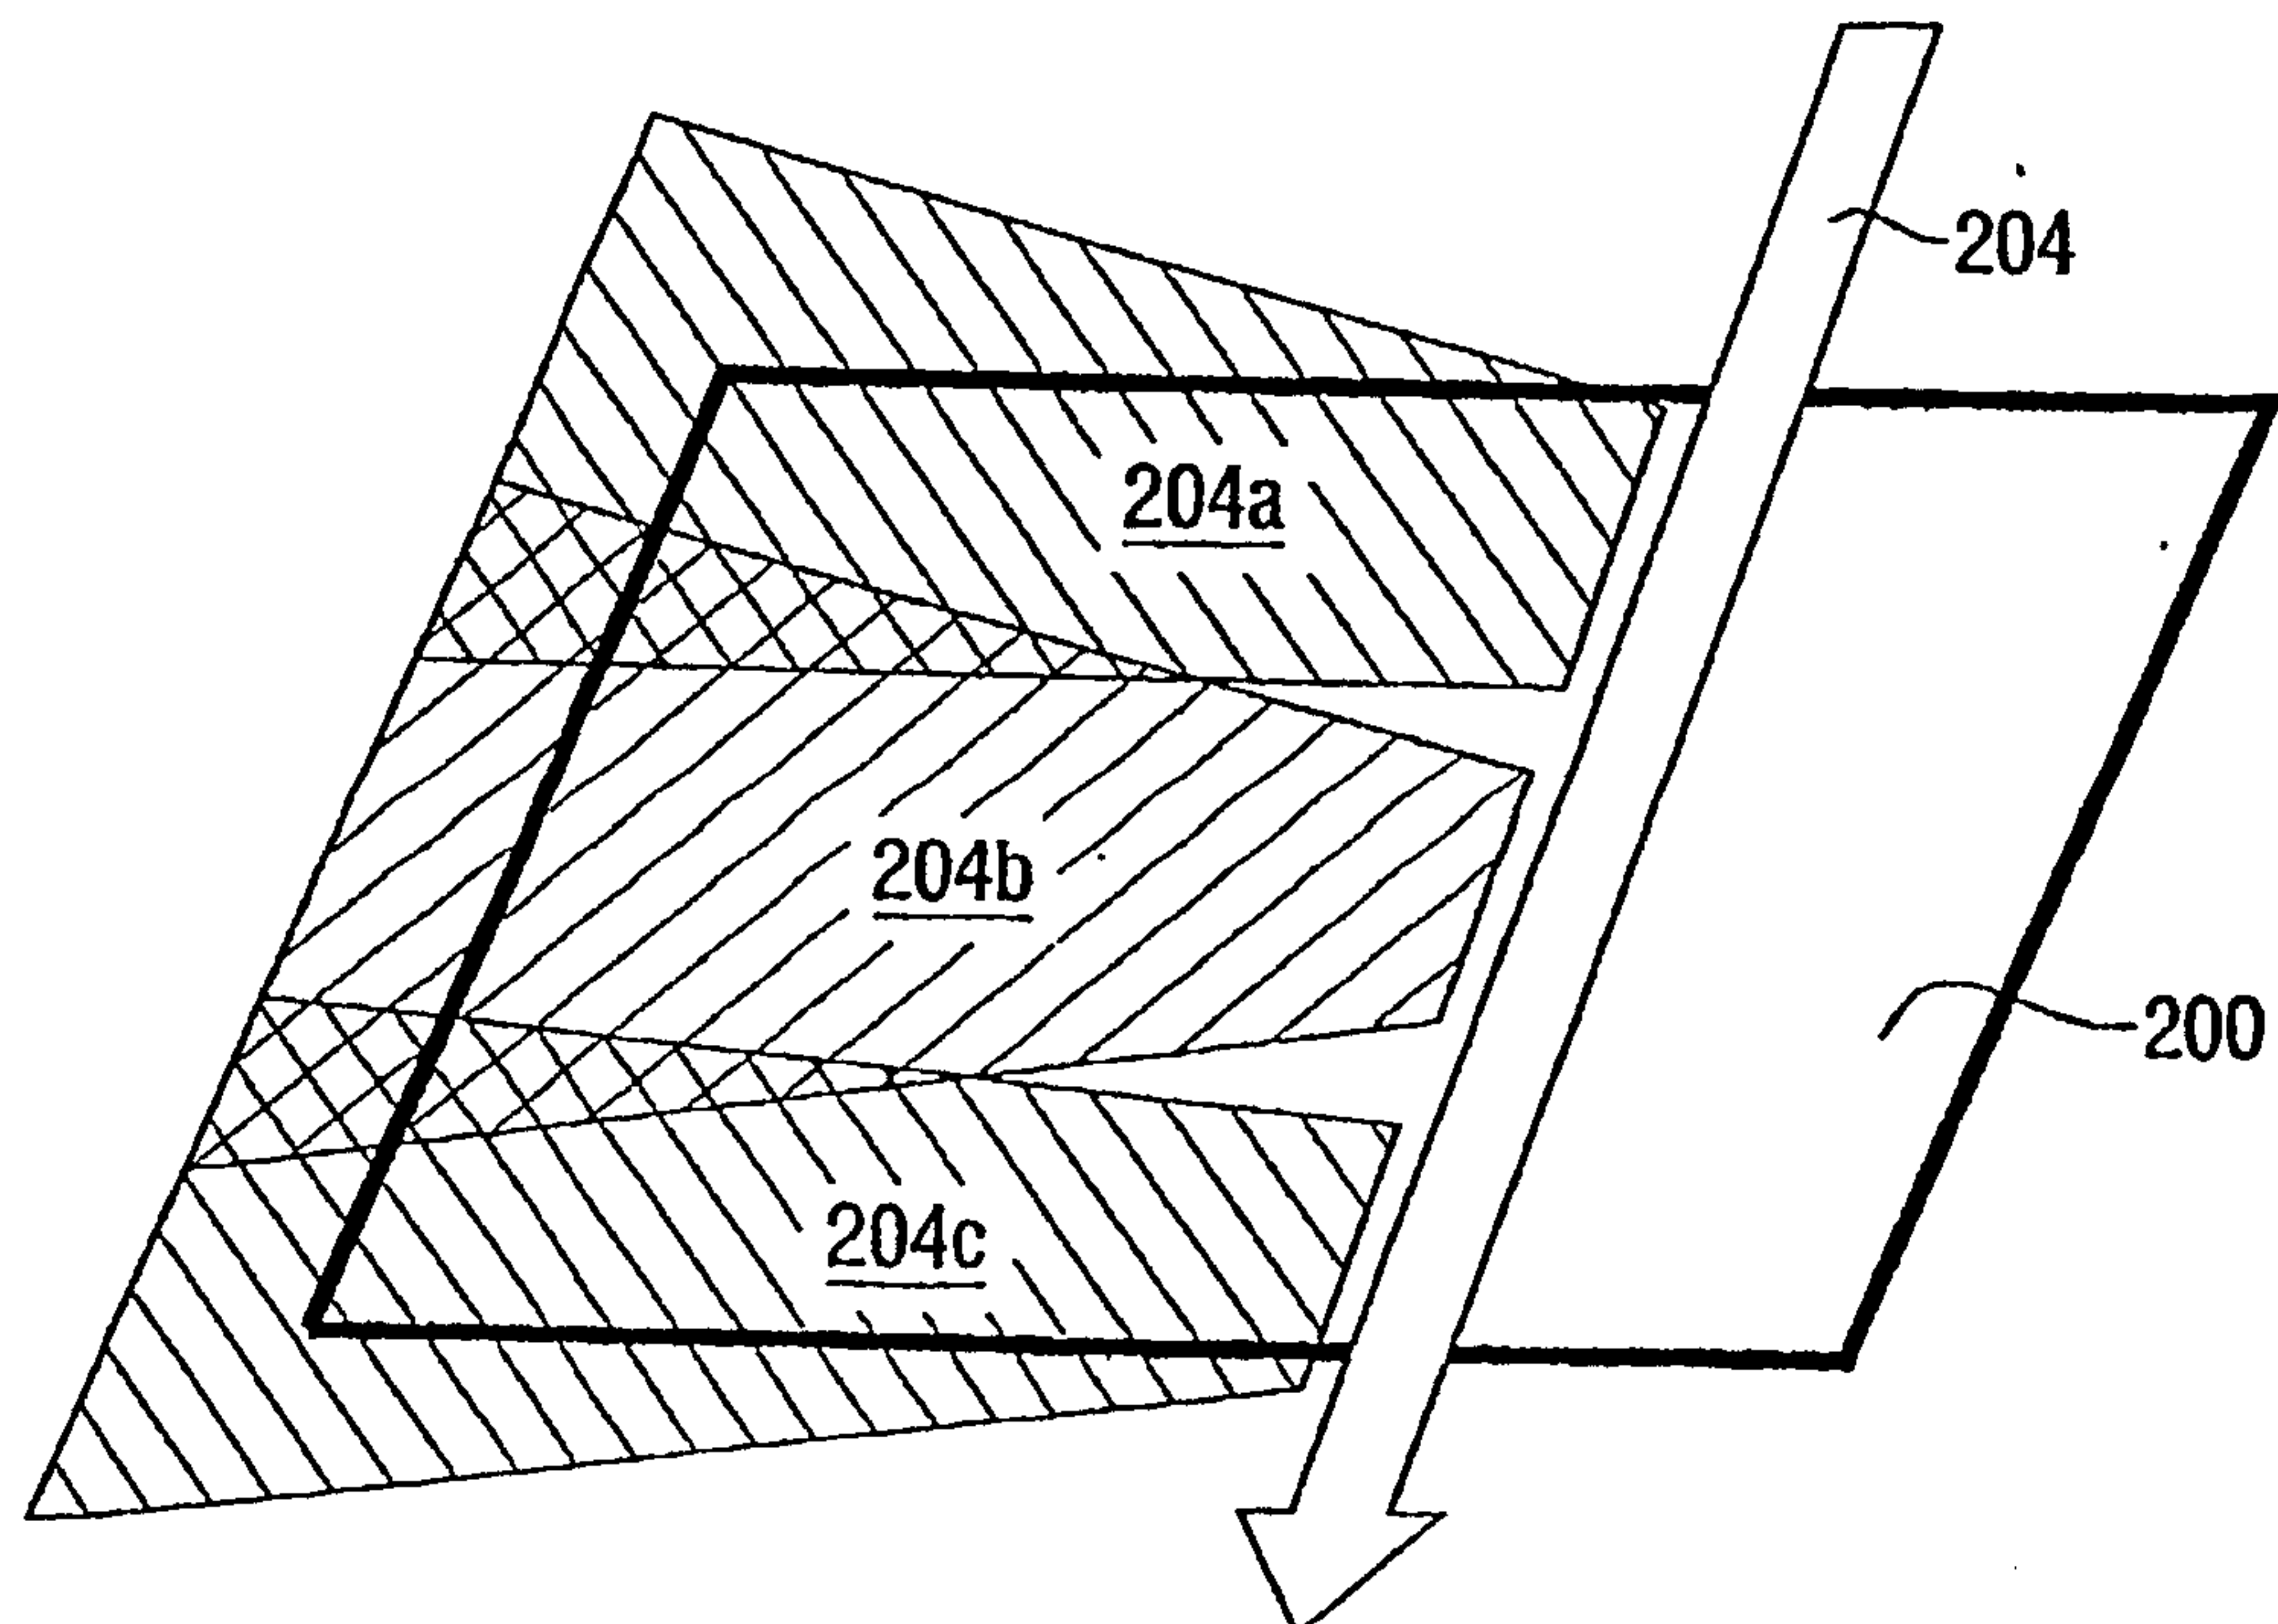


FIG. 8

7/7

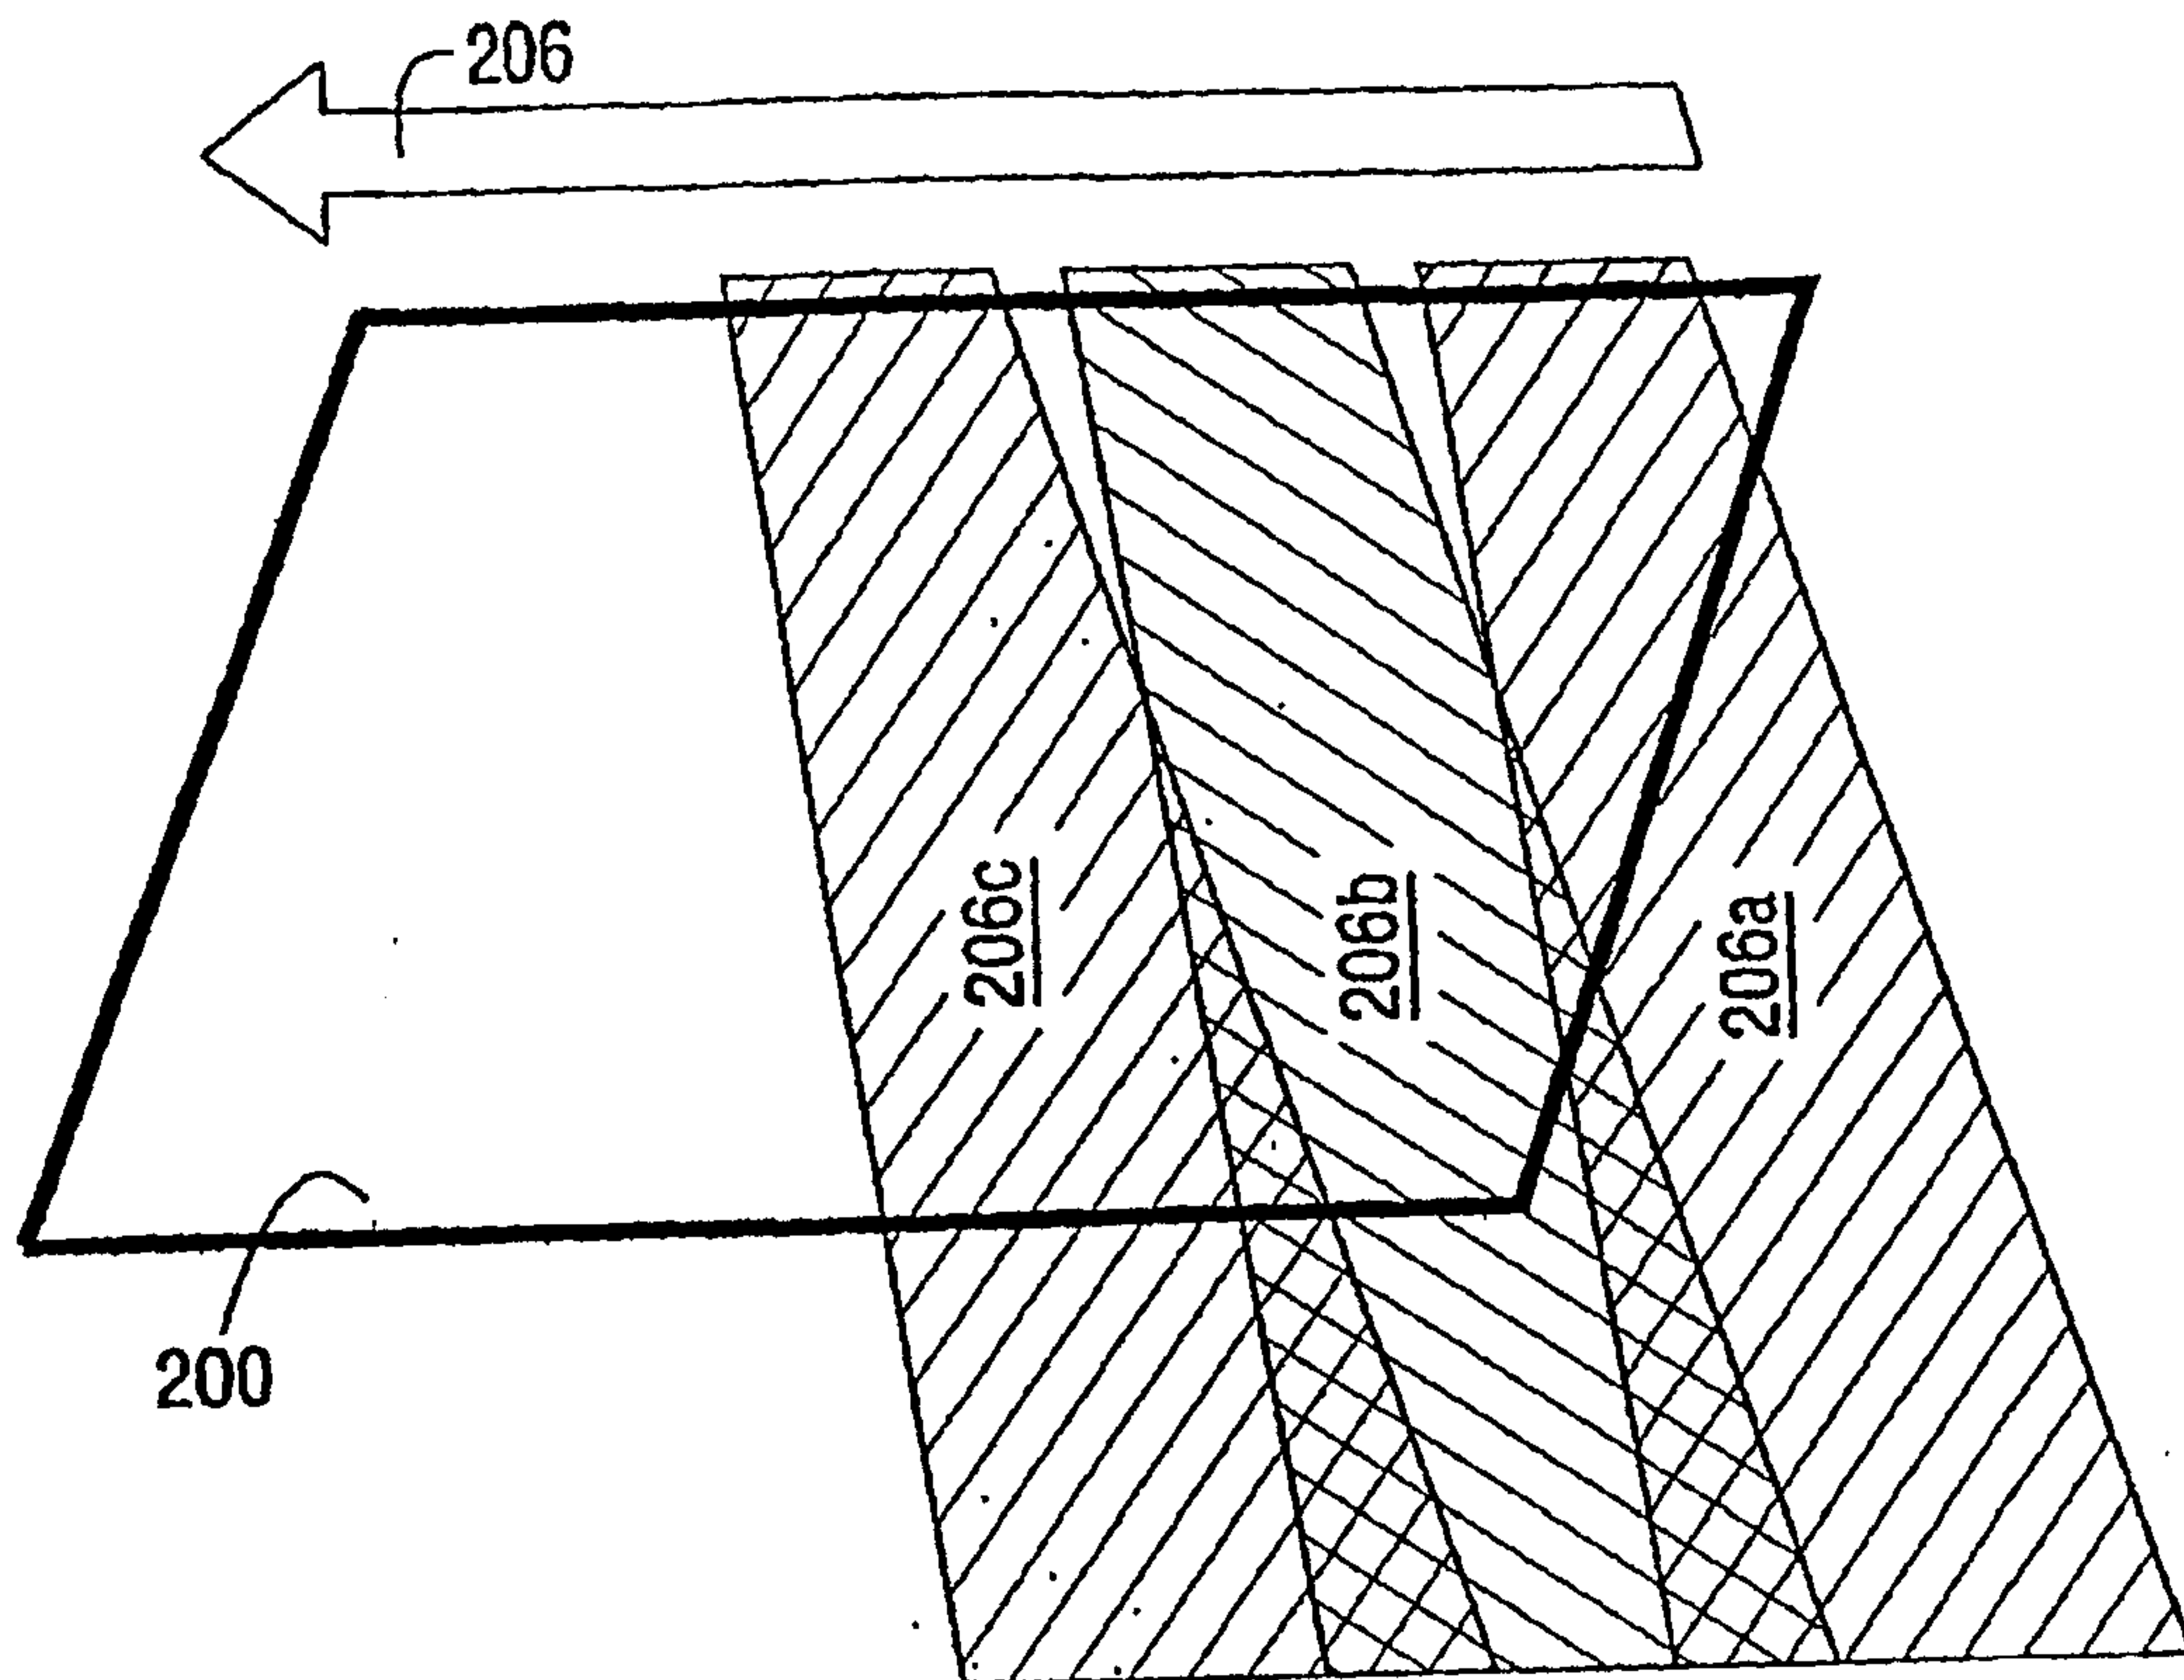


FIG. 9

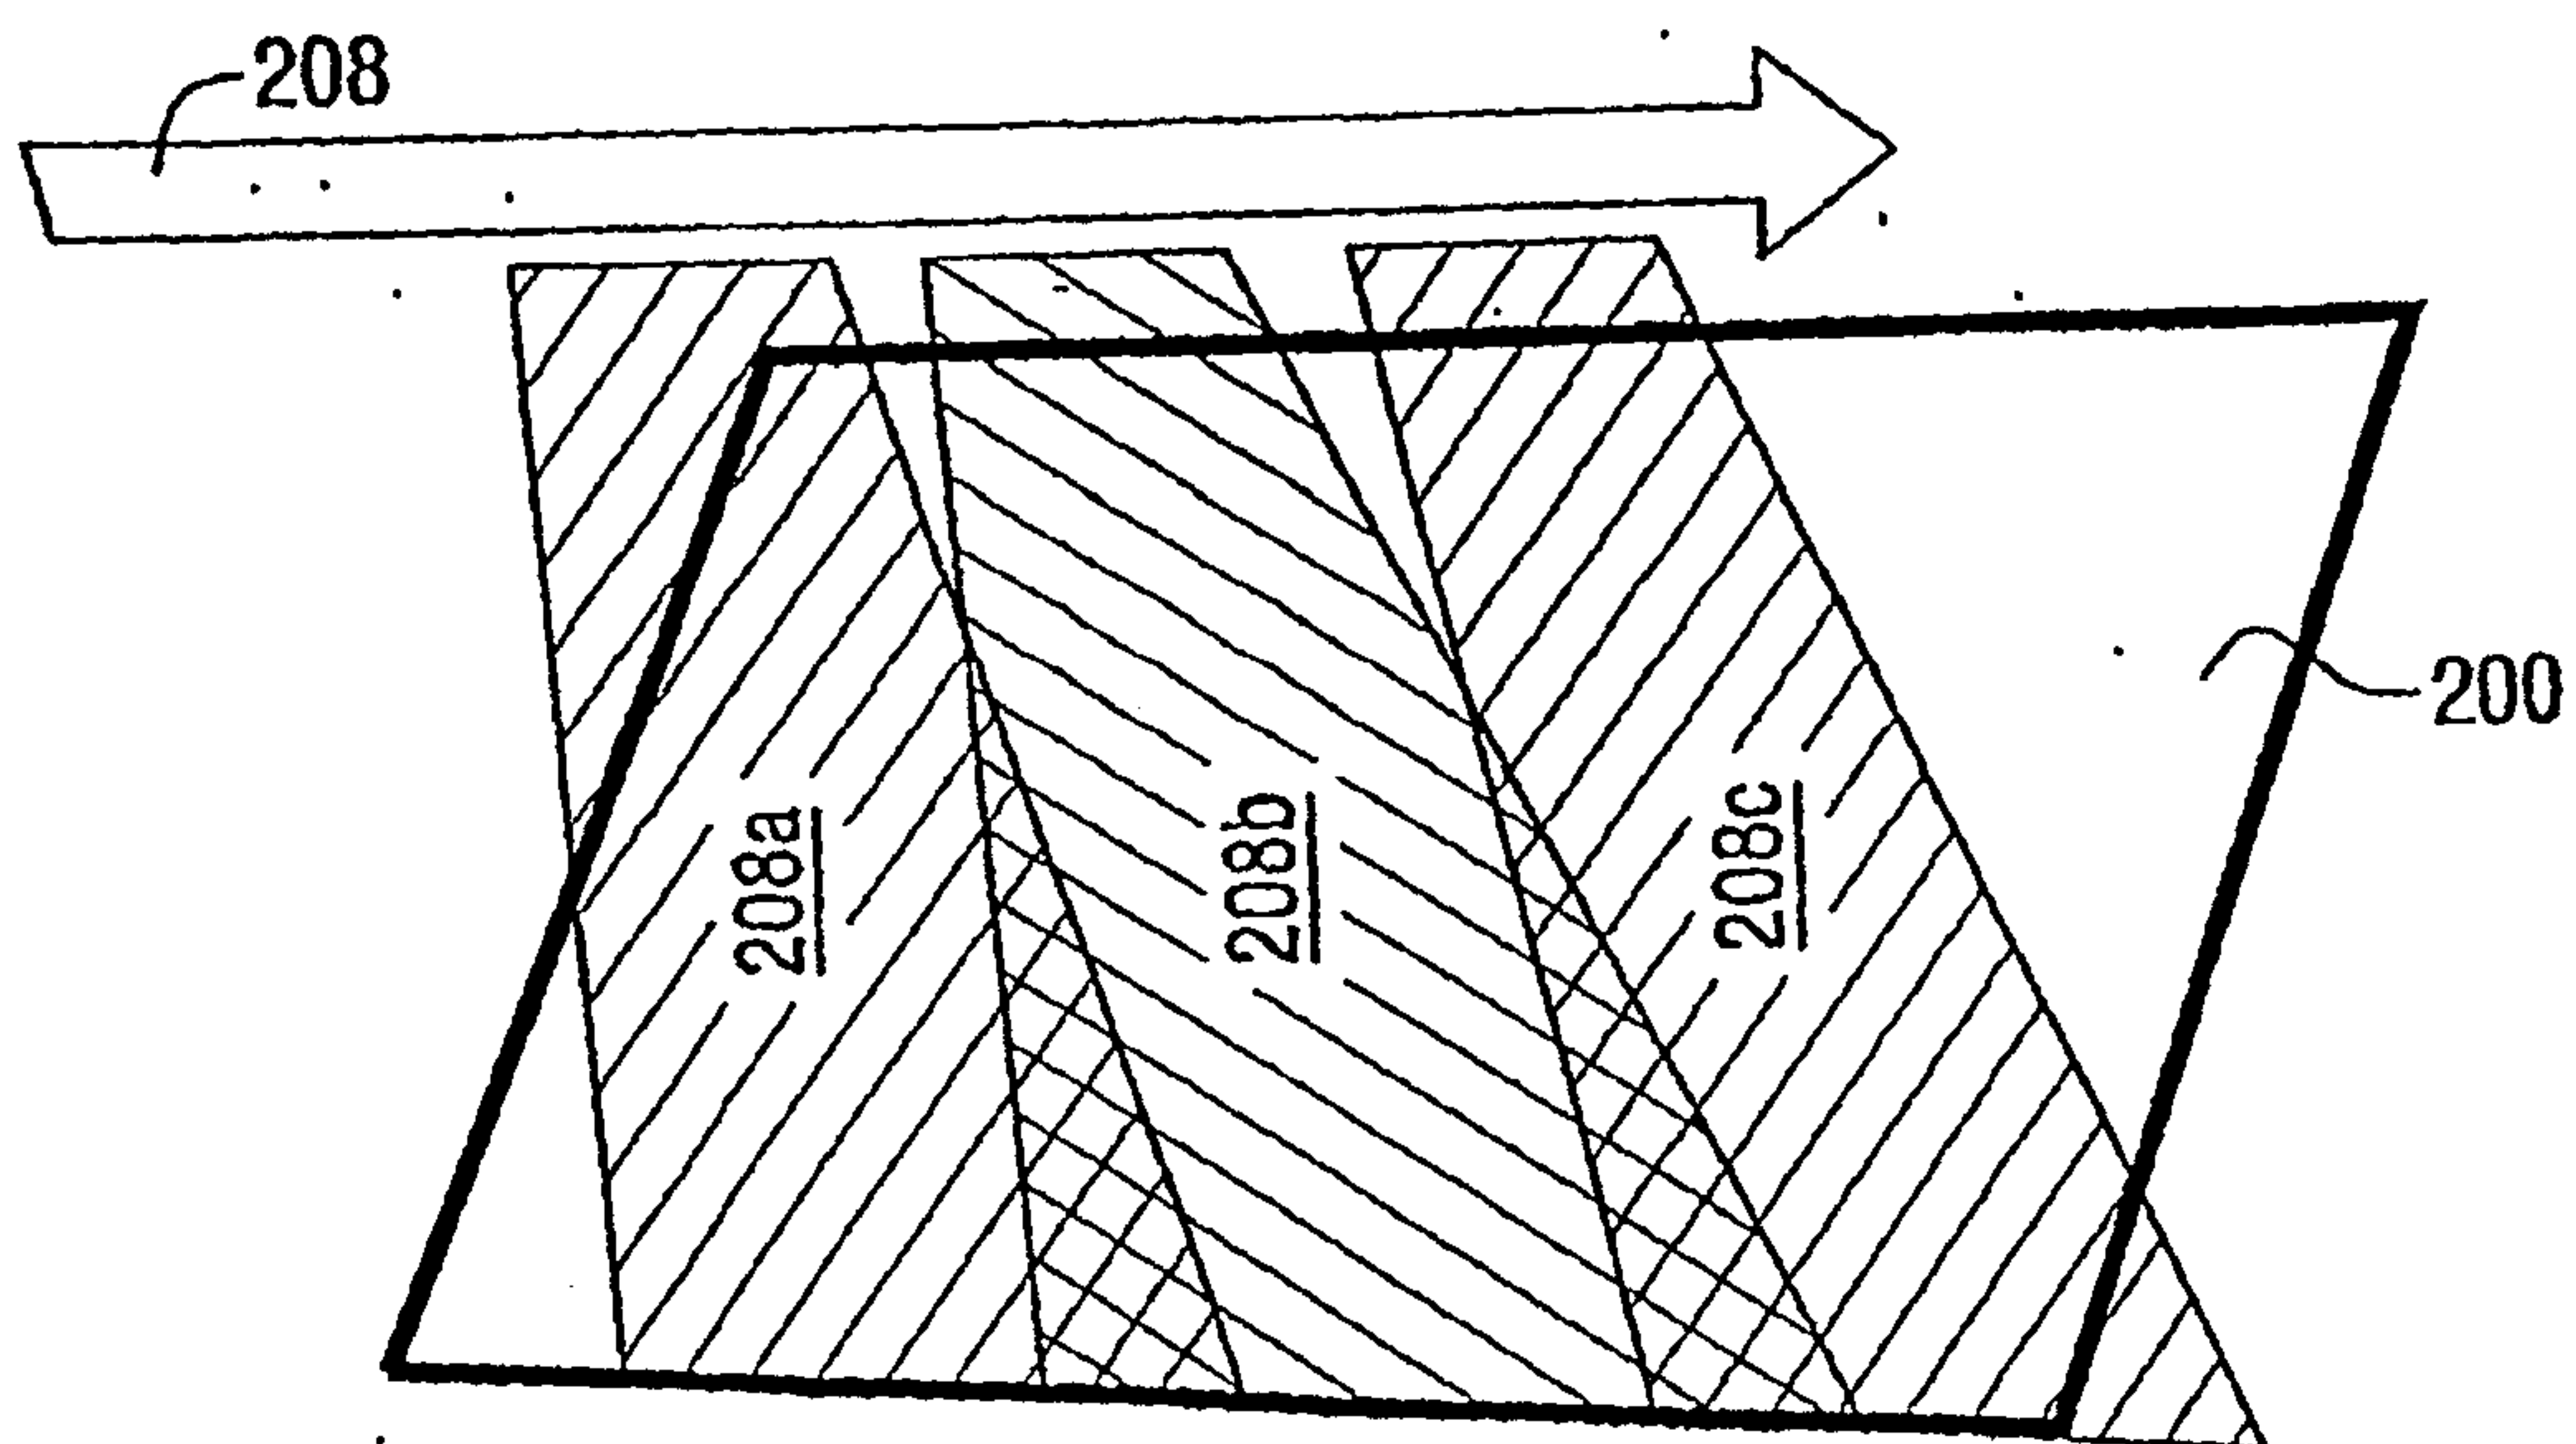


FIG. 10

