

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 July 2014 (03.07.2014)

(10) International Publication Number  
**WO 2014/102789 A1**

(51) International Patent Classification:  
*A61J 11/00* (2006.01)

(21) International Application Number:  
PCT/IL2013/051070

(22) International Filing Date:  
26 December 2013 (26.12.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
224061 31 December 2012 (31.12.2012) IL

(72) Inventor; and

(71) Applicant : VASERMAN, Elchanan [IL/IL]; 2 Sulam  
Yaakov St., 97729 Jerusalem (IL).

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,  
ZW.

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments (Rule 48.2(h))

(54) Title: UNIDIRECTIONAL VALVE FOR PRESURIZED CONTAINERS

(57) Abstract: In a nipple for a baby feeding container, a valve part is disclosed, comprising a unidirectional valve formed of a pliable material and oppositely oriented such that when attached to the container a normal fluid flow through the valve is into the container while a flow from the container to the outside is normally blocked, the valve is characterized by a plurality of normally closed non intersecting slits formed in a deformable wall which blocks the flow of liquid from the container to the outside unless when the slits become temporarily distorted by the natural mouth maneuverings of a baby. The valve is especially advantageous for use in baby feeding containers of inflatable type in which the liquid content is pressurized under the pressure exerted by the stretched elastomeric walls of the container.



WO 2014/102789 A1

## UNIDIRECTIONAL VALVE FOR PRESURIZED CONTAINERS

## FIELD OF THE INVENTION

The present invention is in the field of valves for baby  
5 feeding devices.

## BACKGROUND OF THE INVENTION

Baby feeding bottles in use today are in the form of rigid containers made of polymeric materials. They  
10 comprise a teat and screw closure over a top opening through which liquid nutrition content can be filled when the closure is taken off. One known problem associated with such bottles is that during the feeding process there is a build up of vacuum inside due to  
15 volumes of liquid exiting the bottle for consumption without simultaneously being exchanged by similar volumes of air. This vacuum complicates the feeding process, distracts its continuity and upsets the baby. A number of solutions to this problem have been suggested, one of  
20 which is the use of inflatable containers that automatically adapt their volume to the volume of their liquid content, as disclosed by WO2006129302. Elastomeric balloon-like containers as suggested by WO2006129302 require special arrangements in the nipple, for  
25 preventing uncontrolled leakage of liquid from the container through the nipple under the pressure exerted on the liquid content by the stretched balloon-like container's wall. Four alternative valve arrangements that shut the nipple against uncontrolled leakage while

allowing flow of the nursing liquid under the natural nursing actions of a baby are disclosed by WO2006129302. Three of said four alternative arrangements share the common attribute that the pressure exerted by the contained liquid on the valve tends to open the valve, while leak of the liquid is prevented due a predetermined resistance of the valve to the liquid pressure. No leakage will occur whenever the valve's resistance is sufficiently greater so as to overcome the internal liquid pressure. When the natural nursing actions of a baby cooperate with the internal liquid pressure to increase the pressure on the valve beyond its predetermined threshold of resistance, the valve opens and liquid is released through. In the embodiment illustrated by Figures 3 and 4 of WO2006129302, part 51 of the pneumatic actuator 50 cooperates with the internal liquid pressure for lifting the flap 44 upon squeezing of the actuator 50 by the gums of a nursing baby. In the embodiment illustrated by Figure 5 of WO2006129302, suction by a nursing baby cooperates with the internal liquid pressure for lifting the element 56 against the biasing force of spring 63. In the embodiment illustrated by Figures 10 to 12 of WO2006129302 suction applied by a nursing baby cooperates with the internal liquid pressure for distorting the valve's cover 104 into central cavity 106, thereby exposing the apertures 100 to the internal liquid.

#### SUMMARY OF THE INVENTION

In a first broad aspect the invention relates to the recognition of a most appropriate valve type for use in baby feeding devices of the type comprising inflatable

container. In this regard it is suggested by the inventor of the present invention that inclusion of an oppositely oriented unidirectional valve in the liquid outlet of a baby feeding device of the type comprising inflatable  
5 container is the most advantageous way for preventing undesired leaks from the container.

Principally, any type of unidirectional valve that can temporarily lose its sealing property (either by the operation of an actuator, or by distortion of its normal  
10 shape) in response to natural mouth maneuverings of a baby during bottle-feeding, can be adopted for use in the balloon-like container suggested by WO2006129302. In the context of the present invention the term "unidirectional valve" refers to a valve designed to open whenever the  
15 fluid pressure directed from a fluid inlet of the valve towards a fluid outlet thereof is greater from a predetermined threshold value, wherein fluid pressure in the opposite direction tends to close the valve more firmly than in the absence of any directional pressure.  
20 According to the present invention the unidirectional valve should, however, be oriented in the nipple as if to allow liquid flow from outside into the container, i.e. oppositely to its natural orientation (considering the purpose of the container to let its content out for  
25 feeding a baby). The same valve can thus, at least principally, be used also for pre use introduction of liquid content into the container, by forcing the liquid through the valve by a pressure sufficiently greater for overcoming the resistance of the elastomeric container's  
30 wall to be stretched.

A main advantage of such valve once put to use in an inflatable container e.g. of the type suggested by

WO2006129302 is that the liquid pressure exerted on the liquid content by the balloon-like stretched wall will tend to close the valve thus securing it against leakage better than what provided by any of the three valve arrangements originally suggested by said document, arrangements in which the internal liquid pressure tends to open the valve.

Reference is made hereby to figure 4 of US5035340 in which a nipple for baby bottle is suggested, comprising a dome shaped unidirectional valve. The valve construction comprises two intersecting slits formed in a dome shaped wall, such that an opening normally closed by four flaps is created in the center of the domed wall. The valve is placed oppositely in the bottle's nipple, i.e. with the convex side of the dome facing the contained liquid such that the more the weight of the liquid inside the bottle presses on the valve (e.g. when the bottle is maintained upside down), more tightly the four flaps become together, thus more tightly the valve becomes closed. The build-up of vacuum inside the bottle is limited, however, because the valve functions as a unidirectional, allowing entrance of air from outside when the atmospheric pressure is greater than the pressure inside the bottle. The valve lets the liquid content out when distorted in response to natural mouth maneuverings of a baby during bottle-feeding. Unfortunately, the valve suggested by US5035340 cannot be fully recommended for use in inflatable containers of the type disclosed by WO2006129302, because the internal liquid pressure in such containers is substantially greater than in the conventional ones towards which the invention of US5035340 is aimed. While in conventional containers the

pressure on the valve results from the liquid weight, in inflatable containers it mainly results from the pressure exerted on the liquid by the stretched container's wall. When turned upside down, the liquid weight adds up to the already existing wall stretching pressure. This greater total pressure requires better sealing properties than can be achieved by the oppositely placed unidirectional valve disclosed by US5035340. Furthermore, in order to minimize leaks, a valve for the inflatable container type of WO2006129302 needs a better reliability and a faster response than provided by the valve of US5035340 in returning to a sealing state from the distorted open state caused by the natural mouth maneuverings of a baby during bottle-feeding. Unfortunately, in case the valve of US5035340 is adopted for inflatable container of the type presented by WO2006129302, the pressurized reverse flow forced through the valve by the thrust provided by the inflatable container, and/or the internal liquid pressure maintained in the inflatable container, may prevent one or more of the valve flaps from retracting to its regular undistorted position upon release of the baby's mouth pressure, thus leaving the valve partially open i.e. with one or more of the flaps remaining over bent towards a reverse flow permitting position. The above discussed issues *mutatis mutandis* apply also to a three slit triple flapped unidirectional valve disclosed by DE63500 that is similar in operation and in drawbacks to the valve of US5035340. A cone shaped valve of the type disclosed in Fig. 8 of WO2006129302 may provide for a better resistance against over bending of the flaps than provided by the valves suggested by US5035340 and DE63500, since the angle between opposing wall segments is sharper in a cone than in a dome, thus in a conically

shaped valve each segment (flap) more effectively opposes over bending of either facing or juxtaposed flaps. Yet, actual experiments performed by the inventor reveal that commercialization of inflatable baby feeding  
5 containers will be more successful if more perfect and reliable sealing properties than can be attained by the conical valve suggested by WO2006129302 will be developed without losing simplicity.

The problems associated with unidirectional valves  
10 based on the aforementioned types when used in inflatable containers are solved by a second aspect of the invention, relating to a nipple for baby feeding containers, the nipple comprising a unidirectional valve oriented with a convexity of a deformable curved wall  
15 thereof (e.g. a domed wall or a conic wall) facing the container's hollow, said valve is characterized by at least two non intersecting slits formed in the deformable curved wall, which through said slits liquid can controllably flow. Due to the fact that the slits do not  
20 intersect, the valve closure means is flap free, interference between the function of the slits is avoided, and the transformation of each slit from a distorted open state to a normal close state and vice versa is substantially independent of the state of the  
25 other slits.

Preferably, the unidirectional valve is flap free, i.e. free of flaps resulting from its slits design. This can be achieved by avoiding intersection between valve's slits and by forming each slit free of substantial  
30 internal bending, and preferably as straight as possible (i.e. following a geodesic line of the curved wall).

The invention thus concern a part in a nipple for a baby feeding container, which comprises a unidirectional valve formed of a pliable material and oppositely oriented such that when attached to the container a normal fluid flow through the valve is into the container while a flow from the container to the outside is normally blocked, the valve is characterized by at least two normally closed non intersecting slits providing for reverse liquid flow, i.e. from the container to the outside, upon distortion of the slits by natural mouth maneuverings of a baby.

In various embodiments of the present invention the slits are formed in a deformable and preferably curved wall disposed substantially transversely to the intended direction of liquid flow through the valve. Preferably, in preferred embodiments of the invention in which said wall is curved, a convexity of the curved wall is arranged to face a container's hollow when the nipple is attached to the container. In preferred embodiments of the invention the curved wall is has a dome like shape (referred to hereinafter as 'domed'). In alternative embodiments of the invention the curved wall is of conic shape.

In various preferred embodiments the slits are located in respective bulged regions formed (e.g. for reinforcement) in the deformable valve wall.

In various preferred embodiments of the present invention the curved wall of the valve is of rotational symmetry and is preferably positioned with its axis of symmetry substantially parallel to or being a longitudinal axis of symmetry of the nipple. Preferably, the slits are angularly spaced about a center of symmetry of said

deformable transversely disposed wall, preferably in substantially equal spaces.

In various embodiments of the invention at least three non intersecting angularly spaced slits are provided for  
5 allowing liquid flow upon distortion of at least one slit by natural mouth maneuverings of a baby (when said at least one slit is occasionally and/or intentionally oriented substantially perpendicularly to the gums of the baby), the slits are diverging from near a mid point of a  
10 transversely disposed deformable wall towards a circumference thereof.

In various preferred embodiments of the invention at least part of the slits differ in length, thereby allowing to change the flow rate of liquid from the  
15 container to a baby's mouth by rotating the container such that a slit of a desired length (thus providing for a respectively desired opening size upon distortion) will be oriented substantially perpendicularly to the gums of the baby.

20 In a preferred embodiment of the invention three non intersecting angularly spaced slits are provided, diverging from near an apex of the convexity of the curved wall towards a circumference thereof.

In yet farther aspects of the invention the oppositely  
25 oriented unidirectional valve according to the invention can be used also for controlling fluid flow through a pacifier in which it is mounted, as well as for manually or mechanically controlling the flow of fluids from containers in uses other than for baby feeding, in which  
30 the fluids are maintained under pressure, including

flexible and/or inflatable elastomeric containers maintained under fixed or variable external pressure.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention will be further explained by the  
5 accompanying Figures. With specific reference now to the  
figures in detail, it is stressed that the particulars  
shown are by way of example and for purposes of  
illustrative discussion of one or more preferred  
embodiments of the present invention, and are presented  
10 in the cause of providing what believed to be the most  
useful and readily understood description of the  
principles and conceptual aspects of the invention. In  
this regard, no attempt is made to show in the figures  
structural details of the invention in more detail than  
15 necessary for understanding the basics of the invention,  
the description taken with the drawings making apparent  
to those skilled in the art how several forms of the  
invention may be embodied in practice.

#### Brief Description of the Figures:

20 **Fig. 1** illustrates a valved nipple part according to the  
present invention as seen from its liquid inlet side.

**Fig. 2** illustrates a longitudinal cross section of the  
valved nipple part of Fig. 1, taken through line A-A.

**Fig. 3** illustrates the valved nipple part of Fig. 1 as  
25 seen from its liquid outlet side.

**Fig. 4** illustrates the valved nipple part of Fig. 1 as  
seen from its liquid inlet side when distorted by  
squeezing it vertically in a mid portion of its length ,  
e.g. by the natural mouth maneuverings of a baby during  
30 bottle-feeding.

**Fig. 5** illustrates the valved nipple part of Figs. 1 and 6 in perspective view showing its length and its liquid inlet opening.

**Fig. 6** illustrates a variation of the valved nipple part of Fig 1, having slits of three different sizes allowing for a selectable liquid flow rate.

**Fig. 7** illustrates the valved nipple part of Fig. 6 as seen from its liquid inlet side when distorted by squeezing it vertically in a mid portion of its length , e.g. by the natural mouth maneuverings of a baby during bottle-feeding.

**Fig. 8** illustrates a longitudinal cross section of a variation of the valved nipple part of Fig. 1, differing from the embodiment of Fig. 1 in that the curved wall of the valve is conic rather than domed, and in that it comprises an integral domed nipple edge.

**Fig. 9** is a sectional view of a fluid-operated embodiment of a valved nipple according to the invention, shown in its closed state and attached to a baby feeding container.

#### DETAILED DESCRIPTION OF THE FIGURES

It will be evident to those skilled in the art that the invention is not limited to the details of the foregoing illustrative embodiment and that the present invention may be embodied in other specific forms without departing from the spirit or essential attributes thereof. The present embodiment is therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description, and all changes

which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

**Fig. 5** illustrates a perspective view of a valved nipple part (1) according to the present invention. At least the valved part of the nipple is formed of a pliant material such as silicon rubber, and comprises a hollow cylindrical wall (3) constituting a nipple's neck within which a unidirectional dome shaped valve (4) (shown by Figs. 1 to 4) is formed from the same piece of material.

For concentrating smoothening and regulating the flow of liquid from the valve (4) into the mouth of a baby user the valved nipple part (1) may be further provided with a domed edge (119) having an aperture (120) at its center as shown in the embodiment of Fig. 8. The provision of a domed edge such as (119) of Fig. 8 can be achieved e.g. by snugly fitting the entire valved nipple part (1) into a hollow of a cylindrical neck of a conventional baby feeding nipple (not illustrated) such that the convexity of the dome shaped valve (4) will be facing the inflatable container to which the nipple is to be attached. Alternatively, a domed edge such as (119) of Fig. 8 can be integrated with a valve part (1) according to the invention by any acceptable production method.

The valve comprises a domed wall (4) having three through slits (5)(15)(25) angularly spaced about the apex point (11) of its convexity (2a).

The unidirectional valve domed wall (4) is oriented within the nipple's neck (3) such that its concaved side (2) is facing the liquid outlet opening (9) of the nipple (1), and its convexity (2a) facing the liquid inlet opening (7) of the nipple (1). A cylindrical widening (13) extending from the nipple's neck (3) and having an

inner circumferential groove (8) at the liquid inlet of the nipple (1) allow for fixing the nipple to a matching cylindrical protrusion located at the liquid outlet of a baby feeding container (not shown), e.g. inflatable container of the type suggested by WO2006129302. As can be appreciated, when liquid from such baby feeding container is pressurized against the convexity (2a) of the domed wall (4), the domed wall tends to contract, thereby tightening and closing the slits (5)(15)(25) and preventing the liquid from leaking through. Contrarily, if liquid is pressurized from outside the container against the concavity (2) of the domed wall (4), the domed wall tends to extract, thereby loosening and widening the slits (5)(15)(25) and permitting the liquid to freely flow through, from outside into the container.

Considering the purpose of the container to let its content out for feeding a baby, the orientation of the valve (4) within the nipple (1) is opposite to natural, i.e. it is oppositely oriented within the nipple. The increasing resistance of the valve (4) against reverse flow as the pressure from its convex side increases, is thus advantageous for preventing leakage from inflatable containers of the type disclosed by WO2006129302 in which the contained liquid is maintained in some high over atmospheric pressure. Reverse flow is permitted however through the valve (4) upon distortion of the valve during bottle-feeding of a baby due to the natural mouth maneuverings of the baby. A distortion of the valve (4) resulting from a temporal squeezing of the nipple's neck (3) is illustrated by Fig. 4. The distortion includes widening of at least one of the slits, depending on the squeezing direction and magnitude. In the

illustrated situation the squeezing is vertical along slit (5) causing it to widen such that pressurized liquid will escape through it from the container side to the nipple outlet opening (9) and into the baby's mouth.

- 5 In the illustrated embodiment the slits (5)(15)(25) are located in respective bulged regions (6)(16)(26) formed for reinforcement on the convex side (2a) of the domed wall (4). In the illustrated embodiment the curved wall (4) of the valve is of rotational symmetry about a  
10 longitudinal axis of symmetry (10) of the nipple(1). The slits (5)(15)(25) are angularly spaced about a center of symmetry (11) of the curved wall (4), in substantially equal spaces of 120 degrees each, and are diverging from near the apex of the convexity (2a) of the curved wall  
15 (4) towards a circumference thereof, thereby guaranteeing effective functionality of liquid release upon squeezing the nipple neck (3) in any occasional direction. Due to the fact that the slits (5)(15)(25) do not intersect, the valve closure is flap free. Furthermore they are  
20 substantially straight (i.e. following a geodesic of the dome (4)) and short (in the illustrated embodiment their length is each about 40% of the radius of the dome (4)). Interference between the function of the slits is thus avoided, and the transformation of each slit from a  
25 distorted open state to a normal closed state and vice versa is fast, reliable, and substantially independent of the state of the other slits.

**Fig. 6** illustrates a variation (1A) of the valved nipple part (1) of Fig 1. This variation differs from the  
30 embodiment of Fig. 1 by having slits (5a)(15a)(25a) of three different sizes, respectively, thereby allowing for a selectable liquid flow rate. When the inflatable

container to which the valved nipple part (1A) is attached is oriented such that the shortest slit (5a) is substantially perpendicular to the gums of a baby user, the slit (5a) will be distorted as shown by Fig. 7 upon squeezing, thereby allowing liquid to flow from the container under the pressure of its stretched walls. The flow rate will through it will be smaller however than slit (5) of Fig. 1, since slit (5a) is shorter, thus providing for a smaller opening upon distortion. By Rotation of the container so as to bring the mid sized slit (15a) or the large sized slit (15b) to a perpendicular position respective to the baby's gums, will result with respectively greater flow rates.

**Fig. 8** illustrates a longitudinal cross section of a variation (101) of the valved nipple part (1) of Fig. 1, differing from the embodiment of Fig. 1 in that the curved wall (104) of the valve is conic rather than domed, and in that it comprises an integral domed nipple edge (119) having a conventional outlet aperture (120).

The conic wall is provided with a plurality of non intersecting slits (105)(115) angularly spaced about a top (111) of the cone shaped wall (104) and symmetrically distributed about a longitudinal axis (111) of the valved nipple part (101). The slits are preferably formed in respective bulged regions (106)(116) in which the curved wall (104) is thicker than in its other regions (104). As in the embodiment of Fig. 1, a concavity (102) of the conic wall (104) is facing away from the container and toward the liquid outlet aperture (120) which is at the baby user side.

Another embodiment of a valved nipple according to the present invention is shown in Fig. 9. this embodiment is

similar to the embodiment illustrated by Figures 3 and 4 of WO2006129302, with the main difference being that in the present invention the valve is positioned reversely, i.e. such that the internal liquid pressure tends to keep the valve closed, thus (oppositely to its functioning in WO2006129302) sealing the container more firmly as the internal liquid pressure increases. The valve (26) is shown in its closed state and attached to a partially illustrated baby feeding container (100) (preferably of the inflatable balloon-like type suggested by WO2006129302) by means of a teat and screw closure (55).

The present embodiment utilizes the biting action of the baby to open the valve (26) which comprises two inter-engaging elements (44) and (46). In the drawing the lower element (44) is a movable flap, biased upwards and hinged at its left extremity (44a). The upper element (46) is fixed and provided with an aperture (48), which is normally sealed by the lower flap (44) coming into close contact to the bottom edges of the aperture (48). The flap (44) cannot be over bent to allow reverse flow of liquid from the container to the nipple, since the upper element (46) blocks any further movement of the flap (44) towards beyond its sealing position. Reverse flow through the valve can thus occur only upon actuation by a specially designed actuator e.g. of the type exemplified by the figure and described hereinafter.

A first part (51) of a sealed, partially fluid-filled flexible pneumatic actuator (50) is positioned between the two inter-engaging elements (44)(46). A second part (52) of the actuator (50) extends into the nipple (22). The arrangement is such that a squeezing action on the nipple (22) by a nursing baby displaces fluid within the

actuating means (50) to separate the two elements (44)(46) as the first part of the actuator (51) changes from a collapsed state seen in the present figure, to a round state (not illustrated). When the first part of the actuator (51) comes round, it pushes the flap (44) down, i.e. in the direction indicated by the small arrow illustrated near the bottom right of flap (44). This enables fluid (116) to flow under pressure of the inflated container (100) through the aperture (48) into the nipple (22) and out of the nipple opening (54).

As can be seen in Fig. 6, the normally closed position of the lower flap (44) is attained when there is no mechanical pressure on the actuator part (52) and the first part (51) of the actuator is a flat oval as illustrated.

The actuator (50) is preferably filled with water (49) and leaving a small portion of its inner volume for air or an inert gas. The quantity of gas is just sufficient to allow the valve (26) to close under its upwards biasing when no external pressure is applied thereto. Thus when the baby releases pressure on the nipple (22), the part (51) of the actuator disposed between the elements (44) and (46) is pressed between the closed elements to revert to its flat oval form. A light spring (not shown) can optionally be added to increase the upwards biasing so as to improve closure of the valve. The neck of the nipple (22) can be designed similar to the nipple neck (3) of the embodiment of Figures 1-5, and its outlet opening (54) can be wider, similar to the outlet opening (9) of the embodiment of Figures 1-5. Differently from the embodiment of Figures 3-4 of WO2006129302, the oppositely oriented unidirectional

valve (26) according to the present invention can allow pre filling of the container with a pressurized liquid forced into the container (100) through aperture (48). Post filling, the elastomeric walls of container (100) will be stretched and will thus maintain the contained liquid in over atmospheric pressure thereby firmly tightening together the flap (44) to the upper element (46) to prevent uncontrolled leak of the pressurized liquid.

10

## CLAIMS:

1. In a nipple for a baby feeding container a part comprising a unidirectional valve formed of a pliable material and oppositely oriented such that when attached to the container a normal flow through the valve is into the container while a flow from the container to the outside is normally blocked, the valve is characterized by at least two normally closed non intersecting slits providing for reverse liquid flow from the container to the outside upon distortion of the slits by natural mouth maneuverings of a baby.
2. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 1, wherein the slits are formed in a deformable curved wall wherein a convexity of the curved wall is arranged to face a container's hollow when the nipple is attached to the container.
3. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 2, wherein the deformable curved wall is domed or conic.
4. In a nipple for a baby feeding container a part comprising a unidirectional valve according to anyone of the previous claims, wherein the slits are located in respective bulged regions formed in a deformable wall of the valve.
5. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim

2, wherein the curved wall has a rotational symmetry.

5 6. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 5, wherein an axis of the rotational symmetry is substantially parallel to or being a longitudinal axis of the nipple.

10 7. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 4, wherein a plurality of slits are formed in and are angularly spaced about a center of symmetry of the deformable wall.

15 8. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 7, wherein the angular spaces are substantially equal.

20 9. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 2, wherein three non intersecting angularly spaced slits are provided, diverging from near an apex of the convexity of the curved wall towards a circumference thereof.

25 10. In a nipple for a baby feeding container a part comprising a unidirectional valve according to anyone of the preceding claims, wherein at least three non intersecting angularly spaced slits are provided for allowing liquid flow upon distortion of at least one slit by natural mouth maneuverings of a baby, the slits are diverging from near a mid point

of a deformable wall towards a circumference thereof.

11. In a nipple for a baby feeding container a part comprising a unidirectional valve according to claim 5 10, wherein the at least part of the slits differ in length.

10

15

20

1/2

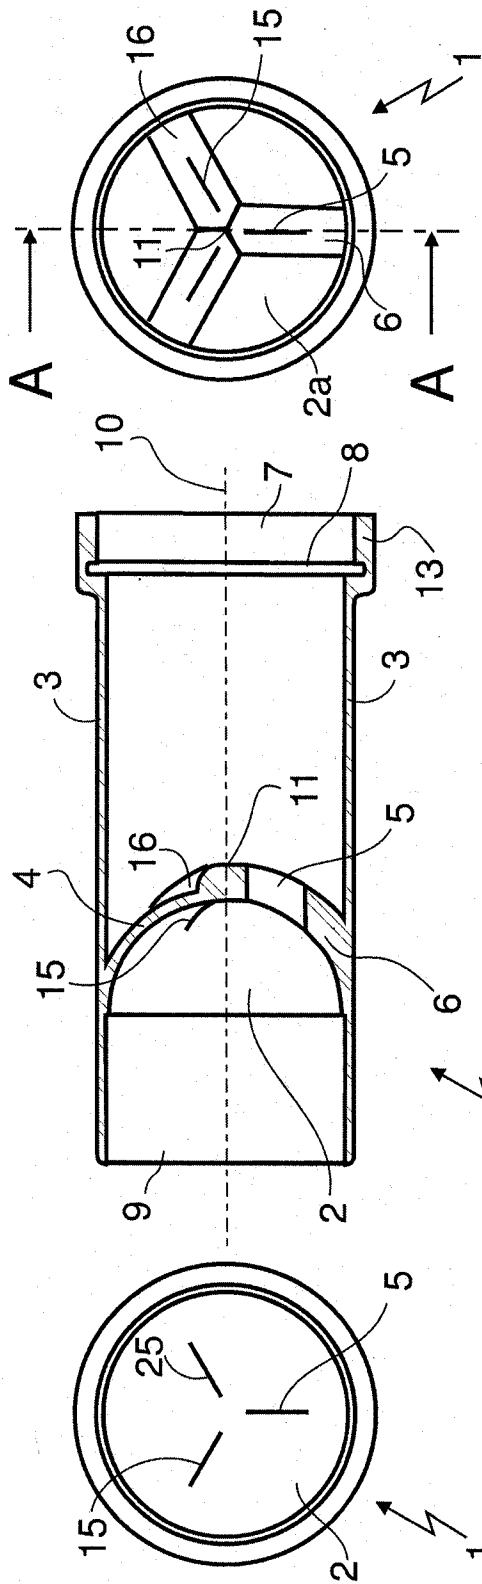


Fig. 1

Fig. 2

Fig. 3

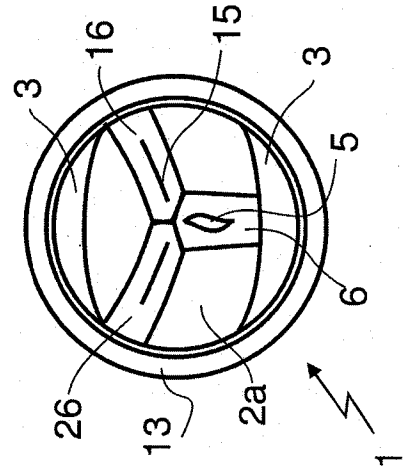


Fig. 4

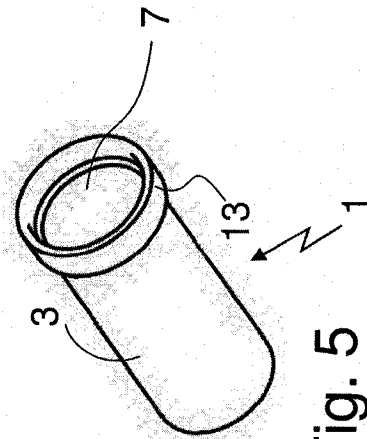


Fig. 5

2/2

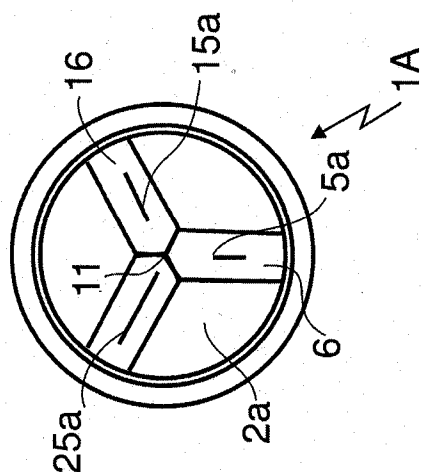


Fig. 6

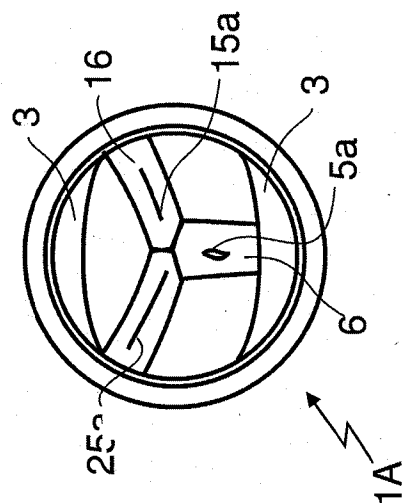


Fig. 7

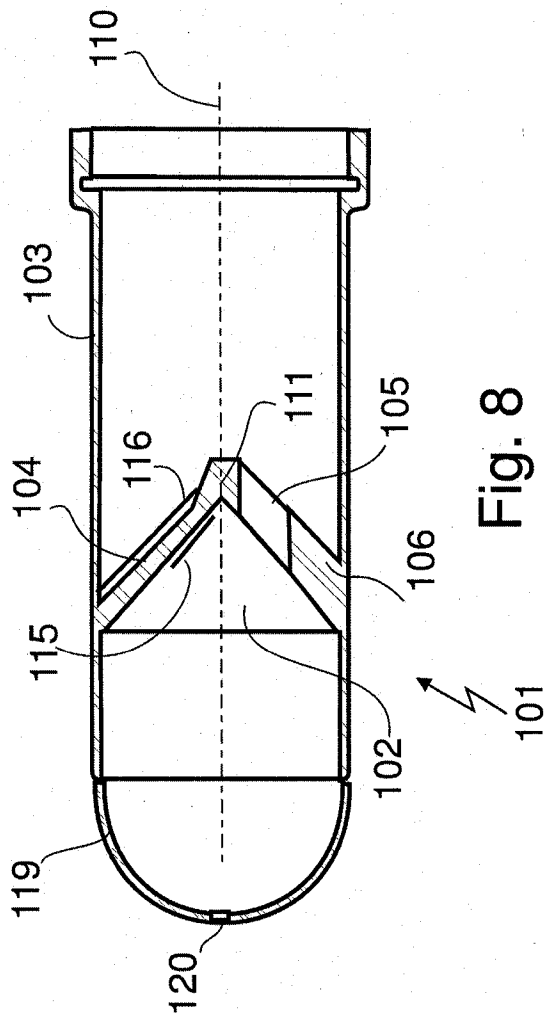


Fig. 8

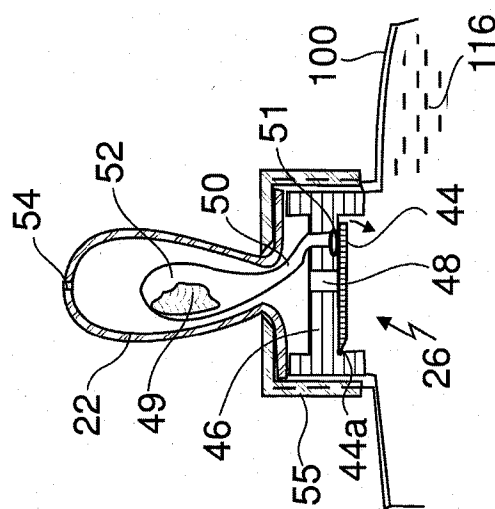


Fig. 9

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2013/051070

| <b>A. CLASSIFICATION OF SUBJECT MATTER</b><br>IPC (2014.01) A61J 11/00<br><br>According to International Patent Classification (IPC) or to both national classification and IPC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                  |                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| <b>B. FIELDS SEARCHED</b><br><br>Minimum documentation searched (classification system followed by classification symbols)<br>IPC (2014.01) A61J 9/00<br><br>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched<br><br>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)<br>Databases consulted: Esp@cenet, Google Patents<br>Search terms used: valve slit cut aperture baby infant bottle teat nipple mouth lip operat maneuver open control                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                  |                                                                    |
| <b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                  |                                                                    |
| Category*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Citation of document, with indication, where appropriate, of the relevant passages                               | Relevant to claim No.                                              |
| Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DE 63500 C<br>15 Jul 1892 (1892/07/15)<br>the whole document, figures                                            | 1-6                                                                |
| Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | GB 1224675 A Biberon Remond<br>10 Mar 1971 (1971/03/10)<br>description page 1 line 45 to page 2 line 25, figures | 1,7-11                                                             |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | US 20070102388 A1 Lewis, Julie<br>10 May 2007 (2007/05/10)<br>the whole document, figure 6                       | 1-11                                                               |
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | FR 2840200 A1 Craveur<br>05 Dec 2003 (2003/12/05)<br>abstract, figures.                                          | 1-11                                                               |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                  |                                                                    |
| * Special categories of cited documents:<br>"A" document defining the general state of the art which is not considered to be of particular relevance<br>"E" earlier application or patent but published on or after the international filing date<br>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)<br>"O" document referring to an oral disclosure, use, exhibition or other means<br>"P" document published prior to the international filing date but later than the priority date claimed<br>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<br>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone<br>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art<br>"&" document member of the same patent family |                                                                                                                  |                                                                    |
| Date of the actual completion of the international search<br>30 Apr 2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                  | Date of mailing of the international search report<br>01 May 2014  |
| Name and mailing address of the ISA:<br>Israel Patent Office<br>Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel<br>Facsimile No. 972-2-5651616                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                  | Authorized officer<br>MOR Yosef<br><br>Telephone No. 972-2-5651756 |

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/IL2013/051070

| Patent document cited search report |             |    | Publication date | Patent family member(s) | Publication Date |
|-------------------------------------|-------------|----|------------------|-------------------------|------------------|
| DE                                  | 63500       | C  | 15 Jul 1892      | NONE                    |                  |
| US                                  | 20070102388 | A1 | 10 May 2007      | NONE                    |                  |
| FR                                  | 2840200     | A1 | 05 Dec 2003      | FR 2840200 A1           | 05 Dec 2003      |
|                                     |             |    |                  | FR 2840200 B1           | 16 Nov 2007      |
|                                     |             |    |                  | AU 2003255617 A1        | 19 Dec 2003      |
|                                     |             |    |                  | AU 2003255617 A8        | 19 Dec 2003      |
|                                     |             |    |                  | CA 2487582 A1           | 11 Dec 2003      |
|                                     |             |    |                  | EP 1515679 A1           | 23 Mar 2005      |
|                                     |             |    |                  | FR 2840201 A1           | 05 Dec 2003      |
|                                     |             |    |                  | FR 2840201 B3           | 30 Jul 2004      |
|                                     |             |    |                  | WO 03101371 A1          | 11 Dec 2003      |
|                                     |             |    |                  | US 2005224443 A1        | 13 Oct 2005      |
| GB                                  | 1224675     | A  | 10 Mar 1971      | GB 1224675 A            | 10 Mar 1971      |
|                                     |             |    |                  | BE 734038 A             | 17 Nov 1969      |
|                                     |             |    |                  | DE 6926423 U            | 30 Oct 1969      |
|                                     |             |    |                  | FR 1582948 A            | 10 Oct 1969      |
|                                     |             |    |                  | LU 59348 A1             | 07 Jan 1970      |