

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 August 2007 (30.08.2007)

PCT

(10) International Publication Number
WO 2007/096361 A1

(51) International Patent Classification:

C10M 161/00 (2006.01) C10N 30/06 (2006.01)
C10N 10/04 (2006.01) C10N 40/25 (2006.01)

(21) International Application Number:

PCT/EP2007/051625

(22) International Filing Date:

20 February 2007 (20.02.2007)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

06250923.7 21 February 2006 (21.02.2006) EP

(71) Applicant (for all designated States except US): SHELL
INTERNATIONALE RESEARCH MAATSCHAPPIJ
B.V. [NL/NL]; NL-2596 HR The Hague (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FUJITSU, Takashi
[JP/JP]; Showa Shell Sekiyu K.K., 4052-2 Nakatsu,
Aikawa-Cyo, Aiko-Gun, Kanagawa, Kanagawa (JP).
GRIFFITHS, Joanna [GB/GB]; Pool Lane, Ince, Chester
Cheshire CH1 3SH (GB).

(74) Agent: ZEESTRATEN, Albertus Wilhelmus Joannes;
C30, NL-2501 CJ The Hague (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report

[Continued on next page]

(54) Title: LUBRICATING OIL COMPOSITION

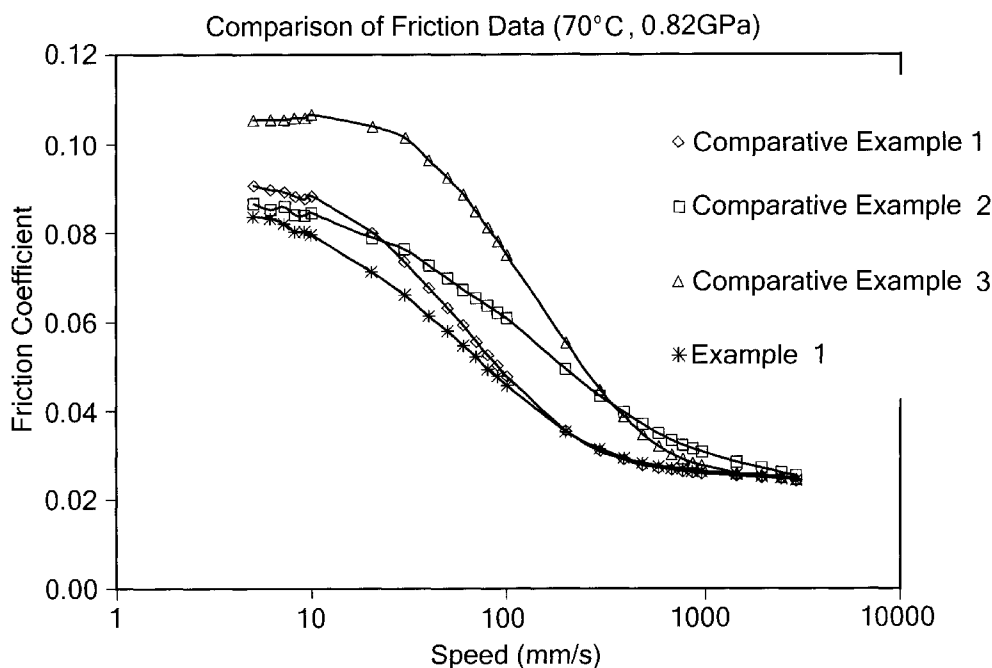

(57) Abstract: A lubricating oil composition comprising base oil, one or more glycerol esters selected from glycerol monooleate and/or glycerol dioleate, optionally in combination with glycerol trioleate, wherein said composition further comprises one or more dispersant- viscosity index improver compounds and an additive amount of one or more additional polyhydric alcohol esters; and a method of lubricating an internal combustion engine comprising applying said lubricating oil composition thereto.

WO 2007/096361 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

LUBRICATING OIL COMPOSITION

The present invention relates to a lubricating oil composition, in particular to a lubricating oil composition which is suitable for lubricating internal combustion engines and which has improved friction
5 reduction and fuel economy.

Increasingly severe automobile regulations in respect of emissions and fuel efficiency are placing increasing demands on both engine manufacturers and lubricant formulators to provide effective solutions to
10 improve fuel economy.

Optimising lubricants through the use of high performance basestocks and novel additives represents a flexible solution to a growing challenge.

Friction-reducing additives (which are also known as
15 friction modifiers) are important lubricant components in reducing fuel consumption and various such additives are already known in the art.

Friction modifiers can be conveniently divided into two categories, that is to say, metal-containing friction
20 modifiers and ashless (organic) friction modifiers.

Organo-molybdenum compounds are amongst the most common metal-containing friction modifiers. Typical organo-molybdenum compounds include molybdenum dithiocarbamates (MoDTC), molybdenum dithiophosphates
25 (MoDTP), molybdenum amines, molybdenum alcoholates, and molybdenum alcohol-amides. WO-A-98/26030, WO-A-99/31113, WO-A-99/47629 and WO-A-99/66013 describe tri-nuclear molybdenum compounds for use in lubricating oil compositions.

However, the trend towards low-ash lubricating oil compositions has resulted in an increased drive to achieve low friction and improved fuel economy using ashless (organic) friction modifiers.

5 Ashless (organic) friction modifiers typically comprise esters of fatty acids and polyhydric alcohols, fatty acid amides, amines derived from fatty acids and organic dithiocarbamate or dithiophosphate compounds.

10 Further improvements in lubricant performance characteristics have been achieved through the use of synergistic behaviours of particular combinations of lubricant additives.

WO-A-99/50377 discloses a lubricating oil composition which is said to have a significant increase
15 in fuel economy due to the use therein of tri-nuclear molybdenum compounds in conjunction with oil soluble dithiocarbamates.

EP-A-1041135 discloses the use of succinimide dispersants in conjunction with molybdenum
20 dialkyldithiocarbamates to give improved friction reduction in diesel engines.

US-B1-6562765 discloses a lubricating oil composition which is said to have a synergy between an oxymolybdenum nitrogen dispersant complex and an
25 oxymolybdenum dithiocarbamate which leads to unexpectedly low friction coefficients.

EP-A-1367116, EP-A-0799883, EP-A-0747464, US-A-3933659 and EP-A-335701 disclose lubricating oil compositions comprising various combinations of ashless
30 friction modifiers.

WO-A-92/02602 describes lubricating oil compositions for internal combustion engines which comprise a blend of ashless friction modifiers which are said to have a synergistic effect on fuel economy.

The blend disclosed in WO-A-92/02602 is a combination of (a) an amine/amide friction modifier prepared by reacting one or more acids with one or more polyamines and (b) an ester/alcohol friction modifier prepared by reacting one or more acids with one or more polyols.

US-A-5114603 and US-A-4683069 describe lubricating oil compositions comprising mixtures of glycerol monooleate and glycerol dioleate in combination with other additives which were added for their conventional purpose.

EP-A-0747464 describes a lubricating oil composition for automatic transmissions which comprises alkoxyated fatty amines as well as a mixture of two friction modifiers which are selected from a large list of possible compounds. Whilst said list includes glycerol esters, it is of note that there are no examples in EP-A-0747464 which comprise glycerol esters as friction modifiers.

US-A-5286394 discloses a friction-reducing lubricating oil composition and a method for reducing the fuel consumption of an internal combustion engine.

The lubricating oil composition disclosed therein comprises a major amount of an oil having lubricating viscosity and a minor amount of a friction-modifying, polar and surface active organic compound selected from a long list of compounds including mono- and higher esters of polyols and aliphatic amides. Glycerol monooleate and oleamide (i.e. oleylamide) are mentioned as examples of such compounds.

However, current strategies with regard to friction reduction for fuel economy oils are not sufficient to meet ever increasing fuel economy targets set by Original Equipment Manufacturers (OEMs).

For example, molybdenum friction modifiers typically outperform ashless friction modifiers in the boundary regime and there is a challenge to approach similar levels of friction modification using solely ashless friction modifiers.



Thus, given the increasing fuel economy demands placed on engines, there remains a need to further improve the friction reduction and fuel economy of internal combustion engines utilising low ash lubricating oil compositions.

It is therefore desirable to further improve on the performance of known ashless friction modifiers and known combinations of ashless friction modifiers, in particular to further improve on the friction-reducing performance of polyol ester friction modifiers such as glycerol monooleate that have been commonly used in the art.

There has now been surprisingly found in the present invention a lubricating oil composition which has good friction reduction and fuel economy.



Accordingly, the present invention provides a lubricating oil composition comprising base oil, one or more glycerol esters selected from glycerol monooleate, and/or glycerol dioleate, optionally in combination with glycerol trioleate, wherein said composition further comprises one or more dispersant-viscosity index improver compounds and an additive amount of one or more additional polyhydric alcohol esters.

It will be appreciated that glycerol monooleate has two possible structures, that is to say structures (a) and (b) indicated below.



Glycerol monooleate used in the lubricating oil composition of the present invention may be conveniently present as compound having structure (a), compound having structure (b) or mixtures thereof.

5 It will be further appreciated that glycerol dioleate also has two possible structures, that is to say structures (c) and (d) indicated below.

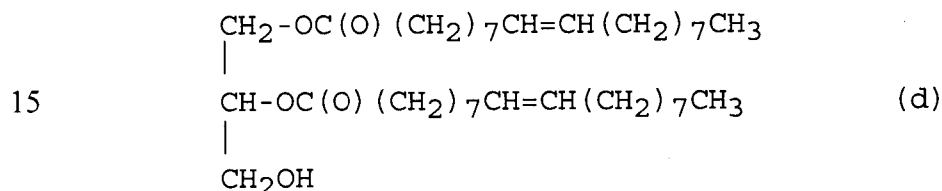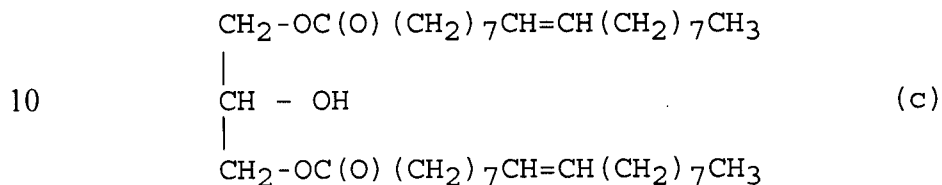

Glycerol dioleate used in the lubricating oil composition of the present invention may be conveniently present as compound having structure (c), compound having structure (d), or mixtures thereof.

20

Commercially available glycerol monooleate may contain minor amounts of glycerol dioleate and glycerol trioleate.

25 In a preferred embodiment of the present invention, the one or more glycerol esters are present in a total amount in the range of from 0.05 to 5.0 wt. %, more preferably in the range of from 0.5 to 3.0 wt. % and most preferably in the range of from 0.7 to 1.5 wt. %, based on the total weight of the lubricating oil composition.

30

By "an additive amount of one or more additional polyhydric alcohol esters" in the present invention, is meant that said one or more additional polyhydric alcohol esters are preferably present in a total amount in the

range of from 0.1 to 2.0 wt. %, based on the total weight of the lubricating oil composition.

Said one or more additional polyhydric alcohol esters are more preferably present in a total amount in
5 the range of from 0.1 to 1.0 wt. %, based on the total weight of the lubricating oil composition.

Preferred additional polyhydric alcohol esters include other glycerol esters such as glycerol stearates, for example glycerol monostearate, neopentyl glycol esters
10 such as neopentyl glycol oleates, pentaerythritol esters such as pentaerythritol oleates and trimethylolpropane (TMP) esters such as trimethylolpropane oleates and trimethylolpropane stearates.

The one or more additional polyhydric alcohol esters
15 present in the lubricating oil composition of the present invention may be fully or partially esterified esters.

Dispersant-viscosity index improver compounds are multi-functional compounds that in addition to acting as viscosity index improvers also exhibit dispersant
20 behaviour.

Such compounds are well known in the art and have been described in many publications, for example, Chapter 5 ("Viscosity index improvers and thickeners") by R.L. Stambaugh in "Chemistry and Technology of Lubricants",
25 eds., R.M. Mortier, S.T. Orszulik, Blackie/VCH, 1992, pp. 124.

Such compounds may be conveniently prepared by conventional methods and may be generally prepared as described in the afore-mentioned reference. For example,
30 amongst others, said compounds may also be prepared according to the methods described in EP-A-0730022, EP-A-0730021, US-A-3506574 and EP-A2-0750031.


Examples of dispersant-viscosity index improver compounds that may be conveniently used include those described in US-B1-6331510, US-B1-6204224 and US-B1-6372696.

5 Examples of dispersant-viscosity index improver compounds include those available ex. RohMax under the trade designations "Acryloid 985", "VISCOPLEX 6-325", "Viscoplex 6-054", "Viscoplex 6-954" and "Viscoplex 6-565" and that available ex. The Lubrizol Corporation
10 under the trade designation "LZ 7720C".

Particularly preferred dispersant-viscosity index improver compounds that may be conveniently employed in the present invention are polyalkylene glycol-polymethacrylate copolymers. The polyalkylene glycol
15 moieties therein may comprise branched or unbranched alkylene groups.

Examples of polyalkylene glycol-polymethacrylate copolymers that may be conveniently used are polyethylene glycol-polymethacrylate copolymers and polypropylene
20 glycol-polymethacrylate copolymers.

Polyalkylene glycol-polymethacrylate copolymers which are especially preferred for use as dispersant-viscosity index improver compounds in the present invention include compounds according to formula I,

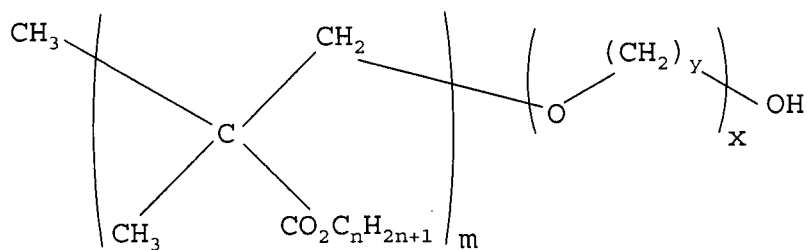


(I)

wherein n is an integer in the range of from 1 to 20, preferably 10 to 20, m is an integer in the range of from 75 to 200, y is an integer in the range of from 2 to 6 and x is an integer in the range of from 200 to 600.

5 Examples of most preferred dispersant-viscosity index improver compounds that may be conveniently employed in the present invention include polyethylene glycol-polymethacrylate co-polymers.

10 Polyethylene glycol-polymethacrylate co-polymers which are especially preferred for use as dispersant-viscosity index improver compounds in the present invention include compounds according to formula II,

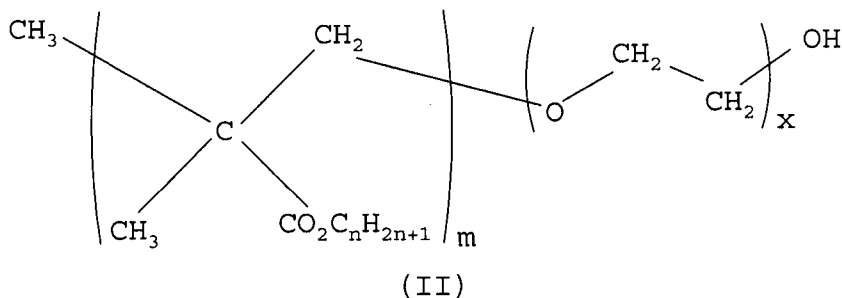

15 wherein n is an integer in the range of from 1 to 20, preferably 10 to 20, m is an integer in the range of from 75 to 200 and x is an integer in the range of from 200 to 600.

20 Preferred polyalkylene glycol-polymethacrylate copolymers dispersant-viscosity index improver compounds that may be conveniently used in the present invention include viscosity index improver which is available under the trade designation "VISCOPLEX 6-325" from RohMax.

25 In a preferred embodiment of the present invention, the one or more dispersant-viscosity index improver compounds are present in a total amount in the range of from 0.1 to 10 wt. %, more preferably in the range of from 0.2 to 7 wt. % and most preferably in the range of from

0.5 to 4 wt. %, based on the total weight of the lubricating oil composition.

The total amount of base oil incorporated in the lubricating oil composition of the present invention is preferably present in an amount in the range of from 60 to 92 wt. %, more preferably in an amount in the range of from 75 to 90 wt. % and most preferably in an amount in the range of from 75 to 88 wt. %, with respect to the total weight of the lubricating oil composition.

There are no particular limitations regarding the base oil used in the present invention, and various conventional known mineral oils and synthetic oils may be conveniently used.

The base oil used in the present invention may conveniently comprise mixtures of one or more mineral oils and/or one or more synthetic oils.

Mineral oils include liquid petroleum oils and solvent-treated or acid-treated mineral lubricating oil of the paraffinic, naphthenic, or mixed paraffinic/naphthenic type which may be further refined by hydrofinishing processes and/or dewaxing.

Naphthenic base oils have low viscosity index (VI) (generally 40-80) and a low pour point. Such base oils are produced from feedstocks rich in naphthenes and low in wax content and are used mainly for lubricants in which colour and colour stability are important, and VI and oxidation stability are of secondary importance.

Paraffinic base oils have higher VI (generally >95) and a high pour point. Said base oils are produced from feedstocks rich in paraffins, and are used for lubricants in which VI and oxidation stability are important.

Fischer-Tropsch derived base oils may be conveniently used as the base oil in the lubricating oil composition of the present invention, for example, the Fischer-

Tropsch derived base oils disclosed in EP-A-776959, EP-A-668342, WO-A-97/21788, WO-00/15736, WO-00/14188, WO-00/14187, WO-00/14183, WO-00/14179, WO-00/08115, WO-99/41332, EP-1029029, WO-01/18156 and WO-01/57166.

5 Synthetic processes enable molecules to be built from simpler substances or to have their structures modified to give the precise properties required.

Synthetic oils include hydrocarbon oils such as olefin oligomers (PAOs), dibasic acid esters, polyol
10 esters, and dewaxed waxy raffinate. Synthetic hydrocarbon base oils sold by the Shell Group under the designation "XHVI" (trade mark) may be conveniently used.

Preferably, the base oil is constituted from mineral oils and/or synthetic oils which contain more than 80% wt
15 of saturates, preferably more than 90 % wt., as measured according to ASTM D2007.

It is further preferred that the base oil contains less than 1.0 wt. %, preferably less than 0.1 wt. % of sulphur, calculated as elemental sulphur and measured
20 according to ASTM D2622, ASTM D4294, ASTM D4927 or ASTM D3120.

Preferably, the viscosity index of base fluid is more than 80, more preferably more than 120, as measured according to ASTM D2270.

25 Preferably, the lubricating oil composition has a kinematic viscosity in the range of from 2 to 80 mm²/s at 100 °C, more preferably in the range of from 3 to 70 mm²/s, most preferably in the range of from 4 to 50 mm²/s.

30 The total amount of phosphorus in the lubricating oil composition of the present invention is preferably in the range of from 0.04 to 0.1 wt. %, more preferably in the range of from 0.04 to 0.09 wt. % and most preferably in

the range of from 0.045 to 0.09 wt. %, based on total weight of the lubricating oil composition.

The lubricating oil composition of the present invention preferably has a sulphated ash content of not greater than 1.0 wt. %, more preferably not greater than 0.75 wt. % and most preferably not greater than 0.7 wt. %, based on the total weight of the lubricating oil composition.

The lubricating oil composition of the present invention preferably has a sulphur content of not greater than 1.2 wt. %, more preferably not greater than 0.8 wt. % and most preferably not greater than 0.2 wt. %, based on the total weight of the lubricating oil composition.

The lubricating oil composition of the present invention may further comprise additional additives such as anti-oxidants, anti-wear additives, detergents, dispersants, friction modifiers, viscosity index improvers, pour point depressants, corrosion inhibitors, defoaming agents and seal fix or seal compatibility agents.

Antioxidants that may be conveniently used include those selected from the group of aminic antioxidants and/or phenolic antioxidants.

In a preferred embodiment, said antioxidants are present in an amount in the range of from 0.1 to 5.0 wt. %, more preferably in an amount in the range of from 0.3 to 3.0 wt. %, and most preferably in an amount of in the range of from 0.5 to 1.5 wt. %, based on the total weight of the lubricating oil composition.

Examples of aminic antioxidants which may be conveniently used include alkylated diphenylamines, phenyl- α -naphthylamines, phenyl- β -naphthylamines and alkylated α -naphthylamines.

Preferred aminic antioxidants include dialkyldiphenylamines such as p,p'-dioctyl-diphenylamine, p,p'-di- α -methylbenzyl-diphenylamine and N-p-butylphenyl-N-p'-octylphenylamine, monoalkyldiphenylamines such as mono-t-butyl-diphenylamine and mono-octyl-diphenylamine, bis(dialkylphenyl)amines such as di-(2,4-diethylphenyl)amine and di(2-ethyl-4-nonylphenyl)amine, alkylphenyl-1-naphthylamines such as octylphenyl-1-naphthylamine and n-t-dodecylphenyl-1-naphthylamine, 1-naphthylamine, aryl-naphthylamines such as phenyl-1-naphthylamine, phenyl-2-naphthylamine, N-hexylphenyl-2-naphthylamine and N-octylphenyl-2-naphthylamine, phenylenediamines such as N,N'-diisopropyl-p-phenylenediamine and N,N'-diphenyl-p-phenylenediamine, and phenothiazines such as phenothiazine and 3,7-dioctylphenothiazine.

Preferred aminic antioxidants include those available under the following trade designations: "Sonoflex OD-3" (ex. Seiko Kagaku Co.), "Irganox L-57" (ex. Ciba Specialty Chemicals Co.) and phenothiazine (ex. Hodogaya Kagaku Co.).

Examples of phenolic antioxidants which may be conveniently used include C7-C9 branched alkyl esters of 3,5-bis(1,1-dimethyl-ethyl)-4-hydroxy-benzenepropanoic acid, 2-t-butylphenol, 2-t-butyl-4-methylphenol, 2-t-butyl-5-methylphenol, 2,4-di-t-butylphenol, 2,4-dimethyl-6-t-butylphenol, 2-t-butyl-4-methoxyphenol, 3-t-butyl-4-methoxyphenol, 2,5-di-t-butylhydroquinone, 2,6-di-t-butyl-4-alkylphenols such as 2,6-di-t-butylphenol, 2,6-di-t-butyl-4-methylphenol and 2,6-di-t-butyl-4-ethylphenol, 2,6-di-t-butyl-4-alkoxyphenols such as 2,6-di-t-butyl-4-methoxyphenol and 2,6-di-t-butyl-4-ethoxyphenol, 3,5-di-t-butyl-4-hydroxybenzylmercaptooctylacetate, alkyl-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionates such as n-

octadecyl-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate, n-butyl-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate and 2'-ethylhexyl-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate, 2,6-d-t-butyl- α -dimethylamino-p-cresol, 2,2'-methylenebis(4-alkyl-6-t-butylphenol) such as 2,2'-methylenebis(4-methyl-6-t-butylphenol, and 2,2-methylenebis(4-ethyl-6-t-butylphenol), bisphenols such as 4,4'-butylidenebis(3-methyl-6-t-butylphenol, 4,4'-methylenebis(2,6-di-t-butylphenol), 4,4'-bis(2,6-di-t-butylphenol), 2,2-(di-p-hydroxyphenyl)propane, 2,2-bis(3,5-di-t-butyl-4-hydroxyphenyl)propane, 4,4'-cyclohexylidenebis(2,6-t-butylphenol), hexamethyleneglycol-bis[3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate], triethyleneglycolbis[3-(3-t-butyl-4-hydroxy-5-methylphenyl)propionate], 2,2'-thio[diethyl-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate], 3,9-bis{1,1-dimethyl-2-[3-(3-t-butyl-4-hydroxy-5-methylphenyl)propionyloxy]ethyl}2,4,8,10-tetraoxaspiro[5,5]undecane, 4,4'-thiobis(3-methyl-6-t-butylphenol) and 2,2'-thiobis(4,6-di-t-butylresorcinol), polyphenols such as tetrakis[methylene-3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate]methane, 1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl)butane, 1,3,5-trimethyl-2,4,6-tris(3,5-di-t-butyl-4-hydroxybenzyl)benzene, bis-[3,3'-bis(4'-hydroxy-3'-t-butylphenyl)butyric acid]glycol ester, 2-(3',5'-di-t-butyl-4-hydroxyphenyl)methyl-4-(2",4"-di-t-butyl-3"-hydroxyphenyl)methyl-6-t-butylphenol and 2,6-bis(2'-hydroxy-3'-t-butyl-5'-methylbenzyl)-4-methylphenol, and p-t-butylphenol - formaldehyde condensates and p-t-butylphenol - acetaldehyde condensates.

Preferred phenolic antioxidants include those available under the following trade designations: "Irganox L-135" (ex. Ciba Specialty Chemicals Co.), "Yoshinox SS" (ex. Yoshitomi Seiyaku Co.), "Antage W-400" (ex. Kawaguchi Kagaku Co.), "Antage W-500" (ex. Kawaguchi

Zinc dithiophosphate compounds in which R¹ to R⁴ are all different from each other can be used alone or in admixture with zinc dithiophosphate compounds in which R¹ to R⁴ are all the same.

5 Preferably, the or each zinc dithiophosphate used in the present invention is a zinc dialkyl dithiophosphate.

Examples of suitable zinc dithiophosphates which are commercially available include those available ex. Lubrizol Corporation under the trade designations "Lz 1097" and "Lz 1395", those available ex. Chevron Oronite 10 under the trade designations "OLOA 267" and "OLOA 269R", and that available ex. Afton Chemical under the trade designation "HITEC 7197"; zinc dithiophosphates such as those available ex. Lubrizol Corporation under the trade 15 designations "Lz 677A", "Lz 1095" and "Lz 1371", that available ex. Chevron Oronite under the trade designation "OLOA 262" and that available ex. Afton Chemical under the trade designation "HITEC 7169"; and zinc dithiophosphates such as those available ex. Lubrizol 20 Corporation under the trade designations "Lz 1370" and "Lz 1373" and that available ex. Chevron Oronite under the trade designation "OLOA 260".

The lubricating oil composition according to the present invention may generally comprise in the range of 25 from 0.4 to 1.0 wt. % of zinc dithiophosphate, based on total weight of the lubricating oil composition.

Additional or alternative anti-wear additives may be conveniently used in the lubricating oil composition of the present invention.

30 Typical detergents that may be used in the lubricating oil composition of the present invention include one or more salicylate and/or phenate and/or sulphonate detergents.

However, as metal organic and inorganic base salts which are used as detergents can contribute to the sulphated ash content of a lubricating oil composition, in a preferred embodiment of the present invention, the amounts of such additives are minimised.

Furthermore, in order to maintain a low sulphur level, salicylate detergents are preferred.

Thus, in a preferred embodiment, the lubricating oil composition of the present invention may comprise one or more salicylate detergents.

In order to maintain the total sulphated ash content of the lubricating oil composition of the present invention at a level of preferably not greater than 1.0 wt. %, more preferably at a level of not greater than 0.75 wt. % and most preferably at a level of not greater than 0.7 wt. %, based on the total weight of the lubricating oil composition, said detergents are preferably used in amounts in the range of 0.05 to 12.5 wt. %, more preferably from 1.0 to 9.0 wt. % and most preferably in the range of from 2.0 to 5.0 wt. %, based on the total weight of the lubricating oil composition.

Furthermore, it is preferred that said detergents, independently, have a TBN (total base number) value in the range of from 10 to 500 mg.KOH/g, more preferably in the range of from 30 to 350 mg.KOH/g and most preferably in the range of from 50 to 300 mg.KOH/g, as measured by ISO 3771.

The lubricating oil compositions of the present invention may additionally contain an ash-free dispersant which is preferably admixed in an amount in the range of from 5 to 15 wt. %, based on the total weight of the lubricating oil composition.

Examples of ash-free dispersants which may be used include the polyalkenyl succinimides and polyalkenyl succinic acid esters disclosed in Japanese Laid-Open Patent Application Nos. JP 53-050291 A, JP 56-120679 A, 5 JP 53-056610 A and JP 58-171488 A. Preferred dispersants include borated succinimides.

Examples of further viscosity index improver improvers which may conveniently be used in the lubricating oil composition of the present invention include the 10 styrene-butadiene copolymers, styrene-isoprene stellate copolymers and the polymethacrylate copolymer and ethylene-propylene copolymers. Such viscosity index improver improvers may be conveniently employed in an amount in the range of from 1 to 20 wt. %, based on the 15 total weight of the lubricating oil composition.

Polymethacrylates may be conveniently employed in the lubricating oil compositions of the present invention as effective pour point depressants.

Furthermore, compounds such as alkenyl succinic acid 20 or ester moieties thereof, benzotriazole-based compounds and thiodiazole-based compounds may be conveniently used in the lubricating oil composition of the present invention as corrosion inhibitors.

Compounds such as polysiloxanes, dimethyl 25 polycyclohexane and polyacrylates may be conveniently used in the lubricating oil composition of the present invention as defoaming agents.

Compounds which may be conveniently used in the lubricating oil composition of the present invention as 30 seal fix or seal compatibility agents include, for example, commercially available aromatic esters.

The lubricating oil compositions of the present invention may be conveniently prepared by admixing the one or more glycerol esters selected from glycerol

monooleate and/or glycerol dioleate, optionally in combination with glycerol trioleate, one or more dispersant-viscosity index improver compounds and an additive amount of one or more additional polyhydric alcohol esters and, optionally, further additives that are usually present in lubricating oil compositions, for example as herein before described, with mineral and/or synthetic base oil.

In another embodiment of the present invention, there is provided a method of lubricating an internal combustion engine comprising applying a lubricating oil composition as hereinbefore described thereto.

The present invention further provides the use of a combination of one or more glycerol esters selected from glycerol monooleate and/or glycerol dioleate, optionally in combination with glycerol trioleate, one or more dispersant-viscosity index improver compounds and an additive amount of one or more additional polyhydric alcohol esters in a lubricating oil composition in order to improve fuel economy and/or friction reduction.

The present invention is described below with reference to the following Examples, which are not intended to limit the scope of the present invention in any way.

EXAMPLES

Formulations

Table 1 indicates the formulations that were tested.

The formulations in Table 1 comprised conventional detergents, dispersants, antioxidants and zinc dithiophosphate additives, which were present as additive packages in diluent oil.

The base oils used in said formulations were mixtures of polyalphaolefin base oils (PAO-4 available from BP Amoco under the trade designation "DURASYN 164" and PAO-5

available from Chevron Oronite under the trade designation "SYNFLUID 5").

The conventional viscosity index improver that was used was an isoprene-styrene viscosity index (VI) improver available under the trade designation "INFINEUM SV300" from Infineum.

The dispersant-viscosity index (VI) improver that was used was a polyethylene glycol-polymethacrylate (PEG-PMA) copolymer available under the trade designation "VISCOPLEX 6-325" from RohMax.

The glycerol monooleate that was used was that available under the trade designation "RADIASURF 7149" from Oleon Chemicals. Said component is primarily glycerol monooleate with minor amounts of glycerol dioleate and glycerol trioleate.

The additional polyhydric alcohol ester that was used was trimethylol propane (TMP) monooleate available under the trade designation "ADEKA FM-110" from Asahi Denka Kogyo Co. Ltd.

The oleylamide used was that available under the trade designation "UNISLIP 1757" from Uniqema.

All formulations described in Table 1 were SAE 0W20 viscosity grade oils.

Said formulations were manufactured by blending together the components therein in a single stage blending procedure at a temperature of 70°C. Heating was maintained for a minimum of 30 minutes to ensure thorough mixing, whilst the solution was mixed using a paddle stirrer.

30

TABLE 1

Additive (wt. %)	Ex. 1	Comp. Ex. 1	Comp. Ex. 2	Comp. Ex. 3
Anti-foam	30ppm	30ppm	30ppm	30ppm
Additive package ¹	10.9	10.9	10.9	10.9
Glycerol Monooleate	1.0	1.5	1.5	1.0
Trimethylol propane monooleate	0.5	-	-	0.5
Isoprene-styrene VI improver	-	2.7	-	2.7
PEG-PMA dispersant-VI improver	2.9	-	2.9	-
Oleylamide	-	0.2	0.2	-
PAO-4 Base Oil	33.9	33.9	33.9	33.9
PAO-5 Base Oil	50.8	50.8	50.6	51.0
TOTAL	100	100	100	100

5 ¹ Conventional additive package containing calcium salicylate detergents having TBNs of 165 mg.KOH/g and 280 mg.KOH/g, dispersant, pour point depressant, aminic and phenolic antioxidants, zinc dithiophosphate additives and diluent oil.

Mini-Traction Machine (MTM) Test

Friction measurements were carried out on a Mini-Traction Machine manufactured by PCS instruments.

10 The MTM Test was described by R. I. Taylor, E. Nagatomi, N. R. Horswill, D. M. James in "A screener test for the fuel economy potential of engine lubricants", presented at the 13th International Colloquium on Tribology, January 2002.

15 Friction coefficients were measured with the Mini-Traction Machine using the 'ball-on-disc' configuration.

The ball specimen was a polished steel ball bearing, 19.05 mm in diameter. The disc specimen was a polished bearing steel disc, 46 mm in diameter and 6 mm thick.

The ball specimen was secured concentrically on a motor driven shaft. The disc specimen was secured concentrically on another motor driven shaft. The ball was loaded against the disc to create a point contact area with minimum spin and skew components. At the point of contact, a slide to roll ratio of 100% was maintained by adjusting the surface speed of the ball and disc.

The tests were run at a pressure of 0.82 GPa (load of 20N) with variable temperatures and mean surface speeds as detailed in Table 2.

Results and Discussion

The formulations described in Table 1 were tested using the afore-mentioned test and the results obtained thereon are detailed below:

15 Testing under Low Load Conditions

The formulations of Example 1 and Comparative Examples 1 to 3 were tested in the MTM test under low load conditions (0.82 GPa). Testing was carried out under a variety of temperature conditions (45 °C, 70 °C, 105 °C and 125 °C) and speeds (2000, 1000, 500, 100, 50 and 10 mm/s).

Friction coefficients were measured and are described in Table 2.

TABLE 2

MTM Test Conditions		Ex. 1	Comp. Ex. 1	Comp. Ex. 2	Comp. Ex 3
Temp. (°C)	Speed (mm/s)	Friction Coefficient			
125	2000	0.0180	0.0161	0.0215	0.0193
125	1000	0.0219	0.0170	0.0272	0.0282
125	500	0.0314	0.0224	0.0351	0.0469
125	100	0.0327	0.0591	0.0563	0.0892
125	50	0.0714	0.0713	0.0638	0.0981
125	10	0.0786	0.0808	0.0696	0.0938
105	2000	0.0196	0.0185	0.0245	0.0209
105	1000	0.0213	0.0197	0.0314	0.0277
105	500	0.0279	0.0242	0.0404	0.0445
105	100	0.0571	0.0551	0.0641	0.0906
105	50	0.0673	0.0689	0.0717	0.1022
105	10	0.0789	0.0808	0.0804	0.1026
70	2000	0.0250	0.0248	0.0271	0.0255
70	1000	0.0261	0.0257	0.0307	0.0276
70	500	0.0280	0.0276	0.0369	0.0345
70	100	0.0457	0.0478	0.0609	0.0749
70	50	0.0579	0.0632	0.0698	0.0924
70	10	0.0795	0.0882	0.0844	0.1066
45	2000	0.0297	0.0297	0.0305	0.0302
45	1000	0.0321	0.0319	0.0337	0.0329
45	500	0.0336	0.0335	0.0375	0.0354
45	100	0.0415	0.0433	0.0551	0.0604
45	50	0.0498	0.0548	0.0652	0.0775
45	10	0.0754	0.0836	0.0837	0.1049

Figure 1 represents graphically the results of Table 2 which were obtained under a low load of 0.82 GPa at 70°C for Example 1 and Comparative Examples 1 to 3. Such

conditions are typical of those found in the valve train of an engine.

Comparative Example 1 in Figure 1 shows the friction coefficients exhibited under low load conditions (0.82
5 GPa) by a lubricating oil composition comprising a conventional friction modifier combination of glycerol monooleate (GMO) and oleylamide with a standard viscosity index improver.

10 In contrast, it is apparent from Figure 1 that the use in Comparative Example 2 of a dispersant-viscosity index improver gives rise to higher friction coefficients at the higher speeds.

The lubricating oil composition of Comparative Example 3 comprises a combination of GMO and TMP
15 monooleate with a standard viscosity index improver. Figure 1 shows that the lubricating oil composition of Comparative Example 3 exhibits much higher friction coefficients than the GMO/oleylamide/standard viscosity index improver combination of Comparative Example 1.


20 The lubricating oil composition of Example 1 comprises a combination of GMO and TMP monooleate with a dispersant viscosity index improver. In spite of the poor results displayed in Comparative Examples 2 and 3 for the use of GMO/dispersant viscosity index improver
25 and GMO/TMP monooleate combinations, it is apparent from Figure 1 that the use of a GMO, TMP monooleate and dispersant viscosity index improver additive combination in Example 1 gives rise to a synergistic friction reduction. Indeed, the additive combination in Example 1
30 even outperforms the commonly used GMO/oleylamide friction modifier combination of Comparative Example 1.

C L A I M S

1. A lubricating oil composition comprising base oil, one or more glycerol esters selected from glycerol monooleate and/or glycerol dioleate, optionally in combination with glycerol trioleate, wherein said
5 composition further comprises one or more dispersant-viscosity index improver compounds and an additive amount of one or more additional polyhydric alcohol esters.
2. Lubricating oil composition according to Claim 1, wherein said one or more glycerol esters are present in a
10 total amount in the range of from 0.05 to 5.0 wt. %, based on the total weight of the lubricating oil composition.
3. Lubricating oil composition according to Claim 1 or 2, wherein said one or more additional polyhydric alcohol esters are present in a total amount in the range of from
15 0.1 to 2.0 wt. %, based on the total weight of the lubricating oil composition.
4. Lubricating oil composition according to any one of Claims 1 to 3, wherein said one or more additional polyhydric alcohol esters are selected from other glycerol
20 esters such as glycerol stearates, neopentyl glycol esters such as neopentyl glycol oleates, pentaerythritol esters such as pentaerythritol oleates and trimethylolpropane (TMP) esters such as trimethylolpropane oleates and trimethylolpropane stearates.
- 25 5. Lubricating oil composition according to any one of Claims 1 to 4, wherein said one or more dispersant-viscosity index improver compounds are present in a total amount in the range of from 0.1 to 10 wt. %, based on the total weight of the lubricating oil composition.

6. Lubricating oil composition according to any one of Claims 1 to 5, wherein said one or more dispersant-viscosity index improver compounds are polyalkylene glycol-polymethacrylate copolymers.

5 7. Lubricating oil composition according to any one of Claims 1 to 6, wherein said one or more dispersant-viscosity index improver compounds are selected from compounds according to formula I,

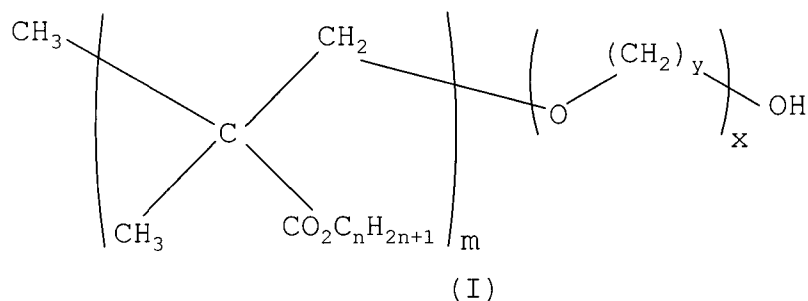


10 wherein n is an integer in the range of from 1 to 20, preferably 10 to 20, m is an integer in the range of from 75 to 200, y is an integer in the range of from 2 to 6 and x is an integer in the range of from 200 to 600.

15 8. Lubricating oil composition according to any one of Claims 1 to 7, wherein the lubricating oil composition has a total amount of phosphorus in the range of from 0.04 to 0.1 wt. % and/or a sulphur content of not greater than 1.2 wt. %, based on total weight of the lubricating oil composition.

20 9. Lubricating oil composition according to any one of Claims 1 to 8, wherein the lubricating oil composition has a sulphated ash content of not greater than 1.0 wt. %, based on the total weight of the lubricating oil composition.

25 10. Method of lubricating an internal combustion engine comprising applying a lubricating oil composition according to any one of Claims 1 to 9 thereto.

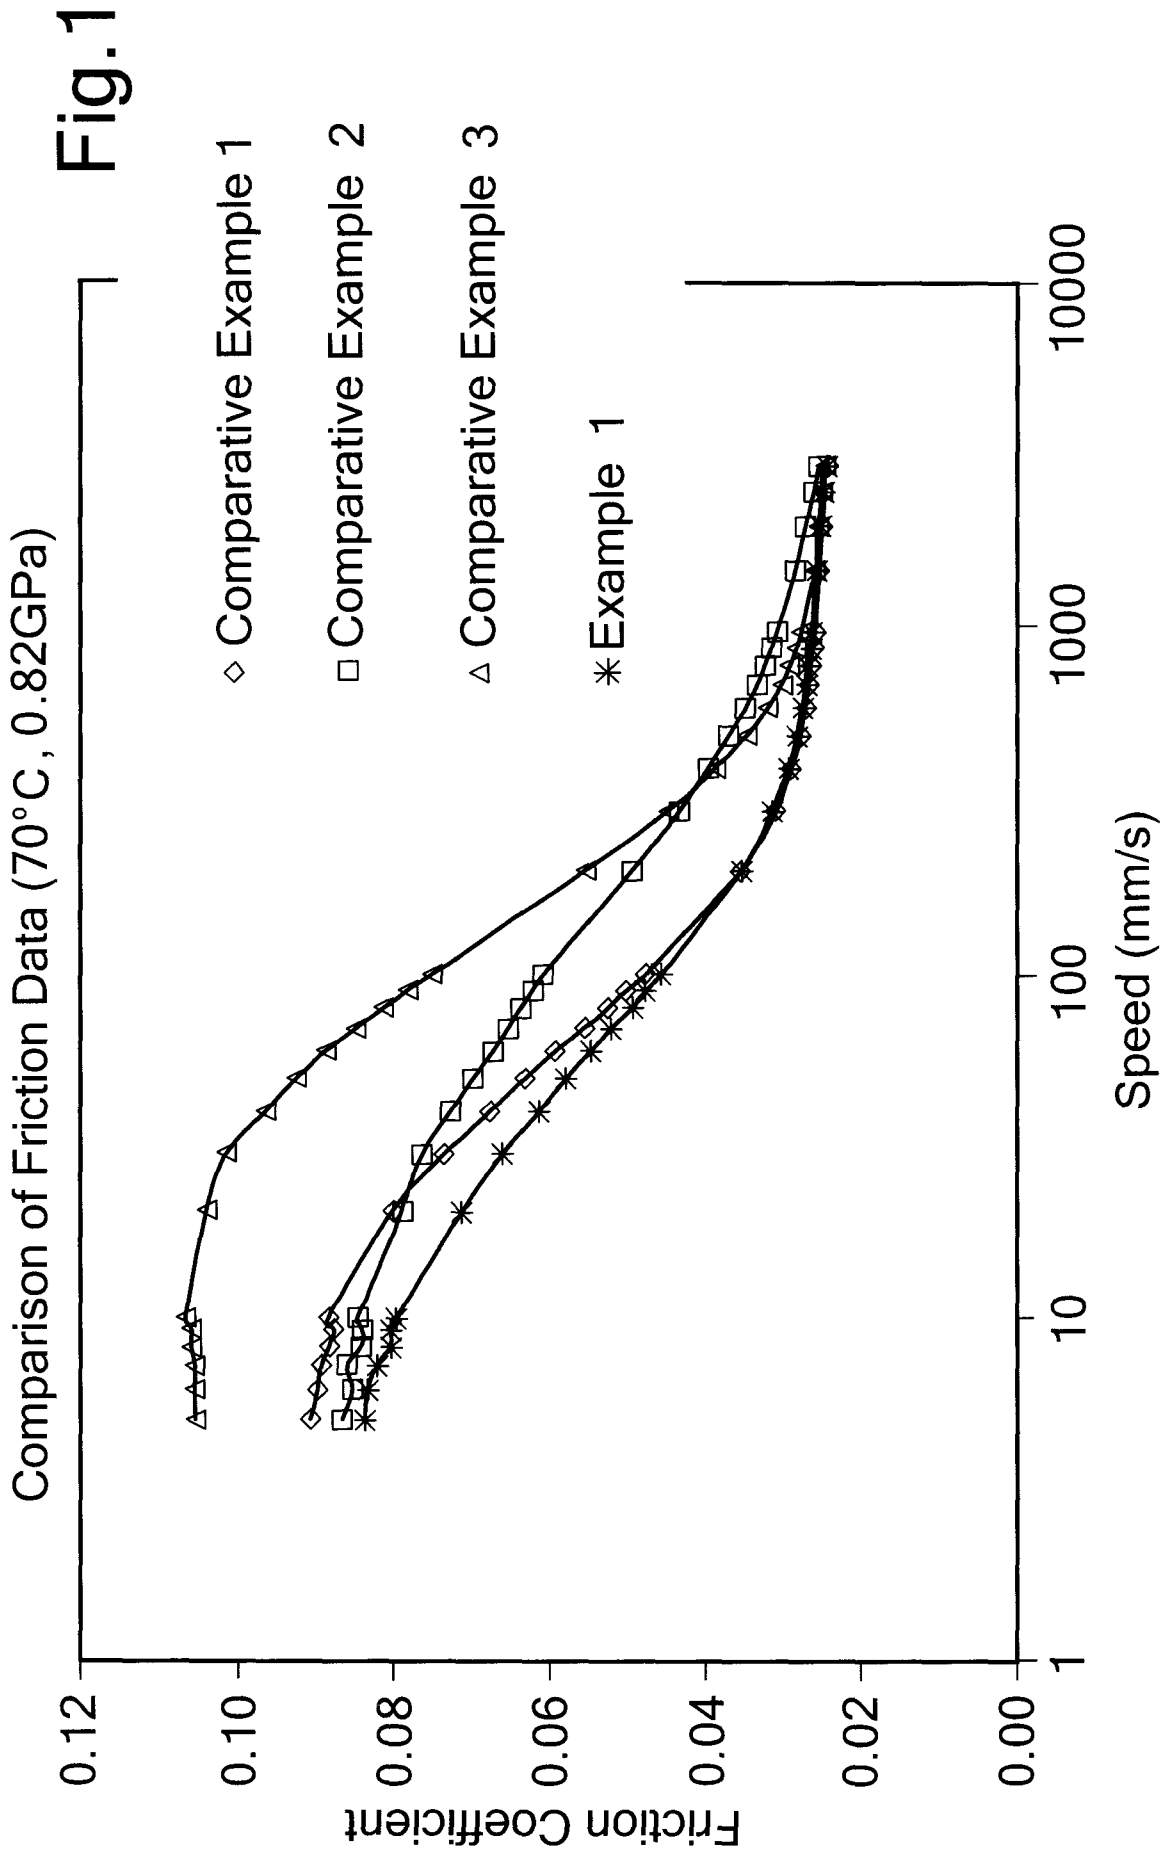

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/051625

A. CLASSIFICATION OF SUBJECT MATTER

INV. C10M161/00
ADD. C10N10/04 C10N30/06 C10N40/25

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C10M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/148477 A1 (FRIEND CHRISTOPHER L [GB] ET AL) 7 July 2005 (2005-07-07) paragraphs [0070], [0082]; examples 1-3, Reference-example-1	1-10
X	US 5 114 603 A (KENNEDY STEVEN [US] ET AL) 19 May 1992 (1992-05-19) example 3	1-10
X	EP 0 905 221 A (NCH CORP [US]) 31 March 1999 (1999-03-31) paragraphs [0009], [0014], [0017]; examples 1,2; table p.5	1-10
X	GB 2 097 813 A (EXXON RESEARCH ENGINEERING CO) 10 November 1982 (1982-11-10) page 2, lines 41-48; examples 1,3	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

16 May 2007

Date of mailing of the international search report

30/05/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bertrand, Samuel

INTERNATIONAL SEARCH REPORT

 International application No
 PCT/EP2007/051625

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005148477	A1	07-07-2005	CA 2552606 A1 28-07-2005 EP 1702049 A1 20-09-2006 WO 2005068590 A1 28-07-2005
US 5114603	A	19-05-1992	NONE
EP 0905221	A	31-03-1999	DE 905221 T1 07-10-1999 ES 2131490 T1 01-08-1999 GR 99300023 T1 30-07-1999 US 5885942 A 23-03-1999
GB 2097813	A	10-11-1982	AU 554024 B2 07-08-1986 AU 8340582 A 11-11-1982 BE 893083 A1 05-11-1982 CA 1174660 A1 18-09-1984 DE 3216390 A1 13-01-1983 FR 2505355 A1 12-11-1982 HK 41090 A 01-06-1990 IT 1151566 B 24-12-1986 JP 57187394 A 18-11-1982 NL 8201866 A 01-12-1982 SG 60888 G 10-03-1989