

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/156940 A1

(51) International Patent Classification:
F28D 15/04 (2006.01) *H01L 23/427* (2006.01)

(74) Agents: TSUDA, Diane M. et al.; The Boeing Company,
P.O. Box 2515, MC 110-SD54, Seal Beach, California
90740-1515 (US).

(21) International Application Number:
PCT/US2008/063942

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(22) International Filing Date: 16 May 2008 (16.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/762,422 13 June 2007 (13.06.2007) US

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): THE
BOEING COMPANY [US/US]; 100 North Riverside
Plaza, Chicago, Illinois 60606-2016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ZHAO, Yuan
[CN/US]; 502 Fargo Street, Thousand Oaks, California
91360 (US). CHEN, Chung-Lung [US/US]; 3916 Via
Verde, Thousand Oaks, California 91360 (US).

Published:
— with international search report

(54) Title: HEAT PIPE DISSIPATING SYSTEM AND METHOD

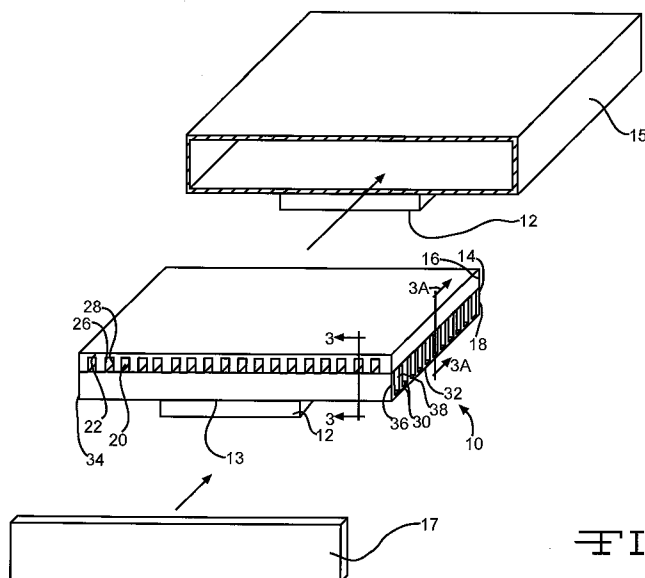


FIG. 1

(57) Abstract: A heat pipe device (10) for dissipating heat from a heat source (12) includes a porous wick structure (14) having a first porous wick portion (16) disposed adjacent to a second porous wick portion (18). The first porous wick portion is defined by a first set of microgrooves (20). The second porous wick portion is defined by a second set of microgrooves (30) disposed in non-parallel adjacent alignment to the first set of microgrooves. The heat pipe device may be disposed within a closed chamber enclosure (15) to which the heat source is attached. In further embodiments, methods are disclosed for manufacturing devices for dissipating heat from a heat source, and for using devices to dissipate heat from a heat source.

WO 2008/156940 A1

HEAT PIPE DISSIPATING SYSTEM AND METHOD

BACKGROUND

Many heat pipe devices and methods exist for dissipating heat from a heat source. For instance, in one existing heat pipe device, a closed chamber is used. The closed chamber has a porous wick layer extending around a perimeter of the inner surface of the chamber. In the center of the chamber is an empty cavity. The chamber is filled with a saturated working fluid with liquid only existing in the voids of the wick. When heat is applied in an evaporator area, the liquid in the evaporator wick vaporizes and fills the center cavity. Since the opposite side of the evaporator is cooled, the vapor condenses on that side. The condensed liquid is wicked back to the evaporator by capillary force. However, this type of structure or process, or other types of existing structures or processes, may experience one or more problems in practical applications, especially for high power density electronics. The problems may include insufficient structure strength, low capacity, low tolerance to local heat fluxes at hot spots, poor performance at high heat flux conditions, complex internal constructions, high manufacturing costs, and/or one or more other types of problems.

A device, method of use, and/or method of manufacture is needed to decrease one or more problems associated with one or more of the existing devices and/or methods for dissipating heat from a heat source.

SUMMARY

In one aspect of the disclosure, a device is provided for dissipating heat from a heat source. The device comprises a porous wick structure comprising a first porous wick portion disposed adjacent to a second porous wick portion. The first porous wick portion is defined by a first set of microgrooves. The second porous wick portion is defined by a second set of

microgrooves disposed in non-parallel adjacent alignment to the first set of microgrooves.

In another aspect of the disclosure, a method of dissipating heat from a heat source is disclosed. In one step, a porous wick structure is provided having a first porous wick portion disposed adjacent to a second porous wick portion. The first porous wick portion is defined by a first set of microgrooves disposed in non-parallel adjacent alignment to a second set of microgrooves defined in the second porous wick portion. In another step, a surface of the porous wick structure is disposed at least one of against and near a heat source. In still another step, saturated fluid is charged within first porous walls of the first set of microgrooves and second porous walls of the second set of microgrooves. In yet another step, some of the fluid is evaporated near the surface of the porous wick structure to form a vapor and dissipate heat from the heat source. In an additional step, vapor is flowed between and within the adjacent second and first sets of microgrooves. In another step, the vapor is condensed into a liquid away from the surface of the porous wick structure. In still another step, the condensed liquid is flowed to at least one of the first and second porous walls.

In a further aspect of the disclosure, a method is disclosed of manufacturing a device for dissipating heat from a heat source. In one step, a first porous wick portion is molded so that it is defined by a first set of microgrooves. In another step, a second porous wick portion is molded so that it is defined by a second set of microgrooves. In still another step, the first porous wick portion is disposed adjacent to the second porous wick portion so that the first set of microgrooves is disposed in non-parallel adjacent alignment to the second set of microgrooves. In an additional step, the first and second porous wick portions are sintered together.

In still another aspect of the disclosure, a vapor chamber is provided for transferring heat with an internal working fluid. The vapor chamber comprises a sealed enclosure having interior walls which contain a wick material attached to at least one of the walls. The wick material includes a first portion oriented in a first direction and a second portion oriented in a second

direction different than the first direction. The working fluid is free to travel in both the first and second directions.

These and other features, aspects and advantages of the disclosure will become better understood with reference to the following drawings, description and claims.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a perspective view of one embodiment of a device for dissipating heat from an attached heat source;

Figure 2 shows a partially unassembled, perspective view of the device of Figure 1, with
10 a first porous wick portion separated from a second porous wick portion;

Figures 3 and 3A show cross-sections of the device of Figure 1 through lines 3-3 and lines 3A-3A respectively;

Figure 4 is a flowchart showing one embodiment of a method of dissipating heat from a heat source; and

15 Figure 5 is a flowchart showing one embodiment of a method for manufacturing the wick structures for a heat pipe device for dissipating heat from a heat source.

DETAILED DESCRIPTION

The following detailed description is of the best currently contemplated modes of
20 carrying out the disclosure. The description is not to be taken in a limiting sense, but is made merely for the purpose of illustrating the general principles of the disclosure, since the scope of the disclosure is best defined by the appended claims.

Figure 1 shows a perspective view of one embodiment of a heat pipe device 10 for
dissipating heat from a heat source 12 to which a surface 13 of the heat pipe device 10 may be
25 aligned near or attached. The device 10 may be adapted to be enclosed within a chamber

enclosure 15 having a cover 17 which is adapted to seal the device 10 within the closed chamber enclosure 15. The chamber enclosure 15 may be adapted to be aligned near or attached to the heat source 12 to heat up the surface 13 of the device 10 disposed within the chamber enclosure 15. In other embodiments, any type of chamber enclosure 15 may be utilized, and the heat source 12 may be applied along any portion of the chamber enclosure 15 to heat up any surface of the device 10. Although some of the figures of the instant disclosure show the heat source 12 abutting directly against the device 10 without showing the intermediate chamber enclosure 15, for any of the embodiments disclosed herein, the intermediate chamber enclosure 15 may be disposed in between the heat source 12 and the device 10. The heat source 12 may comprise any type of heat source needing heat dissipation such as a laser diode array, a motor controller, an electronic device, a heat sink, a missile device, a communication device, an aeronautical device, or other type of heat source. The device 10 may comprise a porous wick structure 14 comprising a first porous wick portion 16 disposed adjacent to, and attached to, a second porous wick portion 18. Each of the first and second porous wick portions 16 and 18 may comprise separately molded members which are attached to one another through a sintering process, or through another type of attachment process.

Figure 2 shows a partially unassembled, perspective view of the device 10 of Figure 1, with the first porous wick portion 16 separated from the second porous wick portion 18. As shown in Figures 1 and 2, the first porous wick portion 16 may be defined by a first set of microgrooves 20 which may extend in a parallel configuration from one end 22 to another end 24 of the first porous wick portion 16. Each of the first set of microgrooves 20 may be defined by opposing side first porous walls 26 and 28. In other embodiments, the first porous wick portion 16 may have a first set of microgrooves 20 which are of varying sizes, orientations, and/or configurations.

Similarly, the second porous wick portion 18 may be defined by a second set of

microgrooves 30 which may extend in a parallel configuration from one end 32 to another end 34 of the second porous wick portion 18. Each of the microgrooves 30 may be defined by opposing side second porous walls 36 and 38. As shown, the second set of microgrooves 30 may be of the same size as the first set of microgrooves 20. In other embodiments, the second porous wick portion 18 may have a second set of microgrooves 30 which are of varying sizes, orientations, and/or configurations.

As shown in Figure 1, when the first porous wick portion 16 is attached to the second porous wick portion 18, the first set of microgrooves 20 may be disposed in a substantially perpendicular, adjacent alignment to the second set of microgrooves 30. In other embodiments, the first set of microgrooves 20 may be disposed in alternative orientations and configurations with respect to the second set of microgrooves 30, such as in any type of non-parallel, adjacent alignment.

Figures 3 and 3A show cross-sections of the device 10 of Figure 1 through lines 3-3 and lines 3A-3A respectively. As shown in Figures 1-3A, the first porous walls 26 and 28 of each of the first set of microgrooves 20 may be interconnected to the second porous walls 36 and 38 of each of the second set of microgrooves 30. In such manner, as shown in Figure 3-3A, saturated liquid 40 may flow within the pores 42 of each of the first porous walls 26 and 28 through, between, and within the pores 44 of each of the second porous walls 36 and 38 as shown by representative direction 46. In other embodiments, the fluid 40 may flow in any direction within and between the pores 42 and 44 of each of the first and second porous walls 26, 28, 36, and 38.

When heat is applied at hot spot 48 at or near the surface 13 of the device 10 which is attached to a heat source 12, the saturated liquid 40 residing within the porous sub-layer 37 and second porous walls 36 and 38 may evaporate at vapor/liquid interfaces within sub-layer 37 and second porous walls 36 and 38, or may boil near the hot spot 48 and form a vapor 50. The vapor 50 may flow through the pores 44 of the porous sub-layer 37 if boiling takes place and may

subsequently enter the second set of microgrooves 30 as shown by representative directions 52 and 53. In other embodiments, the vapor 50 may flow in any direction out of the pores 42 and 44 of each of the first and second porous walls 26, 28, 36, and 38. The vapor 50 may flow within and between the second set of microgrooves 30 and the interconnected first set of microgrooves 20 in representative direction 54. In other embodiments, the vapor 50 may flow in any direction within and between the first and second sets of microgrooves 20 and 30.

When the vapor 50 is far enough away from the hot spot 48, for instance at representative area 56 within the first set of microgrooves 20, the vapor 50 may condense into a fluid 58. In other embodiments, the vapor 50 may condense back into a liquid at any contact surface within the first and second set of microgrooves 20 and 30 that is colder than the hot spot 48. The capillary forces generated by the pores 42 and 44 may return the condensed liquid 58 from the colder area 56, through the pores 42, and 44, and back to the hot spot area 48.

The condensed fluid 58 may then re-circulate through, between, and within the pores 42 and 44 of the first and second porous walls 26, 28, 36, and 38, in order to repeat the process and continue to cool hot spots 48. In other embodiments, the condensed fluid 58 may re-circulate through, between, and within the pores 42 and 44 of the first and second porous walls 26, 28, 36, and 38 in any direction in order to cool hot spots 48.

In another embodiment, a vapor chamber 15 may be provided for transferring heat with an internal working fluid 40. The vapor chamber 15 may comprise a sealed enclosure having interior walls and containing a porous wick material 14 attached to at least one interior wall of the vapor chamber 15. The porous wick material 14 may include a first portion 16 oriented in a first direction, and a second portion 18 oriented in a second direction different than the first direction. The first and second portions 16 and 18 may be interlocked to provide a stronger structure to withstand the internal to external pressure differential. As a result, the vapor chamber 15 may be sturdier, may be made more lightweight by thinner walls, and/or may avoid

the need for additional supporting structures.

Each of the respective first and second portions 16 and 18 may have respective microgrooves 20 and 30 which define the direction of orientation. The microgrooves 20 and 30 may be regular in size and straight, or in other embodiments may be irregular and curvy. In one embodiment, the first and second directions of the first and second portions 16 and 18 may be substantially perpendicular. In other embodiments, the first and second directions may be in varying orientations and configurations relative to one another. In still other embodiments, more than two portions may be used with more than two directions to provide increased heat transfer in a plurality of directions. The fluid 40 may be free to travel within the porous wick material 14 in both of the first and second directions. In such manner, by providing fluid travel in two or more directions, the heat transfer effectiveness may be improved. Vapor 50 may more readily escape from heated spots 13 through the sets of microgrooves 20 and 30.

Figure 4 shows a flow chart of one embodiment 164 of a method of dissipating heat from a heat source 12. In step 166, a porous wick structure 14 may be provided having a first porous wick portion 16 disposed adjacent to a second porous wick portion 18. Each of the first and second porous wick portions 16 and 18 may comprise separately molded members which are attached to one another through a sintering process, or through another type of attachment process. The first porous wick portion 16 may be defined by a first set of microgrooves 20 disposed in non-parallel, adjacent alignment to a second set of microgrooves 30 defined in the second porous wick portion 18.

In one embodiment, the first and second sets of microgrooves 20 and 30 may be disposed in substantially perpendicular adjacent alignment. The first and second sets of microgrooves 20 and 30 may be interconnected so that a vapor 50 may flow between the first and second sets of microgrooves 20 and 30. The first porous walls 26 and 28 of the first set of microgrooves 20 may be interconnected to the second porous walls 36 and 38 of the second set of microgrooves

30 so that a fluid 40 may flow between and within the first and second porous walls 26, 28, 36, and 38.

In step 168, a surface 13 of the porous wick structure 14 may be disposed against a heat source 12. In step 170, a proper amount of saturated working fluid may be charged into the closed chamber with liquid phase 40 residing only within the first porous walls 26 and 28 of the first set of microgrooves 20 and the second porous walls 36 and 38 of the second set of microgrooves 30. In step 172, some of the liquid 40 may evaporate at or near the surface 13 of the porous wick structure 14 to dissipate heat from the heat source 12 and form a vapor 50. In step 174, the vapor 50 may flow between and within the adjacent second and first sets of microgrooves 30 and 20. In step 176, the vapor 50 may be condensed into a condensed fluid 58 at a contact surface 56 that is colder than the surface 13. In step 178, the condensed fluid 58 may flow into the first porous walls 26 and 28, the second porous walls 36 and 38, and/or the porous sub-layer 37.

Figure 5 shows a flow chart of an embodiment 280 of a method of manufacturing a device 10 for dissipating heat from a heat source 12. In step 282, a first porous wick portion 16 may be molded so that it is defined by a first set of microgrooves 20. In step 284, a second porous wick portion 18 may be molded so that it is defined by a second set of microgrooves 30. Both of the first and second porous wick portions 16 and 18 may be molded using at least one of a copper powders and a viscous binder. In other embodiments, other types of materials may be used. After drying the first and second molded porous wick portions 16 and 18, each of the first and second porous wick portions 16 and 18 may be separately heated in an oven and separately sintered at substantially 850 degrees Celsius. In other embodiments, varying processes and temperatures may be used.

In step 286, the first porous wick portion 16 may be disposed adjacent to the second porous wick portion 18 so that the first set of microgrooves 20 is disposed in non-parallel,

adjacent alignment to the second set of microgrooves 30. In step 288, the first and second porous wick portions 16 and 18, including the first and second sets of microgrooves 20 and 30, may be sintered together. In one embodiment, the sintering may occur at substantially 950-1,000 degrees Celsius. In other embodiments, the sintering may occur at varying temperatures.

5 After the first and second wick portions 20 and 30 are sintered together, they may be fixedly disposed in a non-parallel, adjacent alignment, such as in a perpendicular, adjacent alignment. At this time, the first and second sets of microgrooves 20 and 30 may be fixedly disposed so that they are interconnected to allow vapor 50 to flow within and between the first and second sets of microgrooves 20 and 30. Similarly, at this time, the first porous walls 26 and
10 28 of the first set of microgrooves 20, and the second porous walls 36 and 38 of the second set of microgrooves 30 may be fixedly disposed so that they are interconnected to allow fluid 40 to flow within and between the first and second porous walls 26, 28, 36, and 38. The first and second wick portions 20 and 30 may be inserted within a closed chamber enclosure 15.

 One or more embodiments of the disclosure may provide one or more of the following
15 advantages over one or more of the existing devices and/or methods: increased capillary limits; increased heat flux; increased structure strength; decreased size or weight; decreased complexity; decreased manufacturing costs; increased efficiency; increased cooling; and/or one or more other types of advantages over one or more of the existing devices and/or methods.

 It should be understood, of course, that the foregoing relates to exemplary embodiments
20 of the disclosure and that modifications may be made without departing from the spirit and scope of the disclosure as set forth in the following claims.

CLAIMS

1. A device for dissipating heat from a heat source comprising:
a porous wick structure comprising a first porous wick portion disposed adjacent to a second porous wick portion, wherein said first porous wick portion is defined by a first set of
5 microgrooves and said second porous wick portion is defined by a second set of microgrooves disposed in non-parallel adjacent alignment to said first set of microgrooves.
2. The device of claim 1 wherein said first and second sets of microgrooves are disposed in substantially perpendicular adjacent alignment.
3. The device of claim 1 wherein a surface of said device is at least one of attached
10 to and aligned near a heat source.
4. The device of claim 1 wherein fluid is disposed within first porous walls of said first set of microgrooves and within second porous walls of said second set of microgrooves.
5. The device of claim 1 wherein vapor is disposed within said first and second sets of microgrooves.
- 15 6. The device of claim 4 wherein pores of said second porous walls are adapted to flow evaporated vapor from said second porous walls into said second set of microgrooves.
7. The device of claim 5 wherein pores of said first porous walls are adapted to flow condensed fluid from said first set of microgrooves into said first porous walls.
8. The device of claim 1 wherein said first and second sets of microgrooves are
20 interconnected to allow vapor to flow within and between said first and second set of microgrooves.
9. The device of claim 1 wherein first porous walls of said first set of microgrooves and second porous walls of said second set of microgrooves are interconnected to allow fluid to flow within and between said first and second porous walls.
- 25 10. The device of claim 1 wherein said adjacent first and second porous wick portions

comprise separate molded members which are sintered together.

11. The device of claim 1 wherein the device is enclosed within a chamber enclosure.

12. A method of dissipating heat from a heat source comprising:

5 providing a porous wick structure having a first porous wick portion disposed adjacent to a second porous wick portion, wherein said first porous wick portion is defined by a first set of microgrooves disposed in non-parallel adjacent alignment to a second set of microgrooves defined in said second porous wick portion;

disposing a surface of said porous wick structure at least one of against and near a heat source;

10 charging saturated fluid within first porous walls of said first set of microgrooves and second porous walls of said second set of microgrooves;

evaporating some of said fluid near the surface of said porous wick structure to form a vapor and dissipate heat from said heat source;

15 flowing said vapor between and within said adjacent second and first sets of microgrooves;

condensing said vapor into a liquid away from said surface of said porous wick structure; and

flowing said condensed liquid to at least one of said first and second porous walls.

20 13. The method of claim 12 wherein said first and second sets of microgrooves are disposed in substantially perpendicular adjacent alignment.

14. The method of claim 12 wherein said first and second sets of microgrooves are interconnected to allow said vapor to flow between and within said first and second set of microgrooves.

25 15. The method of claim 12 wherein said first porous walls of said first set of microgrooves and said second porous walls of said second set of microgrooves are

interconnected to allow said fluid to flow between and within said first and second porous walls.

16. The method of claim 12 wherein said adjacent first and second porous wick portions comprise separate molded members which are sintered together.

17. The method of claim 12 wherein the heat source comprises at least one of a laser
5 diode array, a motor controller, an electronic device, a heat sink, a missile device, a communication device, and an aeronautical device.

18. The method of claim 12 further comprising the step of disposing said porous wick structure within a closed chamber enclosure.

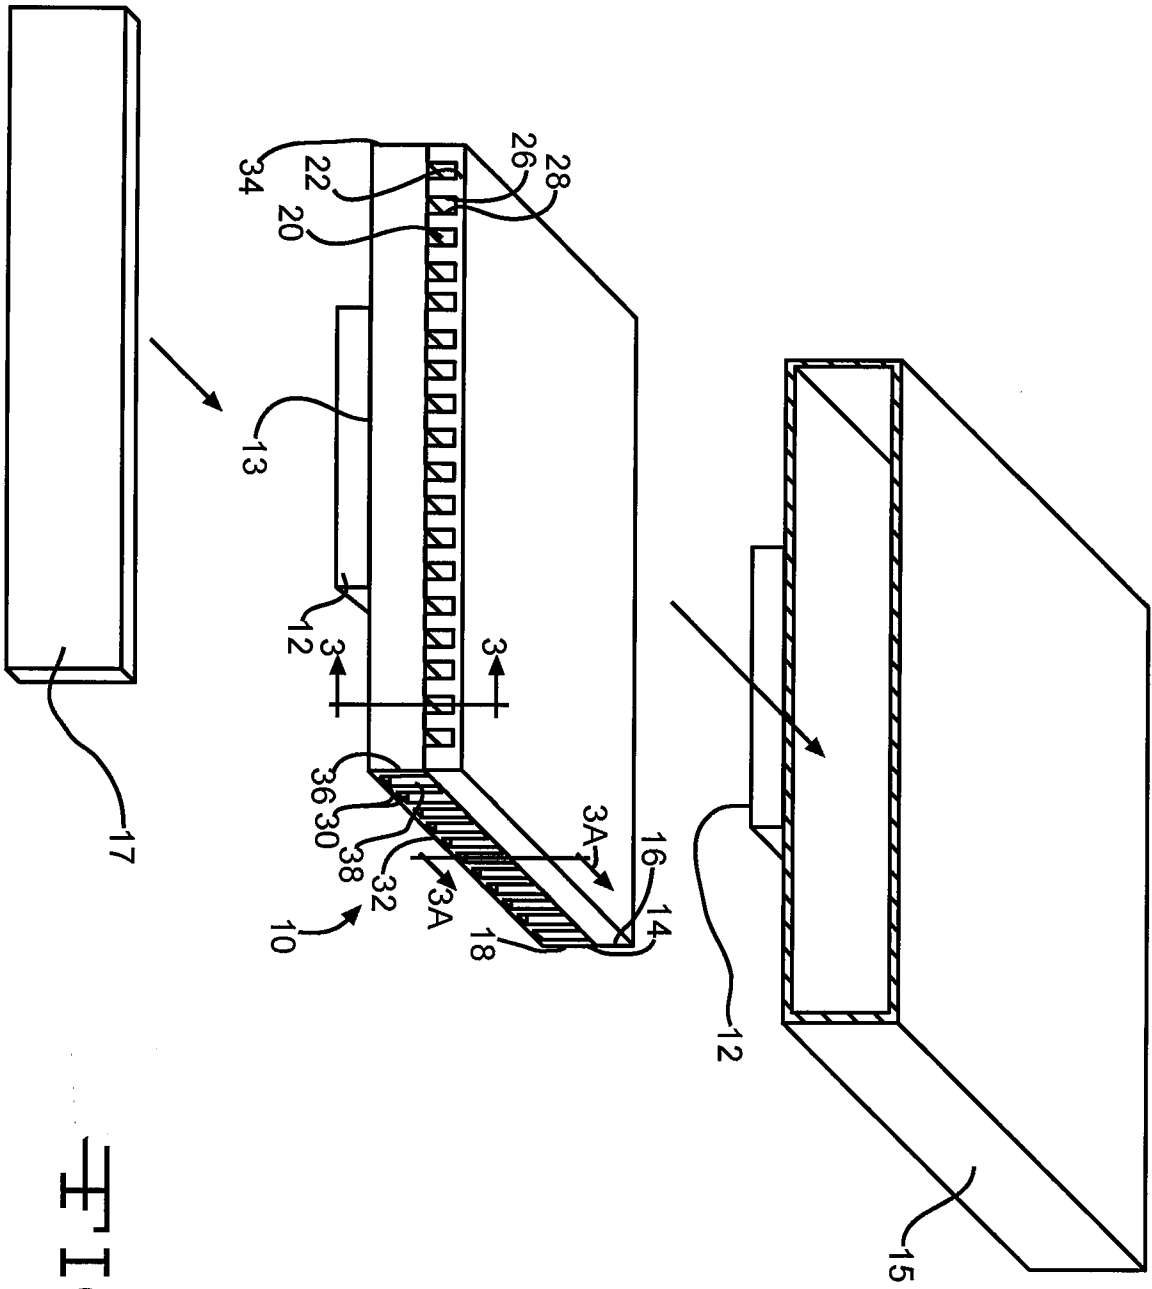


FIG. 1

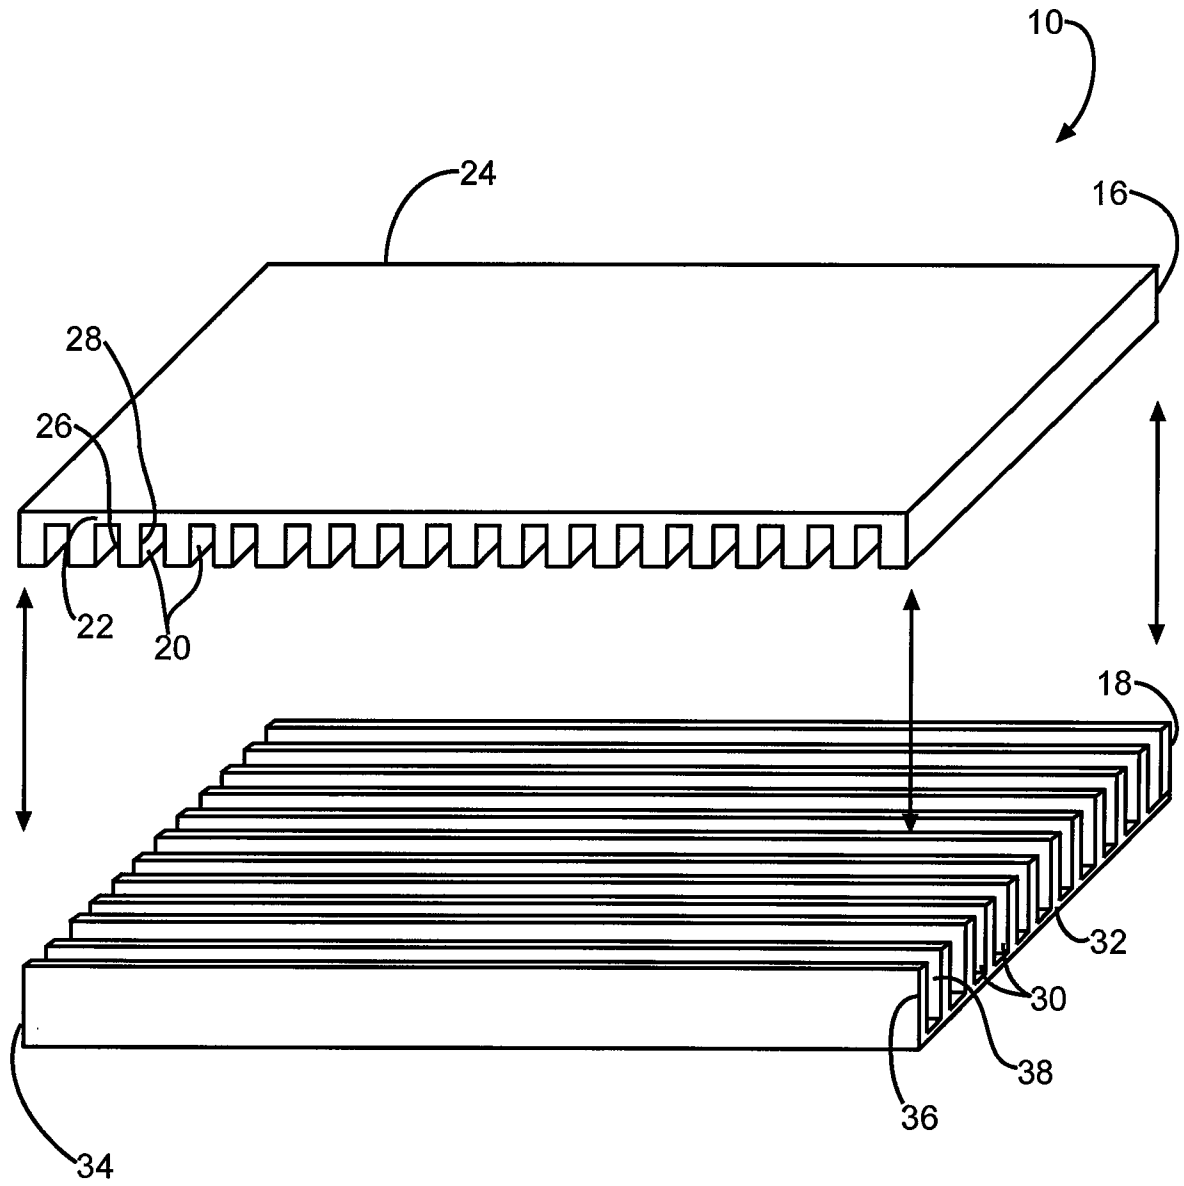


FIG. 2

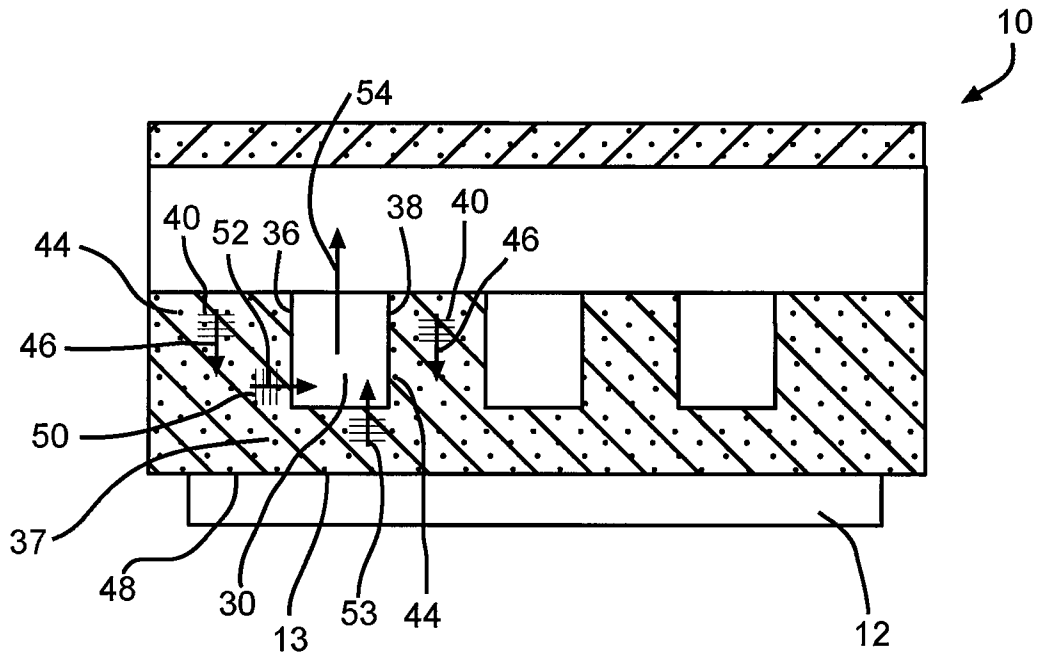


FIG. 3

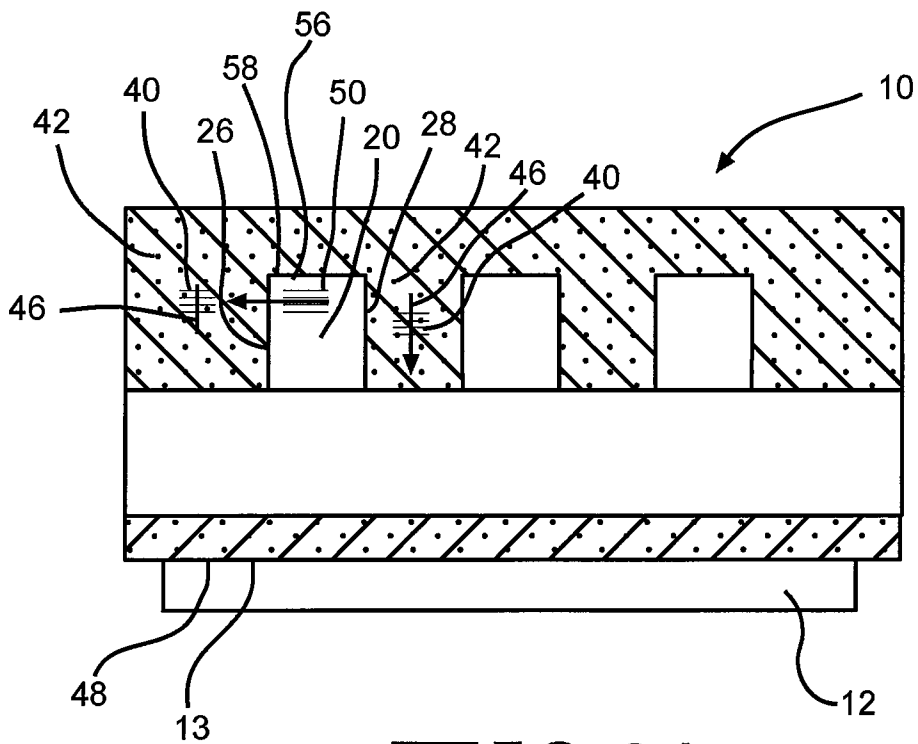


FIG. 3A

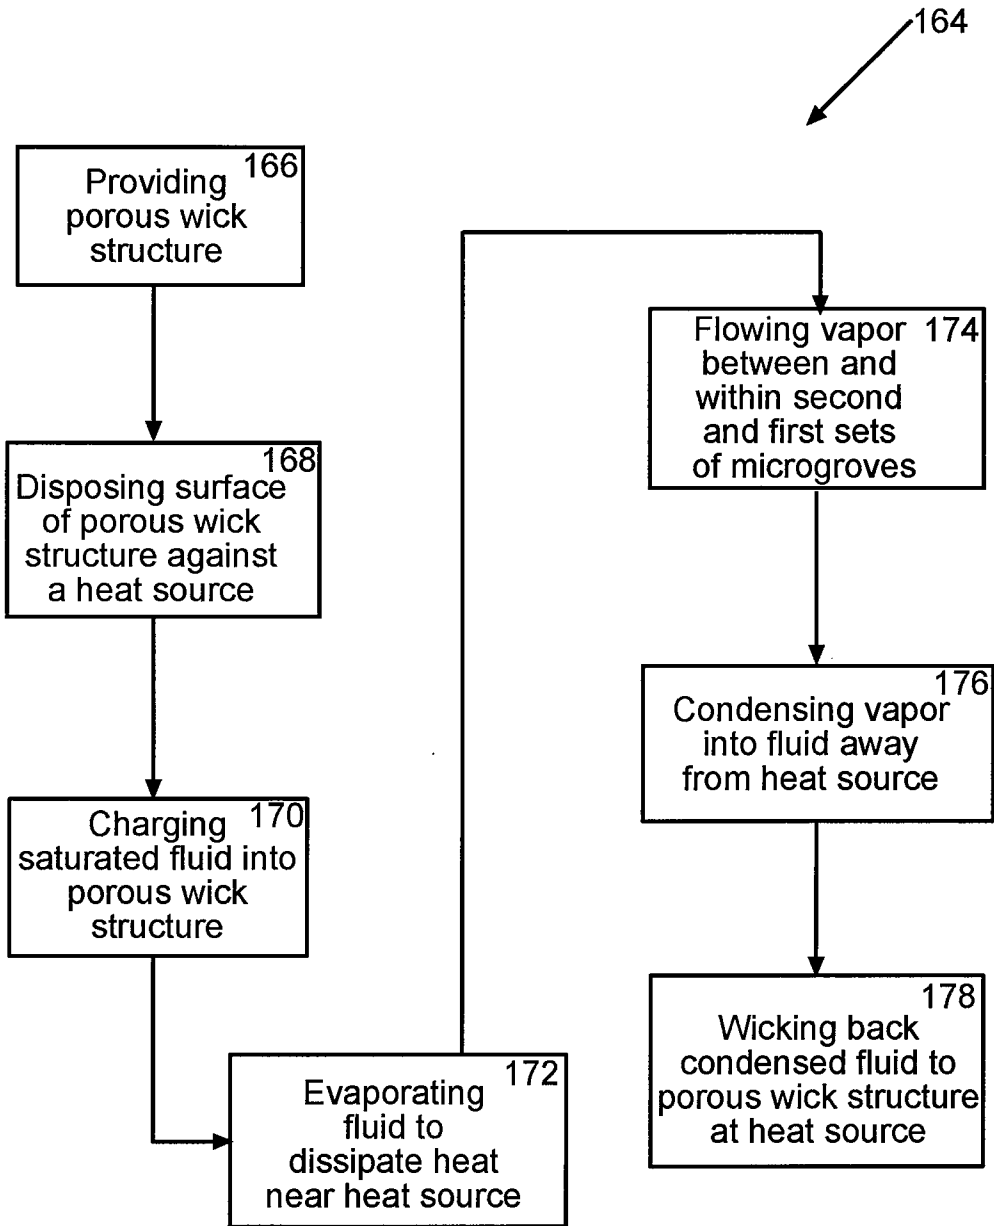


FIG. 4

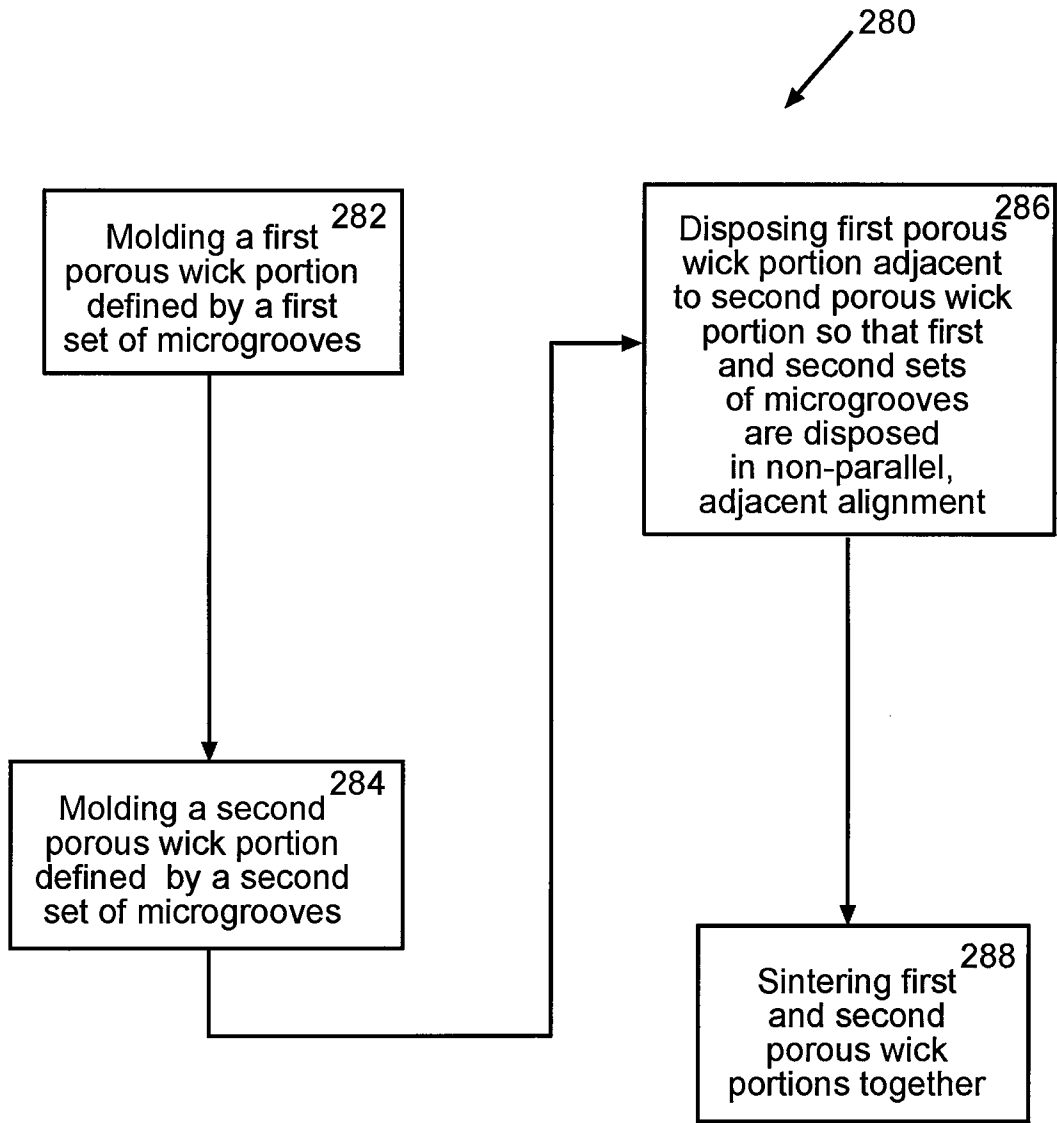


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/063942

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F28D15/04 H01L23/427

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols):
 F28D H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 613 778 A (FELDMAN KARL T JR) 19 October 1971 (1971-10-19) column 2; line 6 - line 33; figure 2	1-18
X	US 3 598 180 A (MOORE ROBERT DAVID JR) 10 August 1971 (1971-08-10) column 15, line 60 - column 17, line 9; figures 1-6 column 19, line 67 - column 20, line 7 column 22, line 14 - line 24	1-18
X	US 2002/179284 A1 (JOSHI YOGENDRA [US] ET AL) 5 December 2002 (2002-12-05) paragraph [0039] - paragraph [0041]; figures 4,5	1-9, 12-15,17
A	US 5 642 776 A (MEYER IV GEORGE A [US] ET AL) 1 July 1997 (1997-07-01) column 3, line 37 - line 63; figure 1	1-18

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

28 August 2008

Date of mailing of the international search report

09/09/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Mootz, Frank

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2008/063942

Patent document cited in search report	Publication date	Patent family member(s)	Publication date																				
US 3613778	A	19-10-1971	NONE																				
US 3598180	A	10-08-1971	NONE																				
US 2002179284	A1	05-12-2002	<table style="width: 100%; border: none;"> <tr> <td style="width: 15%;">AT</td> <td style="width: 35%;">353429</td> <td style="width: 15%;">T</td> <td style="width: 35%;">15-02-2007</td> </tr> <tr> <td>AU</td> <td>2002305127</td> <td>A1</td> <td>21-10-2002</td> </tr> <tr> <td>DE</td> <td>60218025</td> <td>T2</td> <td>20-12-2007</td> </tr> <tr> <td>EP</td> <td>1379825</td> <td>A2</td> <td>14-01-2004</td> </tr> <tr> <td>WO</td> <td>02081996</td> <td>A2</td> <td>17-10-2002</td> </tr> </table>	AT	353429	T	15-02-2007	AU	2002305127	A1	21-10-2002	DE	60218025	T2	20-12-2007	EP	1379825	A2	14-01-2004	WO	02081996	A2	17-10-2002
AT	353429	T	15-02-2007																				
AU	2002305127	A1	21-10-2002																				
DE	60218025	T2	20-12-2007																				
EP	1379825	A2	14-01-2004																				
WO	02081996	A2	17-10-2002																				
US 5642776	A	01-07-1997	NONE																				