



(86) Date de dépôt PCT/PCT Filing Date: 2007/03/27
 (87) Date publication PCT/PCT Publication Date: 2007/10/04
 (85) Entrée phase nationale/National Entry: 2008/09/25
 (86) N° demande PCT/PCT Application No.: KR 2007/001491
 (87) N° publication PCT/PCT Publication No.: 2007/111465
 (30) Priorités/Priorities: 2006/03/27 (KR10-2006-0027609);
 2006/07/13 (KR10-2006-0065727)

(51) Cl.Int./Int.Cl. *C09D 127/12* (2006.01),
B24B 13/005 (2006.01), *C03C 17/00* (2006.01),
C03C 17/28 (2006.01), *C03C 17/32* (2006.01),
C08J 7/04 (2006.01), *C08L 27/12* (2006.01),
G02B 1/10 (2006.01), *G02C 7/02* (2006.01)

(71) Demandeur/Applicant:
 ESSILOR INTERNATIONAL (COMPAGNIE GENERALE
 D'OPTIQUE), FR

(72) Inventeurs/Inventors:
 KIM, HUN RAE, KR;
 KANG, JEONG KI, KR;
 KOO, JA HEUNG, KR;
 LEE, SUN DO, KR

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCÉDE DE DEBORDAGE D'UNE LENTILLE AU MOYEN D'UNE COUCHE DE REVETEMENT
 TRANSPARENTE DE PROTECTION DE LA LENTILLE

(54) Title: EDGING PROCESS OF LENS USING TRANSPARENT COATING LAYER FOR PROTECTING LENS

(57) **Abrégé/Abstract:**

The present invention relates to a process of edging a lens comprising forming a lens-protective transparent coating layer on the surface of the lens. When the lens coated with a transparent coating layer comprising a fluorine-containing elastomer and optionally a fluorine-containing organosilane compound and having a surface energy of less than 15 mJ/m² is edged, the scratch of lens during handling, the damage of lens caused by chemical contaminants, and lens off-centring phenomena can be prevented. Further, such an edging process requires no adhesive tape, making the process simple, and prevents the contamination of the lens surface. Further, the inventive transparent coating layer makes it possible to measure the diopter of lens exactly owing to its transparency and it is manually removable without a chemical.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 October 2007 (04.10.2007)

PCT

(10) International Publication Number
WO 2007/111465 A1

(51) International Patent Classification:

C09D 127/12 (2006.01) *C03C 17/28* (2006.01)
B24B 13/005 (2006.01) *C03C 17/32* (2006.01)
C08L 27/12 (2006.01) *G02B 1/10* (2006.01)
C08J 7/04 (2006.01) *G02C 7/02* (2006.01)
C03C 17/00 (2006.01)

LEE, Sun Do [KR/KR]; Daeyang Town 10-301, #71-14,
Deokam-dong, Daedeok-gu, Daejeon 306-803 (KR).

(21) International Application Number:

PCT/KR2007/001491

(22) International Filing Date: 27 March 2007 (27.03.2007)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:

10-2006-0027609 27 March 2006 (27.03.2006) KR
10-2006-0065727 13 July 2006 (13.07.2006) KR

(71) Applicant (for all designated States except US): **GAEMA TECH CO., LTD.** [KR/KR]; #1692-1, Sinil-dong, Daedeok-gu, Daejeon 306-230 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIM, Hun Rae** [KR/KR]; Daedeok Techno Valley 4-danji Apt. 410-201, #666, Gwanpyeong-dong, Yuseong-gu, Daejeon 305-509 (KR). **KANG, Jeong Ki** [KR/KR]; B-01, #114-13, Eoeun-dong, Yuseong-gu, Daejeon 305-807 (KR). **KOO, Ja Heung** [KR/KR]; Songgang Green Apt. 318-406, Songgang-dong, Yuseong-gu, Daejeon 305-751 (KR).

(74) Agents: **JANG, Seongku** et al.; 19th Fl., Trust Tower, #275-7, Yangjae-dong, Seocho-ku, Seoul 137-130 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EDGING PROCESS OF LENS USING TRANSPARENT COATING LAYER FOR PROTECTING LENS

(57) Abstract: The present invention relates to a process of edging a lens comprising forming a lens-protective transparent coating layer on the surface of the lens. When the lens coated with a transparent coating layer comprising a fluorine-containing elastomer and optionally a fluorine-containing organosilane compound and having a surface energy of less than 15 mJ/m^2 is edged, the scratch of lens during handling, the damage of lens caused by chemical contaminants, and lens off-centring phenomena can be prevented. Further, such an edging process requires no adhesive tape, making the process simple, and prevents the contamination of the lens surface. Further, the inventive transparent coating layer makes it possible to measure the diopter of lens exactly owing to its transparency and it is manually removable without a chemical.

WO 2007/111465 A1

EDGING PROCESS OF LENS USING TRANSPARENT COATING LAYER FOR PROTECTING LENS

Field of the Invention

5

The present invention relates to a process for edging a lens using a lens-protective transparent coating layer having a low surface energy.

Background of the Invention

10

In general, optical lenses or optical parts have various functional coating layers on the surface thereof. For example, a high, medium or low refractive inorganic oxide such as SiO₂, ZrO₂, Al₂O₃ and TiO₂ may be multi-coated on the surface of an optical lens or parts to form an anti-reflective layer, reducing the light reflectance, or a layer capable of selectively absorbing/reflecting light having certain wavelength may be formed to impart various optical properties to the optical lens or parts. Further, indium tin oxide (ITO) may be deposited so as to provide a transparent conductivity or electronic wave shielding property to the optical lens or parts. Recently, such an optical design has been also used as a means for coloring an article under a vacuum condition.

15

However, the deposition of an inorganic oxide on a lens under a vacuum condition has a disadvantage in that the lens is easily contaminated by various contaminants such as chemicals and brine which are difficult to remove. Further, there is the problem that the contaminants incorporated into the inside of the inorganic oxide layer may change the designed optical properties of the lens.

20

To solve the above problems, a method of coating a fluorine-containing organosilane on a lens under a vacuum condition has been developed, and Japanese Patent Application Publication No. 2004-226942 suggested the use of a fluorine-containing oil together with a fluorine-containing organosilane to strengthen the water- and oil-repellant properties.

25

However, the lens coated with such a fluorine-containing or

perfluoropolyether-containing organosilane compound has a low surface energy and a low surface friction coefficient, and accordingly, it does not easily adhere to other substances. Particularly, when the fluorine- or perfluoropolyether-containing organosilane compound is coated on an inorganic oxide layer, the organosilane compound reacts with the inorganic oxide to produce a fluorine-containing film having a high strength and a low surface frictional coefficient.

In order to edge a lens having such a high strength film on its surface, the lens is required to be fixed, e.g., by using an adhesive tape, and even if such an adhesive is used, off-centring of the lens may occur during the edging procedure.

Japanese Patent Application Publication No. 2004-122238 discloses the use of a protective film made of vinyl acetate on the surface of a water- or oil-repellent lens to ameliorate the lens off-centring problem that occurs during edging. But this method still requires the use of an adhesive tape or pad for elaborate edging, and suffers from low chemical resistance of the protective film.

In order to prevent the lens off-centring phenomena, WO 02/92524, WO 03/057641 and WO 04/110946 have suggested a method of depositing a metal fluoride under a vacuum condition and optionally an organic layer for increasing the surface energy on the surface of a water-repellent lens. However, this method has disadvantages in that a further chemical treatment step for removing the deposited metal fluoride layer is required; the rate of deposition and the thickness of the deposited metal fluoride layer cannot be easily controlled, and defective lenses cannot be checked in advance because the metal fluoride deposition is carried out immediately after the deposition of an anti-reflective layer.

Summary of the Invention

Accordingly, it is an object of the present invention to provide an improved process of edging a lens using a temporary lens-protective layer having a good resistance against rotational torque and a high affinity to a

water-repellent surface, which does not generate lens off-centring phenomena even when a separate adhesive tape is not used and can be easily removed in a simple manner.

5 In accordance with one aspect of the present invention, there is provided a process of edging a lens comprising forming a lens-protective transparent coating layer on the surface of the lens, edging the coated lens, and removing the transparent coating layer from the edged lens, wherein the transparent coating layer has a surface energy of less than 15 mJ/m^2 .

10 Detailed Description of the Invention

The lens-protective transparent coating layer according to the present invention is characterized by having a surface energy of less than 15 mJ/m^2 and comprises a fluorine-containing elastomer.

15 Preferably, the surface energy of the transparent coating layer ranges from 11 to 14 mJ/m^2 .

The fluorine-containing elastomer used in the present invention has a high stickiness and simultaneously a high elasticity, and thus, when it is coated on the surface of a lens, it imparts to the lens a good resistance against rotational torque and a good adhesion to the lens, facilitating the lens edging process without using an adhesive tape, and at the same time preventing the contamination of the lens caused by contaminants or chemicals during handling while protecting the lens from damage caused by lens flakes generated during the edging procedure.

25 The transparent coating layer comprising the fluorine-containing elastomer provides the advantages that it can be easily removed simply by hands, without using a chemical, after the completion of the edging process, and it makes possible to determine the exact diopter of lens owing to its high transparency.

30 The fluorine-containing elastomer may be prepared by homopolymerizing or copolymerizing at least one monomer selected from the group consisting of chlorotrifluoroethylene, hexafluoropropylene, hexafluoroacetone, 1-hydropentafluoropropylene, perfluorovinyl ether,




perfluoromethylvinyl ether, trifluoroethylene, tetrafluoroethylene, and vinylidene fluoride. For the copolymerization, at least one comonomer selected from ethylene and propylene may be used.


The fluorine-containing elastomer may be prepared by the methods disclosed in U.S. Patent Nos. 4,758,618; 4,591,616; 3,136,745; 6,294,627; and 4,418,186, and representative examples of commercially available fluorine-containing elastomer include DAIEL™ (Daikin), DYNEON™ (3M), TECNOFLON™ (Solvay Solexis), VITON™ (DuPont) and AFLAS™ (Asahi Glass).

In addition to the fluorine-containing elastomer, the transparent coating layer according to the present invention may further comprise a fluorine-containing organosilane compound in order to enhance the strength of the coating layer.

The fluorine-containing organosilane compound used with the fluorine-containing elastomer functions to impart a low surface energy to the transparent coating layer, thus preventing the attachment of contaminants, and it provides good chemical and scratch resistances.

Representative examples of the fluorine-containing organosilane compound include an organosilane compound having fluorine-substituted alkyl groups represented by any one of formulas (1) to (4), and an organosilane compound having a perfluoropolyether group represented by formula (5), not limited thereto.

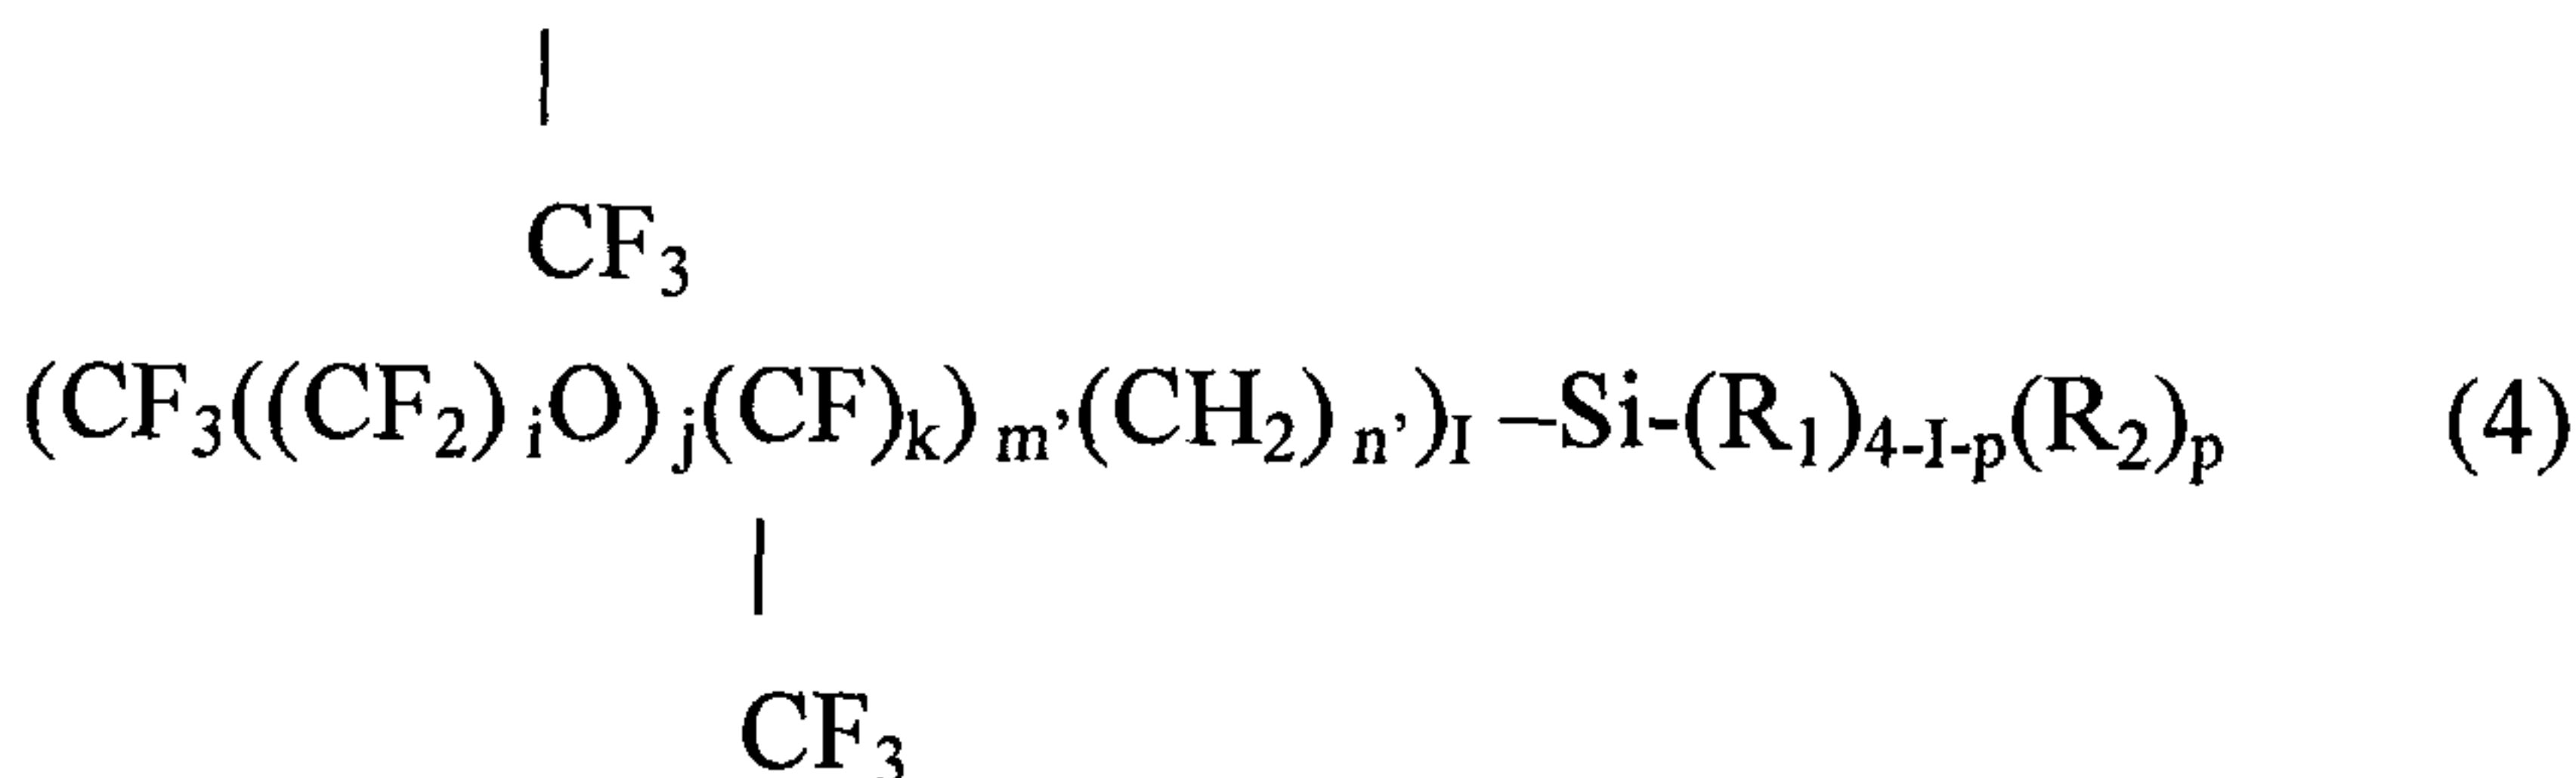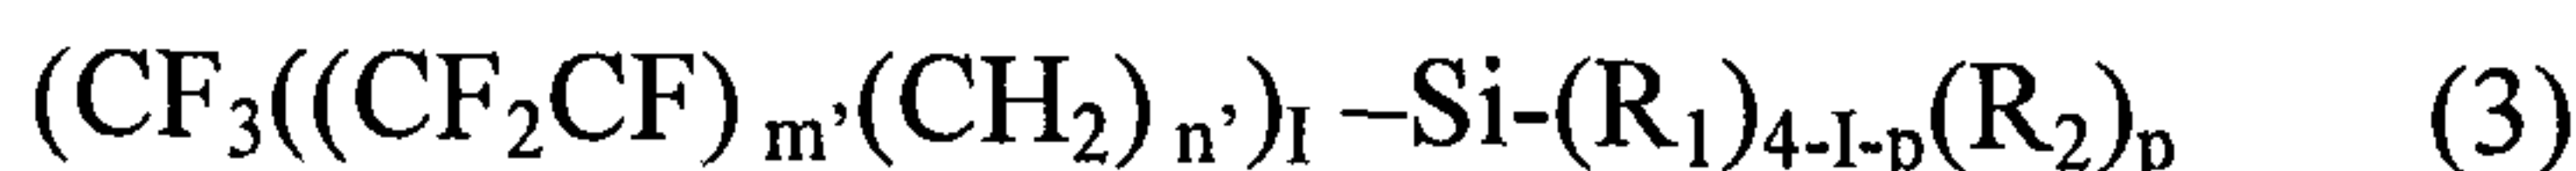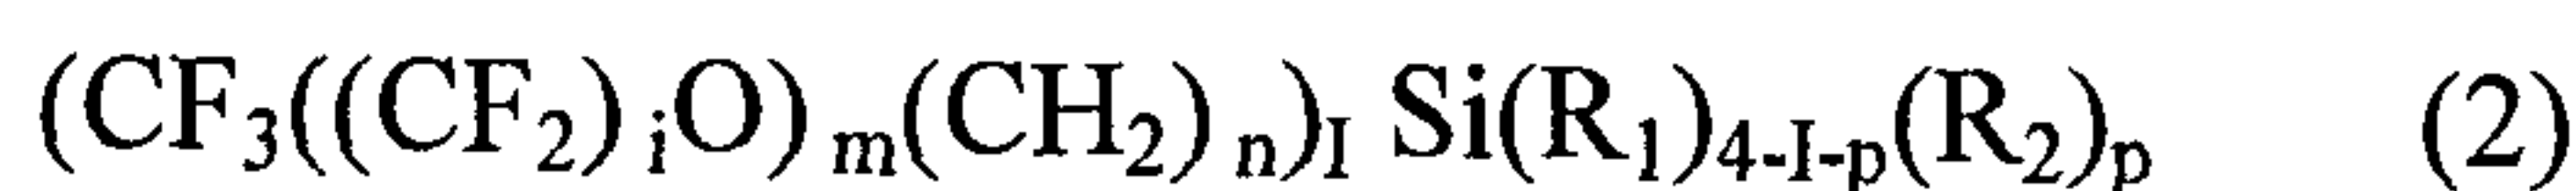

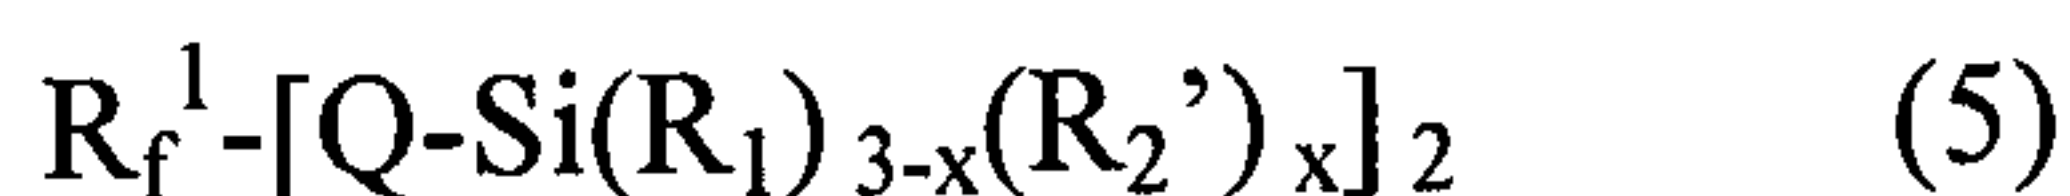

wherein,

R_1 is a hydrolyzable group;

5 R_2 is hydrogen or C_{1-4} alkyl;

R_2' is C_{1-4} alkyl;

R_f^1 is a monovalent or divalent polyfluoropolyether group;

Q is an organic divalent bridging group;

10 i, j, k, m and n are each independently an integer in the range of 0 to 13;

m' is an integer in the range of 1 to 13;

n' is an integer in the range of 0 to 3;

p is an integer in the range of 0 to 3;

l is 1 or 2; and

15 x is 0 or 1.

The hydrolyzable group R_1 may be halogen, C_{1-4} alkoxy, acyloxy, acyl and polyoxyalkylene such as polyoxyethylene (see U.S. Patent No. 5,274,159). Specific examples of the hydrolyzable group R_1 are methoxy, ethoxy, propoxy, 20 chlorine and acetoxy.

In one embodiment of the present invention, R_f^1 is stable and inert, preferably saturated nonpolar fluoroaliphatic group. The fluoroaliphatic group may be a straight, branched or cyclic group, or a combination thereof, and it may contain at least one heterogeneous atom such as oxygen, 2- or 6- 25 valent sulfur, or nitrogen. Preferably, the fluoroaliphatic group may be completely fluorinated, although it may contain at most one hydrogen or chlorine substituent in every two carbon atoms. Suitable fluoroaliphatic group may contain 3 to 18 carbon atoms, preferably 3 to 14 carbon atoms, and more preferably 4 to 10 carbon atoms, and preferably about 40 to about 80 % 30 by weight, and more preferably about 50 to about 79 % by weight of fluorine atoms. Preferably, the end part of the fluoroaliphatic group may be a perfluorinated group having at least 7 fluorine atoms, e.g., $CF_3CF_2CF_2-$, $(CF_3)_2CF-$, and F_5SCF_2- . The preferred fluoroaliphatic group is completely

or substantially fluorinated, and may include a perfluorinated aliphatic radical represented by C_qF_{2q+1} - where q is in the range of 3 to 18, preferably 4 to 10.

In a preferred embodiment of the present invention, R_f^1 is a divalent polyfluoropolyether group. The polyfluoropolyether group may be a straight, branched or cyclic group, or a combination thereof, and it may be saturated or unsaturated, and preferably perfluorinated wherein all of C-H bonds are substituted with C-F bonds. More preferably, the polyfluoropolyether group may include a perfluorinated repeating unit selected from the group consisting of $-(C_qF_{2q})-$, $-(C_qF_{2q}O)-$, $-(CF(Z))-$, $-(CF(Z)O)-$, $-(CF(Z)C_qF_{2q}O)-$, $-(C_qF_{2q}CF(Z)O)-$ and $-(CF_2CF(Z)O)-$ (where q is in the range of 3 to 18, preferably 4 to 10, and Z is a straight, branched or cyclic group, preferably an optionally oxygen-substituted perfluoroalkyl or perfluoroalkoxy group having about 1 to about 9 carbon atoms and 0 to about 4 oxygen atoms), and a combination thereof. Representative examples of the polyfluoropolyether group having the polymeric moiety of the perfluorinated repeating unit are disclosed in U.S. Patent No. 5,306,758, which is incorporated herein as a reference.

The divalent polyfluoropolyether group has preferably an average structure of $-CF_2O(CF_2O)_r(C_2F_4O)_sCF_2-$ (wherein r and s are in the range of 0 to 50 in average, provided that both r and s are not 0), $-CF(CF_3)O(CF(CF_3)CF_2O)_tCF(CF_3)-$, $-CF_2O(C_2F_4O)_tCF_2-$ and $-(CF_2)_3O(C_4F_8O)_t(CF_2)_3-$ (wherein t is in the range of 3 to 50 in average). Among them, $-CF_2O(CF_2O)_s(C_2F_4O)_tCF_2-$, $-CF(CF_3)O(CF(CF_3)CF_2O)_tCF(CF_3)-$ and $-CF_2O(C_2F_4O)_tCF_2-$ are more preferred.

The divalent bridging group Q may be saturated or unsaturated straight, branched or cyclic group. Q may comprise a heterogeneous atom such as oxygen, nitrogen or sulphur, or a functional group such as carbonyl, amido, urethanylene or sulfonamido. Preferably, the divalent bridging group Q may be a non-fluorinated organic group, e.g., hydrocarbon, preferably a straight chain hydrocarbon, optionally comprising a heterogeneous atom or functional group, preferably at least one functional group. Representative examples of Q include $-C(O)NH(CH_2)_3-$, $-CH_2O(CH_2)_3-$, $-$

CH₂OC(O)N(R)(CH₂)₃- (wherein, R is H or a lower alkyl) and -(C_aH_{2a})- (wherein, a is in the range of about 2 to about 6), preferably -C(O)NH(CH₂)₃-.

The fluorine-containing organosilane compound suitable for the present invention typically has a number average molecular weight of greater than about 200, preferably from about 1,000 to 10,000.

Preferred are fluorinated polyethersilane compounds represented by XCF₂O(CF₂O)_f (C₂F₄O)_gCF₂X, XCF(CF₃)O(CF(CF₃)CF₂O)_gCF(CF₃)X, XCF₂O(C₂F₄O)_gCF₂X and X(CF₂)₃O(C₄F₈O)_g(CF₂)₃X, wherein -X is -Q-SiY_{3-x}R¹_x, Q is an organic divalent bridging group, Y is a hydrolyzable group, R¹ is a C₁₋₄ alkyl group, and x is 0 or 1. Preferably, in the fluorinated polyethersilane compound, Q comprises nitrogen atom. More preferably, in the compound, at least one X per molecule is C(O)NH(CH₂)₃Si(OR)₃ wherein R is methyl, ethyl, polyethyleneoxy or a combination thereof. In each compound, f and g may have various values, preferably f is between about 1 and about 50 and g is between about 4 and about 40.

The lens-protective transparent coating layer according to the present invention may be formed by applying a composition for forming the transparent coating layer to the surface of the lens and drying the applied composition. The composition for forming the transparent coating layer may be obtained by dissolving a fluorine-containing elastomer in a solvent to a concentration of 1 to 70 % by weight, preferably 10 to 40 % by weight of a solid content. When the concentration of the elastomer is less than 1 % by weight, the transparent coating layer obtained has insufficient stickiness and elasticity, and when the concentration of the elastomer exceeds 70% by weight, the composition is unevenly coated.

Further, the transparent coating layer forming composition may comprise the above-mentioned fluorine-containing organosilane compound in an amount of 0.001 to 70 % by weight, preferably 0.001 to 30 % by weight based on the elastomer.

The solvent used in the composition may be preferably at least one selected from the group consisting of water, perfluorohexane, perfluoroheptane, perfluorononane, perfluoromethylpentane, perfluorocyclohexane, perfluorodimethylcyclohexane, perfluorotoluene,

hexafluoropropene oxide, trifluoroacetic anhydride, ethyl trifluoroacetate, octafluoropentanol, 2,2-bistrifluoromethylpropanol, pentafluoropropanol, hexadecafluorononanol, perfluoro-2-butanol, isopropyl alcohol, butanol, ethylene glycol, diacetone alcohol, 2-ethoxyethanol, 2-methoxyethanol, 2-butoxyethanol, hexane, heptane, cyclohexane, acetylacetone, dimethylketone, methylethylketone, methylisobutylketone, toluene, benzene, and xylene, not limited hereto.

The transparent coating layer forming composition may comprise a conventional additive well known in the art, such as surfactants and dyes, in amount not affecting the effect of the invention.

The present invention comprises the lens coated with the transparent coating layer forming composition as a temporary protective layer within the scope thereof. The lens to which the transparent coating layer applied may be any one which can be processed by an edging process, and its representative examples may include glasses or camera lenses.

The transparent coating layer-forming composition according to the present invention may be coated on the most outer layer of at least one functional layers formed on a lens, e.g., an inorganic oxide layer (anti-reflective layer), water-repellant layer and/or oil-repellant layer, preferably on water-repellant and/or oil-repellant layer.

The inorganic oxide layer as the anti-reflective layer may be at least one vacuum-deposited ceramic layer known in the art, and its representative examples may include SiO_2 , ZrO_2 , Al_2O_3 , and TiO_2 .

The water-repellant layer or oil-repellant layer to be formed on the surface of the inorganic oxide layer may comprise a fluorine- or perfluoropolyether-containing organosilane compound, and it has hydrophobic or oleophobic characteristics, respectively, which can reduce the surface energy of the glass. The fluorine- or perfluoropolyether-containing organosilane compound is well known in the art, e.g., Japanese Patent Application Publication Nos. 1986-130902, 1983-172246, 1983-122979, 1983-172242, 1985-40254, 1985-6615, 1985-221470, 1987-148902, 1997-157582, 1997-202648 and 1997-263728, not limited hereto.

In the present invention, the transparent coating layer-forming

composition may be applied in a suitable known method selected from a dip-coating, spray-coating, spin-coating, flow-coating, and roll-coating method, preferably a dip coating method.

5 After applied, the transparent coating layer-forming composition may be dried at a temperature of 30~70°C, preferably 50~60°C. If the temperature is lower than 30°C, the curing time is too long, and if the temperature exceeds 70°C, cracks generates on the anti-reflective layer. The curing time is preferably in the range of 1~15 minutes. If the curing time is shorter than 1 minute, the curing is incomplete, and if the curing time exceeds 15 minutes,
10 the quality of lens deteriorates.

The transparent coating layer may have a thickness of 0.1~100 μm, preferably 0.1~10 μm. When the thickness is less than 0.1 μm, the coating layer is incompletely formed, and when the thickness exceeds 100 μm, the curing time is too long, thus lowering the productivity.

15 The lens having the inventive transparent coating layer as a temporary protective layer may be edged using a conventional edging apparatus. In the edging process, the inventive transparent coating layer can prevent lens off-centring phenomena due to its inherent elasticity and appropriate affinity to the surface of the lens. Further, the inventive transparent coating layer
20 makes it possible to measure the diopter of lens exactly owing to its transparency; and it is manually removable without any etching or chemical treatment.

The present invention is illustrated in detail by the following Examples
25 which are not intended to limit the scope of the invention.

Preparation: Plastic lens having anti-reflective layer, water-repellant layer, and oil-repellant layer coated on the surface thereof

30 On the surface of a plastic lens made of diethyleneglycol bisallylcarbonate polymer (refractive index: 1.499), a hard coating layer was formed using a silicon-based hard coating agent (MEXMER TE0801, a product of Gaematech). The hard coating layer was formed using a dipping

method at a withdrawing speed of 15 cm/min, drying the resulting coating layer at room temperature for 1 minute, and curing at 80 °C for 2 minutes and then at 120 °C in a curing oven for 1.5 hours.

5 Thereafter, on the hard coating layer, anti-reflective layers comprised of silicone dioxide, zirconia and indium tin oxide (ITO) were formed by an e-beam evaporation method.

10 The hard coating layer/anti-reflective layer-coated lens thus obtained and a stainless steel filter (a mesh size of 80~100 microns, 18Φ× 3mm) impregnated with 2 ml of OPTOOL DSX (a product of Daikin) were placed in a vacuum deposition apparatus where a water-repellant layer and oil-repellant layer were deposited on the anti-reflective layer by a thermal evaporation method.

15 Example 1: Formation of Transparent Coating layer 1

On the surface of the plastic lens obtained in Preparation, a 10 wt% solution of Dyneon™ THV220A (as a fluorine group-containing elastomer; a copolymer of vinylidene fluoride, tetrafluoroethylene and hexafluoropropene, 3M) dissolved in methyl ethyl ketone was coated as a protective layer for the lens using a dipping method at a withdrawing speed of 15 cm/min, and the coated lens was dried at 50 °C for 5 minutes to form a lens-protective transparent coating layer having a thickness of 1.3 μm on the lens.

25 Example 2: Formation of Transparent Coating layer 2

The procedure of Example 1 was repeated except for using 50 wt% aqueous dispersion of Dyneon™ THV340C (a copolymer of vinylidene fluoride, tetrafluoroethylene and hexafluoropropene, 3M) instead of the Dyneon™ THV220A solution to form a lens-protective transparent coating layer having a thickness of 50 μm on the lens.

30 Example 3: Formation of Transparent Coating layer 3

The procedure of Example 1 was repeated except for using a 20 wt% solution of Viton™ A (a copolymer of vinylidene fluoride and

hexafluoropropene, DuPont) dissolved in methyl ethyl ketone instead of the Dyneon™ THV220A solution to form a lens-protective transparent coating layer having a thickness of 18 μm on the lens.

5 Example 4: Formation of Transparent Coating layer 4

To 10 g of heptadecafluoro-1,1,2,2-tetrahydrodecyl trimethoxysilane (SIH5841.5, Gelest) as a fluorine-containing organosilane, 0.1g of 0.01 N HCl aqueous solution and then 989.9g of isopropyl alcohol were added, and the resulting mixture was refluxed at 100°C for 24 hours. After the completion of reaction, the reaction solution was cooled to room temperature, and distilled at 50°C under a pressure of 10^{-1} mmHg to remove the residual solvent and water completely, to obtain 9g of the desired product, which was added to 500 g of methyl ethyl ketone, and thereto was added 50 g of Dyneon™ THV220A (a copolymer of vinylidene fluoride, tetrafluoroethylene and hexafluoropropene, 3M) as a fluorine group-containing elastomer.

The resulting mixture was stirred for 1 hour to dissolve the components in the solvent completely, and then coated on the surface of the plastic lens obtained in Preparation, and thereafter, a 10 wt% solution of dissolved in methyl ethyl ketone was coated thereon as a protective layer for the lens using a dipping method at a withdrawing speed of 15 cm/min. The coated lens was dried at 50°C for 10 minutes to form a lens-protective transparent coating layer having a thickness of 1.5 μm on the lens.

25 Example 5: Formation of Transparent Coating layer 5

The procedure of Example 4 was repeated except for using SIT8175 (tridecafluoro-1,1,2,2-tetrahydrooctyl triethoxysilane, Gelest) to form a lens-protective transparent coating layer having a thickness of 1.8 μm on the lens.

30 Example 6: Formation of Transparent Coating layer 6

10 g of SIT8175 (tridecafluoro-1,1,2,2-tetrahydrooctyl triethoxysilane, Gelest) as a fluorine-containing organosilane was added to 500 g of methyl ethyl ketone, and the resulting mixture was stirred for 30 minutes and 50 g of Dyneon™ THV220A (3M) as a fluorine group-containing elastomer was

added thereto. The resulting mixture was stirred for 1 hour, and 5 g of Ancamine 2458 (a produce of Air Products) was added thereto. The resulting mixture was stirred for 1 hour. The resulting coating solution was coated on the surface of the plastic lens obtained in Preparation using a dipping method at a withdrawing speed of 15 cm/min, and the coated lens was dried at 50°C for 10 minutes to form a lens-protective transparent coating layer having a thickness of 2.0 μm on the lens.

Evaluation of Properties of Transparent Coating layer

10

The lenses having the transparent coating layer for the protection thereof according to the present invention (Examples 1 to 6), the plastic lens before the formation of the transparent coating layer according to Preparation (Comparative Example 1), and the plastic lens to which a silicon-based adhesive film is attached (Comparative Example 2) were evaluated for various properties as described below, and the evaluation results are represented in Table 1.

15

(1) Light Transmittance

20

The light transmittances of the lens before and after coating with the transparent coating layer-forming composition according to the present invention at the visible light wavelength were determined using an apparatus for measuring the light transmittance (Haze Guide Plus, BYK Guidener).

25

(2) Diopter

The diopters of the lens before and after coating with the transparent coating layer-forming composition according to the present invention were measured with a dioptometer (CLM3100P, Huvitz), to observe the change of lens diopter values depending on the formation of the transparent coating layer.

30

(3) Off-centring

For a lens for astigmatism, the axis of the lens was defined as astigmatism-correction axis, and for a lens for non-astigmatism, the lens axis

was defined as the optical central line, and a frame having a high aspect ratio was used as a base frame.

After the lenses were edged with an edging apparatus (TOPCON ALE5000), they were mounted on the base frame to observe the off-centring
5 degree of the astigmatism-correction axis or the angle of the optical central line to the horizontal line passing through the optical axis of the base frame, with a lensmeter.

30 lenses were edged and the percentages of lens having off-centered axis (when the off-centring degree is greater than acceptable $\pm 2^\circ$ deviation)
10 was reported.

(4) Residue

In order to observe the presence of residue on the surface of lens, the lens after peeled the transparent coating layer therefrom by hands was tested
15 with a contact angle tester (KSV Instrument CAM 100) to measure the change of the contact angle of the lens to water.

(5) Surface Energy

After forming the transparent coating layer on the lenses, the contact
20 angles of the lenses to water, glycerol or diiodomethane were measured with a contact angle tester (DSA100, Kruss). The surface energy of the lens was determined by Owens-Wendt method using a drop shape analysis program (see "Estimation of the surface force energy of polymers" Owens D. K., et al., *J. Appl. Polym. Sci.* 13, 1741~1747 (1969)).

25

The evaluation results are represented in Tables 1 and 2.

Table 1

		Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Comp. Example 1	Comp. Example 2
Light Transmittance (%)	Before coating	98	98	98	98.5	98.5	98.6	98.4	98.4
	After coating	93	92	91	94.6	94.5	94.2	-	-
Lens Diopter (for myopia/ astigmatism)	Before coating	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00 /-1.25	-2.00/ -1.25
	After coating	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-2.00/ -1.25	-	-
Off-centring (%)		0	0	0	0	0	0	95	15
Residue (Contact Angle)(°)	Before coating	112°	111°	113°	115.1°	113.9°	114.8°	115.4°	115.2°
	After peeling	112°	111°	113°	115.0°	114.2°	114.6°	-	110.8°

5

Table 2




		Example 1	Example 2	Example 3	Comp. Example 1
Contact Angle (°)	Water	109.0	107.9	109.2	115.4
	Glycerol	108.4	105.1	103.1	111.2
	Diiodomethane	93.1	92.5	88.8	99.4
Surface Energy (mJ/m ²)		11.14	11.89	13.39	9.01



As can be seen from Tables 1 and 2, when a lens is edged after coating of a transparent protective layer according to the present invention, the scratch of lens during handling, the contamination of lens by chemicals or impurities, off centring during edging process and troubles caused by using adhesive tape or pad can be prevented. Further, in accordance with the present invention, since the temporary protective layer is transparent, the lens is easy to measure its diopter. Furthermore, the inventive temporary protective layer can be easily removed by hands without a separate treatment.

While the invention has been described with respect to the above specific embodiments, it should be recognized that various modifications and changes may be made and also fall within the scope of the invention as defined by the claims that follow.

What is claimed is:

1. A process for edging a lens comprising forming a lens-protective transparent coating layer on the surface of the lens, edging the coated lens, and removing the transparent coating layer from the edged lens, wherein the transparent coating layer has a surface energy of less than 15 mJ/m².
2. The process of claim 1, wherein the lens-protective transparent coating layer comprises a fluorine-containing elastomer.
3. The process of claim 2, wherein the fluorine-containing elastomer is a homopolymer or copolymer of at least one monomer selected from the group consisting of chlorotrifluoroethylene, hexafluoropropylene, hexafluoroacetone, 1-hydropentafluoropropylene, perfluorovinyl ether, perfluoromethylvinyl ether, trifluoroethylene, tetrafluoroethylene, and vinylidene fluoride.
4. The process of claim 3, wherein the fluorine-containing elastomer in the form of a copolymer is copolymerized with at least one comonomer selected from ethylene and propylene.
5. The process of claim 2, wherein the lens-protective transparent coating layer further comprises a fluorine-containing organosilane compound.
6. The process of claim 5, wherein the fluorine-containing organosilane compound is selected from the compounds of formulas (1) to (5):

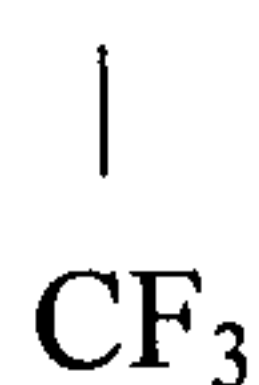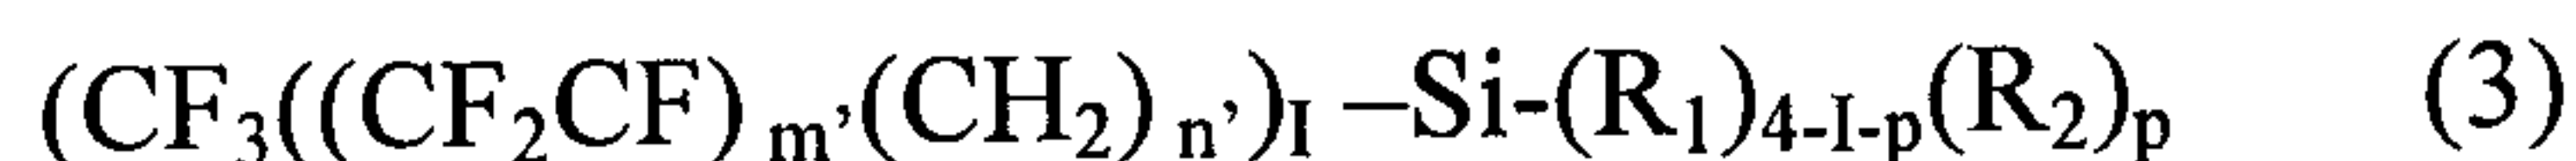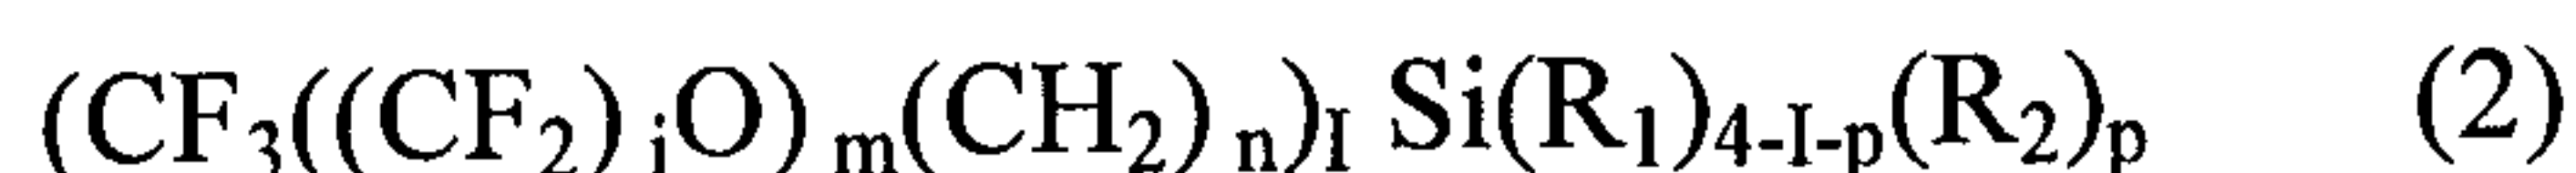

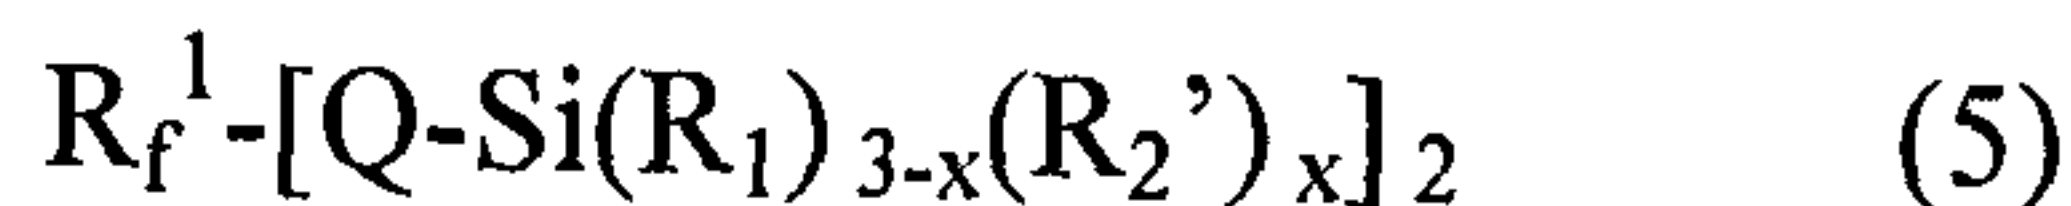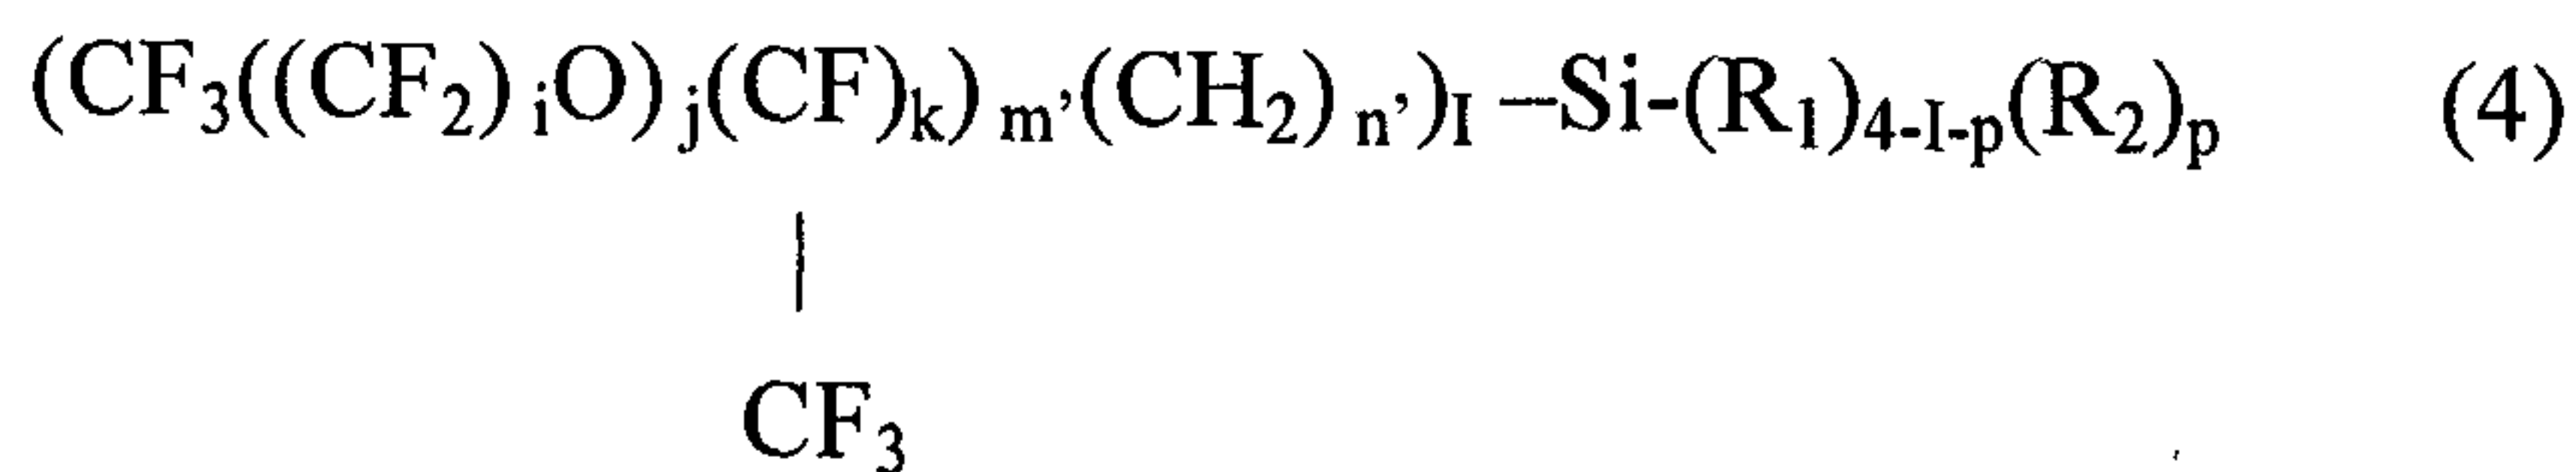

wherein,

R₁ is a hydrolyzable group;

R₂ is hydrogen or C₁₋₄ alkyl;

R₂' is C₁₋₄ alkyl;

R_f¹ is a monovalent or divalent polyfluoropolyether group;

Q is an organic divalent bridging group;

i, j, k, m and n are each independently an integer in the range of 0 to 13;

m' is an integer in the range of 1 to 13;

n' is an integer in the range of 0 to 3;

p is an integer in the range of 0 to 3;

I is 1 or 2; and

x is 0 or 1.

7. The process of claim 5, wherein the lens-protective transparent coating layer is formed by applying on the lens a composition comprising 1 to 70 % by weight of a fluorine-containing elastomer, 0.001 to 70 % by weight of a fluorine-containing organosilane compound based on the elastomer, and a balancing amount of a solvent, and drying the applied composition.

8. The process of claim 7, wherein the lens-protective transparent coating layer is formed by applying on the lens a composition comprising 10 to 40 % by weight of a fluorine-containing elastomer, 0.001 to 30 % by weight of a fluorine-containing organosilane compound based on the elastomer, and a balancing amount of a solvent, and drying the applied composition.

9. The process of claim 7, wherein the drying is conducted at 30~70 °C for 1~15 minutes.

10. The process of claim 1, wherein the lens-protective transparent coating layer has a thickness of $0.1\sim 100\mu\text{m}$.
11. The process of claim 1, wherein the lens before being edged has at least one functional layer selected from an anti-reflective layer, water-repellant layer and oil-repellant layer.
12. The process of claim 1, wherein the lens-protective transparent coating layer has a surface energy of 11 to 14 mJ/m^2 .
13. The process of claim 1, wherein the lens-protective transparent coating layer is manually removable without the use of a chemical.
14. A lens for edging comprising at least one functional layer selected from an anti-reflective layer, water-repellant layer and oil-repellant layer, and a lens-protective transparent coating layer on the functional layer, wherein the transparent coating layer has a surface energy of less than 15 mJ/m^2 .