



(19) **United States**

(12) **Patent Application Publication**

Duncan et al.

(10) **Pub. No.: US 2002/0095909 A1**

(43) **Pub. Date:**

Jul. 25, 2002

(54) **HEAT SEAL APPARATUS FOR LENS PACKAGES**

(76) Inventors: **Gregory Scott Duncan**, Jacksonville, FL (US); **Ravi S. Sanka**, Jacksonville, FL (US); **Gary S. Hall**, Jacksonville, FL (US)

Correspondence Address:
AUDLEY A. CIAMPORCERO JR.
JOHNSON & JOHNSON
ONE JOHNSON & JOHNSON PLAZA
NEW BRUNSWICK, NJ 08933-7003 (US)

(21) Appl. No.: **10/104,452**
(22) Filed: **Mar. 22, 2002**

Related U.S. Application Data

(62) Division of application No. 09/217,878, filed on Dec. 21, 1998.

Publication Classification

(51) **Int. Cl.⁷** **B65B 57/00**; **B65B 51/10**
(52) **U.S. Cl.** **53/51**; **53/131.5**; **53/329.2**;
53/389.3

(57) **ABSTRACT**

The present invention relates to an apparatus for packaging contact lenses. The apparatus includes a plurality of discrete inspection lens carriers and a plurality of contact lens containers. The carriers are movable within the apparatus. A single one of the containers is mounted on a single one of the carriers. The apparatus, in another embodiment, includes a plurality of lens carriers, a plurality of lifts, a plurality of contact lens containers and either a plurality of platens or a plurality of mandrels. One of the containers is mounted on a respective one of the carriers. Each of the platens or each of the mandrels is individually supported by one of the lifts. The lifts apply pressure, within a predetermined range, to each of the containers. The apparatus, in another embodiment, includes a plurality of contact lens containers. A heated mandrel is disposed above the plurality of containers. The heated mandrel is moveable between a retracted position above the plurality of containers and an engaged position immediately adjacent to the plurality of containers. A lidstock is selectively movable between a retracted position and an inserted position. The inserted position is between the heated mandrel and the plurality of containers, whereby in the inserted position the lidstock is fixedly held in position at least until the heated mandrel contacts the lidstock while moving to the engaged position. The apparatus, in yet another embodiment, includes a lidstock having indicia printed thereon. The lidstock is fed from a roll under tension. A vision alignment inspection system checks the print quality on the lidstock and simultaneously checks for registration of the lidstock within the apparatus.

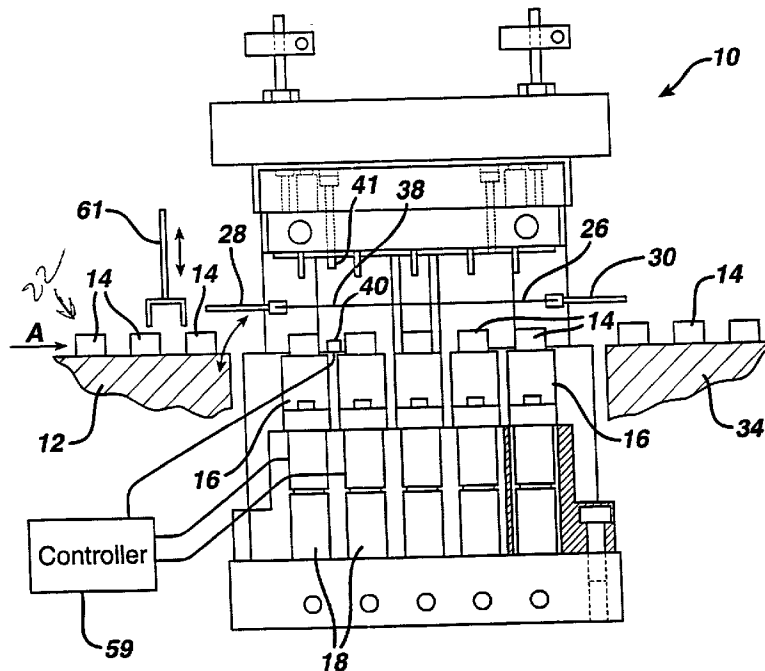


FIG. 1

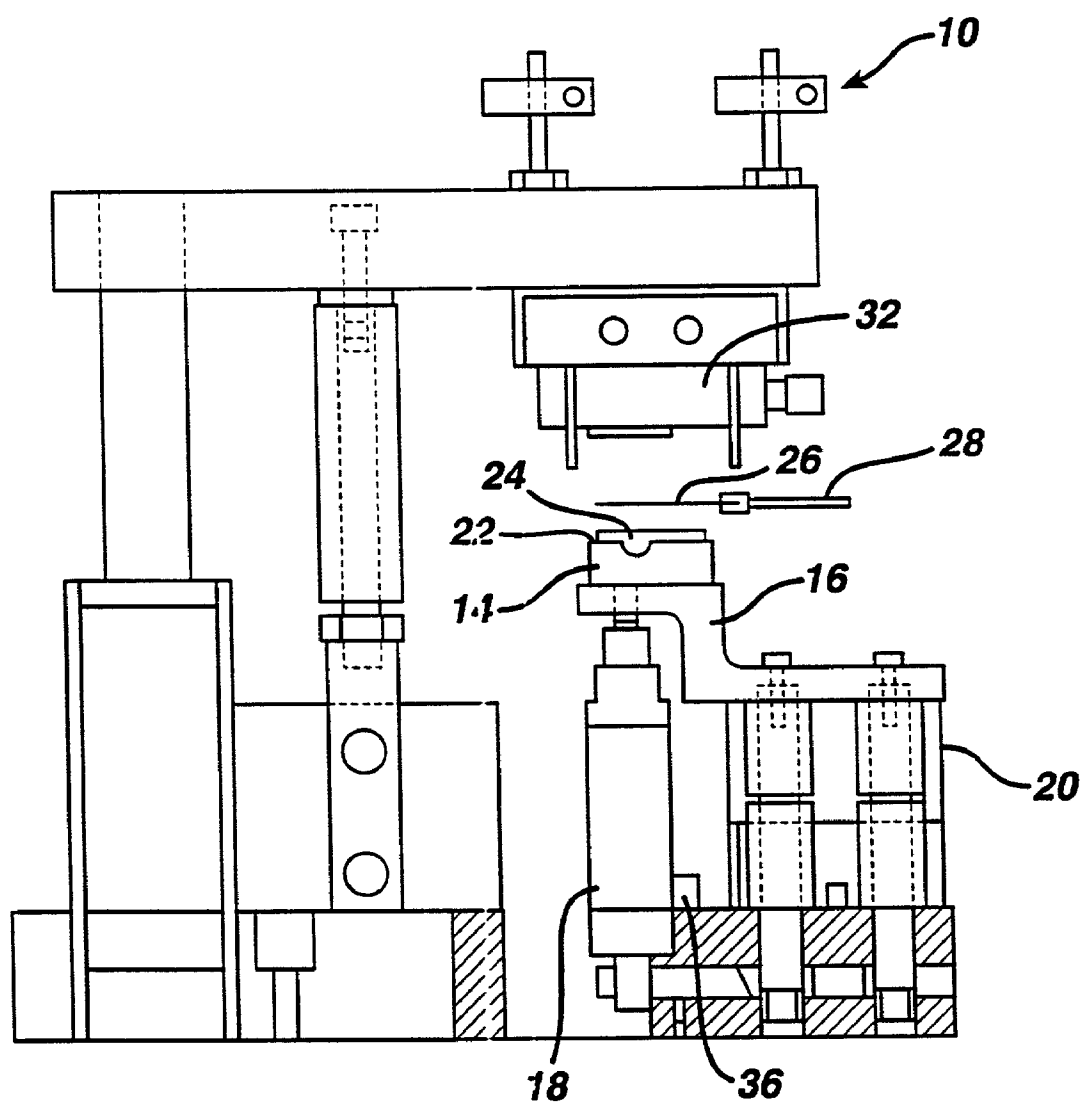


FIG. 2

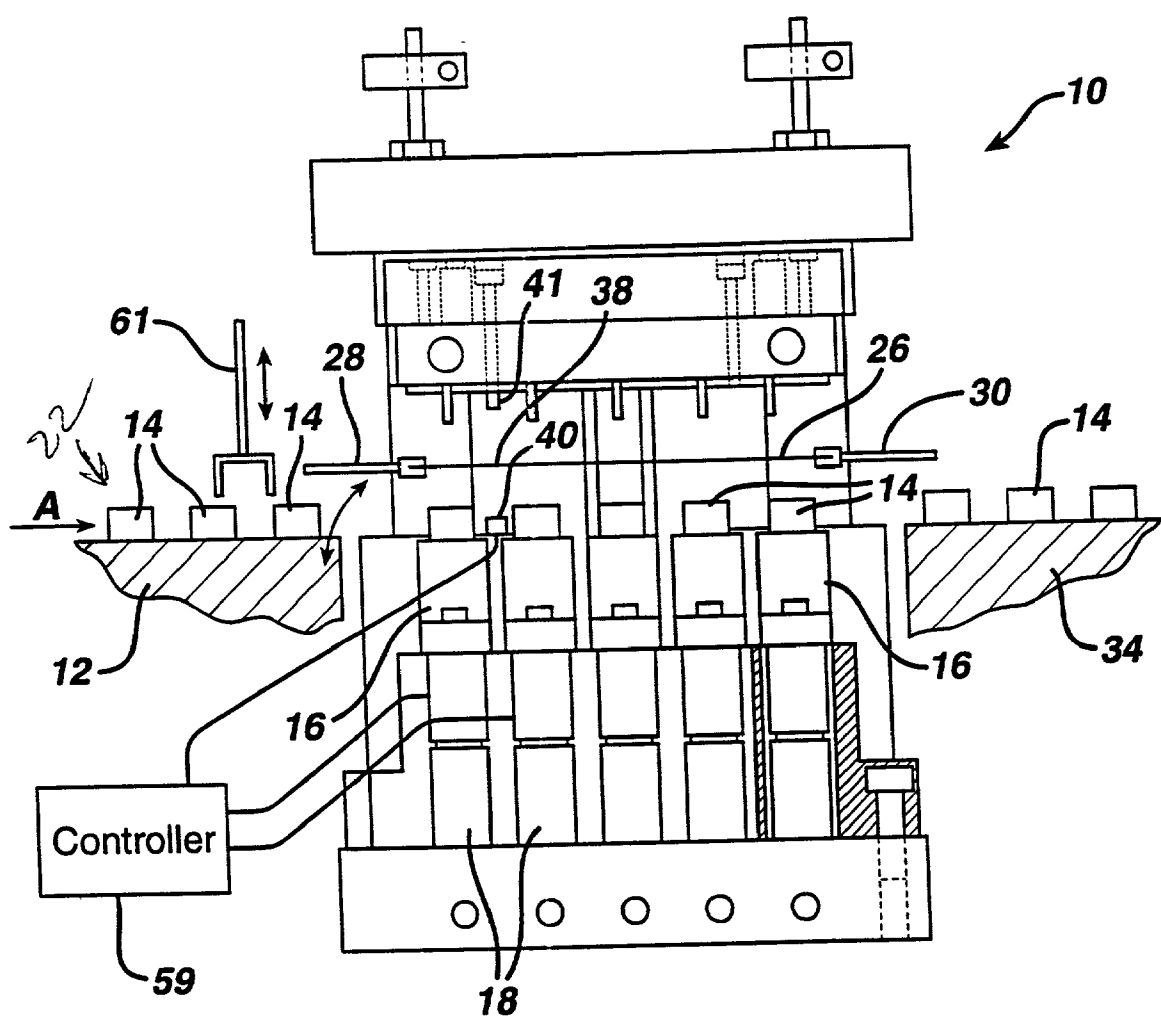


FIG. 3

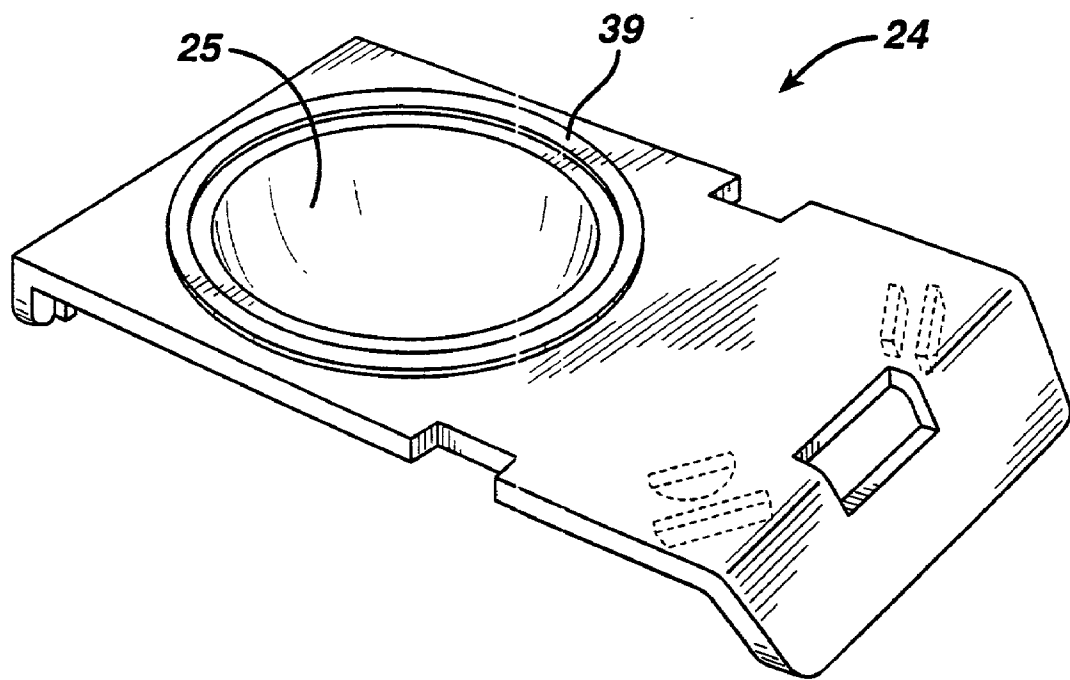


FIG. 4

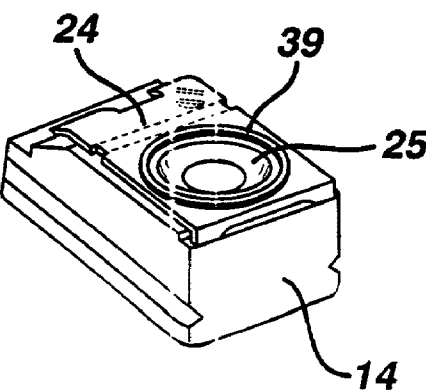


FIG. 5

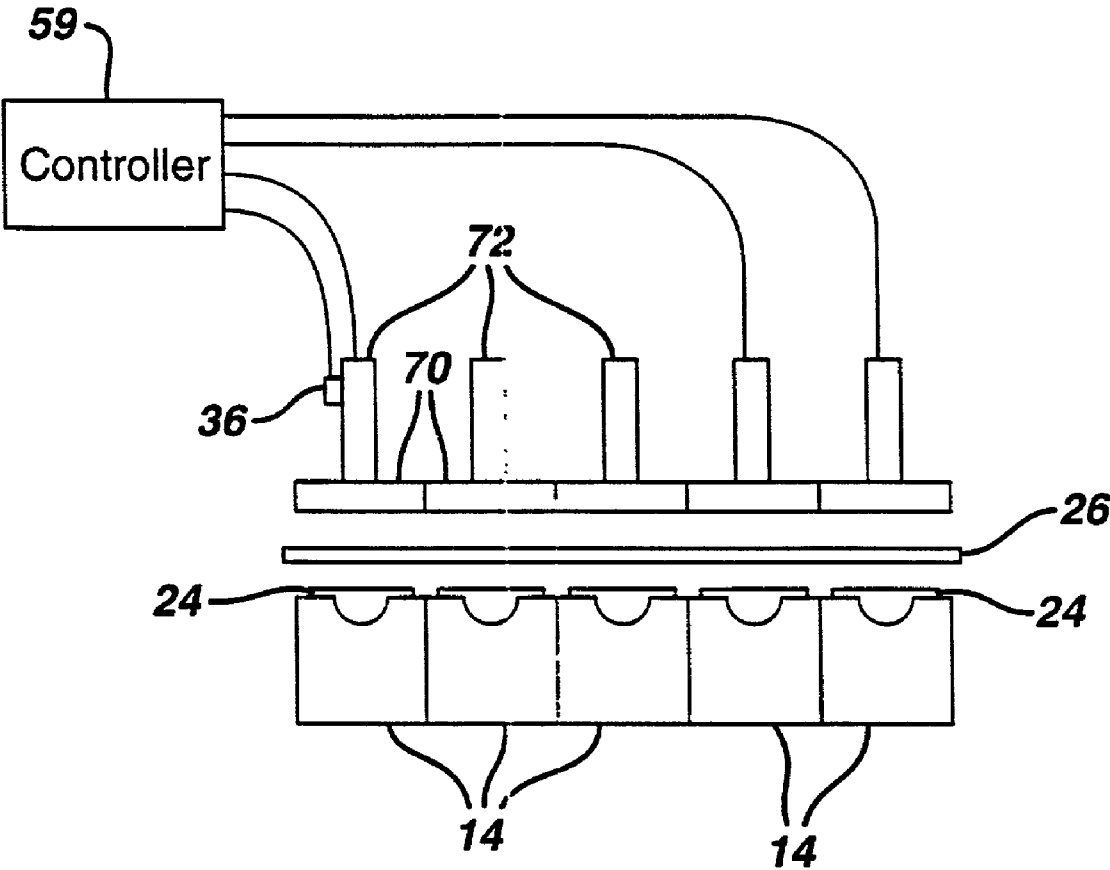


FIG. 6


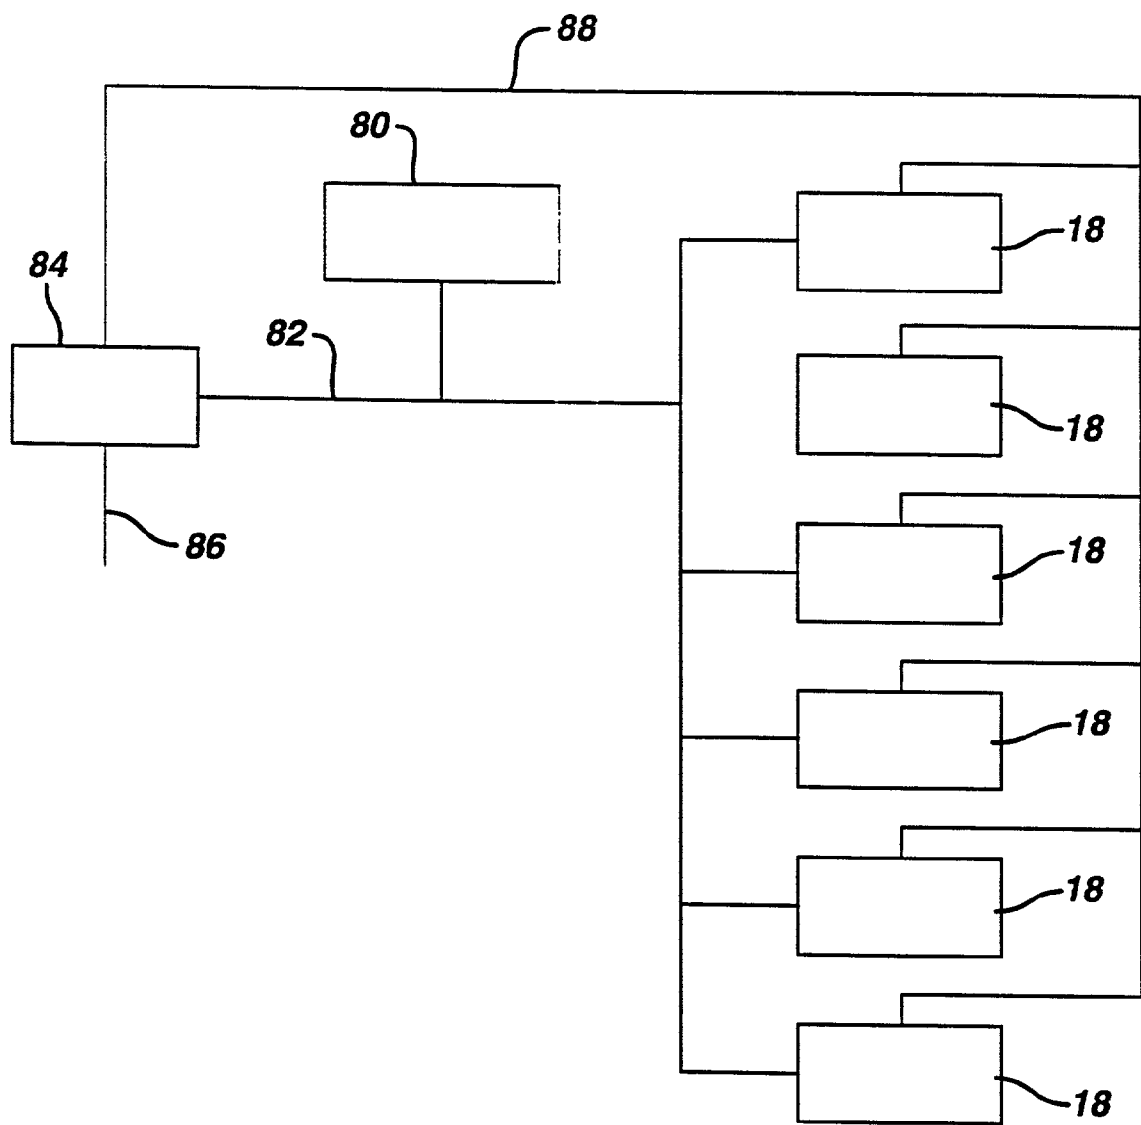


FIG. 7

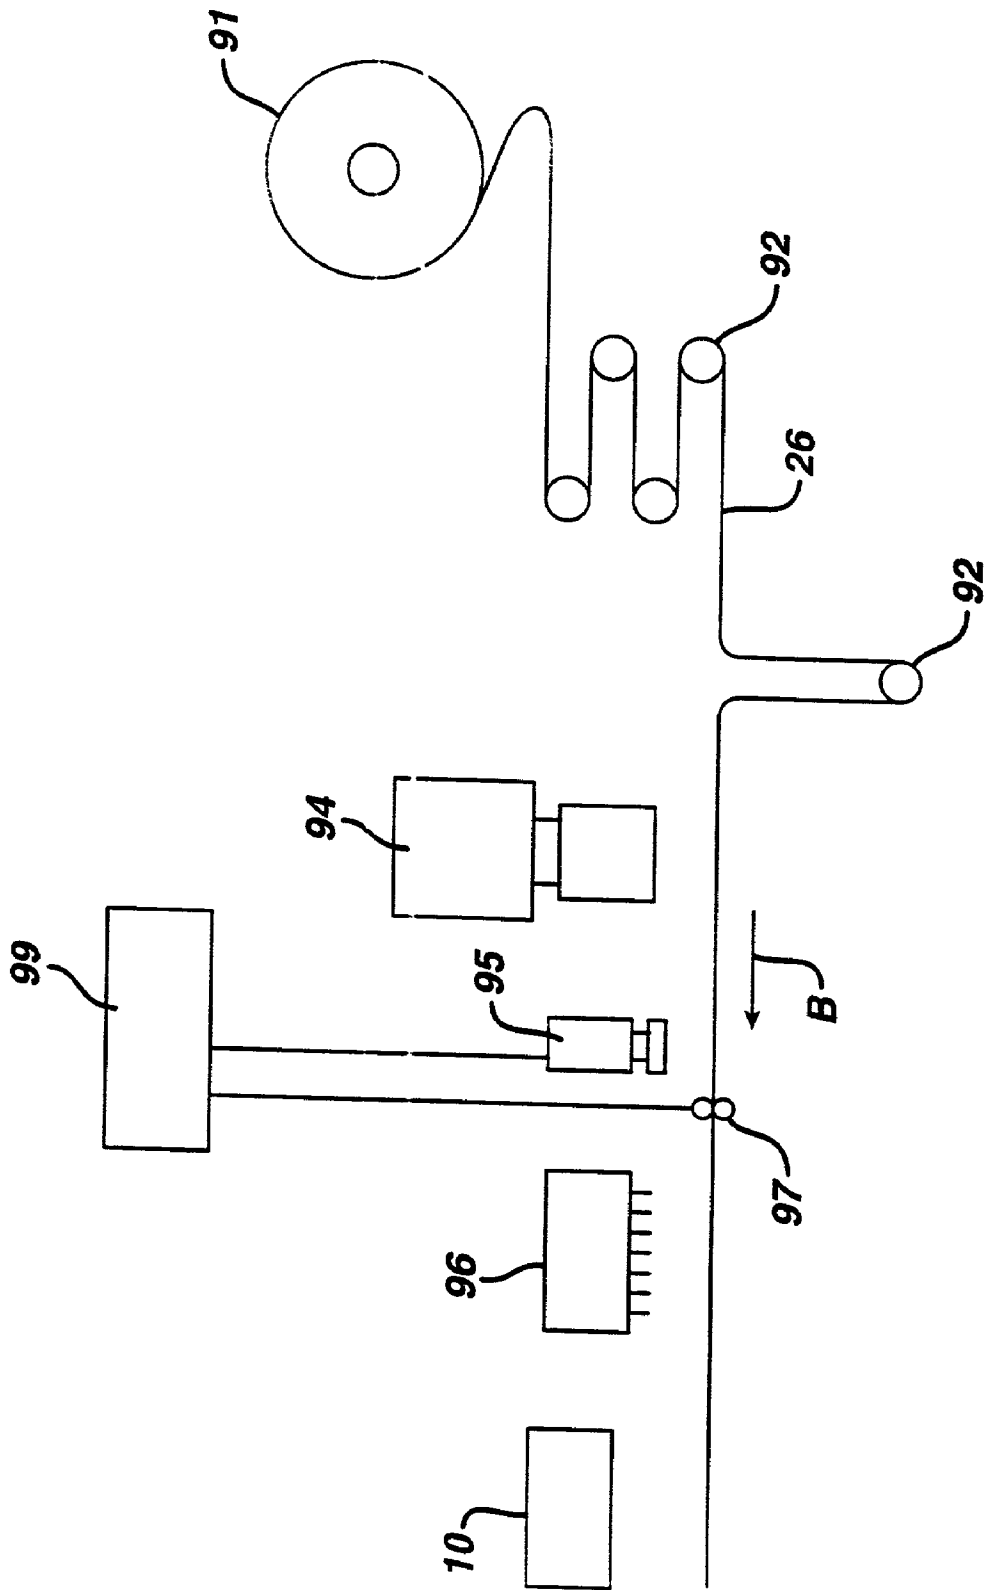

HEAT SEAL APPARATUS FOR LENS PACKAGES

FIELD OF THE INVENTION

[0001] The present invention relates to an apparatus for heat sealing containers containing an ophthalmic contact lens to form a sealed package. More specifically, the present invention relates to an apparatus for heat sealing a lidstock to a lens container to form a package by controlling the application of heat and pressure for each lid and container assembly.

BACKGROUND OF THE INVENTION

[0002] In the manufacture of hydrophilic ("soft") ophthalmic contact lenses, it is conventional to package each manufactured lens in a disposable package for containing a single lens and predetermined amount of liquid (generally buffered saline). Typically, the lens and liquid are introduced to a cavity or well in a container. The container is usually formed from a thermoplastic (e.g., molded polypropylene or polystyrene). After the lens and liquid are placed into the container, the container is sealed by applying a foil strip to the top of the container to form a lid and heat sealing the strip to the top of the container to form a package. The heat sealed package containing both the lens and liquid is then subjected to further processing, including for example, sterilization.

[0003] Conventional apparatus used for the high speed packaging of contact lenses on an assembly line is designed to permit inspection and packaging of several contact lenses simultaneously. Typically, a plurality (generally 6, 8 or 10) of containers are mounted in a fixed carrier rack having a cavity for receiving each container. A contact lens and liquid are introduced to each container mounted on the rack. The rack of containers is then conveyed to an inspection station where each container is inspected to ensure that a contact lens is present and not defective. The rack then moves onto a platen in a heat sealing station where a preformed sheet of foil stock is positioned over the rack of containers. A heated mandrel is then applied to the rack to apply predetermined heat and pressure for a predetermined time, thereby heat sealing the foil stock to each container and forming sealed packages. As a result, each of the containers are now each heat sealed to the sheet of foil stock and are accordingly joined together to form multi-package arrays. The foil stock is provided with perforations to permit the packages to be separated from each other after further downstream processing and/or shipping.

[0004] The packaging approach described above presents several disadvantages. For example, by providing a plurality of lens containers on each rack, the detection and identification of a defective or missing lens on the rack at the inspection station is complicated. A complex matrix tracking system must be employed to identify which container or containers on the rack has failed inspection and track them through the process until they can be removed.

[0005] Another problem inherent in processing multiple containers simultaneously in a fixed rack arrangement, is that each container on the rack is subjected to identical heat sealing conditions. Due to variations in the molding process, the molded thermoplastic containers sometimes vary in height. In such an event, a container of non-standard height may be subjected to either too little pressure (if too short) or

too much pressure (if too tall) compared to the pressure experienced by a container of standard height. As a result, the heat seal formed on one or more of the array of packages joined together by the perforated foil sheet may be of unacceptable quality. One defective heat seal in the array will require that the entire array of packages be discarded, and, thus, an entire production lot is subject to further testing for heat seal failures which, if present, may require rejecting the entire production lot.

[0006] Finally, in the prior art heat sealing apparatus, the sheet of perforated foil stock is positioned over the rack of containers upstream of the heated mandrel station. This arrangement relies on gravity and friction to maintain the lidstock in position until the heat seal is formed. Slight lateral movement of the foil stock causes mis-registration of the stock on the set of containers and could result in a defective set of packages.

[0007] The apparatus described above is disclosed in U.S. Pat. No. 5,687,541 issued to Martin et al. Other packages and packaging apparatus systems are disclosed in U.S. Pat. No. 5,649,410 issued to Martin et al., U.S. Pat. No. 5,561,970 issued to Edie et al., U.S. Pat. No. 5,094,609 issued to Kindt-Larsen, U.S. Pat. No. 4,691,820 issued to Martinez, U.S. Pat. No. 5,620,087 issued to Martin et al., U.S. Pat. No. 5,749,205 issued to Edwards et al. and U.S. Pat. No. 5,577,367 issued to Abrams et al. Each of the references cited herein are incorporated by reference. In the event of conflict in the meaning or interpretation of the present specification and/or appended claims, the present specification controls.

[0008] It will be apparent that there continues to be a need for an apparatus capable of detecting and selectively removing failed containers. In addition, the need exists for a heat sealing apparatus capable of applying a predetermined amount of pressure to each container in a group of containers being sealed simultaneously. Finally, there is a need for a heat sealing apparatus that is capable of maintaining a sheet of lidstock in registration with the set of containers during heat sealing. The present invention addresses these needs.

SUMMARY OF THE INVENTION

[0009] The present invention relates to an apparatus for packaging contact lenses. The apparatus includes a plurality of discrete lens carriers and a plurality of contact lens containers. The carriers are movable within the apparatus. A single one of the containers is mounted on a single one of the carriers.

[0010] The present invention also relates to an apparatus for automatically packaging contact lenses that includes a plurality of lens carriers, a plurality of lifts, a plurality of contact lens containers and either a plurality of platens or a plurality of mandrels. One of the containers is mounted on a respective one of the carriers. Each of the platens or each of the mandrels is individually supported by one of the lifts. The lifts apply pressure, within a predetermined range, to each of the containers.

[0011] The present invention also relates to an apparatus for automatically packaging contact lenses that includes a plurality of contact lens containers. A heated mandrel is disposed above the plurality of containers. The heated mandrel is moveable between a retracted position above the

plurality of containers and an engaged position immediately adjacent to the plurality of containers. A lidstock is selectively movable between a retracted position and an inserted position. The inserted position is between the heated mandrel and the plurality of containers, whereby in the inserted position the lidstock is fixedly held in position at least until the heated mandrel contacts the lidstock while moving to the engaged position.

[0012] The present invention also relates to an apparatus for packaging contact lenses that includes a lidstock having indicia printed thereon. The lidstock is fed from a roll under tension. A vision alignment inspection system checks the print quality on the lidstock and simultaneously checks for registration of the lidstock within the apparatus.

[0013] In another aspect, the present invention relates to an apparatus for packaging ophthalmic hydrophilic contact lenses transported along a conveyor, each lens contained within a container supported by a carrier. The apparatus includes a conveyor for conveying carriers each supporting a container, each container including a well for containing a contact lens and preferably a heat sealing surface. The apparatus also includes a plurality of platens, each of the platens attached to a lift capable of independently exerting a preset pressure against the mandrel (and the container between the platen and mandrel). Each platen receives a single carrier. Preferably there is one transducer, which generates a pressure signal corresponding to the pressure that operates on the cylinders to assure that it is within prescribed limits. A heated mandrel is disposed above the platens. The mandrel is movable from a disengaged position to an engaged position. A lidstock inserter capable of inserting a lidstock between the mandrel in the disengaged position and the heat sealing surfaces of the containers positioned above the plurality of platens is provided. The inserter preferably holds the lidstock in place until the mandrel contacts the lidstock against the container. In addition, a signal processor is provided, capable of receiving the pressure signal from the transducer, comparing the signal to a set of predetermined values, and marking the array for rejection if the pressure exerted by the lift is outside the predetermined range.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The above and still further objects, features and advantages of the present invention will become apparent upon consideration of the following detailed description of a specific embodiment thereof, especially when taken in conjunction with the accompanying drawings wherein like reference numerals in the various figures are utilized to designate like components, and wherein:

[0015] **FIG. 1** is a side elevation view of the heat sealing apparatus according to the present invention;

[0016] **FIG. 2** is a front elevation view of the heat sealing apparatus illustrated in **FIG. 1**;

[0017] **FIG. 3** is a perspective view of a contact lens container;

[0018] **FIG. 4** is a perspective view of a contact lens carrier with a contact lens container received thereon;

[0019] **FIG. 5** is a side view of another embodiment of the present invention;

[0020] **FIG. 6** is a schematic diagram of the pneumatic system of the preferred heat sealing apparatus; and

[0021] **FIG. 7** is a side view of the movement of the lidstock prior to the heat seal apparatus.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] Referring now to **FIGS. 1 and 2**, side and front elevation views of a heat seal apparatus **10** for sealing a lidstock onto a container to form a sealed contact lens package are illustrated. The apparatus includes an upstream conveyor **12** capable of conveying a plurality of individual lens carriers **14** (**FIG. 4**), in the direction indicated by arrow **A** in **FIG. 2**, into the heat seal apparatus **10**.

[0023] As illustrated in **FIG. 2**, in the heat seal apparatus **10**, each individual carrier **14** is positioned above a discrete support platen **16**. Each platen **16** is supported by a lift, e.g., a hydraulic or pneumatic (i.e., fluid) cylinder **18** which is operative to vertically displace the respective platen and by a bearing block **20**.

[0024] Each individual lens carrier **14** supports, on its upper surface **22**, a lens container **24**, which contains a contact lens in a cup-shaped recess or well **25**. The containers can be a portion of the mold, e.g., the front cure mold and/or the bottom half of a contact lens package, which is conventionally referred to as the bowl. Preferably, the container is a bowl. Referring now to **FIG. 3**, container **24** includes a sealing flange **39**, which is disposed about cup-shaped recess **25**. The individual lens carriers **14** are incrementally moved into position in the heat sealing assembly such that one lens carrier **14** is placed upon each of the platens **16**. As illustrated in **FIG. 2**, the heat seal assembly includes, in one illustrative embodiment, five platens which each receive a single lens carrier holding a container. However, in the currently preferred exemplary embodiment, the heat seal assembly includes six platens. Once the set of lens carriers are in position, with each carrier supporting a container **24** thereupon, a lidstock sheet **26** is moved into position between a heated mandrel **32** of the heat seal apparatus and the containers **24**. Lidstock **26** is preferably in the form of a foil lid stock, which is preferably perforated in a conventional manner at a location corresponding to a location between each individual lens carrier **14**. The foil sheet is typically a laminate of aluminum foil and a thermoplastic film, such as a polyethylene. Lidstock **26** is preferably held by a foil maneuvering mechanism which includes a pair of gripping fingers **28, 30**. The fingers selectively move lidstock **26** from a retracted position (not shown) to the inserted position (see **FIGS. 1 and 2**). Preferably, the lidstock is held in position over the containers at least until the heated mandrel contacts the lidstock to the surface of the container at which time the fingers let go of the lidstock and return to the retracted position. In another embodiment, the fingers can hold the lidstock in place until the heat sealing step is complete. The heated mandrel **32** is selectively movable from an upper, non-engaging position, as illustrated in **FIGS. 1 and 2**, to a lower engaged position, thereby applying heat and pressure to a predetermined portion of the lidstock **26** positioned over the container for a predetermined time to create a heat seal and form a sealed package. More specifically, lidstock **26** is heat sealed to the annular flanges **39** of each of the respective containers **24**.

Thereafter, the heated mandrel **32** is raised back up to the upper, non-engaging position. The individual lens carriers **14**, which each now carry a sealed package (i.e., a container **24** heat sealed to foil lidstock **26**) joined by the foil sheet to the adjoining packages to form a set of packages, are next advanced to a downstream conveyor **34** for further processing, in a manner which is known to those skilled in the art. In the preferred mode, six (6) containers are sealed in each step, with two lidstock strips covering three packages each.

[0025] Each cylinder **18** is in fluid communication with a one or more pressure transducers **36** to measure the pressure that is applied by the heated mandrel **32** against the container when mandrel **32** is moved to the lower, engaged position. The heat seal apparatus **10** further includes a controller **59** electrically connected to the one or more pressure transducers and to the individual cylinders, and is programmed with the acceptable predetermined range for the pressures to be exerted in forming the heat seal. The controller preferably comprises a processor or computer programmed to receive the electrical signals from the one or more pressure transducers, determines the pressure applied to the respective packages **24**, and, if necessary, controls one or more of the cylinders **18** to increase or decrease the pressure applied to that container. Preferably, the pressure applied by the heated mandrel **32** against the containers **24** is within the predetermined range.

[0026] The range can be determined by those skilled in the art depending on the material used for package **24**, lidstock **26** and their respective thicknesses to ensure that a proper seal is achieved. Because of the tolerances in the thickness of the sealing flange **39** on the container **24** and the thickness of the lidstock **26**, by applying the heated mandrel to an individually supported lens carrier at a pressure maintained within the predetermined range, the present invention ensures that the proper pressure is applied to each container so that lidstock **26** is properly sealed to container **24** in the set. Thus, in the event one of the pressure transducers senses a pressure out of the predetermined range, the corresponding cylinder is controlled to either rise or descend to increase or decrease respectively, the pressure applied to that container to ensure a proper heat seal.

[0027] Referring now to FIG. 6, in a currently preferred exemplary embodiment, one pressure transducer **80** is used to measure the pressure that is applied to each cylinder or lift **18**. Each cylinder **18** is adjustable between an up position and a down position dependent upon the position of a three way valve **84**. Three way valve **84** receives fluid pressure from a conventional source (not shown) via source conduit **86**. Valve **84** connects fluid line **86** with either cylinder up conduit line **82** or with cylinder down conduit line **88**. It is noted that the pressure transducer **80** is tapped into pressure line **82** to determine the pressure applied by all cylinders **18** when they are in the up position. An alarm (not shown) is activated if the detected pressure is not within a predetermined range. If the alarm is activated the array of packages, which were in the heat sealer, are tracked for discard by the control system.

[0028] Lidstock **26** can be provided with a lid registration mark **38**, which can be sensed by an optical sensor assembly within the heat cylinder assembly to ensure that the lidstock **26** is properly positioned within the heat seal assembly. Registration mark **38** can be an aperture or transparent

portion of the lidstock, such that an optical signal from an optical transmitter **41** of the sensor assembly is received by an optical detector **40** only when the aperture is aligned with the optical signal path defined between the transmitter and receiver. In place of the optical sensor assembly within the heat seal apparatus **10**, registration of the lidstock may be done elsewhere, and the gripping arms **28** and **30** of the lidstock maneuvering mechanism may be arranged to reliably maneuver the lidstock to a predetermined location in proper registration with the platen **16** and, thus, with the carriers **14**. Because the lidstock is preferably held during the heat seal step the alignment preferably does not need to be checked after sealing.

[0029] In the preferred embodiment, in the steps before the lidstock is placed over the containers in the heat seal apparatus, the lidstock (which preferably has most of the graphics pre-printed on it) has some variable product information printed on it, e.g., the power, lot and expiration date of the product and the lidstock is cut and perforated into strips according to the number of containers to be heat-sealed into an array. The printing on the lidstock can be done by any known method, including laser printing or thermal printing, preferably by laser printing. The preprinted graphics on the lidstock preferably provide areas in which this information is to be printed, e.g., blank colored boxes. In the preferred embodiment, shown in FIG. 7, a strip of lidstock **26** is fed off a roll **91** under constant tension through lidstock buffers **92** in the direction shown by arrow B to the printing system **94**, and to the cutting or cutting and perforation system **96** which are located in a line. Preferably, between these two operations is located a vision system **95** which uses a portion of the graphics on the lidstock **26** to check the registration of the lidstock. If, when the strip of lidstock **26** is fed into the printing system **94** and cutting and perforation system **96**, the portion of the graphics is not in its proper location, the vision system **95** communicates to the control system **99** for the process that the lidstock is not in the correct location and the control system **99** instructs the lidstock feed rollers **97** to adjust the position of the lidstock either in the plus or minus direction. By the use of the vision system **95** the lidstock **26** is continuously checked and automatically realigned. The vision system **95** can be located before and/or after the printing system **94**, and/or within the cutting and perforation system **96**, and/or in the heat-seal apparatus **10**. However, in the preferred embodiment, there is only one vision system **95**, e.g., an optical character verification system with location capability, and it checks the laser printing quality at the same time it checks the registration; therefore, it is preferably located after the printing system **94**. By locating the printing system **94** and the cutting and perforation system **96** in a line in which the lidstock **26** is taut between them and under constant tension, the registration of the lidstock **26** by the vision system **95** maintains registration in both systems. Further, in the preferred embodiment, by carefully controlling the lidstock **26** during the cutting and printing steps and by holding the lidstock until the mandrel **32** contacts the lidstock **26** in the heat-sealing apparatus **10**, checking the registration of the lidstock within or after the heat-sealing apparatus **10** is not necessary, and in the preferred embodiment is not done.

[0030] Further, in the upstream conveyor **12**, a conventional inspection system may be used to ensure that a proper or non-defective lens has been placed within each container **24**. In the preferred embodiment, the detection system

described in commonly assigned U.S. patent application Ser. No. 09/187,579 filed Nov. 5, 1998, entitled "Missing Lens Detection System and Method", VTN-423, the disclosure of which is hereby fully incorporated by reference, is upstream of the heat seal apparatus. If either a conventional inspection system or the preferred detection system is used, if an improper or defective lens has been placed within container 24, or, for example, if no lens has been placed within container 24, the carrier 14 supporting the container can be removed from the assembly line (i.e., from conveyor 12) downstream of the inspection station by a discarder arm 61 or the like, which is preferably controlled by the computer for the process acting on information from the detection system or inspection system. An acceptable lens-containing container on a carrier can then be automatically moved into the empty position left by the removed carrier before the individual lens carriers 14 are moved into position before or in the heat seal assembly 10. A device for automatically inspecting contact lenses is described in U.S. Pat. No. 5,687,541 to Martin et al., incorporated herein by reference.

[0031] In another embodiment, the heated mandrel 32 may comprise plural individually actuated dies 70 (FIG. 5) controlled by individual die cylinders 72, each of which individually applies pressure to portions of the lidstock 26 and to a corresponding one of the containers 24 housed in the carriers 14. In this embodiment, the cylinders 18 engaged to the corresponding platens 16 are replaced by the die cylinders 72, and the platen 16 may be a conventional, single base supporting all of the carriers or a single carrier holding multiple containers to be heat sealed. The pressure in the die cylinders can be monitored by one or more pressure transducers 36 as described above in connection with FIG. 2 or FIG. 6 and the controller 59 can be responsive to receipt of electrical signals from the respective transducers to control the individual die cylinders 72 to maintain the pressure applied to each of the packages within the predetermined range, or if the pressure is outside a set range the arrays can be tracked for discard. Again, it is preferable to hold the lidstock in place over the containers until the mandrel is moved to the engaging position causing the lidstock to contact the containers.

[0032] Having described the presently preferred exemplary embodiment of an apparatus for automatically packaging contact lenses in accordance with the present invention, it is believed that other modifications, variations and changes will be suggested to those skilled in the art in view of the teachings set forth herein. It is, therefore, to be understood that all such modifications, variations, and changes are believed to fall within the scope of the present invention as defined by the appended claims.

What is claimed is:

1. An apparatus for packaging contact lenses, said apparatus comprising:

a plurality of discrete inspection lens carriers, said carriers being movable within said apparatus; and

a plurality of contact lens containers, a single one of said containers being mounted on a single one of said carriers.

2. The apparatus according to claim 1, wherein each carrier has a cavity, each container having a bowl, said bowl of said container being receiving in said cavity of said carrier.

3. The apparatus according to claim 1, wherein each of said carriers receives solely one container.

4. The apparatus according to claim 2, wherein each of said carriers receives solely one container.

5. An apparatus for automatically packaging contact lenses, said apparatus comprising:

a plurality of lens carriers;

a plurality of contact lens containers, one of said containers being mounted on a respective one of said carriers;

a plurality of lifts;

a plurality of platens, each of said platens being individually supported by one of said lifts, each of said containers being mounted on a respective one of said platens;

a mandrel disposed above said platens; and

wherein said lifts apply pressure, within a predetermined range, to each of said containers.

6. The apparatus according to claim 5, further comprising a lidstock maneuvering system operative to engage a lidstock and to position said lidstock between said mandrel and said plurality of platens.

7. The apparatus according to claim 5, wherein said mandrel is selectively moveable between a retracted upper position and an engaged lower position to seal said lidstock to said containers, and wherein in said lower position, a pressure applied by said mandrel against each of said platens is maintained within said predetermined range by the respective lifts, thereby compensating for tolerance differences in the thickness of said containers and the thickness of said lidstock to ensure that an adequate seal is formed between said lidstock and each of said containers.

8. The apparatus according to claim 5, further comprising a pressure transducer being connected to said lifts, said pressure transducer generating a signal indicative of the pressure applied by each of said lifts.

9. An apparatus for automatically packaging contact lenses, said apparatus comprising:

a lens carrier;

a plurality of contact lens containers being mounted on said carrier;

a plurality of lifts;

a plurality of mandrels disposed above said carrier, each of said mandrels being individually supported by one of said lifts;

wherein said lifts apply pressure, within a predetermined range, to each of said mandrels.

10. The apparatus according to claim 9, further comprising a lidstock maneuvering system operative to engage a lidstock and to position said lidstock between said mandrels and said carrier.

11. The apparatus according to claim 9, wherein said mandrel is selectively moveable between a retracted upper position and an engaged lower position to seal said lidstock to said containers, and wherein in said lower position, a pressure applied by said mandrel against each of said platens is maintained within said predetermined range by the respective lifts, thereby compensating for tolerance differences in the thickness of said containers and the thickness of said

lidstock to ensure that an adequate seal is formed between said lidstock and each of said containers.

12. The apparatus according to claim 9, further comprising a pressure transducer being connected to said lifts, said pressure transducer generating a signal indicative of the pressure applied by each of said lifts.

13. An apparatus for automatically packaging contact lenses, said apparatus comprising:

- a plurality of contact lens containers,

- a heated mandrel disposed above said plurality of containers, said heated mandrel being moveable between a retracted position above said plurality of containers and an engaged position immediately adjacent to said plurality of containers; and

- a lidstock being selectively movable between a retracted position and an inserted position, said inserted position being between said heated mandrel and said plurality of containers, whereby in said inserted position the lidstock is fixedly held in position at least until said heated mandrel contacts said lidstock while moving to said engaged position.

14. The apparatus according to claim 13, further comprising a plurality of lens carriers, each of said containers being mounted on a respective one of said carriers.

15. An apparatus for packaging contact lenses, said apparatus comprising:

- a lidstock having indicia printed thereon, said lidstock being fed from a roll under tension; and

- a vision alignment inspection system having means for checking the print quality on said lidstock and for simultaneously checking for registration of said lidstock within said apparatus.

16. The apparatus of claim 15, further comprising a printing system and a cutting system, wherein said lidstock is fed from said roll under tension into said printing system and said cutting system, and said vision alignment inspection system is located after said printing system.

17. The apparatus of claim 15, further comprising a printing system and a cutting system, wherein said lidstock is fed from said roll under tension into a printing system and said cutting system and said alignment inspection system is located between said printing system and said cutting system.

18. The apparatus of claim 15, further comprising a heat seal apparatus, wherein said lidstock is mechanically controlled after said vision alignment inspection system to prevent misregistration of said lidstock in said heat seal apparatus.

19. The apparatus of claim 17, wherein said cutting system is located after said printing system.

20. The apparatus of claim 18, wherein said cutting system is located after said printing system.

* * * * *