

(19) **United States**(12) **Patent Application Publication****LEE et al.**(10) **Pub. No.: US 2017/0019357 A1**(43) **Pub. Date: Jan. 19, 2017**(54) **METHOD AND APPARATUS FOR PROVIDING SOCIAL NETWORK SERVICE**(71) Applicants: **Hagen LEE**, Tenaflly (US); **Sang Won MOON**, Bucheon-si (KR)(72) Inventors: **Hagen LEE**, Tenaflly, NJ (US); **Sang Won MOON**, Bucheon-si (KR)(21) Appl. No.: **15/124,232**(22) PCT Filed: **Mar. 2, 2015**(86) PCT No.: **PCT/KR2015/001979**

§ 371 (c)(1),

(2) Date: **Sep. 7, 2016****Related U.S. Application Data**

(60) Provisional application No. 61/949,424, filed on Mar. 7, 2014.

Publication Classification(51) **Int. Cl.****H04L 12/58** (2006.01)**H04L 29/06** (2006.01)**H04L 29/08** (2006.01)(52) **U.S. Cl.**CPC **H04L 51/046** (2013.01); **H04L 51/32** (2013.01); **H04L 67/306** (2013.01); **H04L 63/0428** (2013.01)(57) **ABSTRACT**

A social network service, which can visualize and express a user's emotions or opinions and can randomly arrange or permanently delete the content of conversations exchanged between the user and counterparts includes: receiving a chat room creation request from at least one user equipment; transmitting information on a user equipment that has transmitted a chat room participation request, among at least one other user equipment located within a predetermined distance from the user equipment that has transmitted the chat room creation request, to the user equipment that has transmitted the chat room creation request; and creating a chat room for allowing the user equipment that has transmitted the chat room creation request and at least one other user equipment that has transmitted a chat room participation request to perform messaging communication.

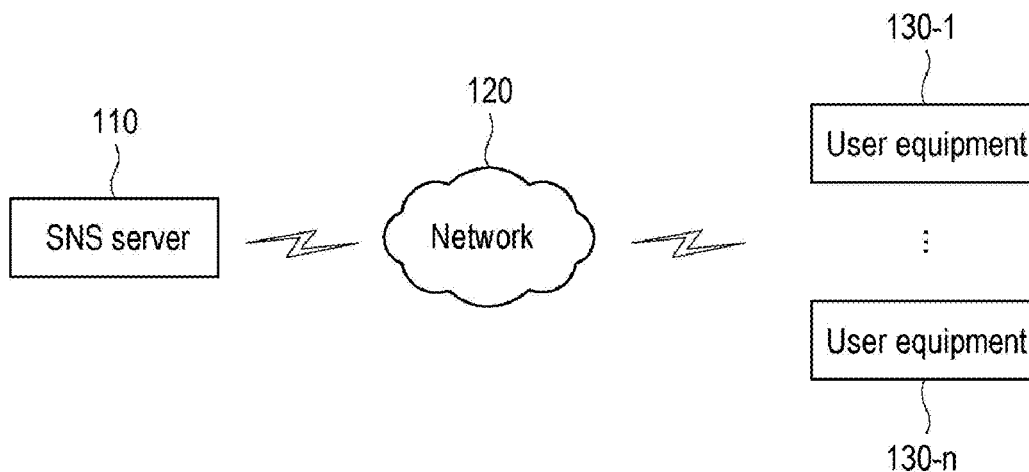
100

FIG. 1

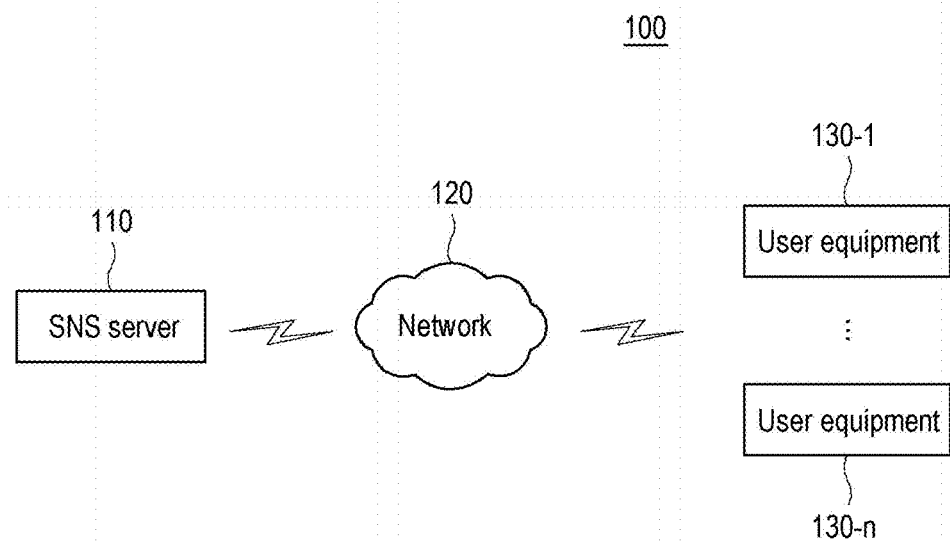


FIG. 2

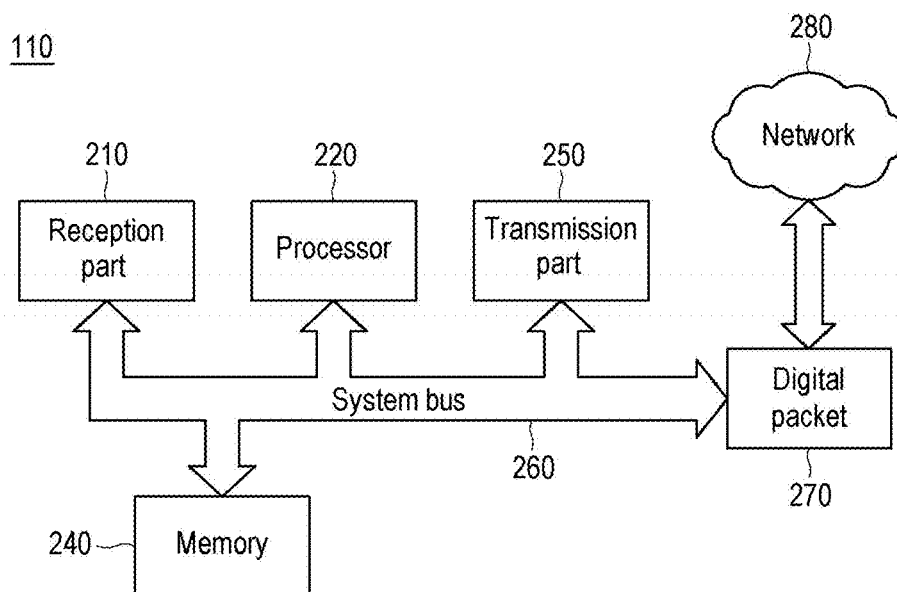


FIG. 3

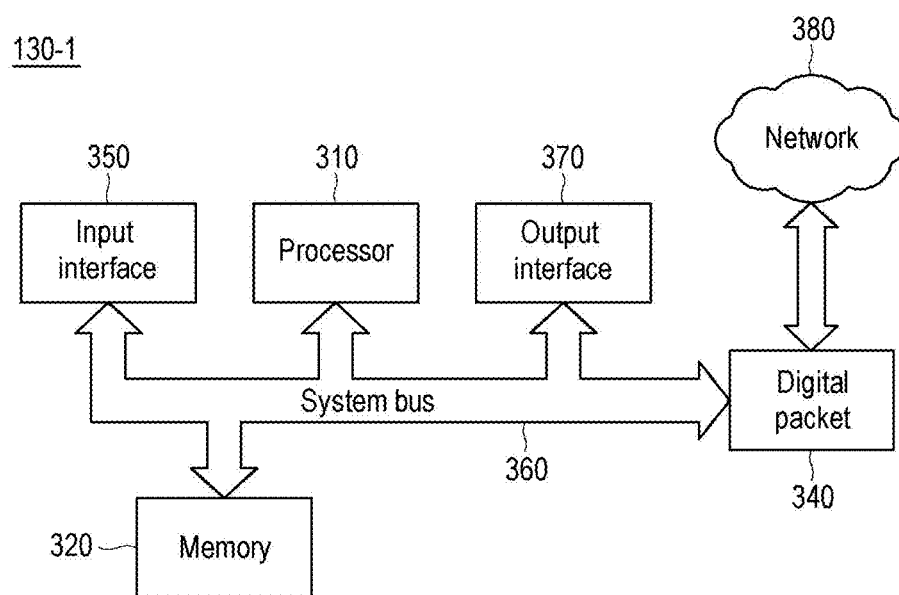


FIG. 4

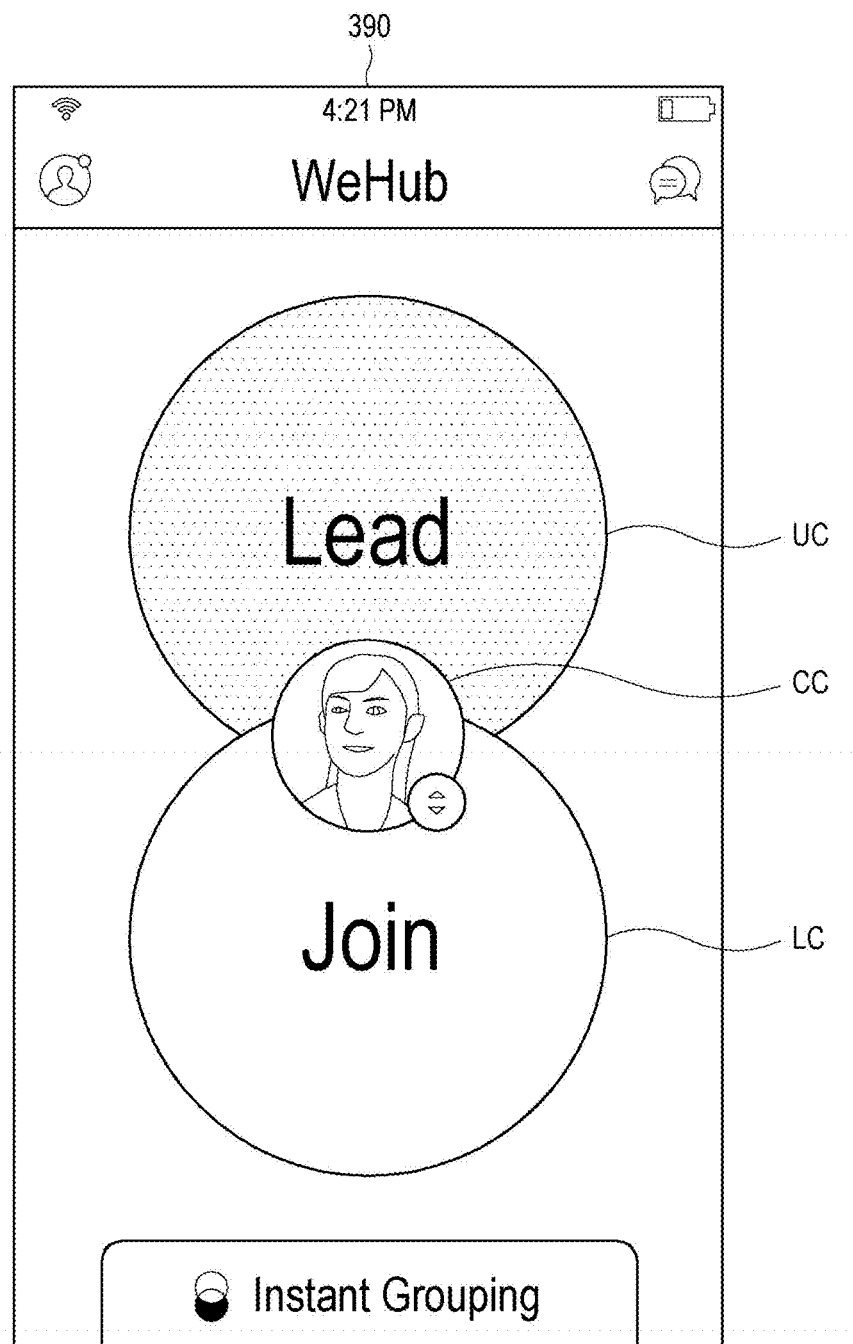


FIG. 5

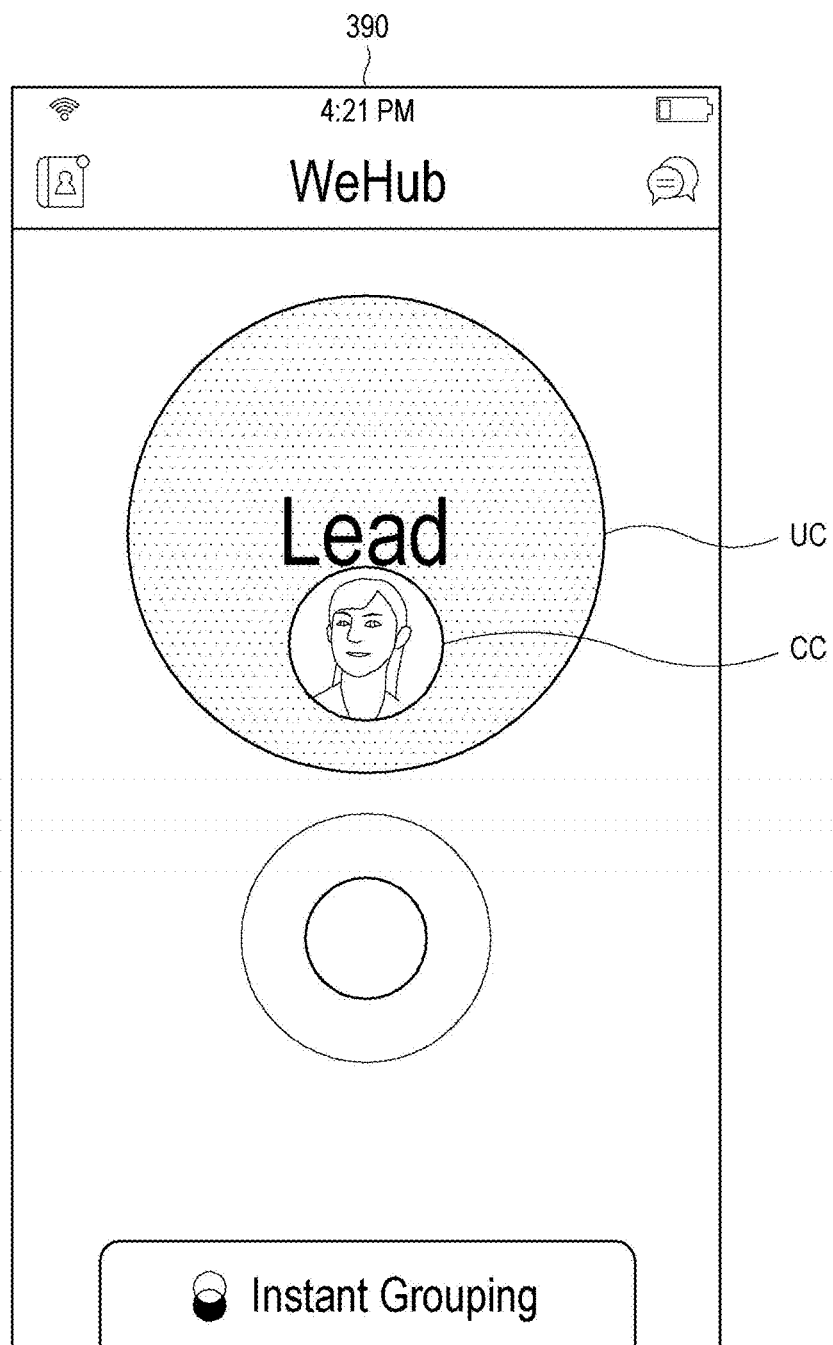


FIG. 6

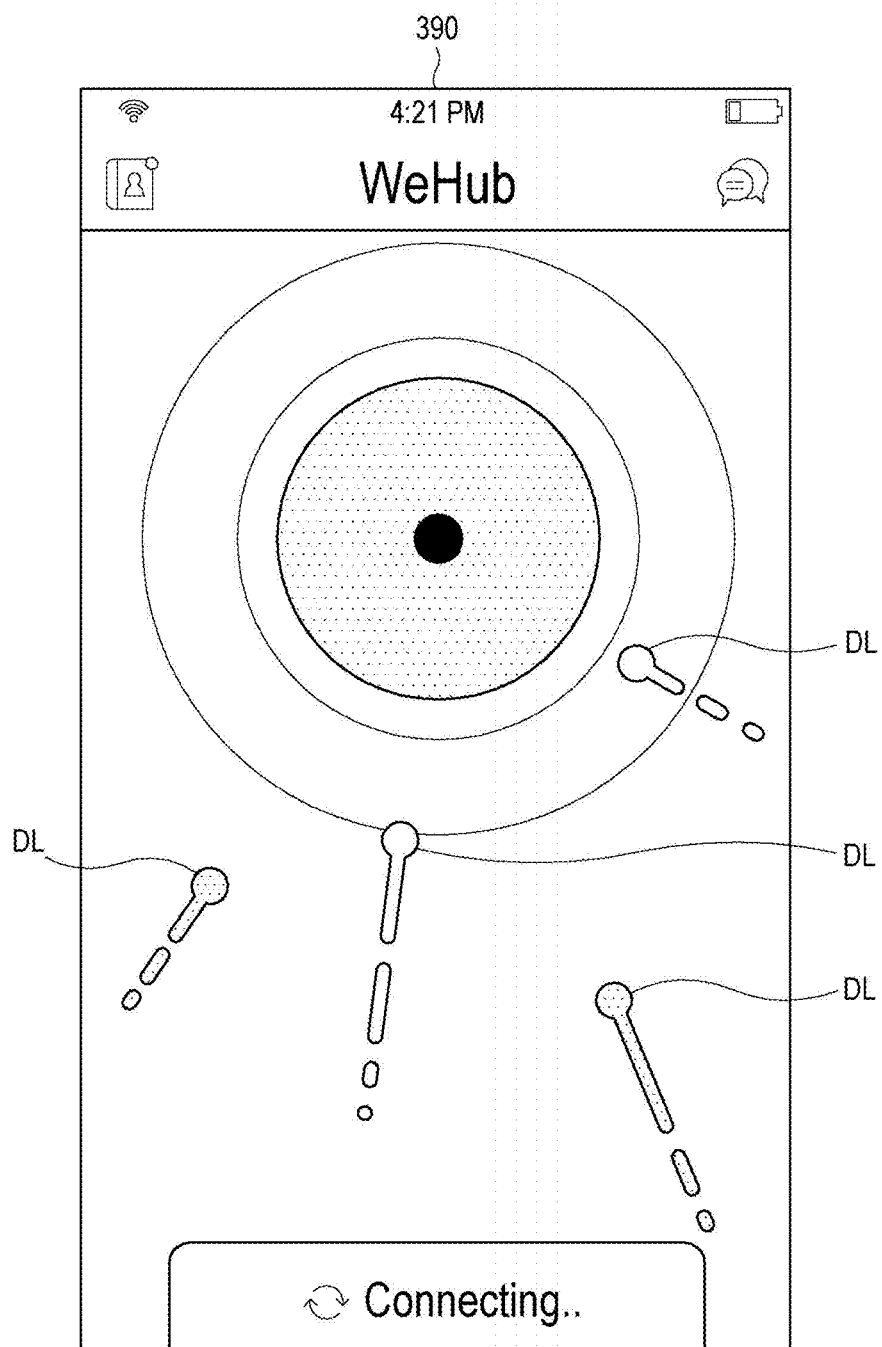


FIG. 7

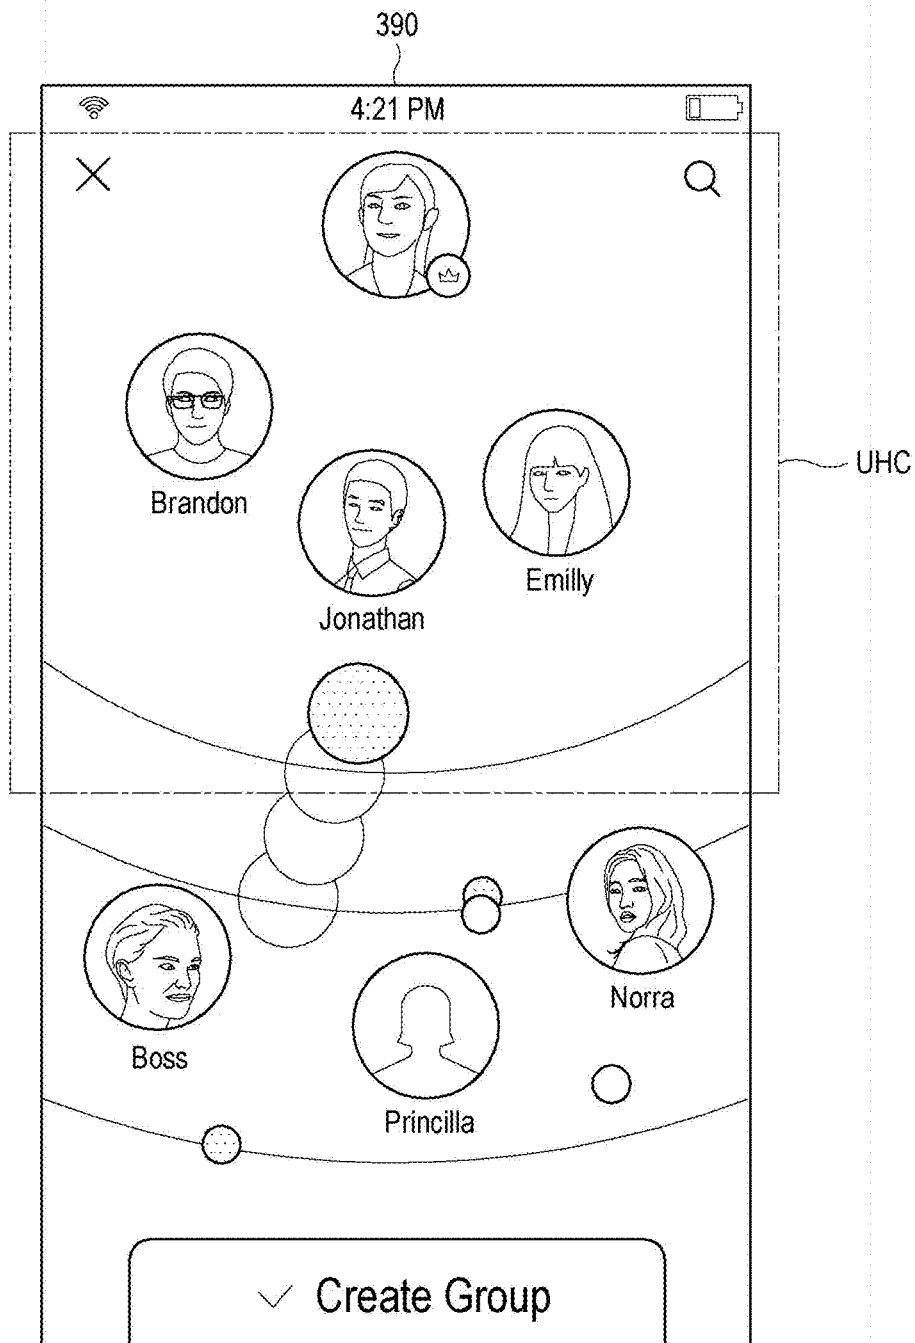


FIG. 8

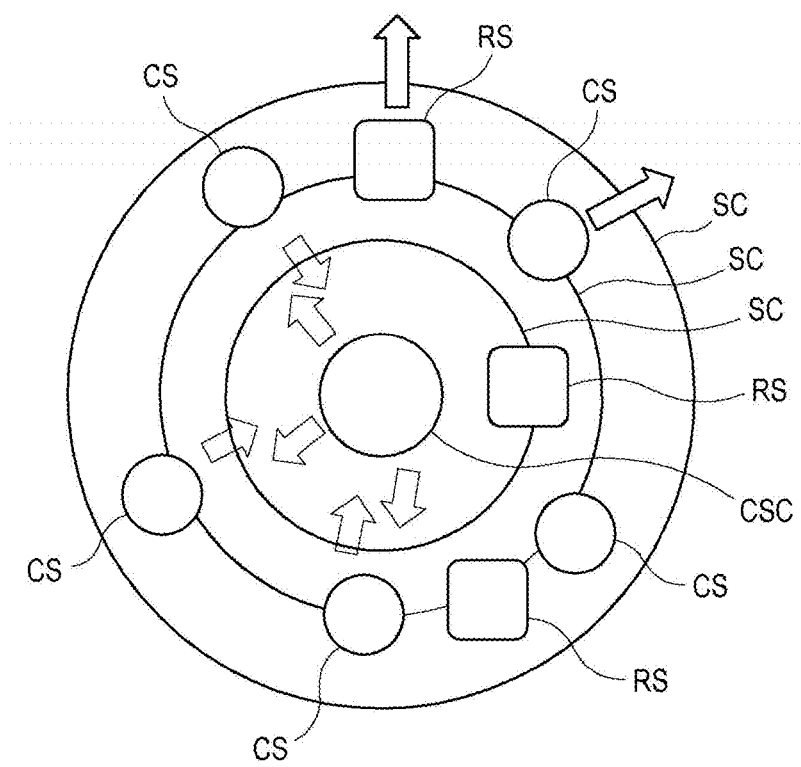


FIG. 9

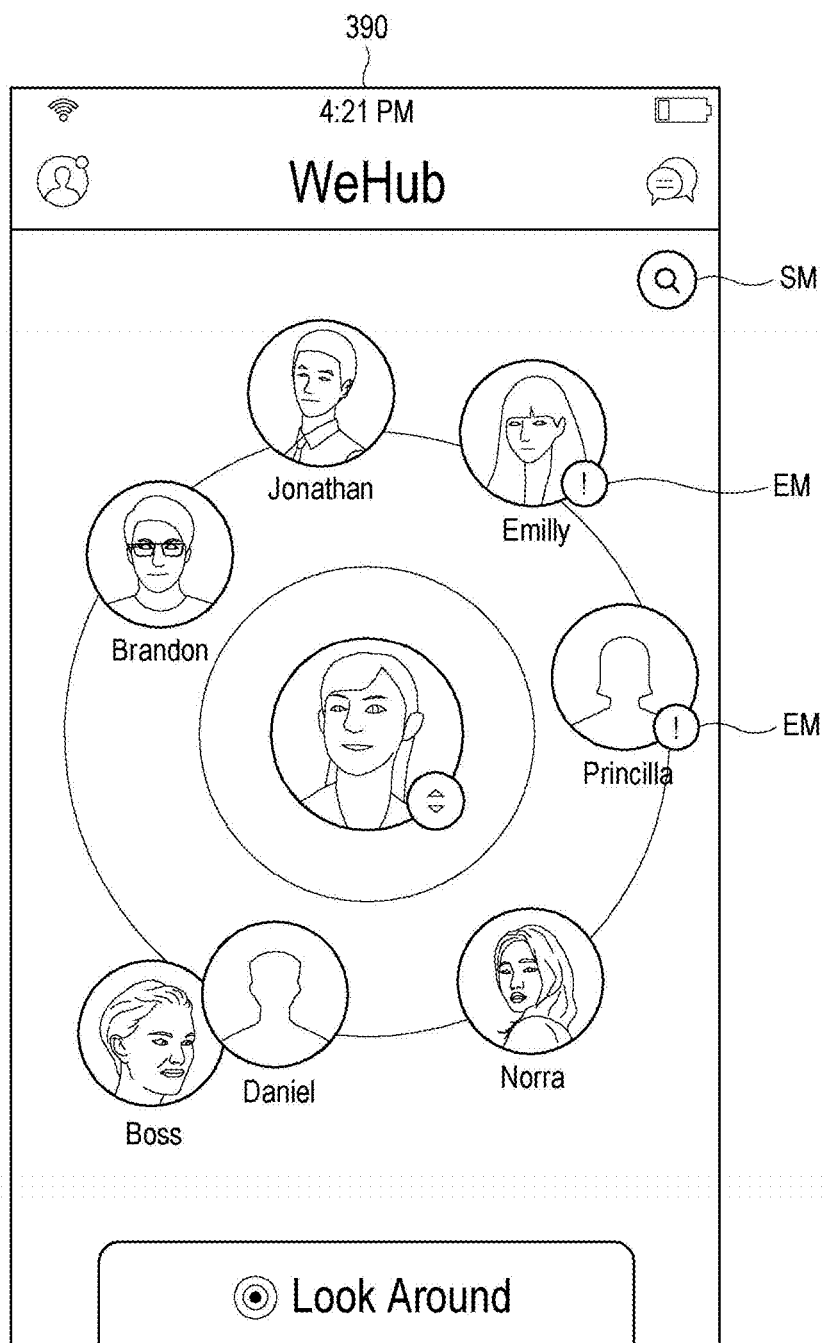


FIG. 10

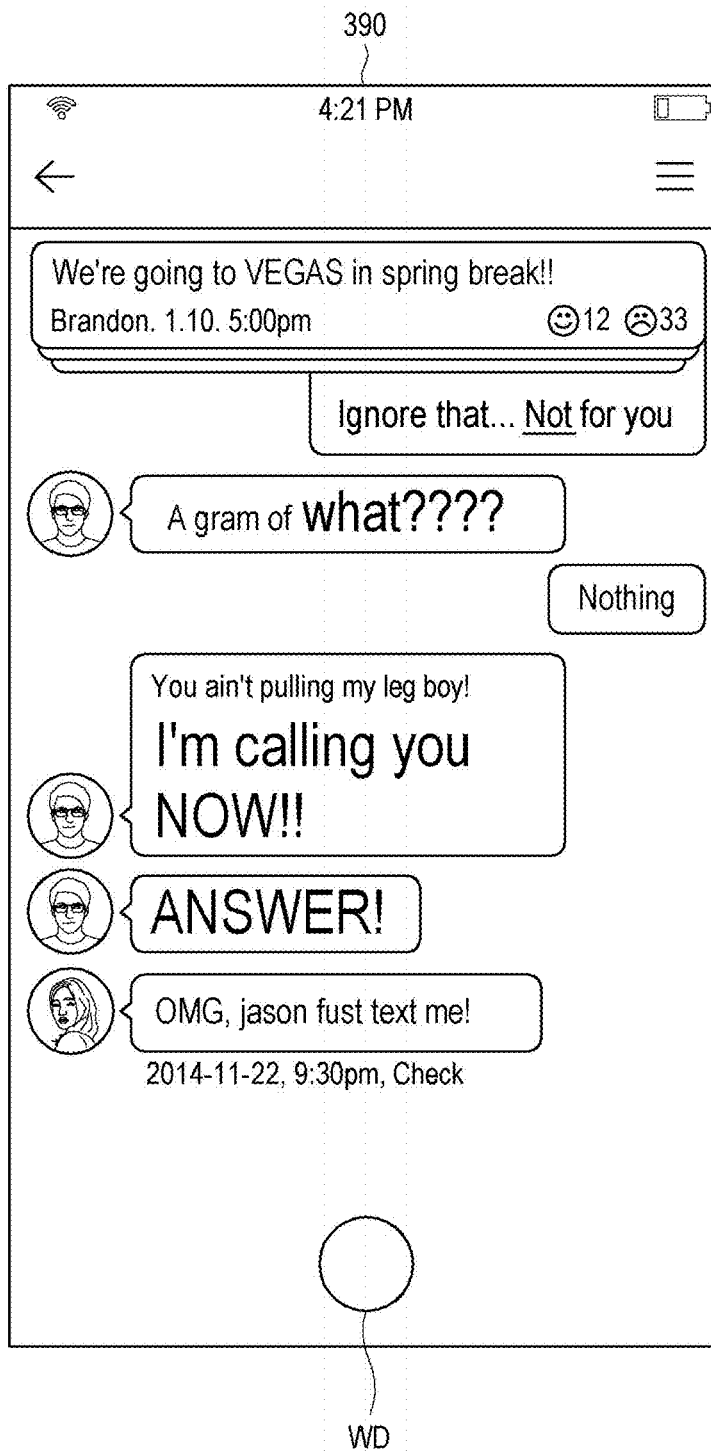


FIG. 11

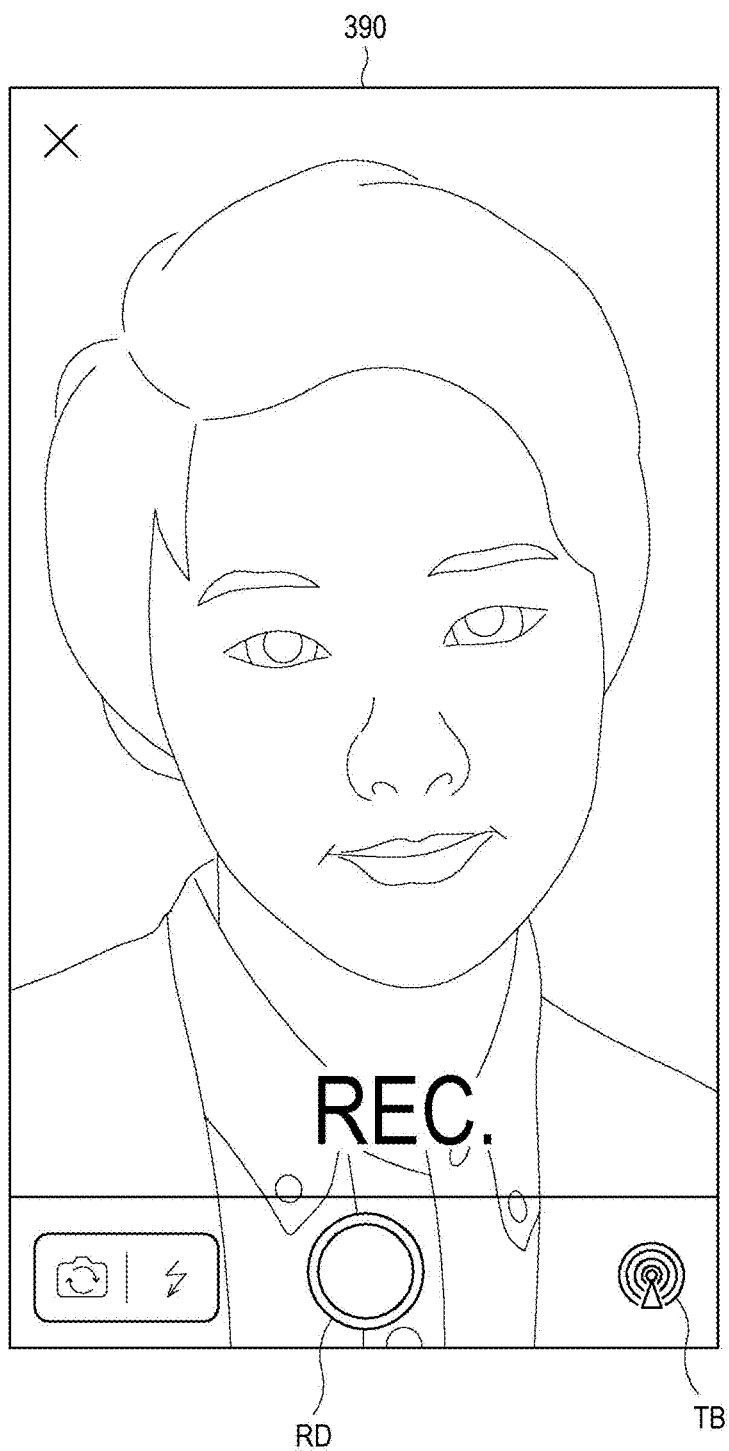


FIG. 12

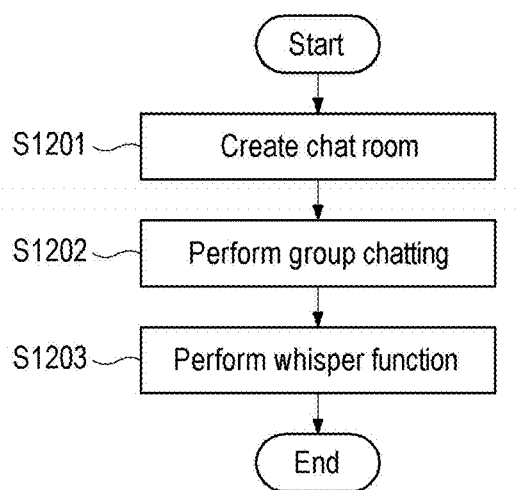


FIG. 13

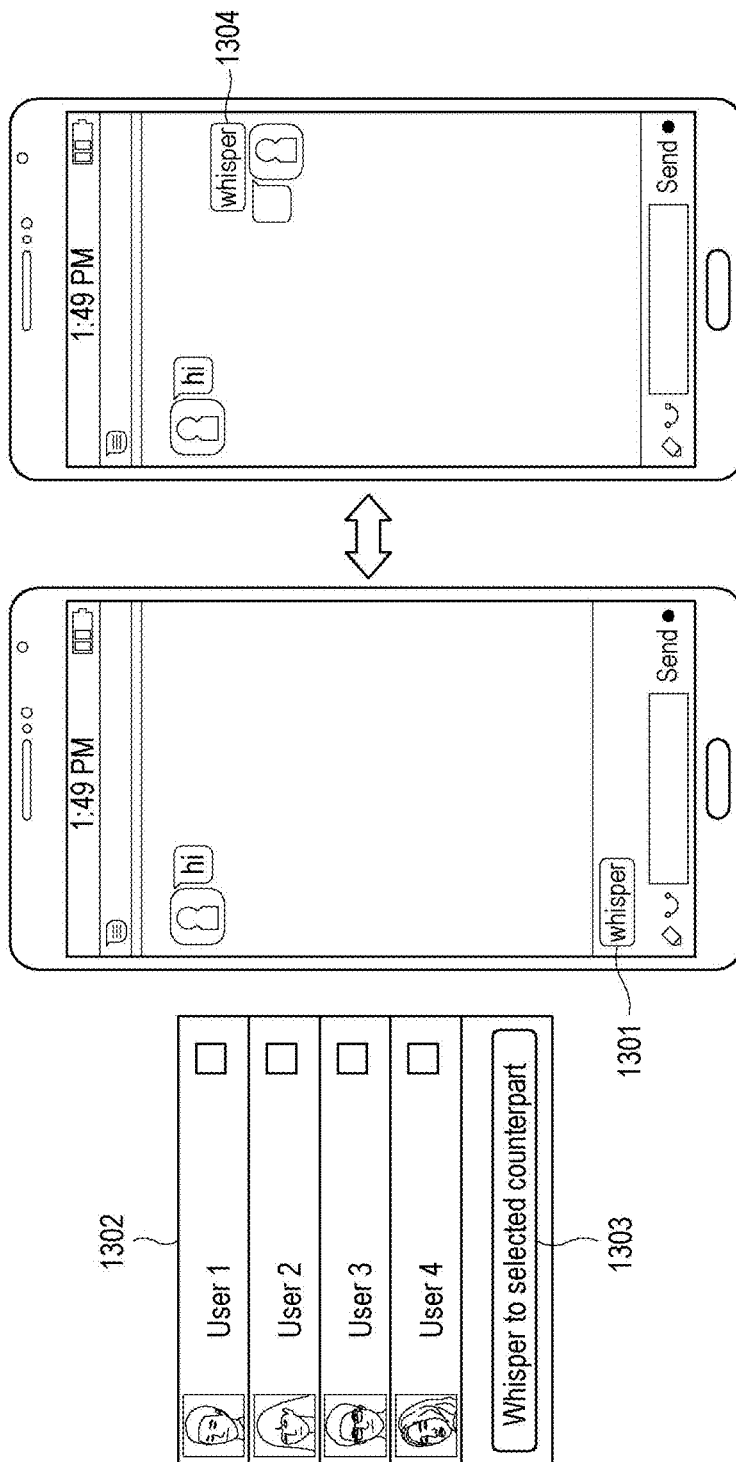


FIG. 14

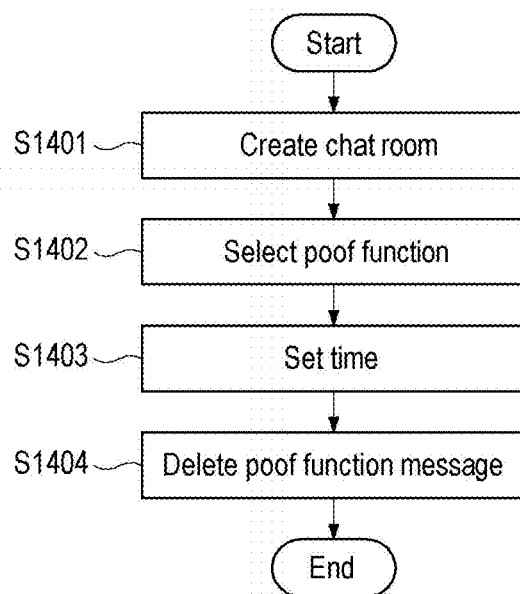


FIG. 15

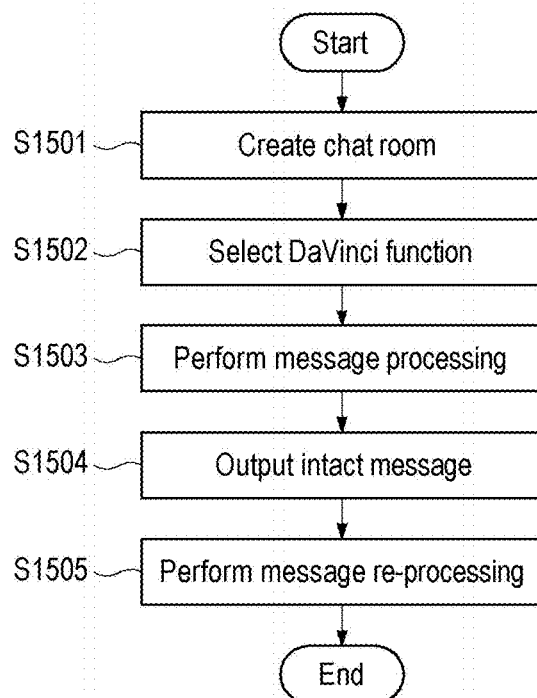


FIG. 16

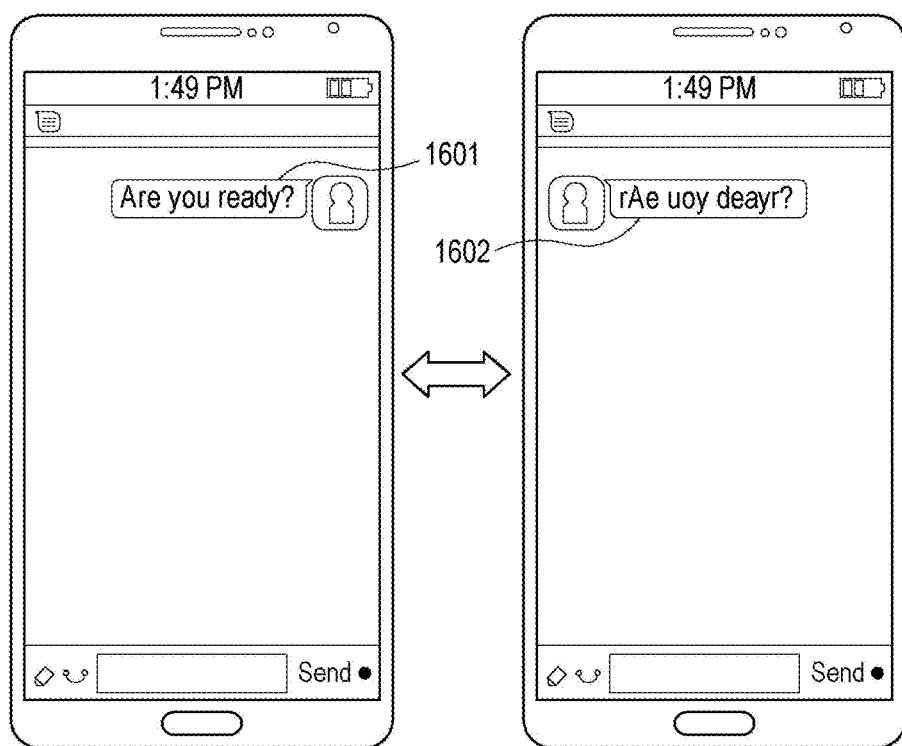


FIG. 17

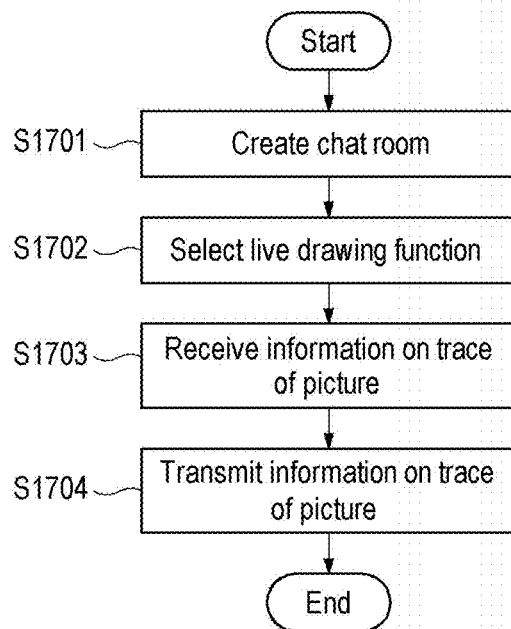


FIG. 18

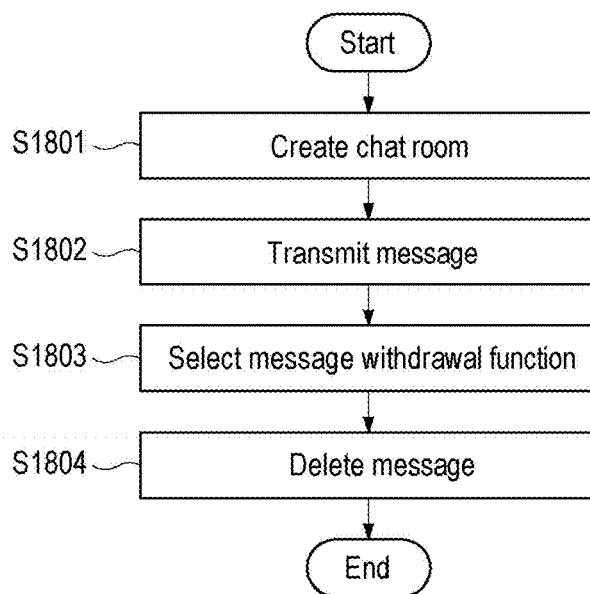


FIG. 19

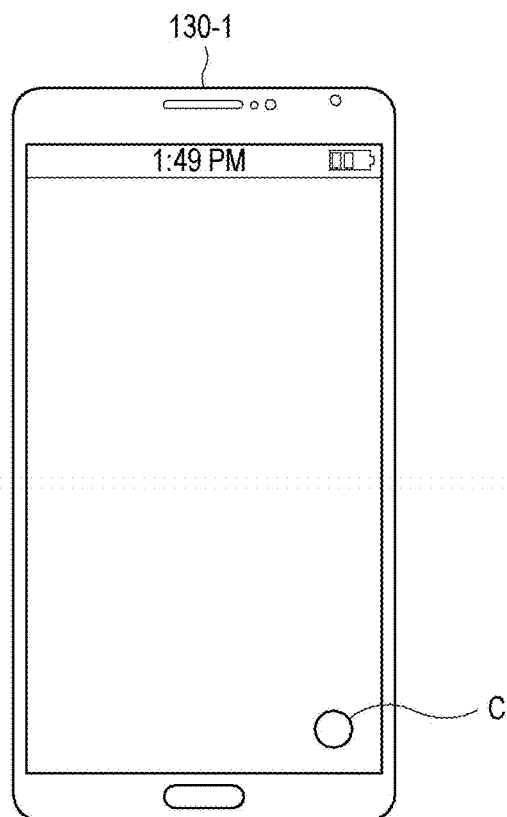


FIG. 20

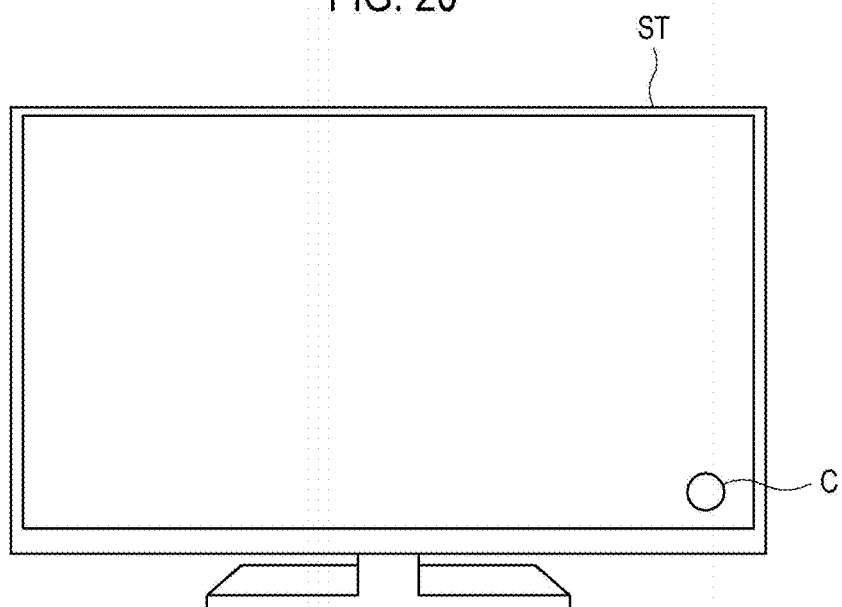


FIG. 21

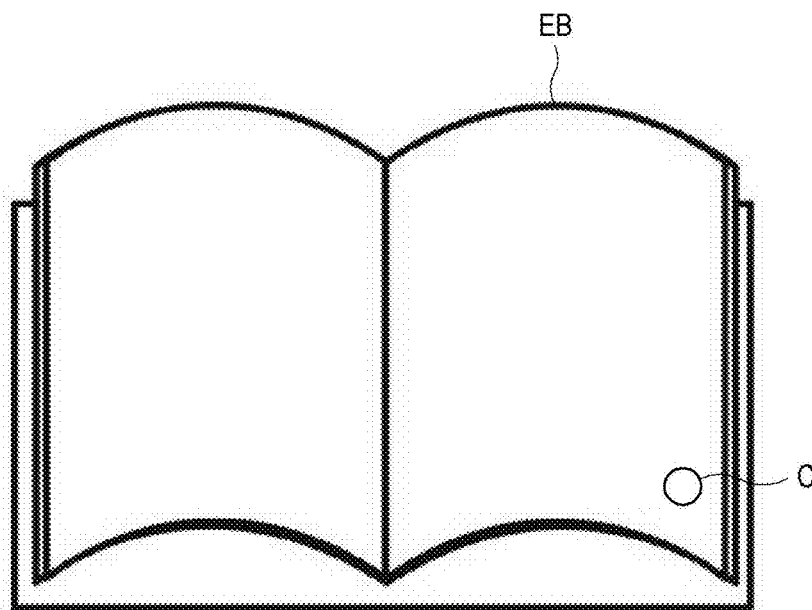


FIG. 22

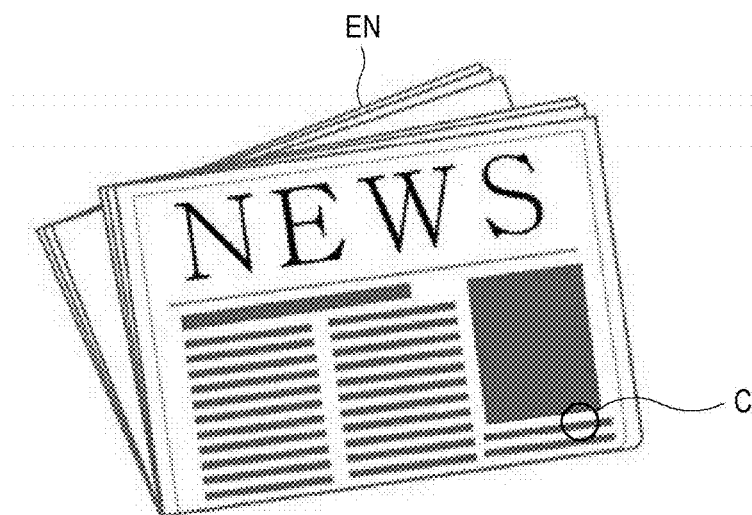


FIG. 23

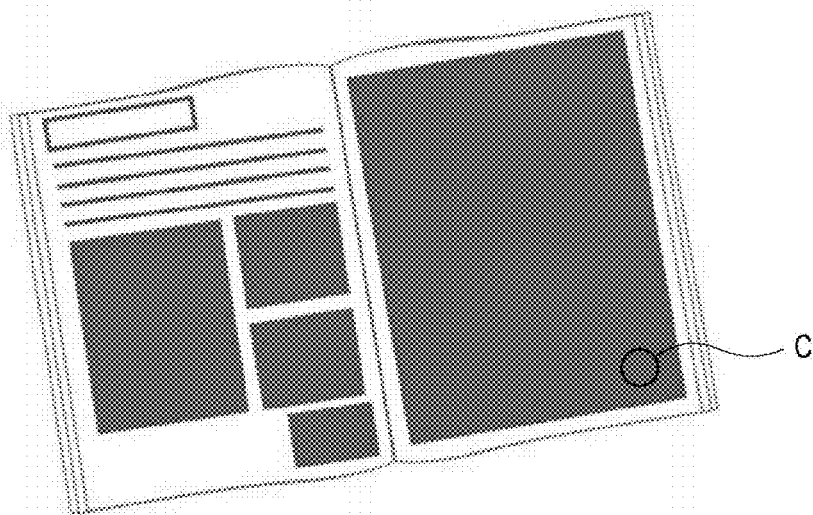


FIG. 24

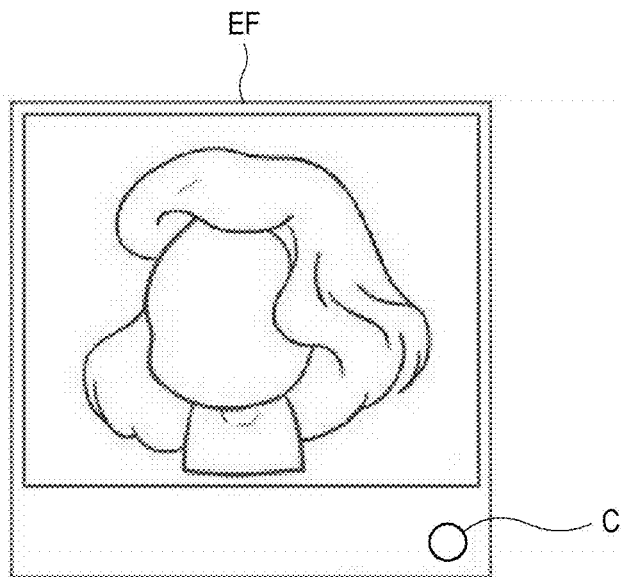


FIG. 25


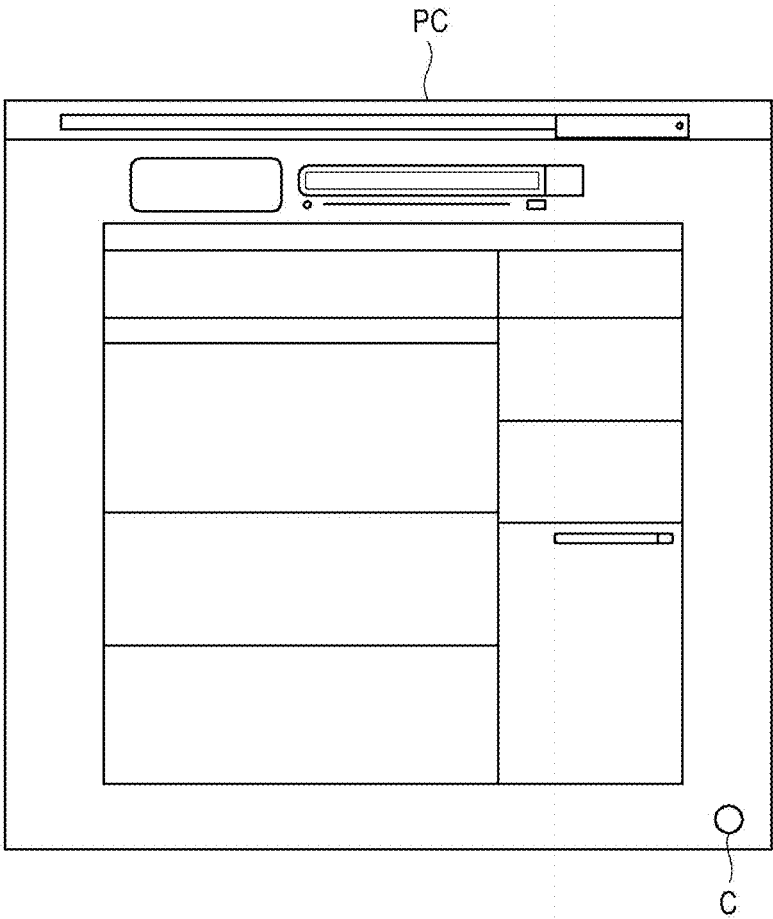


FIG. 26

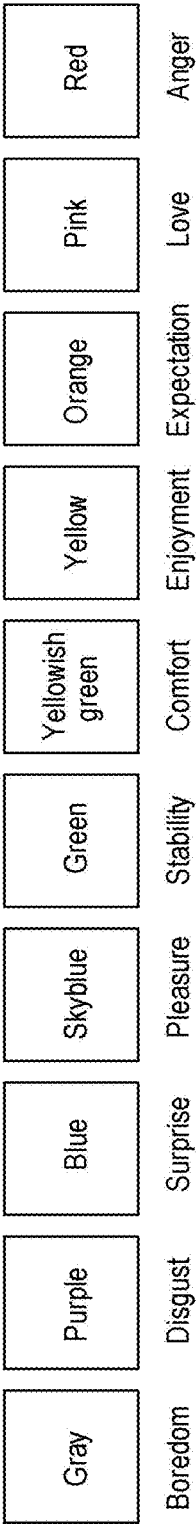

METHOD AND APPARATUS FOR PROVIDING SOCIAL NETWORK SERVICE

TECHNICAL FIELD

[0001] The present disclosure relates to the field of Social Network Service (SNS), and particularly, to a method and apparatus for providing a social network service, which can visualize and express user's emotions or opinions and can randomly arrange or permanently delete the content of conversation exchanged between the user and a counterpart.

BACKGROUND

[0002] Social Network Service (SNS) means an online platform which forms and strengthens social relations through free communication, information sharing, expansion of human network and the like among users. Most of SNSs are web-based services and provide a means for making contact with each other among the users through an e-mail or an instant messenger service.

[0003] An SNS application may provide services such as transfer of pictures, moving images and positions of the users and the like, and a user of the SNS application may communicate an intention to a counterpart using text. In addition, the user of the SNS application may confirm in real-time whether or not the counterpart has read a message, synchronize counterparts registered in a phone book of a cellular phone with a chatting counterpart list of the SNS application, and replace a background screen of a chat window with photos or pictures. Further, the user of the SNS application may communicate an emotion of the user to the counterpart in a chat room by inputting emoticons instead of text.

[0004] A procedure of providing an SNS service using the SNS application is as follows. The SNS application provides the user with the chatting counterpart list. If the user selects a counterpart that the user desires to chat with from the chatting counterpart list, a chat room screen is displayed. The user may additionally invite another chatting counterpart on the chat room screen; and if another chatting counterpart is not added, the user may perform one-to-one chatting with the initially selected counterpart, and if another chatting counterpart is added, the user may perform group chatting. The user inputs text or emoticons on the chat room screen to communicate text or emoticons to the counterpart.

[0005] Recently, leakage of personal information is emerging as an issue, wherein since a conventional SNS application records all of transmitted and received contents of a conversation from beginning to end, a serious infringement of privacy may occur if the contents of conversation are leaked. Furthermore, since the conventional SNS application communicates an intention by using text or emoticons, there is a problem in that an emotion of the user may not be expressed specifically. That is, since an emotion of the user is expressed using only limited emoticons or extremely limited buttons, an accurate and detailed emotion of the user may not be expressed. Since the expression of an emotion is an input of emoticons or text containing an intention of the user, there is a problem in that a content different from actual emotional and biological conditions may be selected so that an inaccurate emotion may be delivered to the counterpart.

Further, since an emotion of the user is expressed using pre-formed emoticons and words, only a simple intention of the user is delivered.

SUMMARY

[0006] The present disclosure provides a method and apparatus for providing a social network service, which can visualize and express user's emotions or opinions and can randomly arrange or permanently delete the content of conversation exchanged between the user and a counterpart.

[0007] A Social Network Service (SNS)-providing method according to the present disclosure, including: a) receiving a chat room creation request from at least one user equipment; b) transmitting information on a user equipment that has transmitted a chat room participation request, among at least one other user equipment located within a predetermined distance from the user equipment that has transmitted the chat room creation request, to the user equipment that has transmitted the chat room creation request; and c) creating a chat room for allowing the user equipment that has transmitted the chat room creation request and at least one other user equipment that has transmitted a chat room participation request to perform messaging communication.

[0008] Further, a Social Network Service (SNS)-providing method according to the present invention, comprising: a) by a user equipment, requesting creation of a chat room; b) receiving, from a server, information on at least one other user equipment located within a predetermined distance from the user equipment and displaying the received information on the user equipment; and c) creating the chat room together with a user equipment that has transmitted a chat room participation request among the at least one other user equipment, to enable messaging communication with the user equipment.

[0009] Further, a Social Network Service (SNS)-providing apparatus includes a reception part for receiving a chat room creation request from at least one user equipment; and a processor for transmitting information on a user equipment that has transmitted a chat room participation request, among at least one other user equipment located within a predetermined distance from the user equipment that has transmitted the chat room creation request, to the user equipment that has transmitted the chat room creation request, and for creating the chat room so that the user equipment that has transmitted the chat room creation request and at least one other user equipment that has transmitted a chat room participation request may perform messaging communication.

[0010] According to the present disclosure, a user can effectively express and communicate an emotional condition of the user by using a social network service and easily and conveniently make use of the social network service, and protection of privacy of SNS users can be reinforced.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a view showing an environment for providing a social network service according to an embodiment of the present disclosure.

[0012] FIG. 2 is a view showing a configuration of a server according to an embodiment of the present disclosure.

[0013] FIG. 3 is a view showing a configuration of a user equipment according to an embodiment of the present disclosure.

[0014] FIGS. 4 to 7 are views showing screens displayed on a user equipment when a location-based SNS chat room is created, according to an embodiment of the present disclosure.

[0015] FIG. 8 is a view showing a Look Around screen for creating an SNS chat room displayed on an output interface of a user equipment, according to an embodiment of the present disclosure.

[0016] FIG. 9 is a view showing a screen for keyword matching displayed on an output interface of a user equipment, according to an embodiment of the present disclosure.

[0017] FIGS. 10 and 11 are views showing a moving image photographing function in an SNS chat room, according to an embodiment of the present disclosure.

[0018] FIG. 12 is a view showing a procedure of performing a function capable of selecting only a specific user and chatting with the user in an SNS chat room, according to an embodiment of the present disclosure.

[0019] FIG. 13 is a view showing a user interface for a whisper function in an SNS chat room, according to an embodiment of the present disclosure.

[0020] FIG. 14 is a view showing a procedure of performing a function capable of deleting a specific message in an SNS chat room, according to an embodiment of the present disclosure.

[0021] FIG. 15 is an exemplary view showing a procedure of performing a function capable of reinforcing security of a specific message in an SNS chat room, according to an embodiment of the present invention.

[0022] FIG. 16 is a view showing a message with a DaVinci function applied thereto in an SNS chat room, according to an embodiment of the present disclosure.

[0023] FIG. 17 is a view showing a procedure of performing a live drawing function capable of drawing a picture in real-time together with a counterpart user in an SNS chat room, according to an embodiment of the present disclosure.

[0024] FIG. 18 is a view showing a procedure of performing a message recall function in an SNS chat room, according to an embodiment of the present disclosure.

[0025] FIGS. 19 to 25 are views showing an emotional signature displayed on various media, according to an embodiment of the present disclosure.

[0026] FIG. 26 is a view showing corresponding colors for expressing emotional signatures of a user, according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0027] Hereinafter, embodiments of the present disclosure will be described in detail with reference to the accompanying drawings. However, in the following description, detailed explanation of well-known functions or configurations will be omitted if it may unnecessarily make the subject matter of the present disclosure unclear.

[0028] FIG. 1 is a view showing an environment for providing a social network service according to an embodiment of the present disclosure.

[0029] As shown in FIG. 1, an environment 100 for providing a social network service (SNS) may include an SNS server 110, a network 120 and a plurality of user

equipments 130-1 to 130-n. Although not shown in the figure, an SNS providing apparatus may include the SNS server 110.

[0030] The SNS server 110 may transmit and receive signals to and from the user equipments 130-1 to 130-n connected through the network 120 to drive and operate an SNS application and relay transmission and reception of messaging signals among the user equipments 130-1 to 130-n. That is, the SNS server 110 may receive a request for the SNS application and data needed for driving and operating the SNS application from a specific user equipment (e.g., 130-1) and transmit the SNS application and data needed for driving and operating the SNS application to the corresponding user equipment 130-1. In addition, the SNS server 110 may receive and store position information from the user equipments 130-1 to 130-n, receive a chat room creation request from a specific user equipment (e.g., 130-1), and transmit information on user equipments 130-n located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the user equipment 130-1, which has transmitted the chat room creation request, to the user equipment 130-1 that has transmitted the chat room creation request. In one embodiment, the SNS server 110 may receive the position information from the user equipments 130-1 to 130-n using a mobile communication network such as a Global Positioning System (GPS), Wi-Fi, 3G, 4G or the like when an SNS application is driven in the user equipments 130-1 to 130-n or when a menu, i.e., an Instant Grouping Menu, for creating a chat room based on the position of a user equipment is driven. In addition, the SNS server 110 may create the chat room in which messaging signals can be transmitted and received and which include user equipments that have transmitted a chat room creation request and the user equipments that have transmitted the chat room participation request, so that a specific user equipment 130-1 may transmit a messaging signal to a user equipment (e.g., 130-n) used by at least one user to which the user equipment 130-1 intends to transmit the corresponding messaging signal. Further, the SNS server 110 may receive a chat room participation request from a plurality of user equipments 130-n, transmit information on user equipments 130-n located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the user equipment 130-1 that has transmitted the chat room creation request to the user equipment 130-1, and create the chat room in which messaging signals may be transmitted and received among the user equipments that have transmitted the chat room participation request. The detailed configuration and functions of the SNS server 110 will be described below.

[0031] The network 120 may relay transmission and reception of signals for providing an SNS between the SNS server 110 and the user equipments 130-1 to 130-n. In one embodiment, the network 120 may include a wireless communication network such as a mobile communication network, a local area network (LAN), a wide area network (WAN) or the like; a wired communication network such as the Internet or the like; and a near field communication network such as Bluetooth, Zigbee, Wi-Fi or the like, but are not limited thereto.

[0032] The user equipments 130-1 to 130-n may receive the chat room creation request or the chat room participation request from users and transmit the chat room creation request or the chat room participation request to the SNS

server 110. Further, the user equipments 130-1 to 130-n may receive an input, such as text, an image, a moving image, an emotional condition of the users, an opinion of the users or the like, from the users; generate a messaging signal based on the input; and transmit the generated messaging signal to the SNS server 110 through the network 120. Further, the user equipments 130-1 to 130-n may display text, an image, a moving image, an emotional condition of the users, an opinion of the users or the like included in the corresponding messaging signal on the display (see “390” of FIG. 4) of the user equipments 130-1 to 130-n using the messaging signal received from other user equipments 130-1 to 130-n through the server 110 and the network 120. In one embodiment, the user equipments 130-1 to 130-n may include a cellular phone such as a smart phone or the like, a personal computer, a terminal dedicated to chatting, and the like. However, the user equipments 130-1 to 130-n may be any apparatus including input devices and output devices and so far as it may communicate with the SNS server 110. The detailed configuration and functions of the user equipment 130-n will be described below.

[0033] FIG. 2 is a view showing a configuration of the server according to an embodiment of the present disclosure.

[0034] As shown in FIG. 2, the SNS server 110 may include a reception part 210, a processor 220, a memory 240, a transmission part 250 and a system bus 260. In one embodiment, the reception part 210, the processor 220, the memory 240 and the transmission part 250 may be connected to one another using the system bus 260.

[0035] The reception part 210 may receive a signal for driving and operating the SNS application, the chat room creation request, the chat room participation request, the SNS message and the like from the user equipment 130-n through the network 120, in the form of a digital packet 270, and transmit the received signal to the processor 220.

[0036] If the reception part 210 receives the signal for driving and operating the SNS application, the chat room creation request or the chat room participation request transmitted from the user equipment 130-1, the processor 220 may store the received signal in the memory 240 and create data, which are needed to drive and operate the SNS application or to create the SNS chat room in the user equipment 130-n, in the form of the digital packet 270. Further, when the processor 220 receives the SNS message from the reception part 210, the processor 220 may perform signal processing needed for the corresponding SNS message and form the SNS message into a digital packet 270 format.

[0037] The transmission part 250 may receive the digital packet 270 formed by the processor 220 and transmit the corresponding digital packet 270 through the network 120 to the user equipment 130-n to which the digital packet is required to be transmitted, using an IP address of the destination.

[0038] FIG. 3 is an exemplary view showing a configuration of the user equipment according to an embodiment of the present disclosure.

[0039] As shown in FIG. 3, the user equipment 130-1 may include a processor 310, a memory 320, an input interface 350, a system bus 360 and an output interface 370. In one embodiment, the processor 310, the memory 320, the input interface 350 and the output interface 370 may be connected to one another through the system bus 360.

[0040] The user equipment 130-1 may further include the input interface 350 and may receive instructions, data, a chat room creation request, a chat room participation request or the like therethrough. Various input devices may be connected to the input interface 350, and the input devices may include an electronic digitizer, a microphone, a pointing device generally referred to as a keyboard or a mouse, a trackball or a touch pad, a joystick, a gamepad, a satellite dish, a scanner and the like, but are not limited thereto. The input interface 350 is a part of a program interacting to exchange information between the user equipment 130-1 and a user and may receive a user request to generate an app driving signal for driving the SNS application and to generate a messaging signal for transmitting various messages including the text, the image, the moving image, the emotional condition of the user, an intention of the user and the like to a counterpart.

[0041] The processor 310 may perform control to receive the app driving signal from the input interface 350, to retrieve an SNS application 334 and data 336 for driving the SNS application from the memory 320, to drive the SNS application and to output the driven SNS application through the output interface 370.

[0042] Further, the processor 310 may receive the chat room creation request or the chat room participation request from the user through the input interface 350 and transmit the chat room creation request or the chat room participation request in the form of a digital packet 340. In addition, the processor 310 may receive a messaging signal from the input interface 350, generate various types of SNS messages including the text, the image, the moving image, the emotional condition of the user, the intention of the user and the like included in the messaging signal, and transmit the SNS message in the form of the digital packet 340. The various types of SNS messages generated by the processor 310 will be described below. Furthermore, the processor 310 may control the output interface 370 to display the text, the image, the moving image, the emotional condition of the user, the intention of the user and the like included in a corresponding SNS message to the user through the output interface 370 using the SNS message received in the form of the digital packet 340 from the SNS server 110 through the network 120.

[0043] The memory 320 may store the SNS application 334 and the data 336 for driving and operating the SNS application and for creating the chat room. In one embodiment, the memory 320 may include those implemented in the form of Read Only Memory (ROM), Random Access Memory (RAM), Compact Disc ROM (CD-ROM), a magnetic tape, a floppy disk, an optical data storage device or a carrier wave (e.g., transmission over the Internet), but is not limited thereto.

[0044] The output interface 370 may display the SNS application driven by the processor 310 and display the content input by the user who has seen the displayed SNS application, through the input interface 350 on the SNS application in the form of an SNS message. Further, the output interface 370 may display information on the user equipments located within a predetermined distance based on a distance from the user equipment, which has transmitted the chat room creation request, to the corresponding user equipment by using the information received from the SNS server 110, display a profile (e.g., an image, a name or the like) of the users using the user equipments regardless of the

distance, or display the information on the user equipments in the shape of dotted lines (see “DL” of FIG. 6). In addition, the output interface 370 may display various types of SNS messages received from a counterpart user through the network 120 on the screen. In one embodiment, the output interface 370 may include those implemented in the form of a Liquid Crystal Display (LCD), a Light Emitting Diode (LED) display, an Organic LED (OLED) display and the like, but is not limited thereto.

[0045] FIGS. 4 to 7 are views showing screens displayed on the user equipment when a location-based SNS chat room is created, according to an embodiment of the present disclosure.

[0046] In one embodiment, when a menu (an Instant Grouping Menu) for creating the SNS chat room based on the position of the user equipment 130-1 is driven, the SNS server 110 may receive and store position information on a corresponding user equipment 130-1. Meanwhile, when the chat room creation request is received from the specific user equipment 130-1, the SNS server 110 may transmit information on other user equipments 130-*n*, which are located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the user equipment 130-1, to the user equipment 130-1. In one embodiment, a user interface consisting of three circles UC, CC and LC as shown in FIG. 4 may be displayed on the output interface 370 of the user equipment 130-1 that has selected the Instant Grouping Menu, and the user may transmit the chat room creation request to the SNS server 110 by moving the circle CC in the middle of the display 390 into the upper circle UC indicated as “Lead” while touching the circle CC (by “drag and drop”) as shown in FIG. 5. In addition, the SNS server 110 may inquire other user equipments 130-*n* located within a predetermined distance from the user equipment 130-1 whether or not to participate in the chat room, and a user who desires to participate in the chat room may transmit the chat room participation request to the SNS server 110. In one embodiment, a user interface consisting of three circles UC, CC and LC as shown in FIG. 4 may be displayed on the output interface 370 of other user equipments 130-*n* located within a predetermined distance from the user equipment 130-1, and a corresponding user may transmit the chat room participation request to the SNS server 110 by moving the circle CC in the middle into the lower circle LC indicated as “Join” while touching the circle CC (by “drag and drop”). In addition, when a predetermined time (e.g., three to five seconds) elapses after the user has moved the circle CC in the middle into the upper circle UC indicated as “Lead” as shown in FIG. 5 at the user equipment 130-1 which has transmitted the chat room creation request, an SNS chat room creation screen as shown in FIG. 6 may be displayed, and the user equipments which have transmitted chat room participation requests may be displayed on the display 390 in the shape of dotted lines DL. Moreover, the SNS server 110 may create the SNS chat room for the user equipment 130-1 which has transmitted the chat room creation request and for the user equipments 130-*n* which have transmitted the chat room participation request to participate in the chat room, and the user equipment 130-1 which has transmitted the chat room creation request and the user equipments 130-*n* which have transmitted the chat room participation request may exchange text, images, moving images, emotional conditions of the users, intentions of the users and the like as messaging signals. In one embodiment, the user

equipments participating in the chat room may be displayed in the upper half circle UHC of the display 390 shown in FIG. 7, and the user equipments that do not participate in the chat room may be displayed outside the upper half circle UHC. Furthermore, the user equipment 130-1 which has transmitted the chat room creation request may withdraw a specific user out of the chat room by selecting the corresponding user among the users participating in the chat room and moving the user out of the upper half circle UHC and may cause a specific user to be involved in the chat room by selecting a corresponding user among the users located outside the upper half circle UHC and moving the user into the upper half circle UHC. In conventional SNS applications, a group chat room including corresponding users can be created only when all the users exchange phone numbers with one another and each of the users registers the other users as friends, whereas according to an embodiment of the present disclosure, an SNS chat room based on the position of a user equipment can be created by only one operation of a specific user regardless of the number of users. According to an embodiment of the present disclosure, exchange of personal information such as a phone number, an e-mail address and the like between users to create a chat room can be omitted.

[0047] FIG. 8 is a view showing a Look Around screen for creating the SNS chat room displayed on an output interface of the user equipment, according to an embodiment of the present disclosure.

[0048] As shown in FIG. 8, when a Look Around menu (see FIG. 9) is selected at the specific user equipment 130-1, the user equipment 130-1 may transmit position information to the SNS server 110, and the SNS server 110 may transmit information on the user equipments, which are located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the corresponding user equipment 130-1, to the corresponding user equipment 130-1. The user equipment 130-1 that has received the information on the neighboring user equipments may display the neighboring user equipments in circular shapes CS and display the group chat room created in the method described with reference to FIGS. 4 to 7 in square shapes RS based on the position of the user equipment 130-1. Moreover, the distance from the user equipment 130-1 to the neighboring user equipments 130-*n* or to the user equipments 130-*n* which have transmitted the chat room creation request may be displayed using a plurality of concentric circles SC, and the profile of the user using the user equipment 130-1 may be displayed at the center of the concentric circles CSC. In addition, when the user selects a circular shape CS displayed on the output interface 370 and moves the circular shape CS to the center of the concentric circles CSC, the user may create a one-to-one chat room with a user equipment corresponding to the circular shape CS; and when the user selects a square shape RS and moves the square shape RS to the center of the concentric circles CSC, the user may participate in the group chat room corresponding to the square shape RS. In one embodiment, the number of circular shapes CS or square shapes RS which can be displayed on the output interface 370 is determined to include a certain number (e.g., twenty to fifty) of user equipments or chat rooms in the order of straight distance closer to the corresponding user equipment 130-1, among the user equipments located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the corresponding user equipment 130-1. In

addition, when the user selects a circular shape CS or a square shape RS displayed on the output interface 370 and moves it to the outside of the concentric circles SC, a user equipment corresponding to the circular shape CS or a group chat room corresponding to the square shape RS may not be displayed on the output interface 370; and if all the circular shapes CS or the square shapes RS displayed on the output interface 370 are moved to the outside of the concentric circles SC, a certain number (e.g., twenty to fifty) of user equipments or group chat rooms may be displayed on the output interface 370 in the order of distance from the closest proximity to the corresponding user equipment 130-1.

[0049] FIG. 9 is a view showing a screen for keyword matching displayed on an output interface of the user equipment, according to an embodiment of the present disclosure.

[0050] As shown in FIG. 9, the SNS application user may select a search menu SM from the Look Around screen on the display 390 for creating the SNS chat room and then input a keyword of interest (e.g., “mountain”). The SNS server 110 that has received information on the keyword input by the user may transmit information on the user equipment 130-*n*, which has input the same keyword “mountain” among the user equipments 130-*n* located within a predetermined distance (e.g., 1 km, 10 km, 100 km, 200 km or the like) from the corresponding user equipment 130-1 based on the position information of the user equipment 130-1 which has input the keyword, so that the transmitted information may be displayed in the form of an exclamation mark EM.

[0051] FIGS. 10 and 11 are exemplary views showing the moving image photographing function in the SNS chat room, according to an embodiment of the present disclosure.

[0052] As shown in FIG. 10, when the user presses a moving image photographing mode button WD at a lower portion of the display 390 for a predetermined time (e.g., two to three seconds) or more in the SNS chat room, the display 390 may be switched to a video recording mode as shown in FIG. 11. In the video recording mode, video is recorded and stored in the corresponding user equipment 130-1 so far as a recording button RD is pressed, and when a transmission button TB is selected, a moving image file stored in the user equipment 130-1 may be transmitted to the SNS server 110. The moving image file stored in the SNS server 110 may be confirmed in the form of a moving image, e.g., a thumbnail, in real-time by using a method such as streaming or the like at the user equipments 130-*n* participating in the SNS chat room including the user equipment 130-1. A moving image can be easily photographed in the SNS chat room and transmitted to a counterpart user in this manner, and this may substitute for the function of an emoticon or a sticker among SNS functions.

[0053] FIG. 12 is a view showing a procedure of performing a function capable of selecting only a specific user and chatting with the user in the SNS chat room, according to an embodiment of the present disclosure.

[0054] As shown in FIG. 12, when the SNS application is driven in the user equipment 130-1, a chatting counterpart list can be confirmed, and the SNS chat room can be created by selecting a desired chatting counterpart (step S1201). In another embodiment, the SNS chat room can be created using a method of creating the SNS chat room based on the position of the user equipment 130-1 described with reference to FIGS. 4 to 8. The user may perform group chatting

at the user equipment 130-1 (step S1202). Particularly, the user may perform one-to-one chatting by selecting only a specific counterpart from the chatting counterpart list or may perform group chatting if another user is invited while performing one-to-one chatting. When the group chatting is performed, the user may perform a so-called whisper function of selecting at least one user among the users participating in the group chatting and separately chatting with the user (step S1203). The use of the whisper function enables an SNS message to be transmitted only to the at least one user selected among the users participating in the group chatting.

[0055] FIG. 13 is a view showing a user interface for the whisper function in the SNS chat room, according to an embodiment of the present disclosure.

[0056] As shown in FIG. 13, when the whisper function is selected in the SNS chat room for group chatting, a list of users 1302 participating in the group chatting can be displayed. When specific users are selected from the list of group chatting users and a whisper function performing button 1303 is selected, “whisper” 1304 indicating the whisper function may be displayed in messages transmitted and received using the whisper function.

[0057] FIG. 14 is an exemplary view showing a procedure of performing a function capable of deleting a specific message in an SNS chat room, according to an embodiment of the present disclosure.

[0058] As shown in FIG. 14, when the SNS application is driven in the user equipment 130-1, the chatting counterpart list can be confirmed, and the SNS chat room can be created by selecting a desired chatting counterpart (step S1401). In another embodiment, the SNS chat room may be created using a method of creating the SNS chat room based on the position of the user equipment 130-1 described with reference to FIGS. 4 to 8. The user may select a so-called poof function at the user equipment 130-1 to cause a message to automatically disappear after a predetermined time elapses, upon transmission of the message in the chat room (step S1402) and may set, by way of user input, a time for sustaining the message until the message with the poof function applied thereto is deleted after the message is confirmed at the counterpart user equipment 130-*n* (step S1403). When a request for transmitting a message with the poof function applied thereto is received, the SNS server 110 may delete the corresponding message from the counterpart user equipment 130-*n* and/or the SNS server 110 when a predetermined time elapses after the message with the poof function applied thereto is confirmed at the counterpart user equipment 130-*n* (step S1404). In this case, the corresponding message may be deleted even from the user equipment 130-1.

[0059] FIG. 15 is a view showing a procedure of performing a function capable of reinforcing security of a specific message in an SNS chat room, according to an embodiment of the present disclosure.

[0060] As shown in FIG. 15, when the SNS application is driven in the user equipment 130-1, the chatting counterpart list can be confirmed, and the SNS chat room can be created by selecting a desired chatting counterpart (step S1501). In another embodiment, the SNS chat room may be created using a method of creating the SNS chat room based on the position of the user equipment 130-1 described with reference to FIGS. 4 to 8. The user may select a DaVinci function at the user equipment 130-1 to reinforce security of a

message by encrypting the message upon transmission of the message in the chat room (step S1502). The SNS server 110 may transmit the message with the DaVinci function applied thereto to a counterpart user equipment after processing the message by randomly arranging text on a syntactic word basis and randomly arranging images on a pixel basis and performing mosaic processing for hiding a specific portion of a moving image or performing blur effect processing for blurring a specific portion of the moving image (step S1503). When the message with the DaVinci function applied thereto is confirmed at the counterpart user equipment, an intact message is output (step S1504) so that the user may confirm the message; and when a predetermined time (e.g., ten to twenty seconds) elapses after the message is confirmed, the text and the images are randomly arranged on the syntactic word and pixel basis, respectively, and re-processing such as mosaic or blur effect processing is performed on the moving image (step S1505) so that an intact message may not be confirmed. In FIG. 16, reference numeral 1601 represents an intact text image, and reference numeral 1602 represents a text message with the DaVinci function applied thereto.

[0061] FIG. 17 is a view showing a procedure of performing a live drawing function capable of drawing a picture in real-time together with counterpart users in the SNS chat room, according to an embodiment of the present disclosure.

[0062] As shown in FIG. 17, when the SNS application is driven in the user equipment 130-1, the chatting counterpart list can be confirmed, and the SNS chat room can be created by selecting a desired chatting counterpart (step S1701). In another embodiment, the SNS chat room may be created using a method of creating the SNS chat room based on the position of the user equipment 130-1 described with reference to FIGS. 4 to 8. The user may select a live drawing function in the chat room at the user equipment 130-1 (step S1702). When the user draws a picture at the user equipment using the live drawing function, the SNS server 110 may receive information on a trace of the picture (step S1703) and transmit information on the corresponding trace to the counterpart user equipments 130-n (step S1704) so that the same picture may appear on a plurality of remotely positioned user equipments 130-n.

[0063] FIG. 18 is a view showing a procedure of performing a message recall function in an SNS chat room, according to an embodiment of the present disclosure.

[0064] As shown in FIG. 18, when the SNS application is driven in the user equipment 130-1, the chatting counterpart list can be confirmed, and the SNS chat room can be created by selecting a desired chatting counterpart (step S1801). In another embodiment, the SNS chat room may be created using a method of creating an SNS chat room based on the position of the user equipment 130-1 described with reference to FIGS. 4 to 8. The user may transmit a message to a counterpart user equipment 130-n at the user equipment 130-1 (step S1802) and may select a specific message after transmitting the message and then select a message recall function (step S1803). When a message recall request is received from the specific user equipment 130-1, the SNS server 110 may delete the corresponding message from the counterpart user equipment 130-n and the SNS server 110 (step S1804).

[0065] An emotional signature (eMo) technique according to an embodiment of the present disclosure allows the SNS server 110 to digitize various emotional conditions of an

SNS user and to transfer them to a counterpart user. In order to digitize various emotional conditions of the user, the user equipment 130-1 can be used to analyze the body temperature, blood flow, heartbeat, moisture of the skin, loudness of a voice, trembling of a voice, typing pattern, image pattern, video pattern and the like of the user. Further, in order to digitize an emotional condition of a user, it is possible to use at least one active method of directly inputting an emotional condition by the user using the user equipment 130-1 and one passive method of sensing an emotional condition of the user by the user equipment 130-1. In one embodiment, as one of the passive methods, a heartbeat rate per minute of the user can be measured using a heartbeat rate measurement sensor attached to the user equipment 130-1. A heartbeat rate of the user between forty and sixty may show a stable state (e.g., an emotional condition of comfort, pleasure or the like), a heartbeat rate between sixty and seventy may show a slightly excited state (e.g., an emotional condition of love, enjoyment or the like) and a heartbeat rate between seventy and one hundred may show an extremely excited state (e.g., an emotional condition of anger or the like). In another embodiment, as one of the passive methods, an emotional condition of the user can be digitized according to how many times a specific word has been used while the user exchanges messages with a counterpart. For example, if the word "love" has been used a predetermined number of times (e.g., five to ten times) while transmitting and receiving messages, an emotional condition of love can be expressed through a big data analysis. In another embodiment, as one of the passive methods, if a face included in an image is recognized as smiling, an emotional condition of pleasure may be expressed, or if the face is recognized as frowning, an emotional condition of anger may be expressed. In another embodiment, if a voice input by the user through the user equipment 130-1 is not greater than a predetermined level (e.g., 10 to 15 dB), a stable emotional condition may be expressed, and if the voice is not less than a predetermined level (e.g., 25 to 35 dB), an excited (angered) emotional condition (anger) may be expressed.

[0066] In one embodiment, the SNS server 110 may express an emotional condition in a circular shape (see "C" of FIG. 19) or the like blinking at an end of an SNS message, an image, a moving image, text or the like by using digitized emotional condition data (e.g., love, pleasure, anger or the like) of the user. The emotional condition may be expressed in a triangular or square shape instead of the circular shape. In addition, the expressed emotional condition may reflect the emotional condition of the user changing in real-time.

[0067] The SNS providing environment 100, i.e., the SNS server 110 and the user equipments 130-1 to 130-n, may share the digitized emotional condition of the user. That is, a specific user equipment 130-1 may measure an emotional condition of a user, transmit a corresponding measurement value of the emotional condition of the user to the SNS server 110 to be stored therein, and transmit the digitized emotional condition of the user to other user equipments 130-n connected through the network 120. The SNS server 110 may perform various signal processing such as analysis, statistics and the like using the digitized emotional condition data of the user received from the user equipments 130-1 to 130-n.

[0068] In addition, a specific user equipment 130-1 may transmit a measurement value of an emotional condition of a user to other user equipments 130-n connected using the

network **120** without passing through the SNS server **110**. In one embodiment, the user equipments **130-1** to **130-n** may include various smart devices such as a personal computer, a tablet, a smart phone, a notebook computer, a personal digital assistant (PDA) and the like. In one embodiment, the SNS server **110** may store the digitized emotional condition of a user together with and incorporated into data of an SNS message, an image, a moving image, text or the like or separately from an SNS message data, an image, a moving image, text or the like.

[0069] FIGS. **19** to **26** are views showing an emotional signature displayed on a variety of media, according to an embodiment of the present disclosure. FIG. **19** shows an emotional signature displayed in a circular shape **C** on the user equipment **130-1** such as a smart phone or the like. Such an emotional signature may be used to express an emotion by the user himself/herself even during general use of the user equipment **130-1** (e.g., calling, web surfing or the like), may be transmitted together upon transmission of a message in the SNS chat room as shown in FIG. **10**, and may be transmitted together with a moving image even upon transmission of the moving image as shown in FIG. **11**, but it is not limited thereto. FIG. **20** shows an emotional signature expressed in a circular shape **C** on a smart television set **ST**, FIG. **21** shows an emotional signature expressed in a circular shape **C** on an electronic book **EB**, FIG. **22** shows an emotional signature expressed in a circular shape **C** on an electronic newspaper **EN**, FIG. **23** shows an emotional signature expressed in a circular shape **C** on an electronic magazine **E-M**, FIG. **24** shows an emotional signature expressed in a circular shape **C** on an electronic picture frame **EF**, and FIG. **25** shows an emotional signature expressed in a circular shape **C** on a web page of a personal computer **PC**.

[0070] FIG. **26** is a view showing responsive colors for expression emotional signatures of a user, according to an embodiment of the present disclosure.

[0071] As shown in FIG. **26**, the SNS server **110** may store the emotional condition of the user by mapping boredom to gray, disgust to purple, surprise to blue, pleasure to sky-blue, stability to green, comfort to yellowish green, enjoyment to yellow, expectation to orange, love to pink and anger to red. Further, when the SNS server **110** receives the digitized emotional signature of the user, it may display a color mapped to the corresponding emotional signature at an end of an SNS message, an image, a moving image, text or the like, for example, in a circular shape (see “**C**” of FIG. **25**).

[0072] While the foregoing methods have been described with respect to particular embodiments, these methods may also be implemented as computer-readable codes on a computer-readable recording medium. The computer-readable recording medium includes any kind of data storage devices that can be read by a computer system. Examples of the computer-readable recording medium include ROM, RAM, CD-ROM, magnetic tape, floppy disk, optical data storage device and the like, and also include that implemented in the form of a carrier wave (e.g., transmission via Internet). Also, the computer-readable recording medium can be distributed to the computer systems which are connected via a network so that the computer-readable codes can be used and executed thereon. Further, the functional programs, codes, and code segments for implementing the foregoing embodiments can easily be inferred by the programmers in the art to which the present disclosure pertains.

[0073] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. Furthermore, numerous variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the appended claims.

What is claimed is:

1. A Social Network Service (SNS)-providing method, comprising:

- a) receiving a chat room creation request from at least one user equipment;
- b) transmitting information on a user equipment that has transmitted a chat room participation request, among at least one other user equipment located within a predetermined distance from the user equipment that has transmitted the chat room creation request, to the user equipment that has transmitted the chat room creation request; and
- c) creating a chat room for allowing the user equipment that has transmitted the chat room creation request and at least one other user equipment that has transmitted the chat room participation request to perform messaging communication.

2. The SNS-providing method of claim 1, further comprising: receiving position information from a plurality of user equipments via a network before the step a).

3. The SNS-providing method of claim 2, wherein the position information is received from the plurality of user equipments when the plurality of user equipments drives an Instant Grouping Menu for creating the chat room.

4. The SNS-providing method of claim 2, wherein the position information is measured using a Global Positioning System (GPS), Wi-Fi or a mobile communication network.

5. The SNS-providing method of claim 1, further comprising: receiving an emotional signature from one user equipment among user equipments participating in the chat room and transmitting the emotional signature to be displayed on the user equipments participating in the chat room.

6. The SNS-providing method of claim 1, further comprising: if a function of causing a message to disappear after a predetermined time elapses upon transmission of the message from one user equipment among user equipments participating in the chat room is selected, the step of deleting the message from user equipments other than the one user equipment when the predetermined time elapses after the message is confirmed by the user equipments other than the one user equipment.

7. The SNS-providing method of claim 1, further comprising: if a function of reinforcing security of a message upon transmission of the message from one user equipment among user equipments participating in the chat room is selected, the step of encrypting the message and transmitting the encrypted message to user equipments other than the one user equipment, outputting the intact message when the message is confirmed, and re-encrypting the message when a predetermined time elapses after the message is confirmed.

8. The SNS-providing method of claim 1, further comprising: if a live drawing function is selected by one user equipment among user equipments participating in the chat room, the step of receiving information on a trace of a

picture when the picture is drawn at the user equipments and transmitting the information on the trace to the user equipments so that the same picture is displayed on the user equipments.

9. A Social Network Service (SNS)-providing method, comprising:

- a) by a user equipment, requesting creation of a chat room;
- b) receiving, from a server, information on at least one other user equipment located within a predetermined distance from the user equipment and displaying the received information on the user equipment; and
- c) creating the chat room together with a user equipment that has transmitted a chat room participation request among the at least one other user equipment, to enable messaging communication with the user equipment.

10. The SNS-providing method of claim 9, wherein the step b) is displaying information on the at least one other user equipment based on a distance from the user equipment that has transmitted the chat room creation request to the at least one other user equipment, or displaying a profile of a user utilizing the at least one other user equipment, regardless of the distance.

11. A Social Network Service (SNS)-providing apparatus, comprising:

- a reception part for receiving a chat room creation request from at least one user equipment; and
- a processor for transmitting information on a user equipment that has transmitted a chat room participation request, among at least one other user equipment located within a predetermined distance from the user equipment that has transmitted the chat room creation request, to the user equipment that has transmitted the chat room creation request, and for creating the chat room so that the user equipment that has transmitted the chat room creation request and at least one other user equipment that has transmitted a chat room participation request may perform messaging communication.

12. The SNS-providing apparatus of claim 11, wherein the reception part receives position information from a plurality of user equipments via a network.

13. The SNS-providing apparatus of claim 12, wherein the position information is received from the plurality of user equipments when the plurality of user equipments drives an Instant Grouping Menu for creating the chat room.

14. The SNS-providing apparatus of claim 12, wherein the position information is measured using a Global Positioning System (GPS), Wi-Fi or a mobile communication network.

15. The SNS-providing apparatus of claim 11, wherein the processor receives an emotional signature from one user equipment among user equipments participating in the chat room and transmits the emotional signature to be displayed on the user equipments participating in the chat room.

16. The SNS-providing apparatus of claim 11, wherein the processor performs control to delete a message from user equipments other than one user equipment when the predetermined time elapses after the message is confirmed by the user equipments other than the one user equipment, if a function of causing the message to disappear after a predetermined time elapses upon transmission of the message from the one user equipment among the user equipments participating in the chat room is selected.

17. The SNS-providing apparatus of claim 11, wherein the processor performs control to encrypt a message and transmit the encrypted message to user equipments other than one user equipment, output the intact message when the message is confirmed, and re-encrypt the message when a predetermined time elapses after the message is confirmed, if a function of reinforcing security of the message upon transmission of the message from the one user equipment among the user equipments participating in the chat room is selected.

18. The SNS-providing apparatus of claim 11, wherein the processor performs control to receive information on a trace of a picture when a picture is drawn at the user equipments and transmit the information on the trace to the user equipments so that the same picture may be displayed on the user equipments, if a live drawing function is selected by one user equipment among the user equipments participating in the chat room.

* * * * *