

**(19) AUSTRALIAN PATENT OFFICE**

(54) Title  
Surgical instrument kit for treating female urinary  
incontinence

(51)<sup>6</sup> International Patent Classification(s)  
A61F 2/00 060101BHAU  
(2006.01) PCT/US02/1477  
A61F 2/00 0  
20060101AFI20

(21) Application No: 2002345375 (22) Application Date: 2002.05.10

(87) WIPO No: W002/098322

(30) Priority Data

(31) Number (32) Date (33) Country  
09/873,571 2001.06.04 US

(43) Publication Date : 2002.12.16

(43) Publication Journal Date : 2003.05.08

(71) Applicant(s)  
Ethicon, GmbH; Ethicon, Inc.

(72) Inventor(s)  
Kammerer, Gene W.; Landgrebe, Susanne; Luscombe, Brian;  
Hoepffner, Hans-Jochen

(74) Agent/Attorney  
Callinan Lawrie, 711 High Street, Kew, VIC, 3101

(56) Related Art  
US 6406423  
US 6273852  
DE 4220283  
WO 2002/028312

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 December 2002 (12.12.2002)

PCT

(10) International Publication Number  
**WO 02/098322 A1**


- (51) International Patent Classification: **A61F 2/00** 23867 Sulfeld (DE), **LUSCOMBE, Brian**; 51 Vollers Drive, Branchburg, NJ 08876-3408 (US).
- (21) International Application Number: PCT/US02/14770
- (22) International Filing Date: 10 May 2002 (10.05.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/873,571 4 June 2001 (04.06.2001) US
- (71) Applicant: **ETHICON, INC.** [US/US]; U.S. Route 22, Somerville, NJ 08876 (US).
- (72) Inventors: **KAMMERER, Gene, W.**; 14 Stephens Drive, East Brunswick, NJ 08816 (US); **HOEPFFNER, Hans-Jochen**; 41 Matthews Farm Road, Belle Mead, NJ 08502 (US); **LANDGREBE, Susanne**; Zuckerhut 3,
- (74) Agents: **JOHNSON, Philip, S.**, et al.; JOHNSON & JOHNSON, 1 Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).
- (81) Designated States (*national*): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GR, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: SURGICAL INSTRUMENT KIT FOR TREATING FEMALE URINARY INCONTINENCE



WO 02/098322 A1

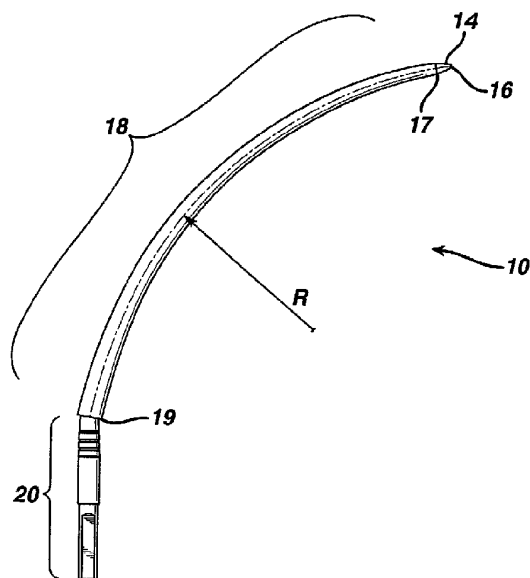

(57) Abstract: Described is a surgical instrument for treating female urinary stress incontinence. The instrument includes a first curved needle element (10) defining in part a curved shaft having a distal end and a proximal, a mesh (12) for implanting into the lower abdomen of a female to provide support to the urethra; a second curved needle element (110) having a proximal end and a distal end, and a coupler (112) for simultaneous attachment to the distal end of the first needle (10) and the distal end of the second needle (110).



(BE, BI, CF, CG, CI, CM, GA, GN, GQ, GW, MT, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report  
before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments*

## SURGICAL INSTRUMENT KIT FOR TREATING URINARY INCONTINENCE

5

CROSS REFERENCE TO RELATED APPLICATION

The present invention is a continuation-in-part of co-pending United States patent application, serial number 09/521,801, filed on March 9, 2000, which claims the benefit of earlier-filed United States provisional patent application, serial number 60/138,231, filed on June 9, 1999, which are both  
10 incorporated by reference in their entirety herein.

## BACKGROUND OF THE INVENTION

1. Field of the Invention

15 The present invention relates generally to a surgical instrument and a method for treating female urinary incontinence and in particular to a needle and mesh configuration for creating a sling beneath the urethra.

2. Background Discussion

Women account for more than 11 million of incontinence cases.

20 Moreover, a majority of women with incontinence suffer from stress urinary incontinence (SUI). Women with SUI involuntarily lose urine during normal daily activities and movements, such as laughing, coughing, sneezing and regular exercise.

SUI may be caused by a functional defect of the tissue or ligaments  
25 connecting the vaginal wall with the pelvic muscles and pubic bone. Common causes include repetitive straining of the pelvic muscles, childbirth, loss of pelvic muscle tone, and estrogen loss. Such a defect results in an improperly functioning urethra. Unlike other types of incontinence, SUI is not a problem of the bladder.

30 Normally, the urethra, when properly supported by strong pelvic floor muscles and healthy connective tissue, maintains a tight seal to prevent involuntary loss of urine. When a woman suffers from the most common form of

SUI, however, weakened muscle and pelvic tissues are unable to adequately support the urethra in its correct position. As a result, during normal movements when pressure is exerted on the bladder from the diaphragm, the urethra cannot retain its seal, permitting

5 urine to escape. Because SUI is both embarrassing and unpredictable, many women with SUI avoid an active lifestyle, shying away from social situations.

United States Patent 5,112,344 describes a method and apparatus for treating female incontinence. The surgical instrument for the application of a filamentary element into the body comprises a tubular shaft having a handle at  
10 one end and a flexible needle slidably receivable in the shaft and adapted at one end to receive a filamentary element. The method of treating female incontinence comprises looping a filamentary element between the wall of the vagina and the rectus abdominis sheath in the anterior wall of the abdomen whereby it passes to each side of the urethra, tightening the loop to bring the  
15 vaginal wall and the urethra into the correct spatial relationship to the pubis allowing the development of scar tissue between the vaginal wall and the anterior wall of the abdomen pubic symphysis and removing the filamentary element.

United States Patent 5,899,909 discloses a surgical instrument  
20 comprising a shank having a handle at one end and connecting means at the other end to receive, one at a time, two curved needle-like elements which are connected at one end to one end of a mesh intended to be implanted into the body. In practice, the mesh is passed into the body via the vagina first at one end and then at the other end at one side and the other, respectively, of the  
25 urethra to form a loop around the urethra, located between the urethra and vaginal wall. The mesh is extended over the pubis and through the abdominal wall and is tightened. The mesh ends are cut at the abdominal wall, and the mesh is left implanted in the body. This trans-vaginal procedure is exemplified by the TVT product sold by the Gynecare franchise of Ethicon Inc., a Johnson &  
30 Johnson Company, of Somerville, NJ, USA. In this procedure two 5 mm needles pass a PROLENE mesh trans-vaginally and through the abdomen to create a tension-free support around the mid urethra. United States Patent 5,899,909 is incorporated herein by reference in its entirety.

An alternate method to treat SUI is the sling procedure. In this procedure a needle or other suture-retrieving device is first inserted through the abdomen, above the pubic bone. The needle is guided behind the pubic bone, through the subrapubic fascia around the urethra, and out of the body through an incision in the anterior vaginal wall. At this point sutures are attached to the needle(s) and pulled up back through the abdominal cavity, where the sutures are fastened to the rectus muscle.

Techniques for protecting against the puncture of the internal structures during this type of procedure have included laparoscopic procedures. This involves making an incision in the abdomen and inserting a video scope to watch the progress of the needles as they pass through the abdominal cavity. These additional incisions are not optimal for the patient. Also, the needles which pass through the abdomen are not designed to capture a mesh but rather a suture which has been previously attached to the mesh or harvested fascia. These needles are generally in the diameter range of about 0.090 ins. to about 0.120 inches. Therefore, the needles do not create a large channel through the fascia. The channel is only wide enough to pass the suture. Accordingly, the sutures do not possess the elongation properties of the PROLENE mesh and therefore can not provide the tension-free support of the TVT. Also attaching a mesh directly to these needles is not optimal because it is very difficult, if at all possible, to pull the mesh through the narrow channel created by the needle.

It would be beneficial to provide a surgical system for use in implanting a mesh within a female body to prevent incontinence that can be implanted either through a trans-vaginal approach or a trans-abdominal approach.

This invention addresses that need and overcomes the deficiencies of the prior art.

#### SUMMARY OF THE INVENTION

The invention overcomes the deficiencies of the prior art and provides for a surgical apparatus and a method for the treatment of female stress urinary incontinence. The invention provides a surgical instrument comprising a handle at one end and connecting means at the other end to receive, one at a time, two

curved needle-like elements, each of which have a blunt tip and a constant or varying diameter. The distal end of the needle comprises an interlocking coupling means for accepting a guide needle or, alternatively, a mesh.

In one embodiment each curved needle connects at its proximal end to  
5 separate ends of a mesh to be implanted within the body. A guide needle, similar in structure to a Stamey needle, is passed through the abdomen and behind the pubic bone, passes along one side of the urethra and to an incision site at the anterior vaginal wall. After the guide needle exits the body through the vagina, the guide needle couples to the distal end of the curved needle. The  
10 curved needle is then pushed back through the vagina and through the fascia, following the path of the guide needle. The curved needle and first end of the mesh pass over the pubis and through the abdominal wall. The guide needle is again passed behind the pubic bone from the abdomen, passes along the other side of the urethra to the incision site in the vaginal wall. The guide needle again  
15 couples to the distal end of the second curved needle, which then passes through the vagina and fascia, following the second path created by the guide needle. The second end of the mesh is extended over the pubis and through the abdominal wall. The mesh ends are cut at the abdominal wall, and the mesh is left in the body, creating a tension-free support between the vaginal wall and the  
20 mid urethra.

In an alternate embodiment a curved needle is passed through the abdomen and behind the pubic bone, passes along one side of the urethra and to an incision site in the anterior vaginal wall. After the curved needle exits the body through the vagina, the distal end of the curved needle couples to one end  
25 of the mesh to be implanted within the body. The curved needle is then pulled back through the vagina and through the fascia, following the path it originally created. The curved needle and first end of the mesh pass over the pubis and out through the abdominal wall. The first end of the mesh de-couples from the curved needle and the needle is again passed behind the pubic bone from the abdomen, passes along the other side of the urethra to the incision site in the  
30 vaginal wall. The needle couples to second end of the mesh and is then pulled back through the vagina and fascia, following the second path created by the needle. The second end of the mesh is extended over the pubis and through the

abdominal wall. The mesh ends are cut at the abdominal wall, and the mesh is left in the body, creating a tension-free support between the vaginal wall and the mid urethra.

The invention is also compatible for use in a trans-vaginal approach as described in U.S. Patent No. 5,899,909.

The object of the invention is to provide a surgical instrument that implants a mesh for treatment of SUI and is capable for using in a trans-vaginal or a trans-abdominal procedure.

An advantage of the invention is that it is useful across different medical specialties depending on preferred surgical approaches.

These and other features and advantages of the present invention will become apparent from the following more detailed description, when taken in conjunction with the accompanying drawings which illustrate, by way of example, the principles of the invention.

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a side view of the needle in one embodiment thereof;

FIGURE 2a is a side view of two needles and a mesh interconnecting the needles;

FIGURES 2b-d are alternate embodiments of the mesh and connecting means between the mesh and needle;

FIGURE 3a is an assembly diagram for two needles and a connector;

FIGURES 3b-d are alternate embodiments of a connector for use in Fig. 3a;

FIGURES 4a-j diagrammatically illustrate several surgical steps of a trans-abdominal method utilizing two needles and guide needle according to the invention to treat SUI;

FIGURES 5a-d illustrate alternate embodiments of coupling the guide needle to the needle;

FIGURES 6a-h diagrammatically illustrate several surgical steps of a trans-abdominal method utilizing a single needle according to an alternate embodiment of the invention to treat SUI;



FIGURES 7a-g illustrate alternate embodiments of coupling the needle to the mesh; and

FIGURES 8a-i diagrammatically illustrate several surgical steps of a trans-abdominal method utilizing two needles and two guide needles according to the  
5 invention to treat SUI

#### DETAILED DESCRIPTION OF THE INVENTION

Before explaining the present invention in detail, it should be noted that the invention is not limited in its application or use to the details of construction  
10 and arrangement of parts illustrated in the accompanying drawings and description, because the illustrative embodiments of the invention may be implemented or incorporated in other embodiments, variations and modifications, and may be practiced or carried out in various ways.

The invention discloses an apparatus and method for treating SUI. A  
15 mesh or tape is passed through pelvic tissue and positioned between the urethra and vaginal wall, creating a supportive sling. The mesh provides a structure means for tissue ingrowth and thereby provides a newly created body tissue supporting means for the urethra. When pressure is exerted upon the lower abdomen, such as during a cough or sneeze, the mesh provides support to the  
20 urethra, allowing it to keep its seal and prevent the unwanted discharge of urine.

Referring to Figs. 1 and 2a, in one embodiment the surgical instrument comprises a needle-like element 10 that attaches to a mesh 12. Needle element 10 defines a certain radius R to perform the surgical procedure discussed herein. The distal end of needle element 10 terminates at a conical section 14 having a  
25 tip 16. Alternate configurations, such as a blade-like, arrow or burr tips are also possible. Preferably, tip 16 is blunt, wherein the tip 16 has a radius of about 0.6 millimeters. A blunt tip is preferred since it is less likely to stick in bone or penetrate bladder wall tissue or blood vessel wall tissue as will be appreciated from the method of implanting the mesh as described below.

30 The proximal end of needle 10 terminates in an attachment segment 20 that is adapted to mate and lock into a handle 21 as disclosed in US patent no. 5,899,909.

Disposed between tip 14 and segment 20 is a curved shaft segment 18 having a distal end 17 and a proximal end 19. The shape of shaft 18 extends substantially a quarter of a circle in order to follow substantially the profile of the pubis between the vagina and the abdominal wall. For the purposes of the method as will be discussed in more detail below, shaft 18 has a preferred radius R of about 106 millimeters. The diameter of shaft 18 may be constant, for example, about 5 mm. Alternatively, the diameter of segment 18 may transition from a smaller diameter at distal end 17 to a larger diameter at proximal end 19. The minimum diameter of distal end 17 may be as small as 0.5mm due to the minimal stresses at this point. The minimal diameter of proximal end 19 is about 4mm.

Needle 10 is preferably tubular with a circular cross section and is made from a material that is compatible with the human body. Preferably, needle 10 is made from AISI 303 stainless steel. The surface of shaft 18 may be smooth, preferably polished, to facilitate penetration of the soft tissue. Alternatively, the surface of needle 10 may have a somewhat rougher surface. A rougher surface would result in slightly additional tissue trauma, which in turn stimulates fibroblast activity around the mesh 12. The surface of needle 10 may also be darkened in shade or color to provide higher visibility while in place in the body during a cystoscopy.

Needle 10 may be manufactured as a single, continuous unit, or alternatively, curved portion 18 may be manufactured separately from linear portion 20. In this manner the two pieces would attach using any conventional attaching means, such as, screwing, or other conventional means as is known to those skilled in the art.

Referring to Figs. 2a-d, mesh 12 comprises any tissue-compatible synthetic material, or any natural material, including, but not limited to, autologous, allograft, xenograft, a tissue engineered matrix, or a combination thereof. An exemplary synthetic material is PROLENE® polypropylene mesh, a mesh having a thickness of 0.7 mm and openings of about 1mm manufactured by Ethicon, Inc., Somerville, New Jersey, U.S.A. This material is approved by the U.S. Food and Drug Administration for implantation into the human body. A still further embodiment of the mesh 12 is a combination of a synthetic material

11 and a natural material 13 centered between the synthetic material 11 as shown in Figs. 2b-c. A still further embodiment of the mesh 12 includes a combination of synthetic material 11 and natural material 13, whereby the natural material is placed over or incorporated within a generally central portion of the synthetic material 11. One advantage of the mesh configurations is that natural material 13 is along the center region of mesh 12 so that after installation of mesh 12, natural material 13 is positioned below the urethra and eliminates possible erosion issues at the interface of the urethra and mesh. Natural material 13 may be connected to the synthetic material 11 by means of sewing, a bio-compatible glue, cell culturing techniques or other known means.

Mesh 12 may be of any convenient shape that suits the intended purpose of the invention. An exemplary width is about 1 cm and the length would be dependent upon the size of the female undergoing the procedure. Mesh 12 may be single or double ply, generally planar in structure, or tubular (Fig. 2d) to provide additional supporting strength and more surface area on which tissue fibers may attach. Moreover, mesh 12 may consist of different types of material, such as a bioabsorbable and non-bioabsorbable material. Mesh 12 may also be coated with an antimicrobial additive to prevent or minimize infection and a lubricous coating, for example, a bioabsorbable hydrogel, to facilitate the mesh passing through the tissue as discussed below. Preferably, mesh 12 is covered by a removal plastic sheath as disclosed in U.S. patent no. 5,899,909. The mesh may also be made radio-opaque and/or of a contrasting color to the body tissue to allow for future diagnostic visualization.

In one embodiment mesh 12 may be attached to needle segment 20 by means of tying, gluing or other suitable attaching means. Preferably, a bio-compatible heat shrink tube fixes mesh 12 onto needle portion 20, Fig. 2a.

Fig. 3a illustrates a needle 10 for use in conjunction with a guide needle 110 and coupler 112. Guide needle 110 may be configured to have a similar radius R as needle 10. Preferably, guide needle 110 has a smaller diameter, about 2 mm. It is possible, however, for guide needle 110 to have the same diameter as needle 10. A coupler 112 acts as an interfacing element useful to couple guide needle 110 to needle 10. Coupler 112 is substantially elliptical-shaped having a first bore opening 114 for accepting distal end 17 and a second

bore opening 116 for accepting the distal end of guide needle 110. Preferably, openings 116 and 114 are configured to allow for a press fit connection with needles 110 and 10, respectively. Alternatively, openings 114 and 116 may comprise a bio-compatible glue or high-friction material to facilitate a strong  
 5 connection between the needles 10/110 and coupler 112. Coupler 10 may be made from any bio-compatible metal, such as stainless steel or polyurethane, silicone, rubber or other similar compound.

Figs. 3b-d illustrate alternate connector means utilizing a high friction tube 170, such as Tygon. Fig. 3b discloses a tube having a constant O.D., but a  
 10 varying I.D. The larger I.D. would accept needle 10 and the smaller I.D. accepts the guide needle 110. Fig. 3c illustrates a tube 172 having both a varying O.D. and I.D. As the needles are placed within the tube the decreasing I.D. compresses around the distal ends of the respective needles and the high coefficient of friction securely anchors the needles. Fig. 3d illustrates the  
 15 needles within the tube 172. Preferably, the ends of tube 170 and 172 are tapered to eliminate any abrupt surface that adds additional drag to the needles as they are pulled through the abdominal cavity.

The surgical procedure for trans-abdominally implanting mesh 12 using two needles is shown in Figs. 4a-j. In the figures the relevant parts of the female  
 20 lower abdomen are disclosed, the vagina being 50, the uterus 52, the urethra 54, the pubic bone 56, the urinary bladder 58 and the abdominal wall 60. A guide needle 110 penetrates the abdominal wall 60, anterior to the pubic bone 56, Fig. 4a and follows the contour of the pubic bone 56 to one side of the urethra 54 and exits the body through an incision having been made in the anterior wall of the  
 25 vagina 50. Coupler 112 attaches to the distal end of guide needle 110, extending out from the body, and needle 10a, Fig. 4b. One end of mesh 12 is attached to the proximal end of needle 10a. The surgeon then retracts guide needle 110 back through the abdomen and advances needle 10a through the vaginal incision following the same path guide needle 110 created, Fig. 4c. The  
 30 needles pass through the vaginal wall and through the soft tissue on one side of the urethra 54, the needles then according to Fig. 4d being passed close to the back of the pubic bone 56, through additional layers of fat, muscle and fascia, and then out the abdominal wall 60 above the pubic bone 56. The surgeon

uncouples handle 21 from the needle 10a and pulls needle 10a out of the body through the abdominal wall 60, Fig. 4e.

Guide needle 110 is disconnected from needle 10a, and the surgeon repeats the same procedure, but passing the guide needle 110 on the opposite  
5 side of the urethra 54, Figs. 4f-j, to complete the implantation of the mesh between the mid-urethra and vaginal wall using needle 10b.

Figs. 8a-i illustrate an alternate preferred embodiment. A first guide  
needle 110a penetrates the abdominal wall 60, anterior to the pubic bone 56 and follows the contour of the pubic bone 56 to one side of the urethra 54 and exits  
10 the body through an incision having been made in the anterior wall of the vagina 50. A second guide needle 110b penetrates the abdominal wall 60, anterior to the pubic bone 56 and follows the contour of the pubic bone 56 to the opposite side of the urethra 54 as guide needle 110a and exits the body through an incision having been made in the anterior wall of the vagina 50, Fig. 8a. At this  
15 point, the surgeon may perform a single cystoscopy to confirm the integrity of the bladder 58. Couplers 112a,b attach to the distal ends of needles 10a,b. Needle 10a, having one end of mesh 12 attached to the proximal end of needle 10a attaches to guide needle 110a via coupler 112a, Fig. 8b. The surgeon then retracts guide needle 110a back through the abdomen and advances needle 10a  
20 through the vaginal incision following the same path guide needle 110a created. The needles pass through the vaginal wall and through the soft tissue on one side of the urethra 54, the needles being passed close to the back of the pubic bone 56, through additional layers of fat, muscle and fascia, and then out the abdominal wall 60 above the pubic bone 56, Figs. 8c-d. The surgeon uncouples  
25 handle 21 from the needle 10a and pulls needle 10a out of the body through the abdominal wall 60, Fig. 8e.

The surgeon repeats the same procedure, but removing guide needle 110b and advancing needle 10b on the opposite side of the urethra 54, to complete the implantation of the mesh between the mid-urethra and vaginal wall  
30 using needle 10b, Figs. 8f-i.

Figs. 5a-d illustrate alternate embodiments for coupling needle 10 to guide needle 110 to implant a mesh 12 trans-abdominally as indicated above. In Figs. 5a-b, the distal end of needle 10 is modified to include a bore opening 118

to allow for a press fit connection with the distal end of guide needle 110. Alternatively, bore-opening 118 may comprise other connection means, such as glue or a high-friction material.

In Fig. 5c, the distal end of needle 10 is modified to include a bore opening 120 and a locking pin 122. Guide needle 110 is modified to include an L-shaped groove 124. The distal end of guide needle 110 inserts into opening 120 and groove 124 engages locking pin 122 and locks thereto with a quarter-turn twist. Fig. 5d illustrates a bore opening 126 in guide needle 110 to accept a protruding element 128 at the distal end of needle 10. Protruding element 128 press fits into bore opening 126.

One advantage of the embodiment shown in Fig. 3 is that the needle 10 can be used for either a trans-abdominal approach or a trans-vaginal approach. In this approach, a kit comprising two needles 10, attached to a mesh 12, at least one coupler and at least one guide needle may be distributed for use by multiple surgeon specialists. For example, a gynecologist may prefer the trans-vaginal approach and will simply discard the connector and guide needle from the kit. On the other hand, a urologist may prefer the trans-abdominal approach and utilize the connector(s) and guide needle(s).

Referring now to Figs. 6a-h, an alternate embodiment of the invention utilizes the needle 10 to penetrate the abdominal wall 60 and couple to the mesh 12. In this embodiment, the mesh 12 is modified to create a connection means for connecting to the distal end of the needle 10. The connection means is preferably detachable so that when the mesh is pulled out of the abdominal wall, the mesh may be detached from the needle and the needle reused to retrieve the other end of the mesh. This embodiment allows for the use of a single needle for the procedure. This embodiment also allows for the use of a mesh constructed, at least in part, of natural materials, which are otherwise not suitable in the pre-affixed embodiment due to the inability of the natural material to survive extended periods in inventory.

A needle 10 with coupling means at the distal end penetrates the abdominal wall 60, anterior to the pubic bone 56, Fig. 6a and follows the contour of the pubic bone 56 to one side of the urethra 54 and exits the body through an incision having been made in the anterior wall of the vagina 50, Fig. 6b. A first

end of mesh 12 attaches to the distal end of needle 10 via coupling means. The surgeon then retracts needle 10 back through the pelvic cavity, following the same path created by needle 10, while at the same time causing mesh 12 to follow the needle, Fig. 4c. The needle 10 and mesh 12 pass through the vaginal wall and through the soft tissue on one side of the urethra 54. The needle and mesh then according to Fig. 4f being passed close to the back of the pubic bone 56, through additional layers of fat, muscle and fascia, and then out the abdominal wall 60 above the pubic bone 56.

Needle 10 disconnects from the first mesh end, and the surgeon repeats the same procedure, but this time passes the needle 10 on the opposite side of the urethra 54, Figs. 6d-h, to complete the implantation of the mesh 12 between the mid urethra and vaginal wall.

Referring to Figs. 7a-g, alternate embodiments for connecting the needle 10 to the mesh 12 are disclosed. Figs. 7a-b disclose a coupler 130 having a proximal end 132 configured to accept the mesh 12 and a distal end 134 for accepting the distal end 17 of needle 10. Distal end 17 comprises a contiguous groove 120 for detachably coupling with coupler 130. Coupler 130 further comprises two spring tabs 136 and 138, each with fingers 140 and 142 for engaging groove 120. Mesh 12 is preferably attached to the distal end 132 using a biocompatible glue or other appropriate mechanical fastening means. The surgeon may simply attach or detach needle 10 from coupler 130 by depressing spring tabs 136 and 138 forcing fingers 140 and 142 upward to allow distal end 17 to slide in or out of coupler 130. Fingers 140 and 142 engage groove 120 to hold needle 10 firmly in place within coupler 130.

Figs. 7c-e illustrate a coupling mechanism 150 similar in function to a safety pin. Spring arm 152 engages with a bore 154 at the distal end 17 of needle 10.

Figs. 7f-g illustrate a loop coupling mechanism 160 attached to mesh 12 for engaging groove 120.

As would be appreciated by one skilled in the art, there exist multiple means for detachably connecting the mesh to the needle.

Since all procedures may be performed using a local anesthesia, the patient is able to provide feedback to the surgeon after mesh 12 is in place.

Typically, the urinary bladder 58 is filled with a fluid, such as water, using a catheter and the patient is requested to cough. The surgeon is able to determine the operation of the urethra and may adjust the placement of the mesh 12, as necessary, by adjusting the ends of mesh 12 located at the outside of the abdomen 60, Figs. 4h and 5h. After adjustments, the surplus mesh at the  
5 abdomen is cut off, and the ends of the mesh are secured within the abdomen and the abdomen is closed. Likewise, the incision at the vaginal wall is closed whereby the tissue flap seals the mesh between the urethra 54 and the wall of vagina 50.

10 Mesh 12 is left in the body and forms an artificial ligament attached to the abdominal wall that provides the support for the urethra as required in order to restore urinary continence to the patient.

It will be apparent from the foregoing that, while particular forms of the invention have been illustrated and described, various modifications can be  
15 made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims.



The claims defining the invention are as follows:

1. A surgical instrument assembly for treating female urinary incontinence comprising:
  - 5 a mesh for implanting into the lower abdomen of a female patient to provide support to the urethra and comprising a first and a second mesh coupling means at first and second ends of the mesh, respectively, wherein the first and second mesh coupling means are each fixedly secured at a first end thereof to the respective first and second ends of the mesh, and each have a recess therein at a second end,
  - 10 a curved needle element defining in part a curved shaft having a distal end and a proximal end,
    - wherein the recesses in the second ends of the first and second coupling means are dimensioned to receive therein and form a tight interference fit with the distal end of the needle to thereby enable the needle element to be removably
    - 15 coupled to the mesh.
2. An assembly according to claim 1, wherein the first and second coupling means further comprises a protrusion extending inwardly into the respective recesses, and wherein the distal end of the needle element has a recess therein, wherein, when
  - 20 the distal end of the needle is received within the recess in the first or second coupling means, the protrusion engages said needle element recess.
3. A surgical instrument assembly comprising:
  - a mesh for implantation into a patient;
  - 25 at least first and second coupling elements at first and second peripheral end portions of said mesh, said first and second coupling elements each being fixedly secured to the mesh at a first end, and each having a recess therein at a second end; and
  - a curved needle element defining in part a curved shaft and having a distal
  - 30 end and a proximal end,
    - wherein the recesses in the second ends of each of the first and second coupling elements are dimensioned to receive therein and form a tight interference fit

2002345375 17 Jan 2006


with the distal end of the needle element to thereby enable the needle element to be removably coupled to the mesh.


4. A surgical instrument assembly substantially as hereinbefore described with  
5 reference to the accompanying drawings.

10 DATED this 16<sup>th</sup> day of January, 2006

15 **ETHICON, INC. and ETHICON, GmbH**  
By their Patent Attorneys:  
CALLINAN LAWRIE


1/36

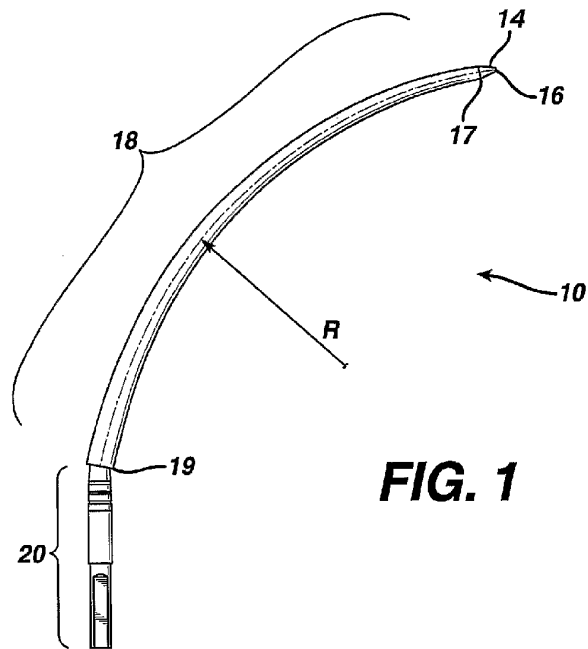

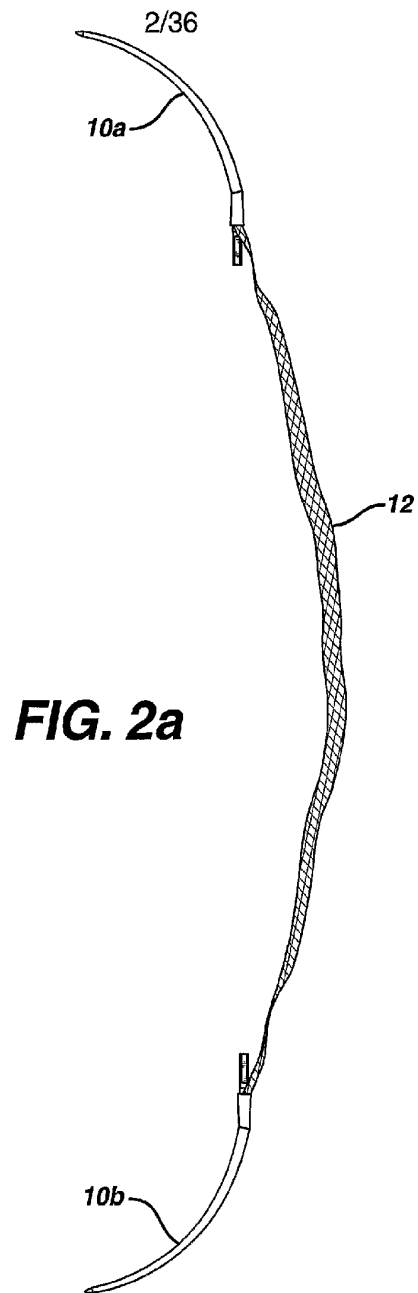


3/36


**FIG. 2b**

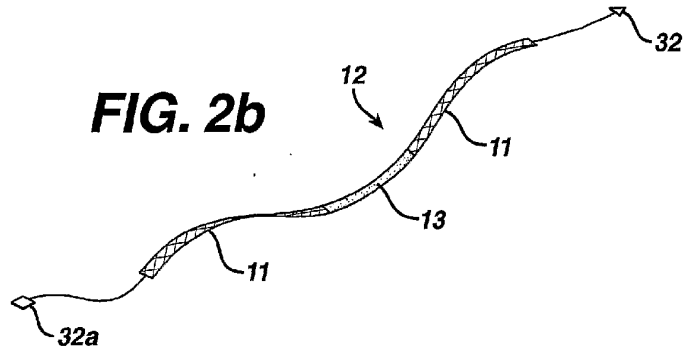

**FIG. 2c**

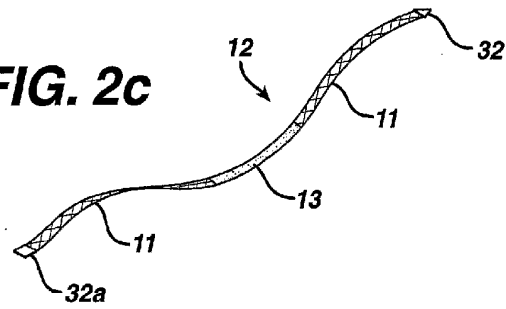


**FIG. 2d**

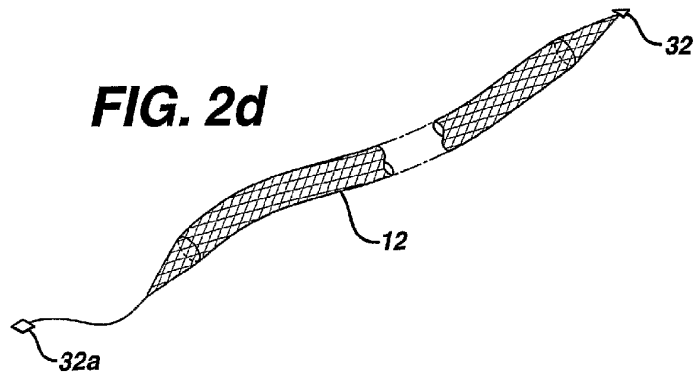


4/36


**FIG. 3a**

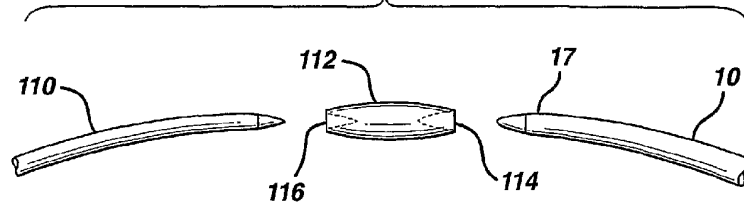


**FIG. 3b**

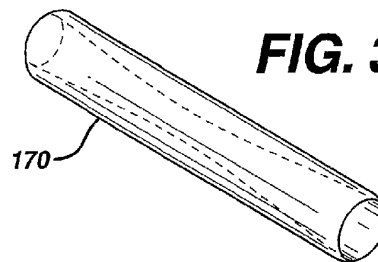

**FIG. 3c**




**FIG. 3d**

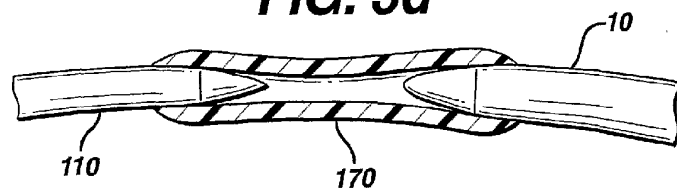


5/36


**FIG. 4a**

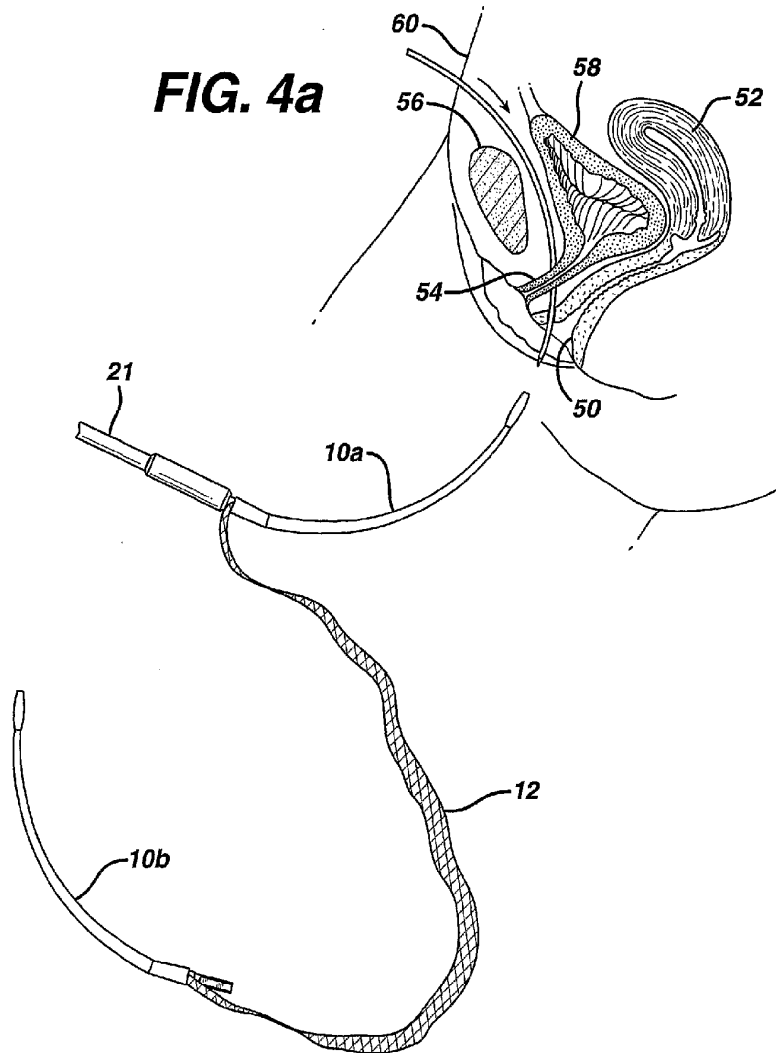


6/36

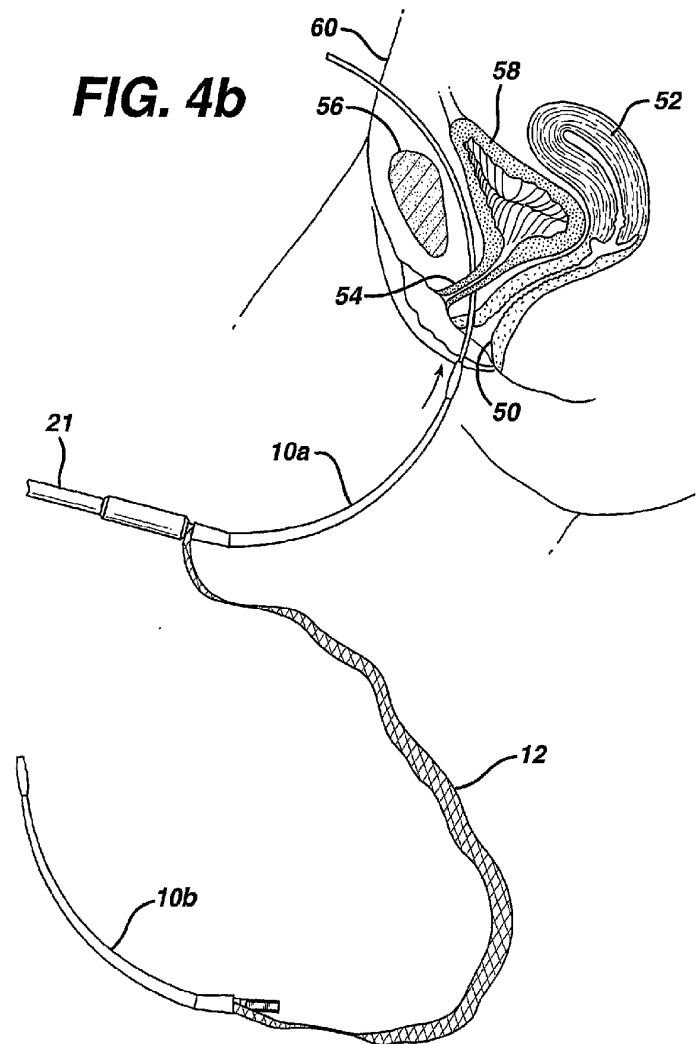




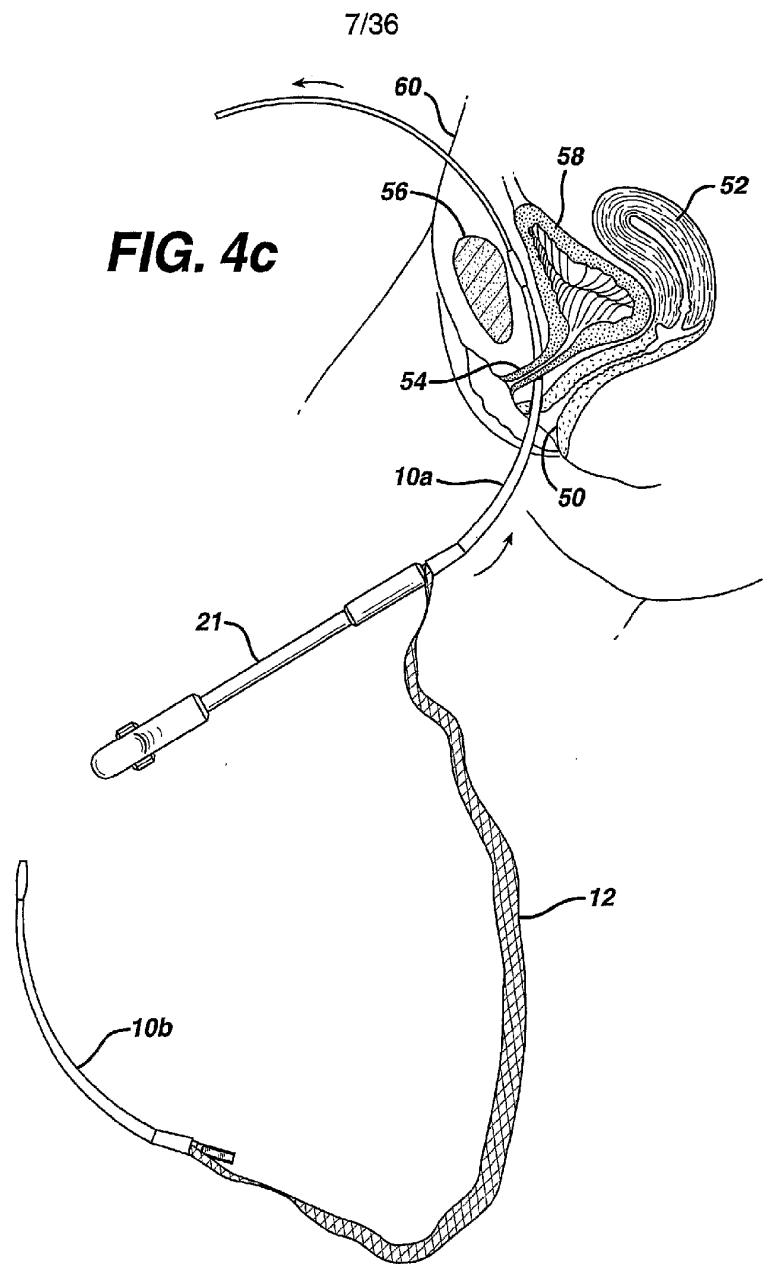


8/36

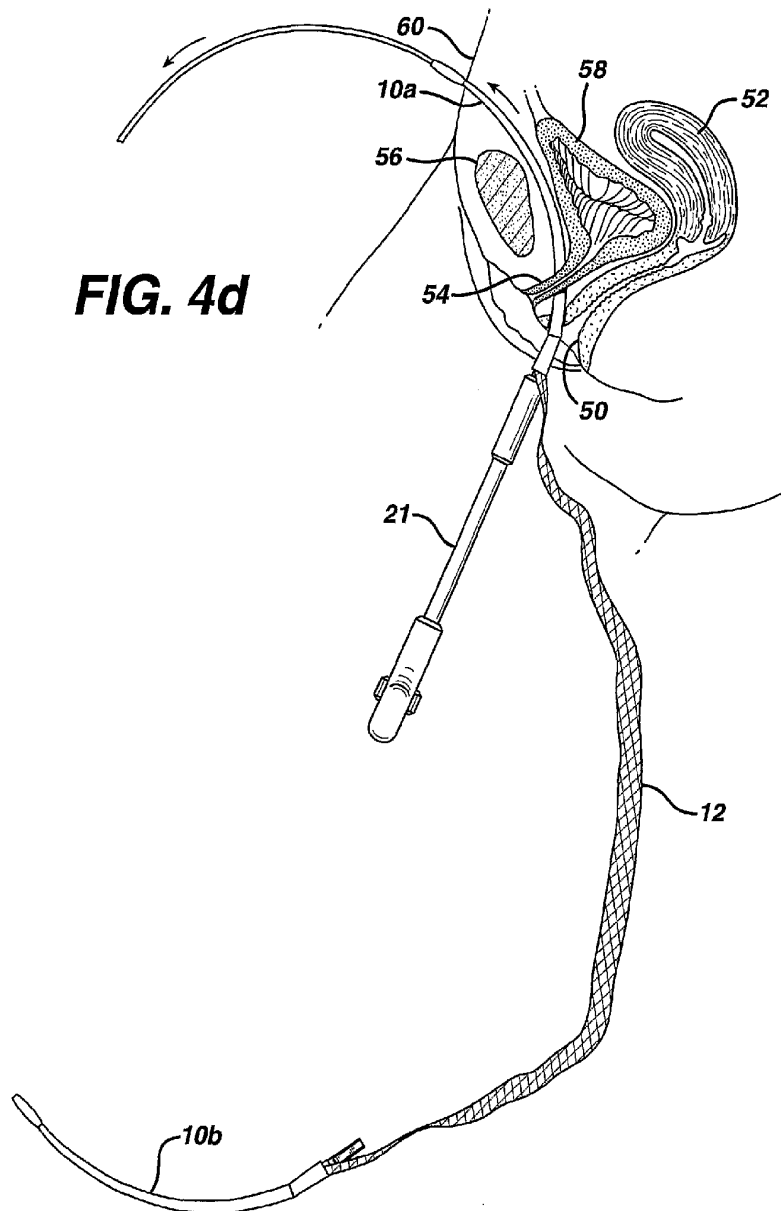

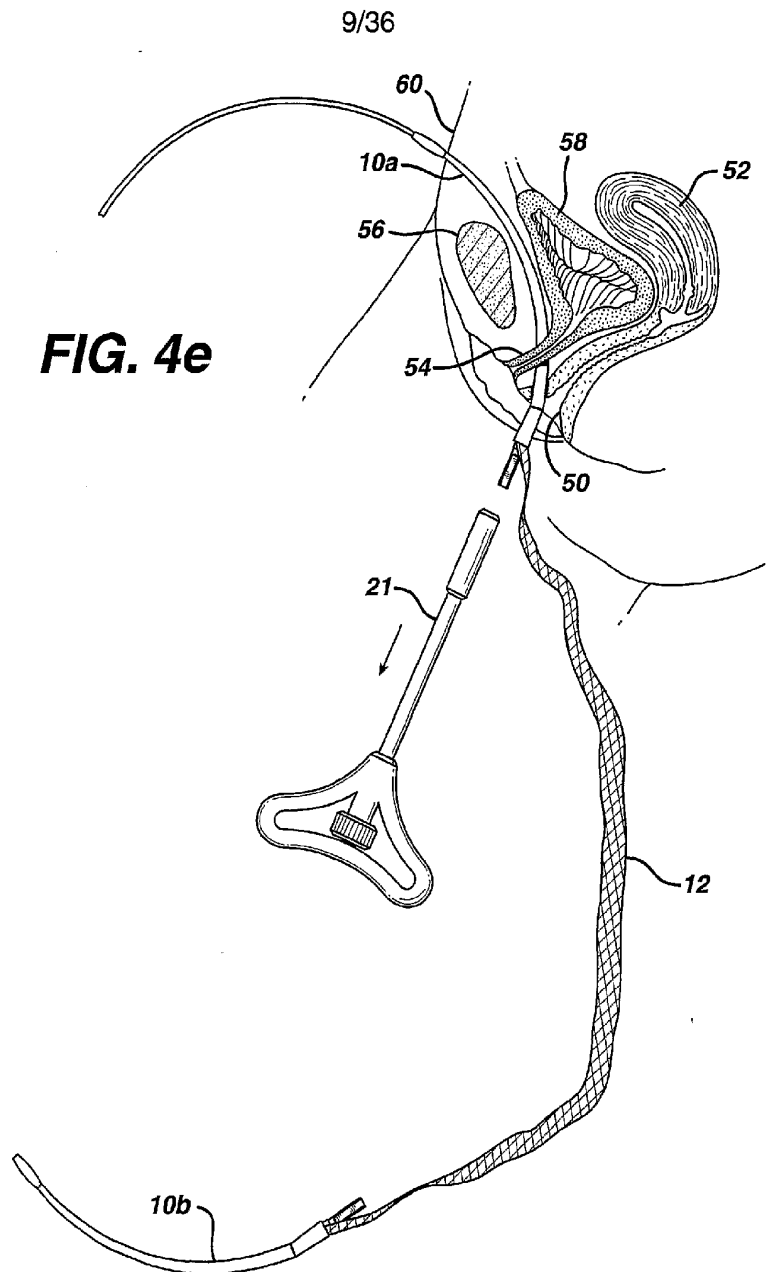


10/36

**FIG. 4f**

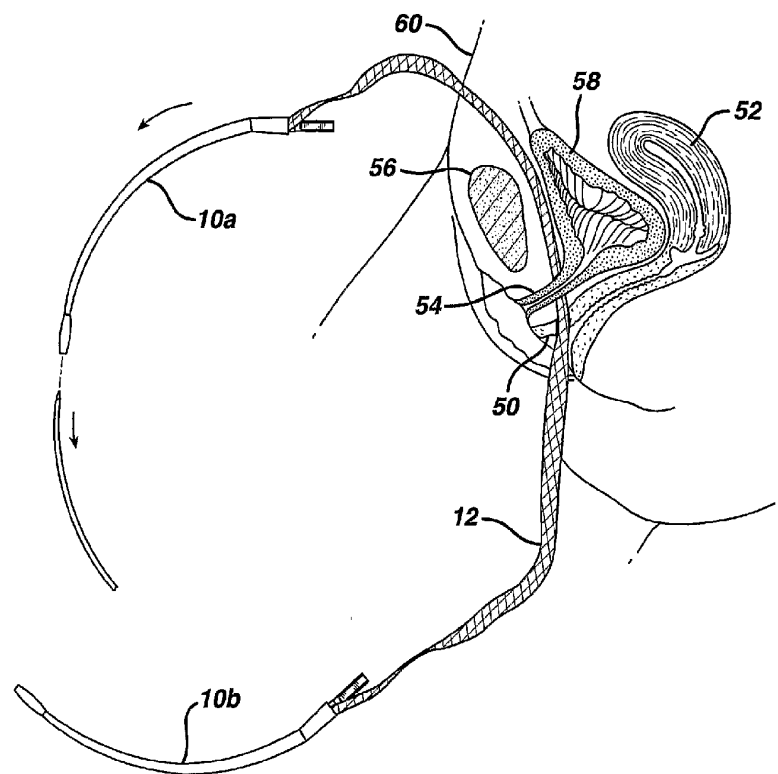


11/36

**FIG. 4g**

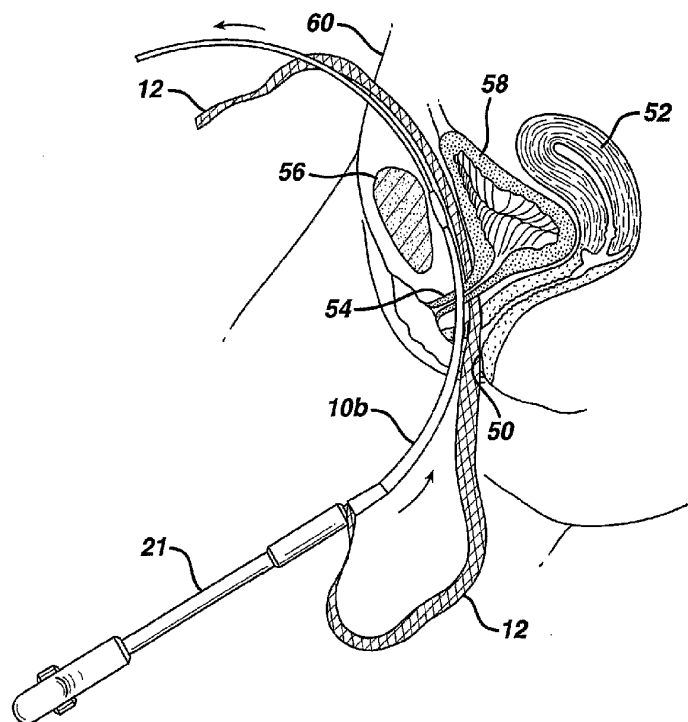


12/36

**FIG. 4h**

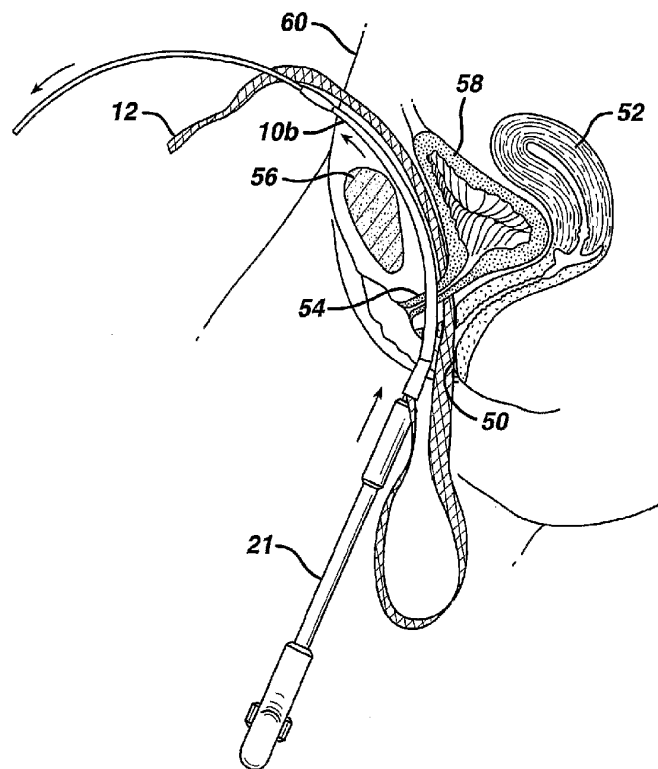


13/36

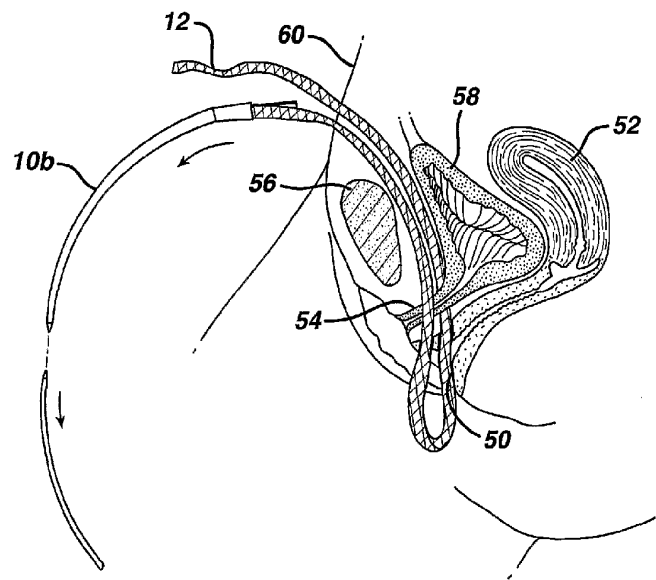**FIG. 4i**



14/36

**FIG. 4j**


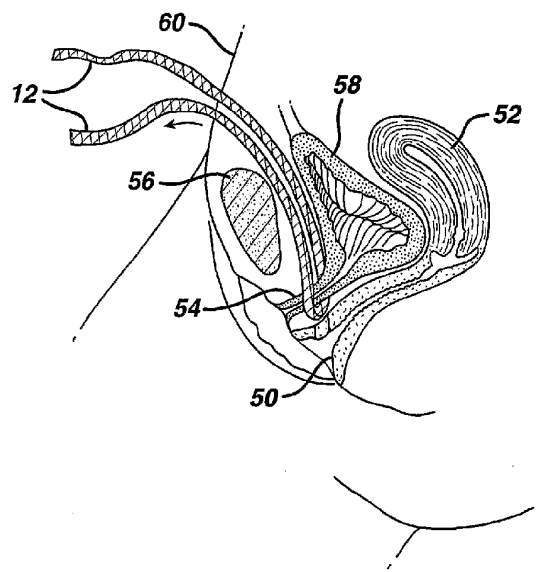





15/36

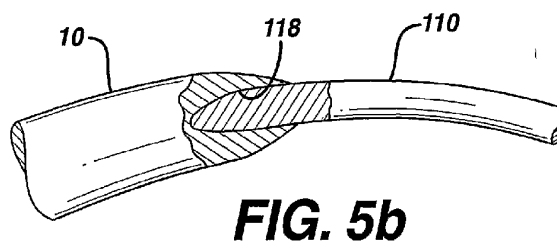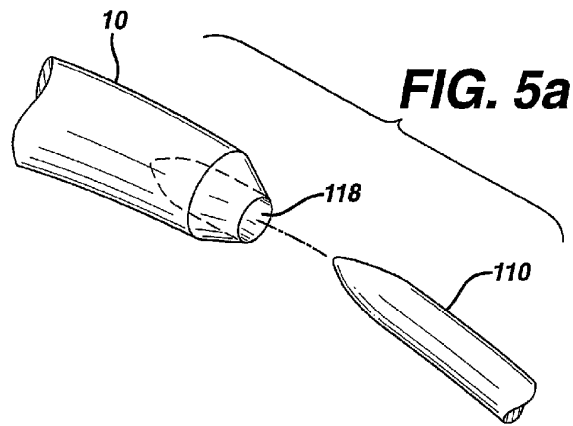

16/36

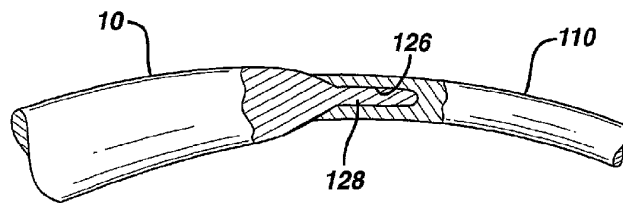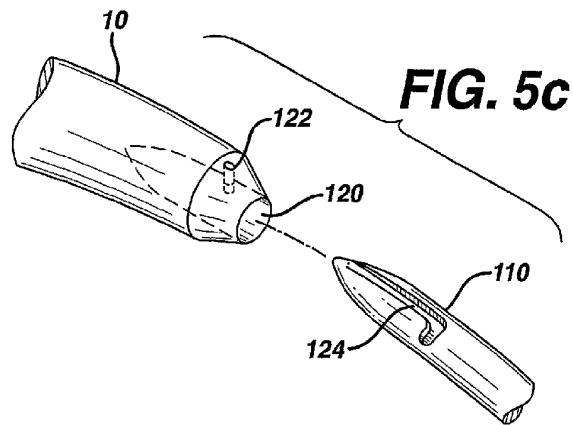


17/36

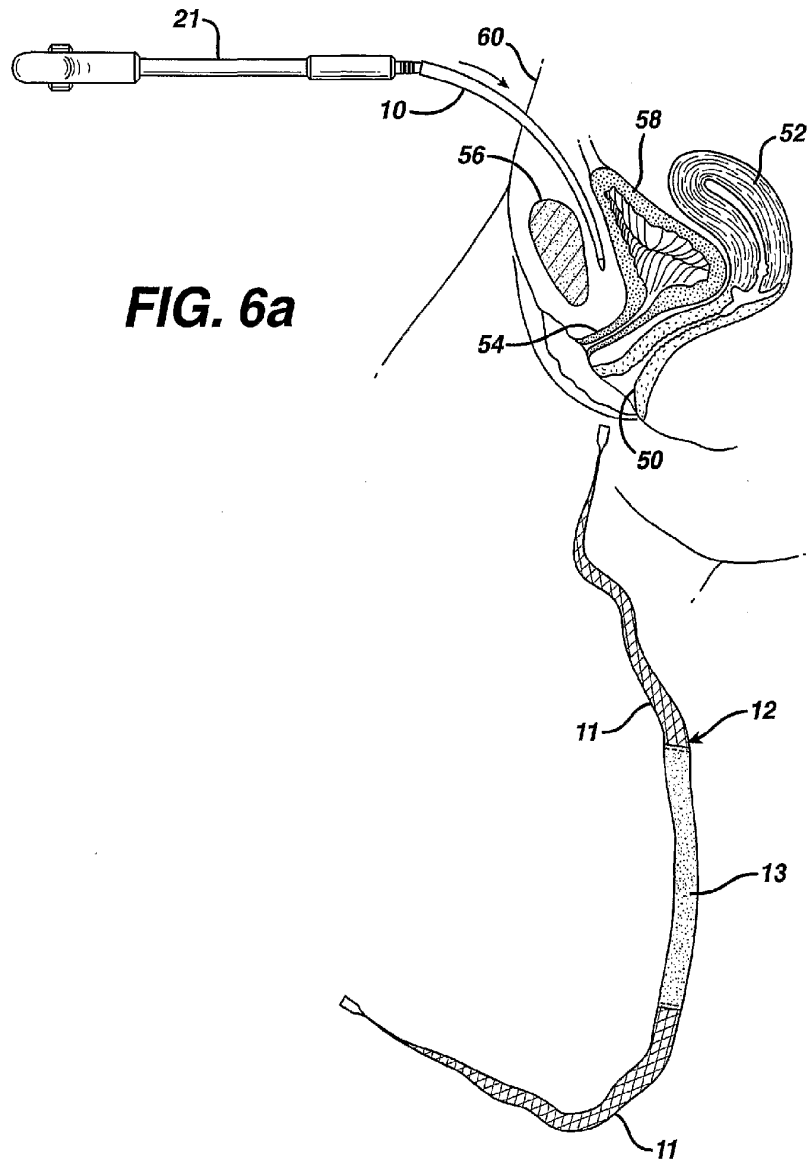


18/36

**FIG. 6b**

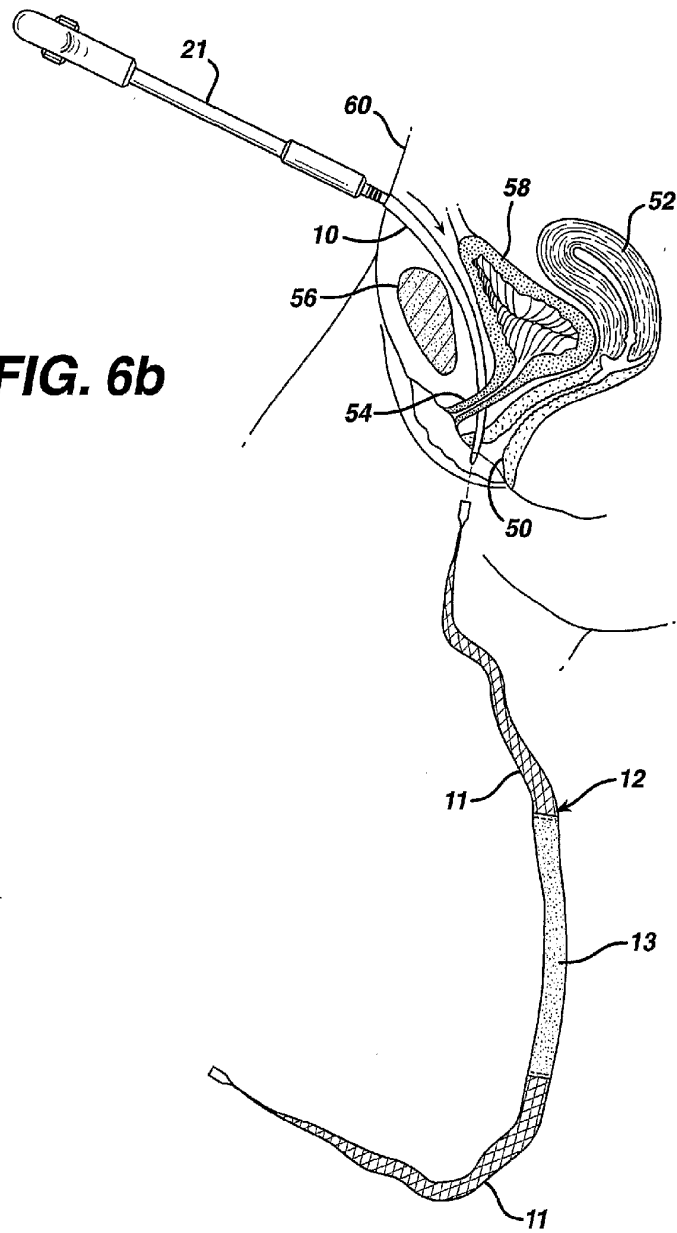


19/36

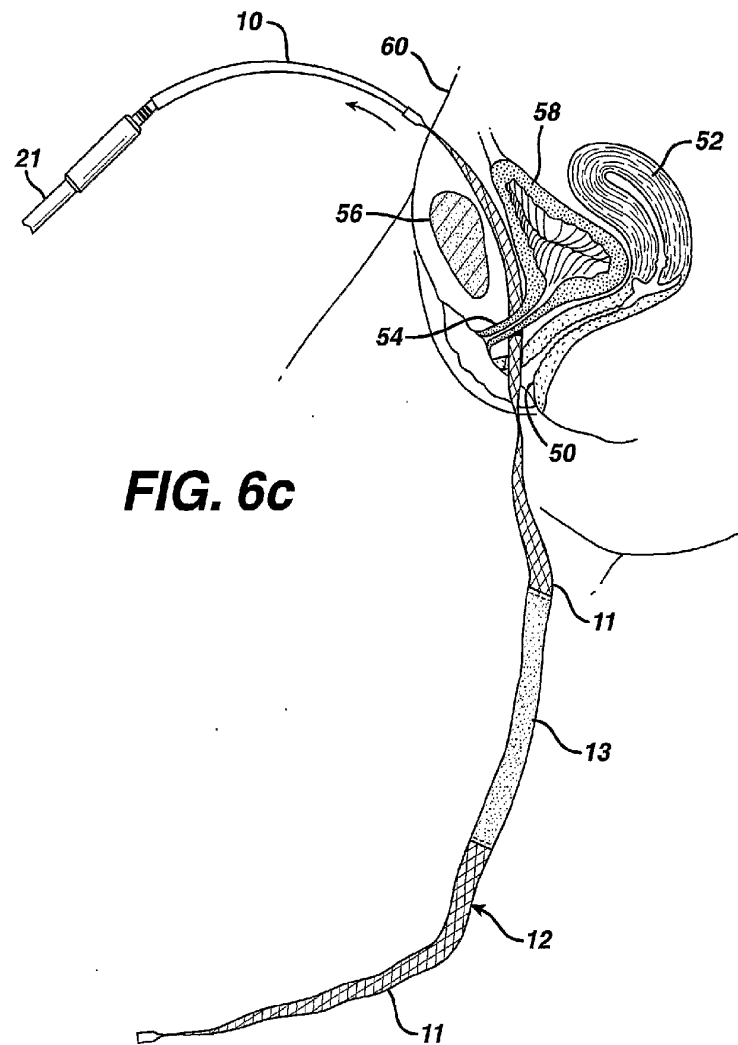


20/36

**FIG. 6d**

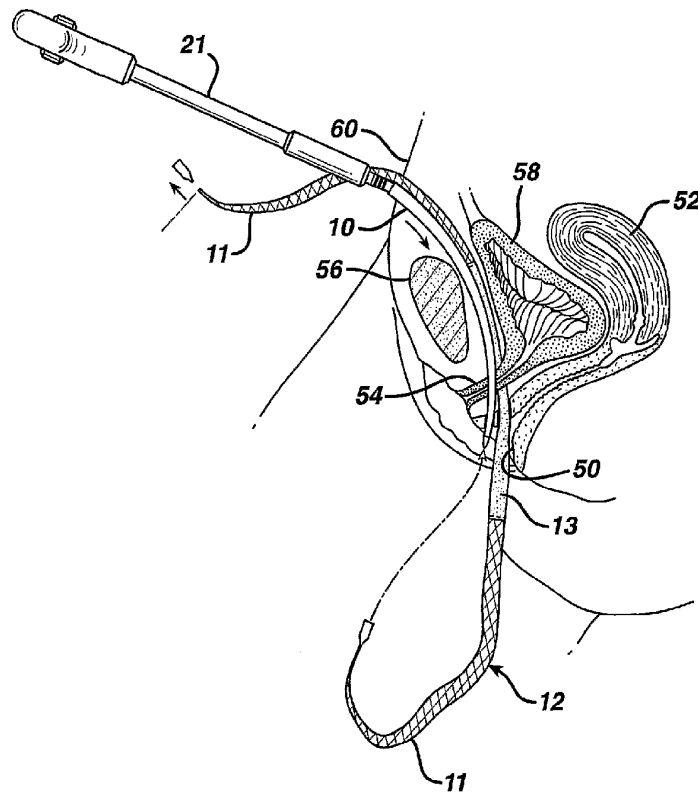


21/36

**FIG. 6e**

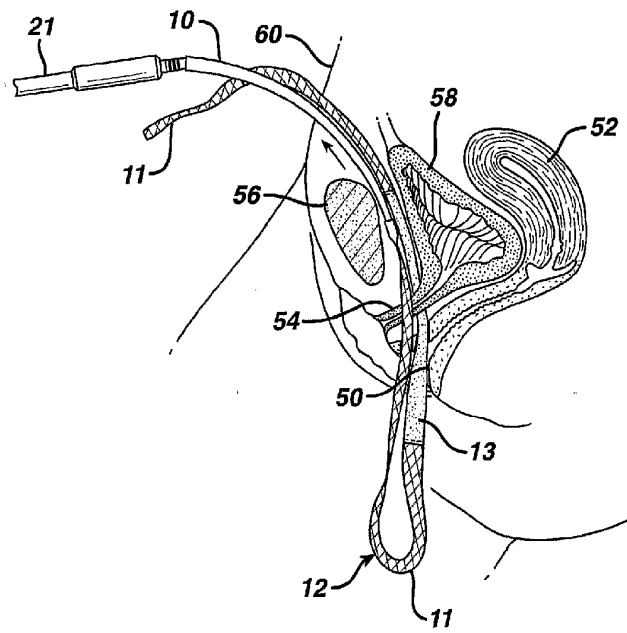

22/36


**FIG. 6f**

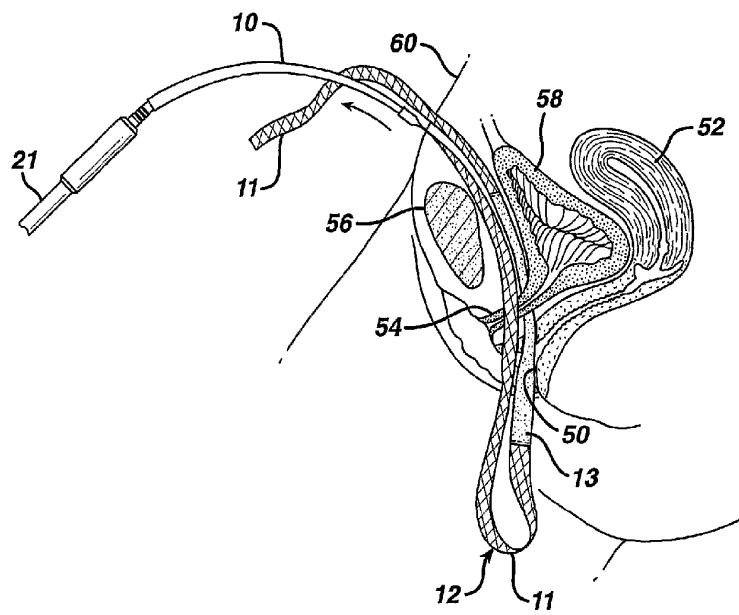




23/36

**FIG. 6g**


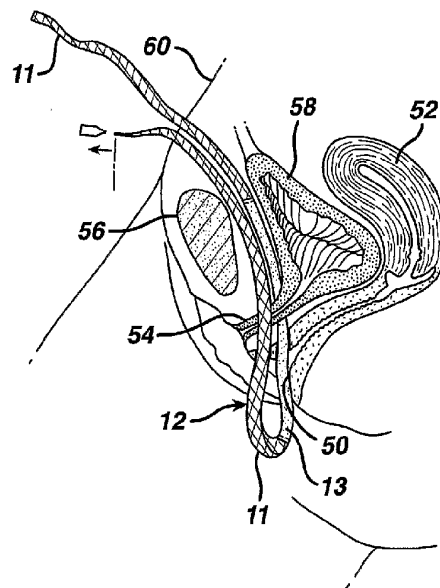


24/36




**FIG. 6h**

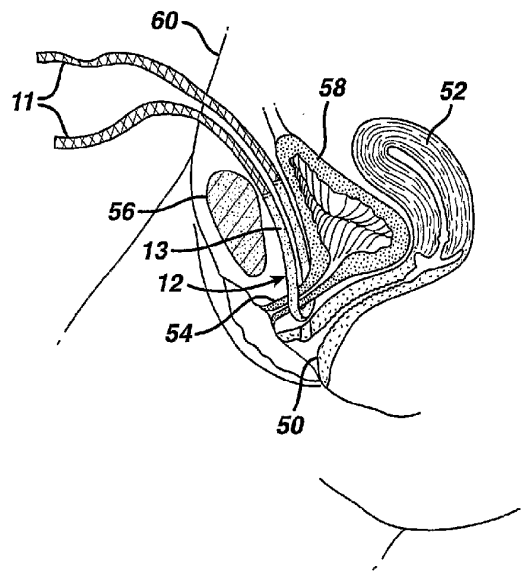



25/36

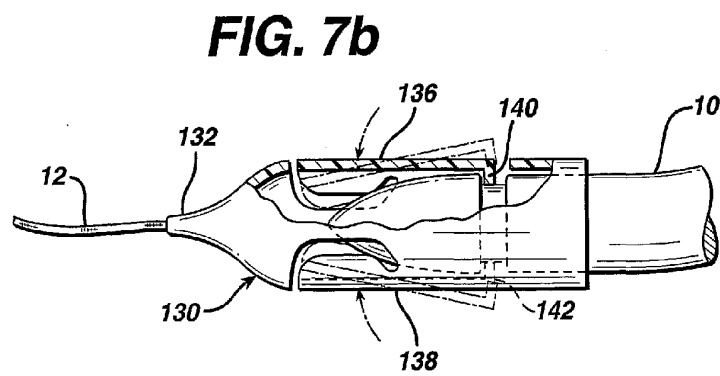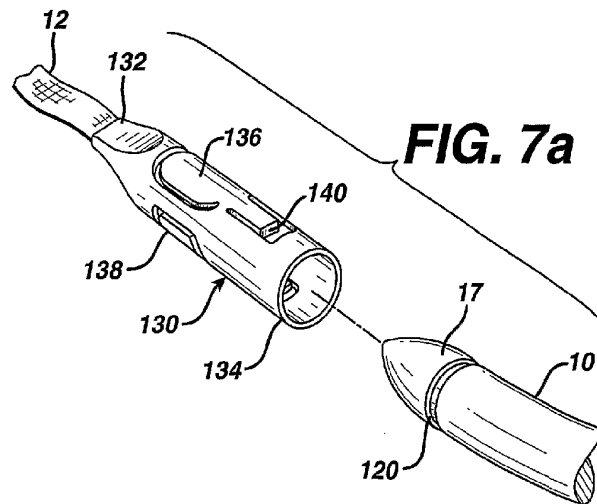

26/36

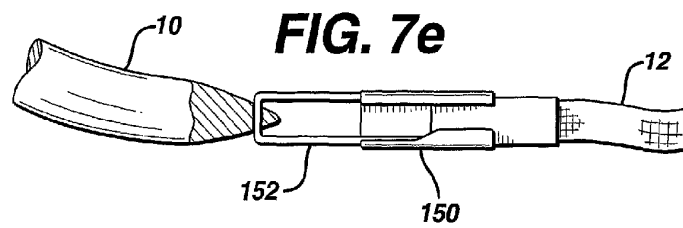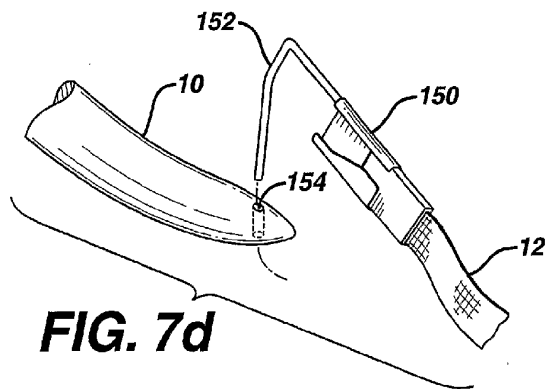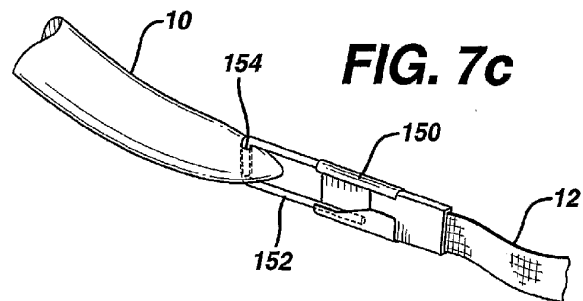


27/36

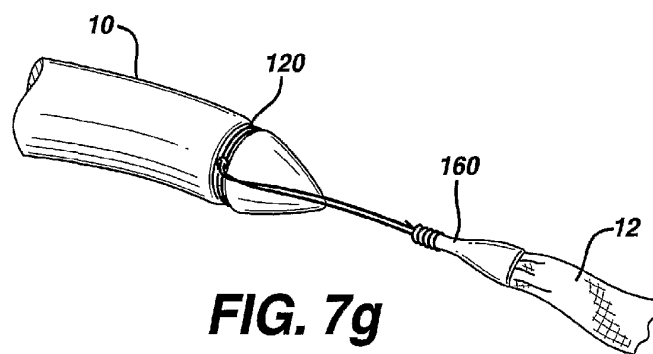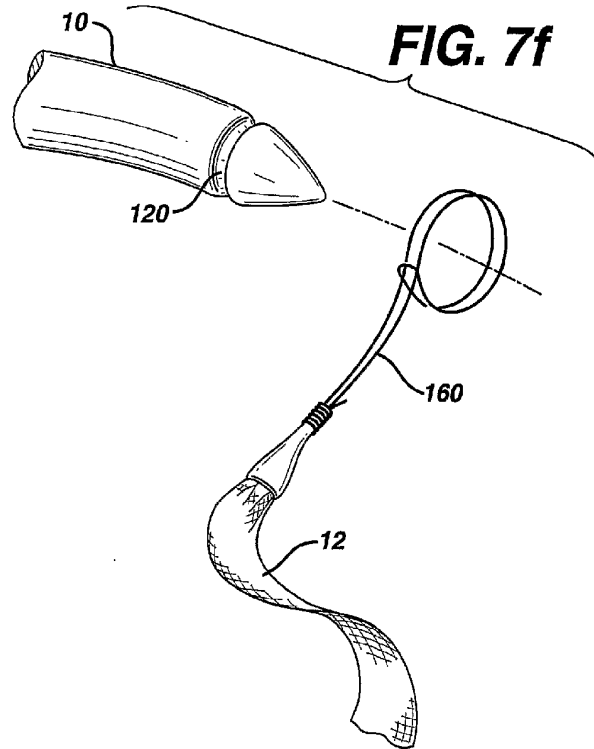





29/36

**FIG. 8b**

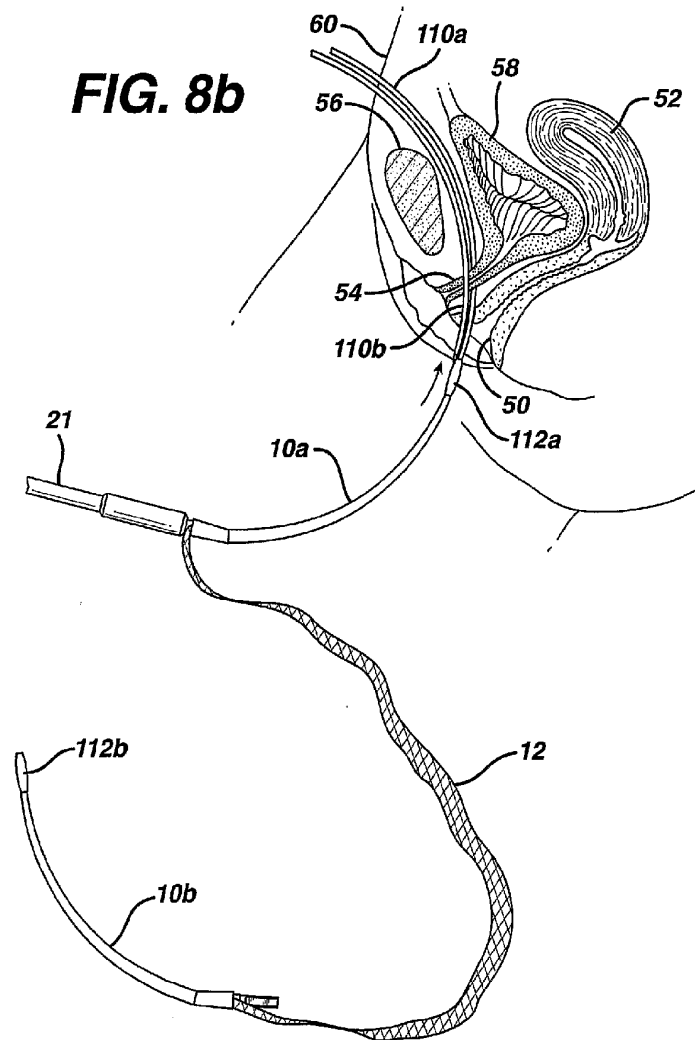


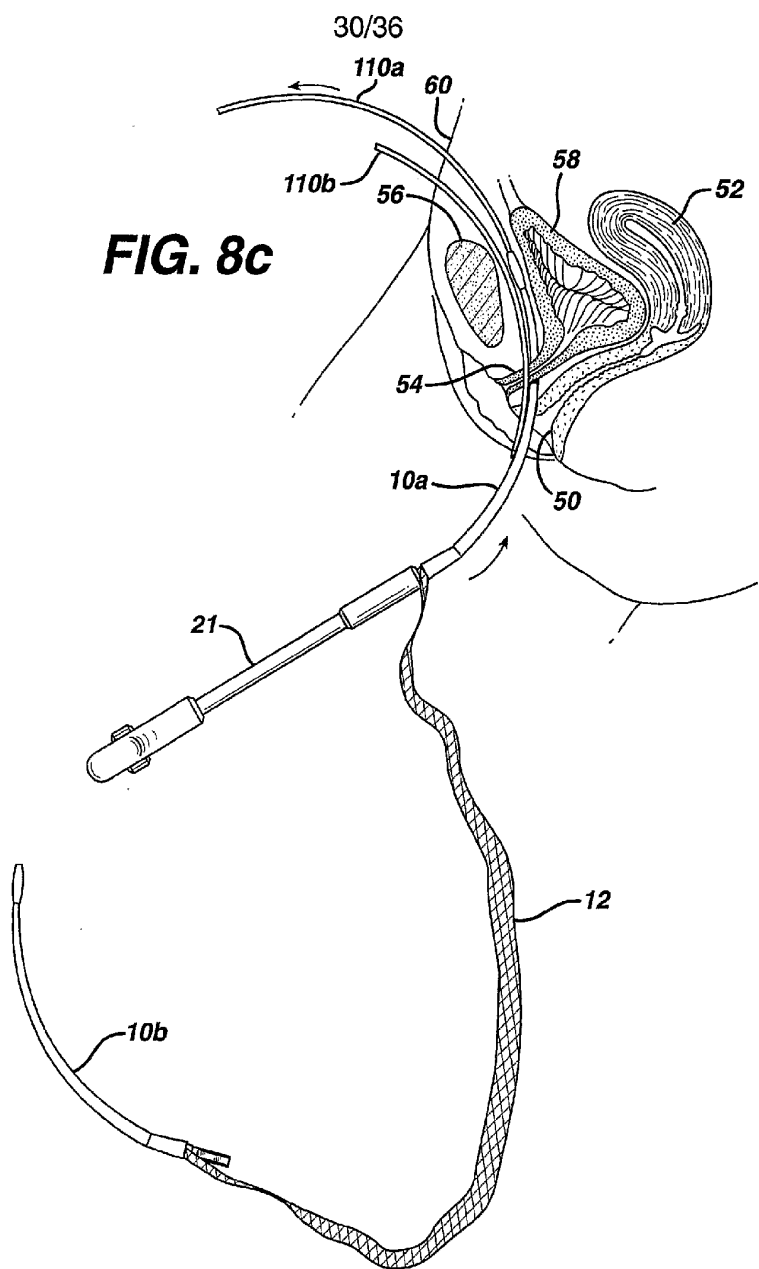



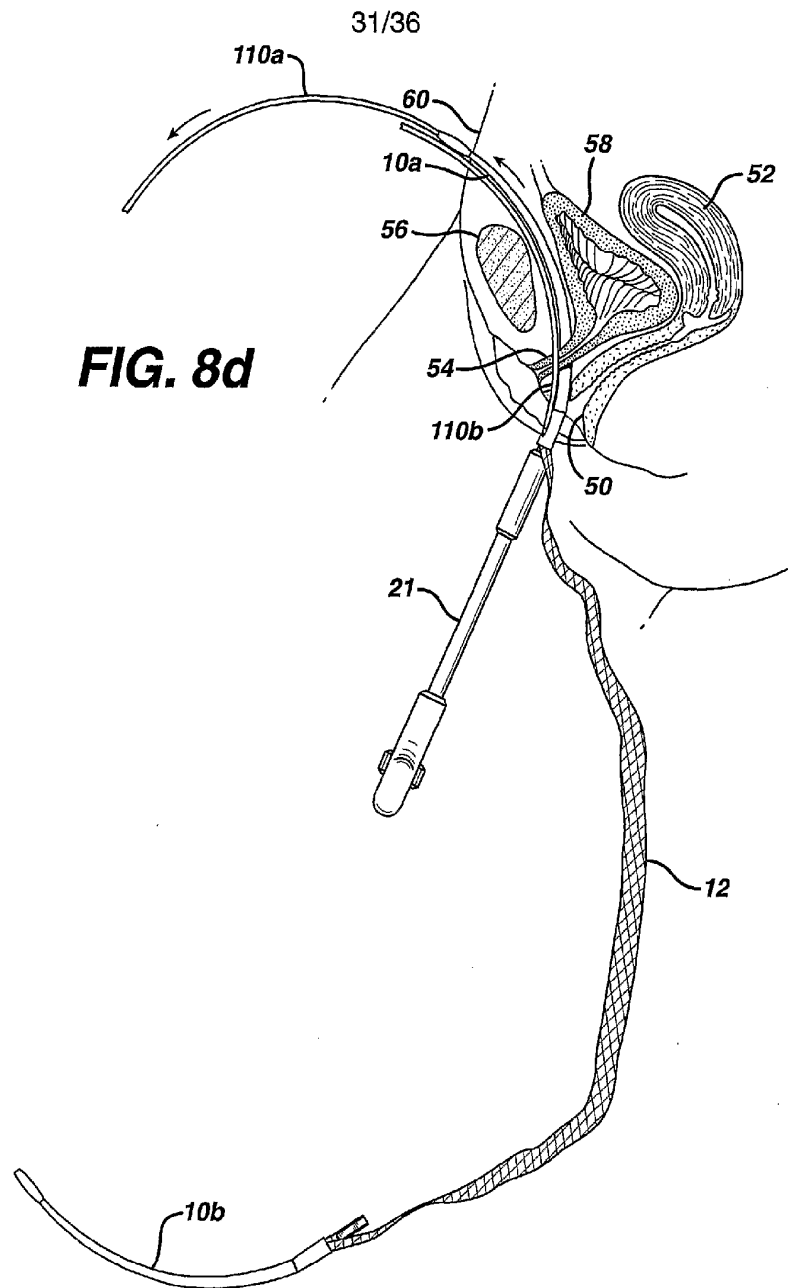


32/36

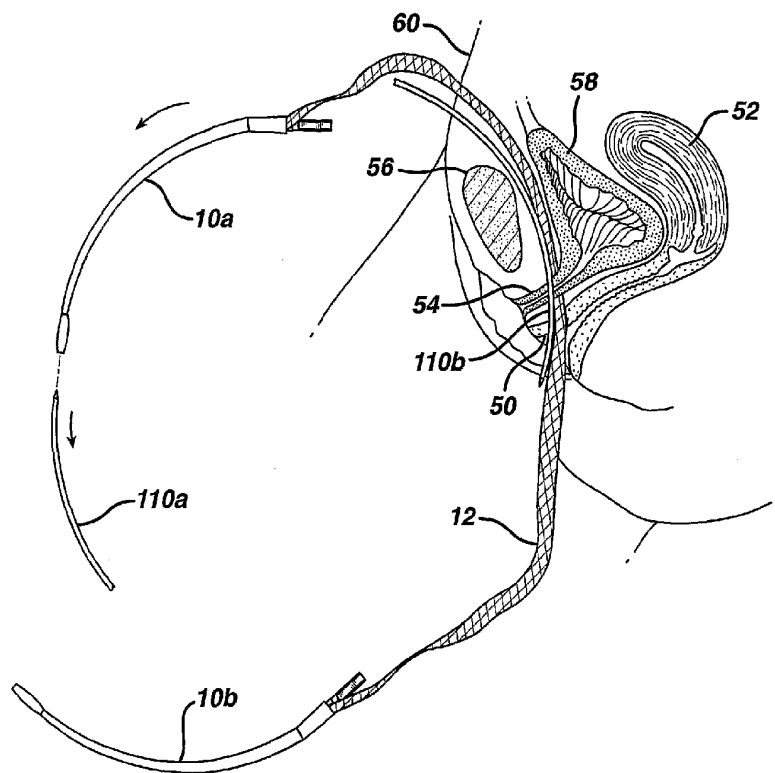
**FIG. 8e**

33/36

**FIG. 8f**

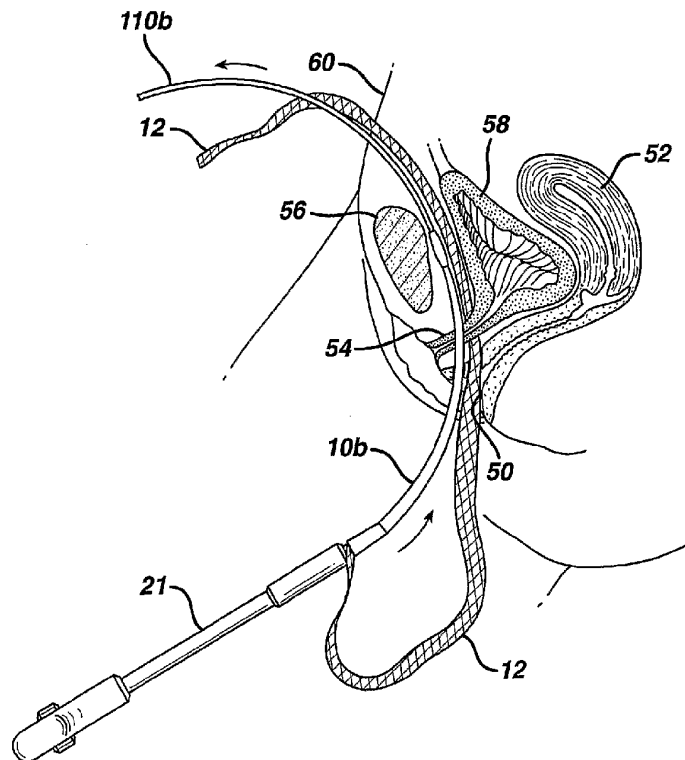


34/36

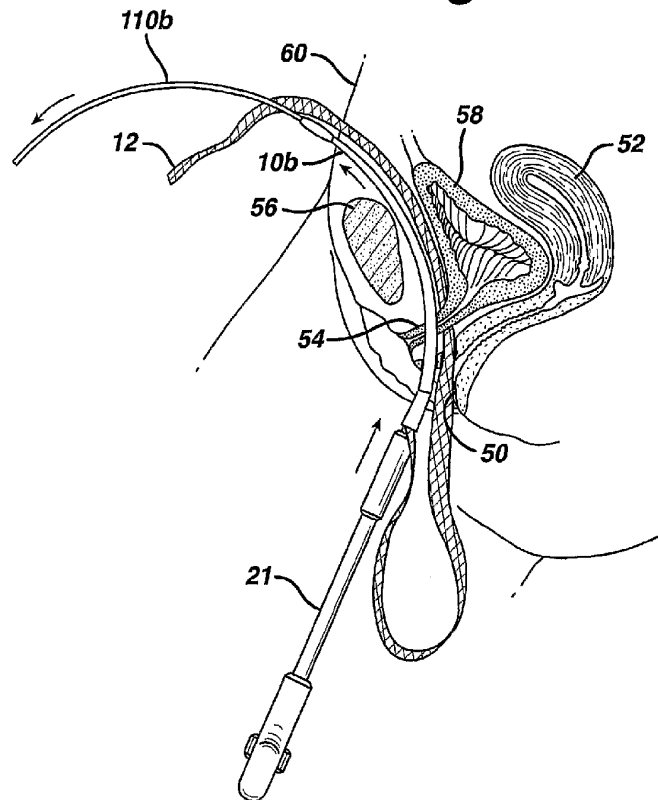**FIG. 8g**

35/36

**FIG. 8h**

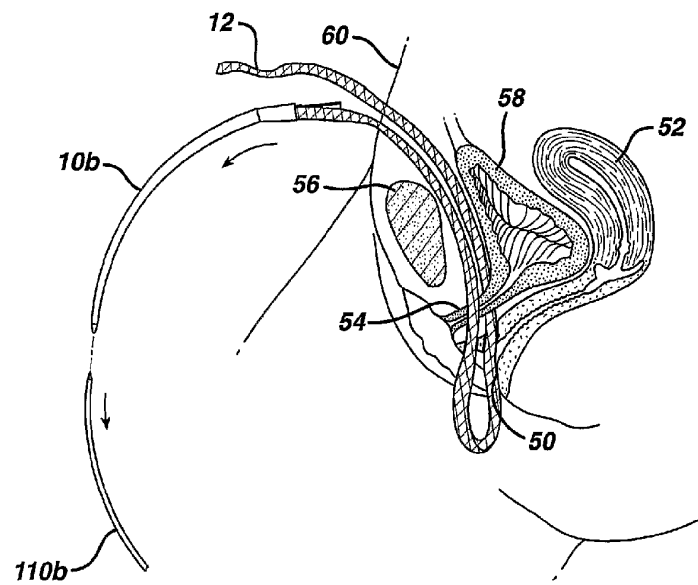

36/36

**FIG. 8i**

