

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199916592 B2
(10) Patent No. 751617

(54) Title
Method for interactive telecommunication

(51)⁷ International Patent Classification(s)
H04H 009/00

(21) Application No: **199916592**

(22) Application Date: **1999.01.06**

(87) WIPO No: **WO99/35771**

(30) Priority Data

(31) Number	(32) Date	(33) Country
24/98	1998.01.09	CH

(43) Publication Date : **1999.07.26**

(43) Publication Journal Date : **1999.09.30**

(44) Accepted Journal Date : **2002.08.22**

(71) Applicant(s)
Swisscom Mobile AG

(72) Inventor(s)
Rudolf Ritter

(74) Agent/Attorney
PHILLIPS ORMONDE and FITZPATRICK,367 Collins Street,MELBOURNE VIC 3000

(56) Related Art
EP 426542
WO 97/40616

16592/99



PCT

WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation ⁶ : H04H 9/00		A1	(11) Internationale Veröffentlichungsnummer: WO 99/35771
		(43) Internationales Veröffentlichungsdatum:	15. Juli 1999 (15.07.99)
(21) Internationales Aktenzeichen: PCT/CH99/00006 (22) Internationales Anmeldedatum: 6. Januar 1999 (06.01.99) (30) Prioritätsdaten: 24/98 9. Januar 1998 (09.01.98) CH (71) Anmelder (für alle Bestimmungsstaaten ausser US): SWISSCOM AG (CH/CH); Viktoriastrasse 21, CH-3050 Bern (CH) Swisscom Mobile AG, Schwarzenstrasse 61, CH-3050 (72) Erfinder; und Bern, Switzerland. (75) Erfinder/Anmelder (nur für US): RITTER, Rudolf [CH/CH]; Rossweidweg 8, CH-3052 Zollikofen (CH). (74) Anwalt: BOVARD AG; Optingenstrasse 16, CH-3000 Bern 25 (CH).		(81) Bestimmungsstaaten: AL, AM, AT, AT (Gebrauchsmuster), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Gebrauchsmuster), DE, DE (Gebrauchsmuster), DK, DK (Gebrauchsmuster), EE, EE (Gebrauchsmuster), ES, FI, FI (Gebrauchsmuster), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Gebrauchsmuster), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO Patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Veröffentlicht Mit internationalem Recherchenbericht.	

ALIAN
SEC
113
ENT OFFICE


IP AUSTRALIA
27 JUL 1999
RECEIVED

(54) Title: METHOD FOR INTERACTIVE TELECOMMUNICATION

(54) Bezeichnung: VERFAHREN ZUR INTERAKTIVEN TELEKOMMUNIKATION

(57) Abstract

The invention relates to a telecommunication method comprising the following steps: integration of programme-related digital data into a TV or radio programme and transmission of said programme; reception and playback of the programme by a mobile telephone combined with a TV or radio receiving system, where the receiving system comprises a chip card reader into which the user of the receiving system can insert a SIM card to identify himself; display of at least one option corresponding to the integrated digital data on a display of the receiving system and selection of an option by the user of the receiving system; preparation of a message corresponding to the selected option by the SIM card, where the message prepared comprises at least one data field from the digital data being received; transmission of the above message by a bidirectional mobile telephone network to a server; automatic user identification by a server, whereby the user identification process uses information stored in the identification card and transmitted by the above bidirectional telecommunications network; linking of at least some received data with user-specific data.

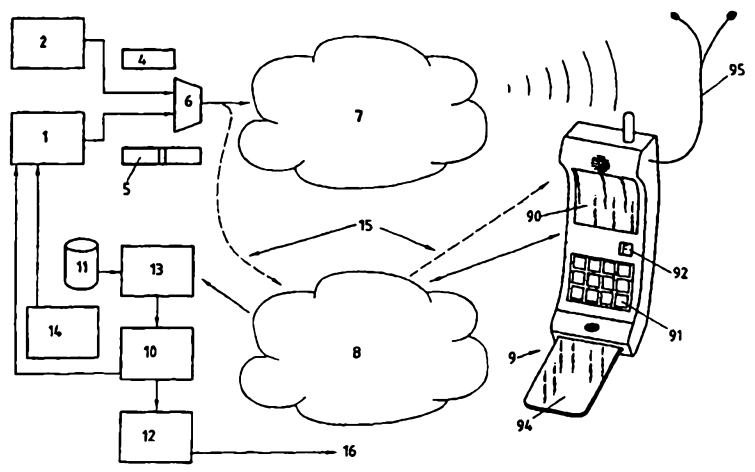

Abstract

Telecommunication method, comprising the following steps:

integrating program-accompanying digital data in a TV or radio program
5 and transmitting this program;

reception and reproduction of this program by a mobile radio device
combined with a TV and/or radio receiving system, the receiving system
comprising a chip-card reader into which the user of the receiving system can
insert a SIM card to identify himself;

10 displaying at least one option corresponding to the integrated digital data
on a display of the receiving system and selection of an option by the user of
the receiving system;


preparation by the SIM card of a message corresponding to the selected
option, the prepared message comprising at least one data field from the digital
15 data received;

transmitting said message to a server over a bidirectional mobile radio
network;

automatic user recognition by the server, the user recognition using
information stored in the identification card and transmitted over the
20 bidirectional telecommunications network;

combining at least some of the data received with user-specific data.

(Fig. 1)



Telecommunication Method

The present invention relates to a telecommunication method and to a receiving system for carrying out this method. The invention relates in particular
5 to a telecommunication method which can be utilized on a broadcast channel.

The most widespread broadcast systems are purely monodirectional and therefore have no backward channel by means of which the receiver could send response messages to the sender. That is the case, for example, in most radio and TV broadcast systems. If the receiver, e.g. the radio listener or the
10 television viewer, would like to react to a program or to a commercial, he must therefore have recourse to some other telecommunications system, e.g. his telephone. If, for example, a product is advertised on television, the interested customer must immediately make a note of the address or telephone number of the supplier and call him later manually. The customer must then identify
15 himself to the supplier and indicate by telephone the product which interests him. This procedure is extremely complicated and error-prone. For this reason, most broadcast systems are not entirely suitable for prompting the receiver to make spontaneous purchases during or just after a commercial. Moreover, it is difficult to design TV or radio programs in which immediate feedback from the
20 receiver is needed.


Adding accompanying digital data to a radio or television program is likewise already known. In television systems, digital data can thus be transmitted during the vertical raster interval. An appropriate hardware and software device in the receiver's television set or PC makes it possible to
25 decode these digital data, to select them, and to store them or display them on the receiver's screen. In radio systems, the transmission of program-accompanying data in addition to the radio programs is used above all with digital radio systems of the DAB (digital audio broadcasting) type. DAB technology makes it possible in this way to transmit both radio programs and
30 accompanying services (program associated data, PAD). DAB receivers containing a data decoder and a respective display are commercially available.



Unfortunately, like the radio or TV program channel, this channel for program-accompanying data is only monodirectional.

Broadcast channels having a backward channel whereby digital data are sent between a server and a number of receivers, e.g. by means of a push channel on the Internet, have meanwhile also become known. According to the user's choice and interests, these digital data can then be stored and/or filtered in the user's receiving system. For example, a complete information program can be transmitted to the user, who then decides, for instance, to display or store only the information pertaining to sports articles or politics. With these systems, the receivers can receive a program passively and respond only when, for example, they want more information on a subject or when they want to order a product. As is well known, however, it is difficult to identify users reliably on the Internet, so that this method is not entirely suitable for transmitting confidential or security-sensitive data, such as product or remittance orders, to the sender or to a supplier. Furthermore, the user must have a minimum knowledge of computer technology in order to take advantage of an offer transmitted through a push-channel in the media program. For instance, the user must compose an E-mail message containing his own identification, a description of the product to be ordered, and the identification of the chosen supplier. Hence this method is rather lengthy and troublesome. Moreover, possible errors made by the user or arising through problems with the transmission in the telecommunications network are not easy to locate. The result is a substantial percentage of orders which cannot be carried out because, for instance, the particulars from the user have been entered incompletely or erroneously.

Described in the patent application EP 426 542 A1 is a method for direct marketing via a television network as well as a device for carrying out the method. According to the teaching disclosed in EP 426 542 A1, television receivers are equipped with chip-card readers, and information received from a sender, which contains product identification, is processed in a chip-card inserted into the chip-card reader, information received and user authentication data stored on the chip-card being processed together, and the result of this processing is displayed on the television screen when the television viewer enters a command. To order



a product, the television viewer can communicate the said result to the sender in a delayed way, for example by means of post or telephone, or immediately, for example via a cable network, according to the teaching disclosed in EP 426 542 A1.

5 The discussion of the background to the invention herein is included to explain the context of the invention. This is not to be taken as an admission that any of the material referred to was published, known or part of the common general knowledge in Australia as at the priority date of any of the claims.

10 An object of the present invention is to provide a telecommunications system which alleviates the above-mentioned drawbacks.

According to one aspect of the present invention there is provided a telecommunication method including the following steps:

15 receiving by means of a suitable telecommunications mobile device, which contains a radio receiver and/or a television receiver, digital data sent out over a broadcast channel, which data are transmitted as program-accompanying data in a media program, the telecommunications mobile device including an identification card by which the user of the telecommunications mobile device is identified,

20 displaying information, corresponding to the received digital data, on a display of the telecommunications mobile device,

entering of a command by the user,

25 preparing a message corresponding to the entered command, the prepared message including at least one data field from the digital data received and an identification of the user determined from the identification card,

sending the prepared message over a mobile radio network.

30 According to a further aspect of the present invention there is provided a telecommunications mobile device including mobile radio components by means of which the telecommunications mobile device can be utilized in a mobile radio network, and which telecommunications mobile device includes an identification card in order to identify the user of the telecommunications mobile device, wherein it further includes:



a radio receiver and/or a television receiver for receiving a media program, sent out over a broadcast channel, and program-accompanying data,



2b

reproducing means for playing back to the user the media program received,

message-preparing means for preparing and sending over the mobile radio network messages including at least one data field from the program-
5 accompanying data and an identification of the user.



By means of the system and method of the present invention, the receiver may automatically compose and transmit messages not only to the sender, but also to other partners, e.g. to suppliers of advertised products.

5 A preferred embodiment of the present invention will now be described with reference to the accompanying drawings wherein:

Fig. 1 shows a schematic view of the system according to the invention;

10 Fig. 2 shows a schematic view of the structure of the order code transmitted;

Fig. 3 shows a screen view generated on the display of the user's receiving system by the inventive Java applet; and

15 Fig. 4 is a flow chart indicating the various steps carried out upon reception of such an applet in the receiving system.

20 Fig. 1 shows schematically the system components which can be utilized for carrying out the inventive method. The individual elements will now be described in detail:

25 Reference numeral 1 represents a marketing-on-line studio. Here individual order numbers 52 are prepared, packed with Java applets 50 (Java is a registered trademark of Sun Microsystems), and assigned to one or more transmission blocks. These messages will be explained below with reference to Fig. 2.

30 In a transmission studio 2, media programs are prepared and divided into transmission blocks. A transmission block may, for instance, correspond to an advertisement, a piece of music, a radio play, a commercial, a film, a Web site, etc. The transmission studio may, for example, be a radio studio, a TV studio,



or an Internet server.

Transmitted transmission blocks 4 are combined at 6 with assigned messages 5 and sent out over a broadcast channel 7. Depending upon the application, broadcast channel 7 may, for example, be an FM broadcasting network, a TV broadcasting network, or an Internet push channel. Alternatively, the transmission blocks 4, e.g. advertising messages, and the respective messages 5 may also be sent out over a conventional mobile communication network 8, as indicated by arrow 15.

10

The transmitted media program is received by a receiving system 9 according to the present invention. The receiving system 9 may, for example, be a mobile telecommunications device having an integrated radio receiver. With this system, the user may telephone quite conventionally over a mobile radio network 8, e.g. a GSM network, or use it as a conventional FM receiver instead, e.g. to listen to radio programs by means of headphones 95. In a modification, the receiving system has a television receiver instead of or in addition to the radio receiver for viewing television programs on a display 90 of the mobile apparatus. Mobile radio apparatus provided with an adequate screen, e.g. for video telephone applications, are commercially available; one skilled in the art can easily integrate a TV tuner in such a mobile videophone apparatus so that television can also be viewed with this system. The mobile radio functions and the radio or TV functions can be operated individually or in combination. In the case of individual operation, the radio or TV receiver can be operated like a conventional individual apparatus. In the case of combined operation, the FM radio or TV receiver is operative, and the mobile radio component is on standby or in communication mode. By means of a special key 92, the user, upon receiving an interesting message, can activate the execution of the applet 5 and the screen display shown in Fig. 3.

30

The receiving system 9 may also consist of a radio and/or TV receiver with additional mobile radio communication components integrated in the




housing. It is equally possible to integrate the mobile radio components in a remote control for a television set or for some other broadcast receiver.

Furthermore, the receiving system may also consist of a computer, e.g. a PC or a palmtop, with integrated reception means for radio, TV, and/or Internet, as

5 well as communication means for a mobile radio network 8. As will be explained below, however, the inventive method can also be carried out with a conventional mobile radio device 9, e.g. a GSM terminal.

The receiving system 9 preferably contains in addition means known per
10 se for sending and receiving SMS (short message system) and/or USSD (unstructured supplementary service data) short messages, as well as filter means known per se for recognizing and temporarily storing special short messages, preferably according to the SICAP method described, among other things, in European Patent No. 0 689 368. Encryption and signature means are
15 preferably present as well in order to decode short messages received and to encode and sign short messages to be sent out. The TTP method may be utilized as an encryption method, for example, or else decryption means functioning according to a point-to-point method.

20 The receiving system 9 can further transmit a short message having an order number to a server 13 over the mobile radio network 8. The server 13 combines the received order number with user identification data from a subscriber data base 11. These user identification data contain at least the full name and address of the subscriber. The user identification data preferably
25 also contain the user's language, his bank connection and/or credit card company, subscribed services, etc. The subscriber data base 11 is preferably the data base of the operator of the telecommunications network 8 for administering the subscribers. Its contents are therefore extremely reliable in principle. It may also contain a temporary address of the subscriber. In a
30 modification, the subscriber data base contains the user identification data only of users who have subscribed to the inventive system.



The receiving system 9 contains user identification means, preferably chip-card reading means, for identifying the user of the receiving system by means of an identification card. Such chip-card reading means are customary, among other things, in GSM mobile apparatus provided with SIM (subscriber
5 identification module) cards. However, other identification cards, e.g. cards known by the name of OpenCard, may also be used, depending upon the receiving system.

The server 13 then combines at least some of the information contained
10 in the short message entered by the user with the user identifications in order to complete the identification of the user not fully transmitted.

The server 13 is connected to a product/information supplier data base
10. It is via this data base that the functions of the system are controlled. It
15 preferably newly contains a user profile. The data combined in the server 13 are sent by means of this data base to the logistics center 12 of the respective supplier, who then delivers the ordered products or information to the user 16.

A data warehouse server 14 analyzes the messages received from the
20 user 9 <sic. 16> and hence draws up user profiles which allow marketing at the point-to-point level. The users may then load a user profile or a group of offered profiles on their identification card 94 so that they can also be directly addressed in the broadcast process.

25 The user may also order a profile for himself and have it assigned to him, e.g. by means of a special order message or on line by means of a computer.

The process which takes place in the elements 9 to 14 is described in more detail in the patent application PCT/CH96/00464, the contents of which are incorporated here.



Fig. 2 shows the structure of the message 5. The order number 52 itself is packed together with the respective Java code 50. This Java applet is received by the SIM card 94 in the mobile apparatus 9, having Java capability, which consequently carries out an interactive process with the user. The Java code 50 is transmitted only between the sender 1 and the mobile apparatus so that this interactive process takes place between the SIM card 9 <sic. 94> having Java capability and the user, but not between the mobile apparatus 9 and the server 13. Instead of Java, the applets may naturally also be written in some other object-oriented computer language.

The message 5 further comprises a user profile 510 drawn up in the studio 1, by means of which profile the data of interest to the user are filtered in the SIM card 94. For example, when the invention is utilized for securities trading, the user profile may, for instance, correspond to a segment of securities in an automatic trading system. The data-processing means in the SIM card 9 <sic. 94> can then automatically prepare a short message for the server 13 if buying or selling signals occur. The user then has the option of carrying out a respective process.

The user profile may be drawn up in the data warehouse 14 by the user himself or by combination. By means of a personal user profile, it becomes possible to indicate to a user the specific products in which he is really interested.

For example, the user may send a short message asking the logistics center 12 for a list of profiles and detail segments, which is displayed on his screen 90. Alternatively, a user profile may also be ordered on line with a PC or other computer. The user profile ordered is, for instance, stored in a user profile table in the secured area of the SIM card 94 and is used for selecting applets containing the information of interest. The user profile table can preferably not be modified by the user directly via the mobile apparatus.



Field 525 contains only a designator F for the order number 52. Fields 526, 527, and 528 contain separators. Field 521 contains a product supplier indication for the product or information offered. This designator preferably consists of a predefined abbreviation of the supplier's name. In order for the user to be able to understand this abbreviation, the supplier's full name is preferably transmitted as well as a link file (500) in the applet 50.

Field 522 contains the product identification, e.g. a product number. The product offered preferably corresponds to the transmission block 4 sent out simultaneously. For instance, if a piece of music is broadcast on the FM channel, various products pertaining to that piece of music may be offered simultaneously on the data channel or on DAB as an option in a menu, e.g. for ordering a CD, or sheet music, or tickets to a concert, etc. This mechanism controlled by the studio 1 may also be designed dynamically.

15

In addition to the product number 522, a link file 501 to one or more product identifications 502, 502', etc. in plain text and in several languages is preferably transmitted in the applet 50 and, if need be, displayed on the screen 90. The product identification is preferably provided with a language flag 503, 503', etc. This makes it possible for the product name to be set to the user's language by means of the language flag on the user-specific Java SIM card.

20

Field 523 (CS) contains a check sum or a parity sum in order to catch any errors in field 52. If such an error occurs at the level of the server 13, the user is prompted to repeat his entry.

25

The check sum is established by means of any known error-checking or error-correction algorithm from field 521 and 522. For example, a parity-check algorithm may be used for establishing the value of the check sum 523. The number of characters in the check sum depends upon the algorithm used and

30



on the maximum accepted error quota.

Finally, field 524 contains an indication concerning the desired transaction. This process can be controlled interactively by the user to enter
5 whether he would like to order a product (ORDER) or whether he would just like to ask for information, for instance. If the receiving system is also linked to the Internet, a code W may also be entered in order to set the apparatus directly to a corresponding Web page. By means of a terminal identification IMEI in the receiving system, the Java applet can recognize whether the system has
10 access to the Internet and whether the W option code must also be offered.

Furthermore, by means of options in field 524, the desired product quantity (M) and the preferred mode of payment (Z) can be selected.

15 This division of information in the short-message order is given only by way of example, for other ways of dividing it are quite conceivable. Moreover, the various data fields may be mixed, encrypted, and/or signed in order to guarantee confidentiality. The information may also be divided up into different short messages sent in succession.

20

Fig. 3 shows diagrammatically the screen 90 during execution of a message which has passed through the filter. In this example, the whole order number 52 is interactively depicted. Under the abbreviated supplier designator 521, the full supplier identification 500 is displayed. Using a cursor 900, the
25 user can choose one of a number of products 522, 522', 522'', ... in a list box in area 901. The name of the chosen product is permanently shown in plain text in field 502. Similarly, the Java applet permits selection of the transaction possibilities (order or information), the desired quantity (M), and the mode of payment (Z) by means of a menu, the chosen option always being explained in
30 plain text in the text area 902 of the screen.



The sequence of operations will now be described in detail. In the case of a mobile apparatus combined with a radio receiver, advertising programs, music, news, etc., are sent out on the broadcast channel 7. At the same time, the order number 52, preferably packed with applet 50, is also sent out on the available data channel. If an offer or a piece of music appeals to the user, he can press the F-key 92 in order to activate the execution of the applet and the screen display of Fig. 3. With the cursor, the user can then pick out an operation, e.g. from the list boxes, and in this way enter a command; depending upon the supplier, only a single option, e.g. a single product which can be ordered, may be displayed instead.

If the user selects a transaction code which does not relate just to information, an interactive process preferably follows so that the user's authenticity can be ensured. This process may take place directly on the card 94, e.g. by means of TTP (trusted third party) or PTP (point-to-point) resources on the card, or interactively in a security server (not shown).

In the case of a mobile apparatus combined with a television receiver or a multifunctional computer, the sequence of operations is analogous. In that case, however, the receiving system may also be linked to the Internet and display Web pages. The system may thereby be set directly to the respective Web page.

The inventive method may also be used with ordinary mobile apparatus which do not contain any additional broadcast channel receivers, as already indicated by arrow 15 in Fig. 1. In that case, messages are sent out from a central office 2 to several or all users over the normal mobile radio network 8 in the broadcast method. In this modification, it is advisable to work with user profiles so that the information reaches only those users who are interested in it or those who have subscribed to a respective service.



The method implemented in the receiving system 9 upon receipt of a message 5 will now be described with reference to Fig. 4.

The receiving system has receiving means for receiving a media program
5 sent out over a broadcast channel and program-accompanying data, and reproduction means for playing the received media program back to the user. The receiving system can thereby receive transmitted messages 5 and applets 50 as program-accompanying data (step 20).

10 The messages 5 received are then evaluated, this evaluation taking place even when the mobile radio part of the receiving system is switched off or in standby mode. If a message with an order number 52 is received (designated by the designator 525), the user profile is evaluated (test 21). If the order number received does not correspond to any customer profile, the
15 process is terminated (step 23); otherwise, this code is further processed. If the mobile apparatus is switched on (test 24), the applet 50 is directly displayed on the display 90 (step 25). The user may then, for example, order products or ask for information, as described above (step 29).

If, on the contrary, the mobile apparatus is switched off, the message 5
20 received or just the applet 50 is filed in a buffer (not shown) on the SIM card 94 or in the receiving system 9 (step 26). Only later, when the mobile apparatus is switched on (27), is the applet 50 executed and the information displayed (step 28), so that the user may order products or ask for information (step 29).



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. Telecommunication method including the following steps:

receiving by means of a suitable telecommunications mobile device,
 5 which contains a radio receiver and/or a television receiver, digital data sent out
 over a broadcast channel, which data are transmitted as program-
 accompanying data in a media program, the telecommunications mobile device
 including an identification card by which the user of the telecommunications
 mobile device is identified,

10 displaying information, corresponding to the received digital data, on a
 display of the telecommunications mobile device,

entering of a command by the user,

preparing a message corresponding to the entered command, the
 prepared message including at least one data field from the digital data
 15 received and an identification of the user determined from the identification
 card,


sending the prepared message over a mobile radio network.

2. Telecommunication method in accordance with claim 1, wherein said
 20 media program is reproduced by the telecommunications mobile device.

3. Telecommunication method in accordance with any one of the preceding
 claims, wherein the displayed information contains at least one menu from
 which a command can be selected.

25 4. Telecommunication method in accordance with any one of the preceding
 claims, wherein the digital data can contain applets which are executed by the
 telecommunications mobile device.

30 5. Telecommunication method in accordance with any one of the preceding
 claims, wherein, when the components needed for processing and displaying
 these data are switched off, the digital data received are temporarily stored in a
 buffer and not processed until these components are switched on.



6. Telecommunication method in accordance with any one of the preceding claims, wherein the digital data received are packed in messages which are first evaluated in order to determine whether they must be displayed.

5 7. Telecommunication method in accordance with claim 6, wherein the received messages which are not of interest to the user are sorted out with the aid of a user profile stored in the memory of the telecommunications mobile device.

10 8. Telecommunication method in accordance with any one of the preceding claims, wherein the digital data are transmitted in a radio channel.

9. Telecommunication method in accordance with any one of the preceding claims, wherein the digital data are transmitted in a TV channel.

15

10. Telecommunication method in accordance with any one of the preceding claims, wherein the prepared message is a SMS message.

20

11. Telecommunication method in accordance with any one of the preceding claims, wherein the prepared message is a USSD message.

12. Telecommunication method in accordance with any one of the preceding claims, wherein the prepared message is signed.



25

13. Telecommunication method in accordance with any one of the preceding claims, wherein the prepared message is encrypted.

14. Telecommunications mobile device including mobile radio components by means of which the telecommunications mobile device can be utilized in a mobile radio network, and which telecommunications mobile device includes an identification card in order to identify the user of the telecommunications mobile device, wherein it further includes:

30

a radio receiver and/or a television receiver for receiving a media program, sent out over a broadcast channel, and program-accompanying data,



reproducing means for playing back to the user the media program received,

message-preparing means for preparing and sending over the mobile radio network messages including at least one data field from the program-
5 accompanying data and an identification of the user.

15. Telecommunications mobile device in accordance with claim 14, wherein the mobile radio components comprise a GSM mobile device.

10 16. Telecommunications mobile device in accordance with claim 14 or 15, wherein the identification card is a SIM card capable of executing the applets transmitted in the program-accompanying data.

15 17. Telecommunications mobile device in accordance with any one of the claims 14 to 16, wherein the message-preparing means are capable of preparing and sending SMS messages.

20 18. Telecommunications mobile device in accordance with any one of the claims 14 to 17, wherein the message-preparing means are capable of preparing and sending USSD messages.

25 19. Telecommunications mobile device in accordance with any one of the claims 14 to 18, further comprising a key for causing information, corresponding to the digital data received, to be displayed on a display of the telecommunications mobile device.

20. A telecommunication method substantially as hereinbefore described with reference to the accompanying drawings.



21. A telecommunication mobile device substantially as hereinbefore described with reference to the accompanying drawings.


DATED: 11 May 2001

5

PHILLIPS ORMONDE & FITZPATRICK


Patent Attorneys for:

SWISSCOM AG




1/4

FIG. 1

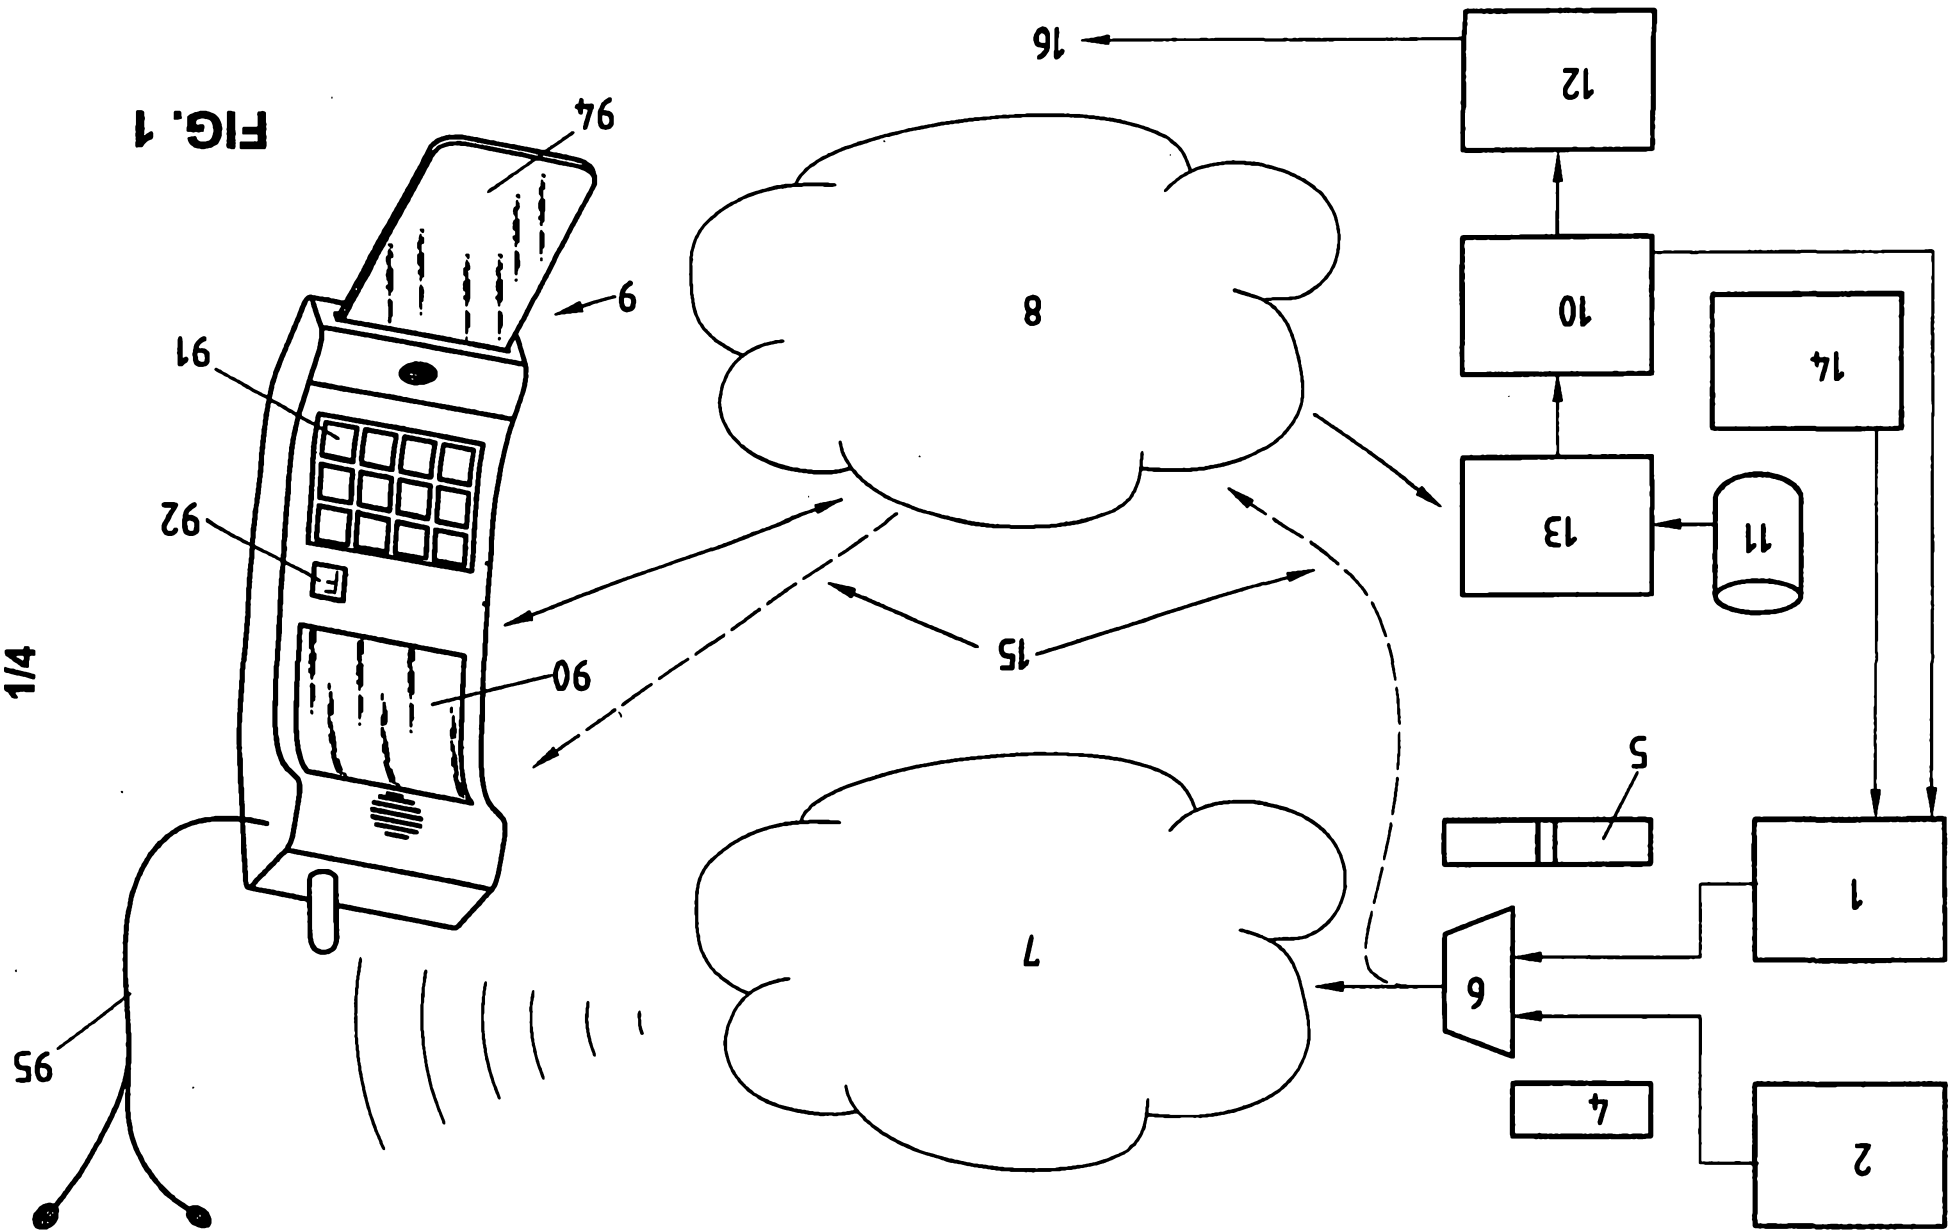

5

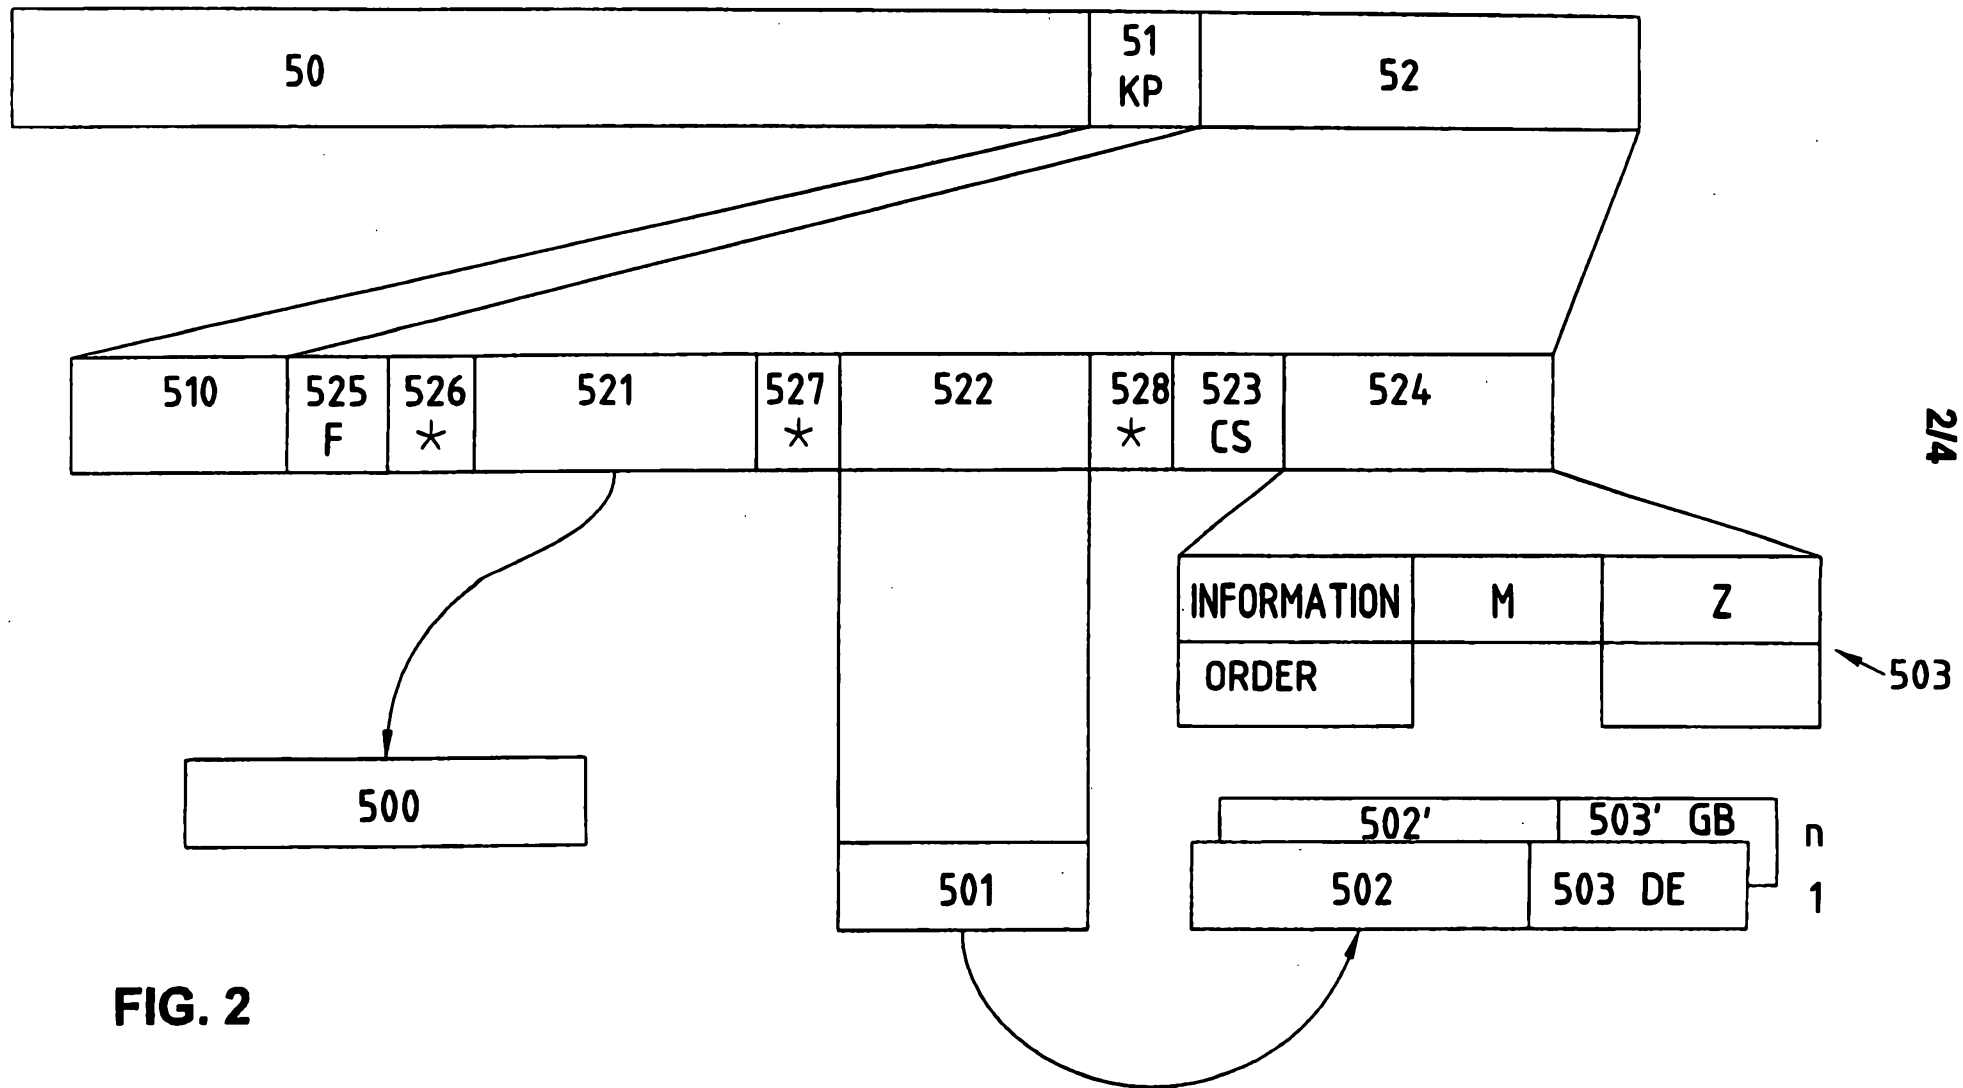

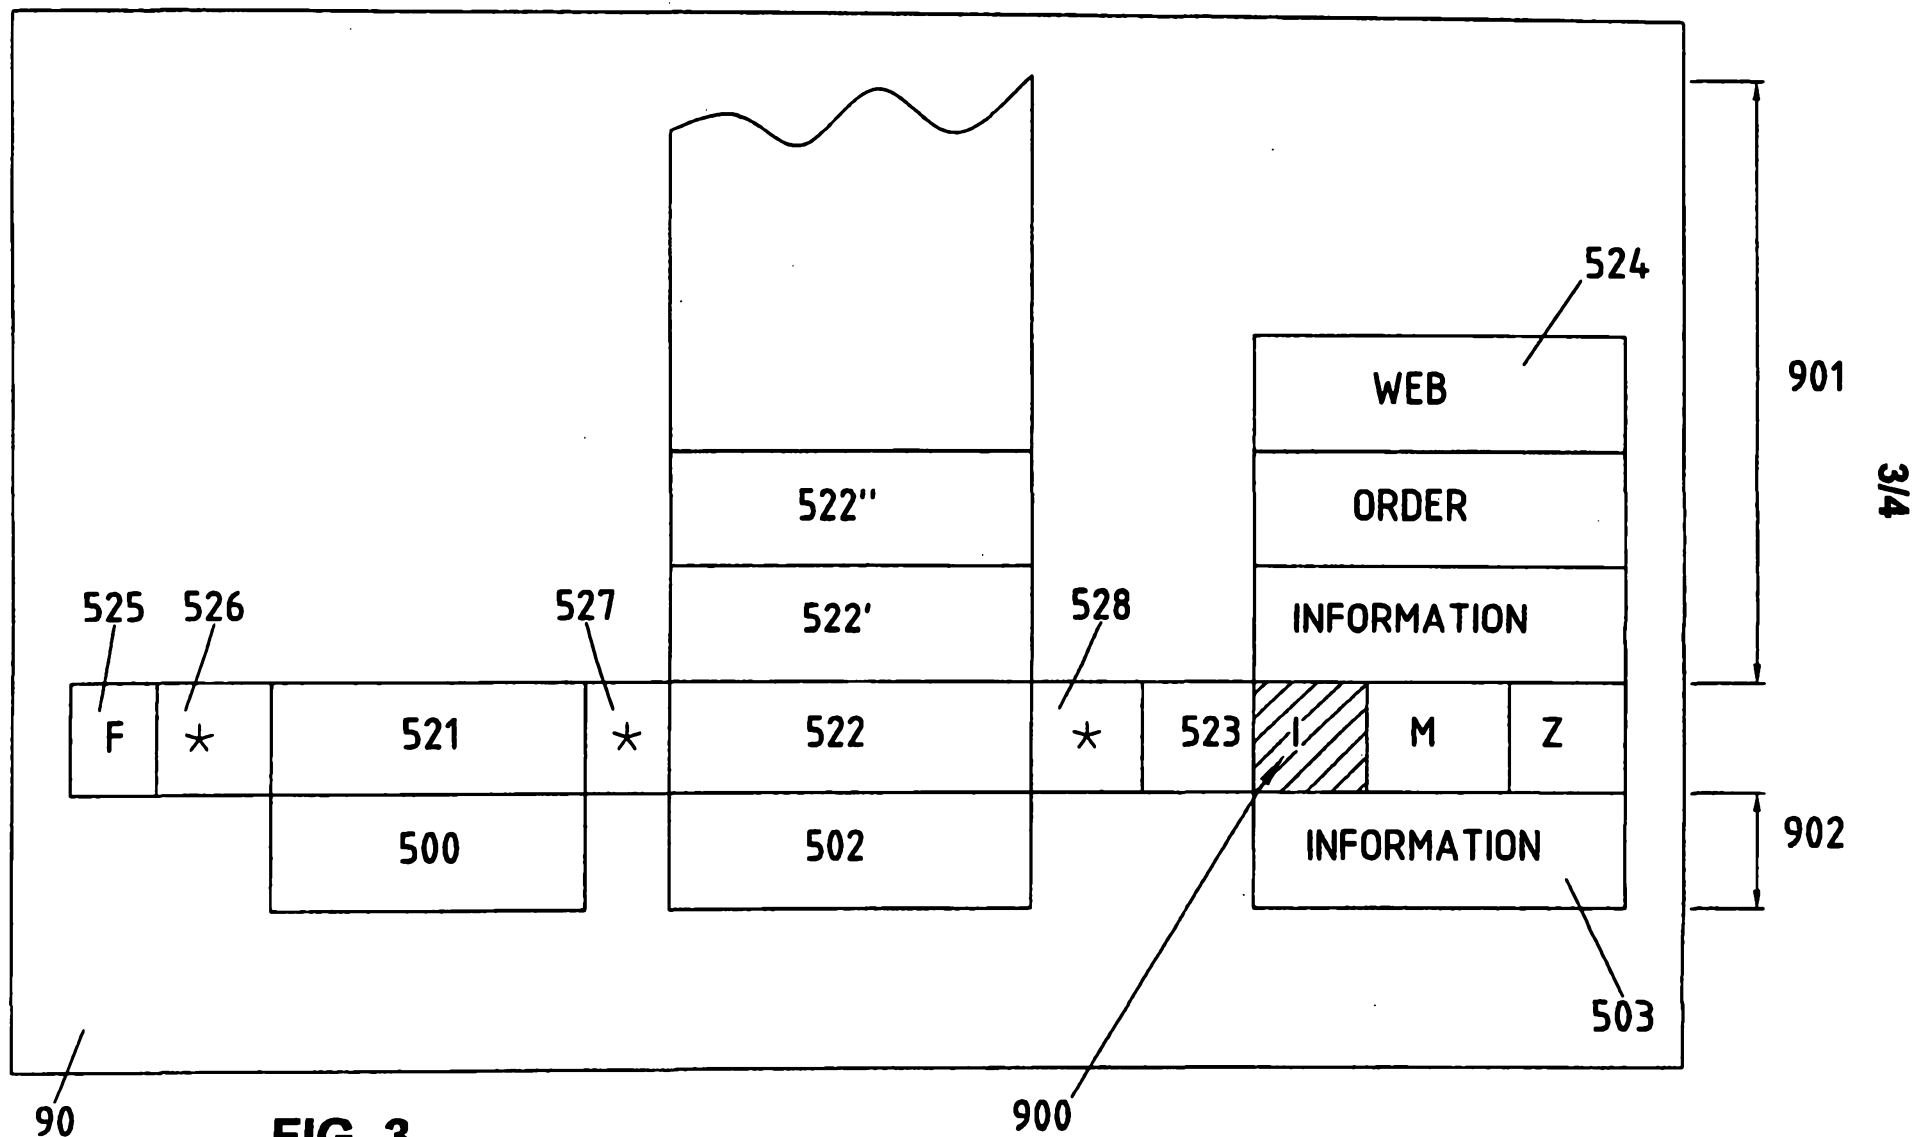


FIG. 3

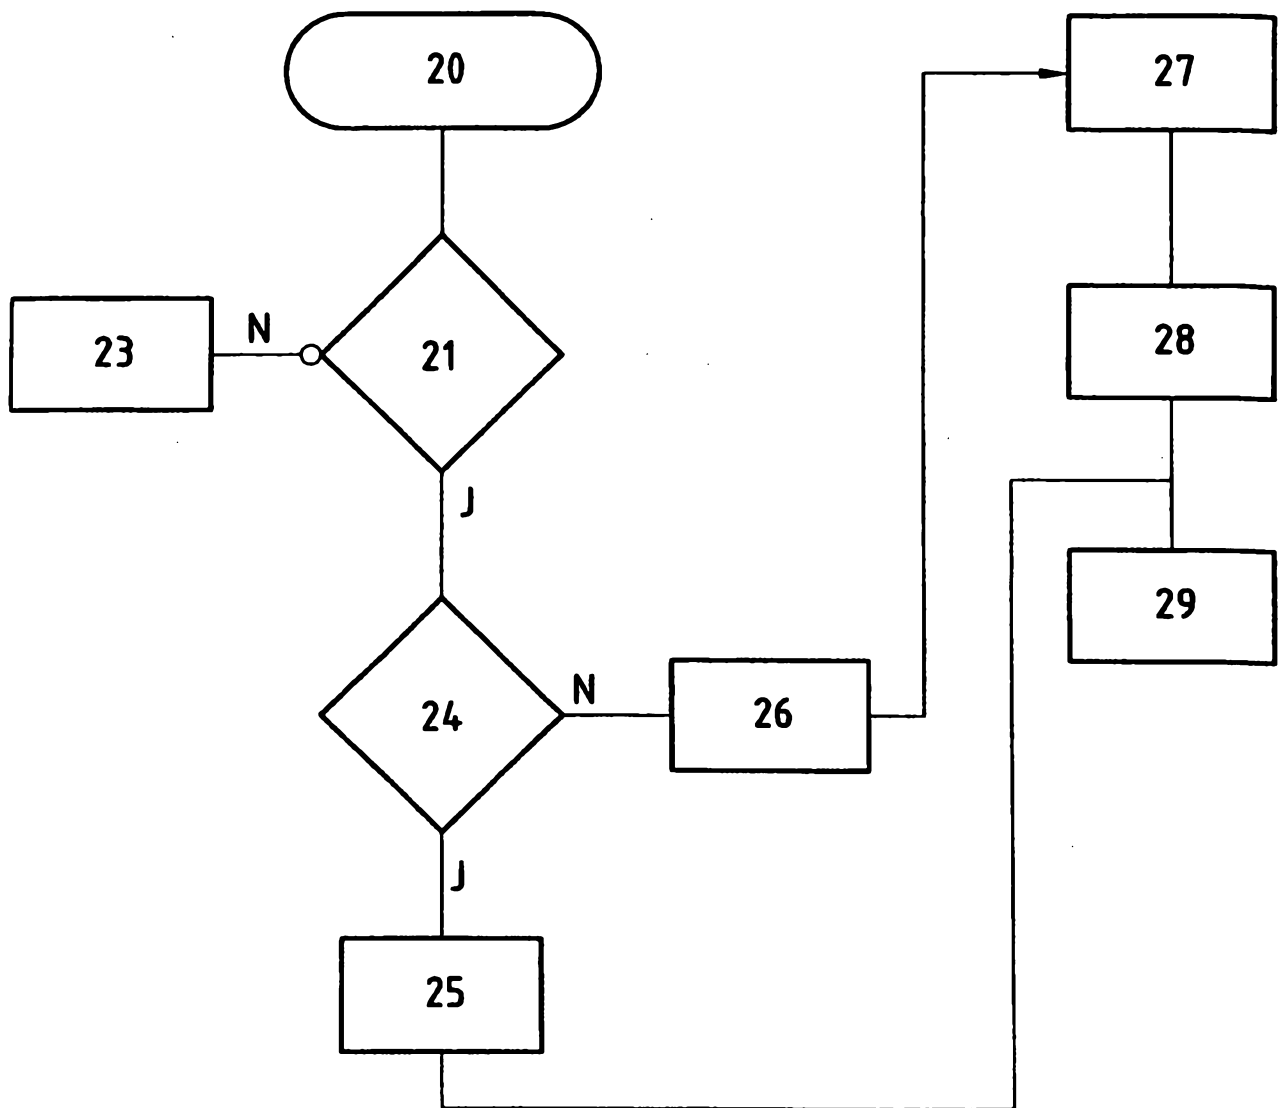


FIG. 4